


2

DATE

SUBJECT OF EXPT.

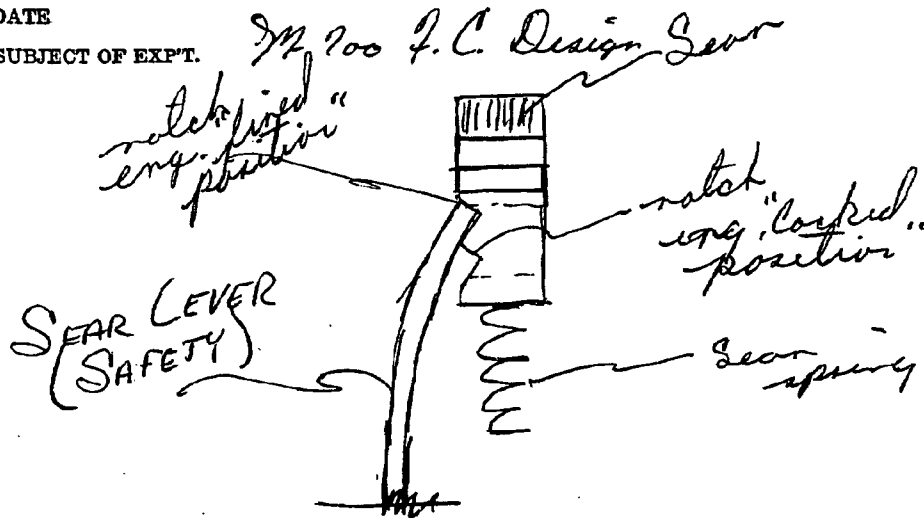

The sketch shows the sear in the fired condition and the safety lever engaged as the bolt is opened and drawn rearward the sear spring forces the sear upward the safety lever springs outward and then returns to the lower notch. With this done the sear has been effectively blocked in two conditions.

EXPERIMENTER

WITNESS

F.E. Martin
Jack East

DATE

DATE

4-8-80

4/9/80