

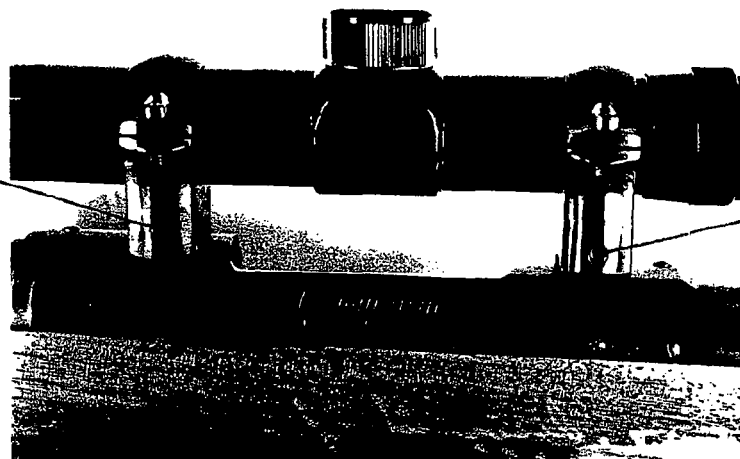
DATE

Aug. 21, 81

SUBJECT OF EXPT.

Scope Mounts (Continued)

The bottom of the Scope Ring had been drilled and reamed for a slip fit over the bushings. If the individual using the rifle wished he could remove the scope by loosening the lock screws and still be able to use the iron sights without interference. Photo has the Scope mounted and locked in to position. As shown bushings can be moved for different scopes.

Lock
ScrewLock
Screw
1 EACH SIDE
OF Mount.

EXPERIMENTER

Fred E. Martin

DATE

8-21-81

WITNESS

C.R. Eddy

DATE

8/16/82