


REVISIONS				
NO.	DATE	BY	REASON	APPROVED

RECOMMENDED MATERIAL AND HEAT TREAT
 MATERIAL MAPLE
 HEAT TREAT _____
 HARDNESS _____
 COLOR _____
 HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

DO NOT SCALE THIS DRAWING. WORK TO FIGURES
 UNLESS OTHERWISE NOTED.
 TOLERANCES ON DECIMAL DIMENSIONS ARE:
 1 PLACE (.1) — TOLERANCE $\pm .015$
 2 PLACE (.01) — TOLERANCE $\pm .010$
 3 PLACE (.001) — TOLERANCE $\pm .005$
 4 ON FRACTIONAL DIMENSIONS $\pm 1/64$
 5 ON ANGULAR DIMENSIONS $\pm .00^\circ$ — 30°
 FINISHES ARE DESIGNATED BY ROOT MEAN
 SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
 VALUES AND ARE THE MAXIMUM ROUGHNESS
 ACCEPTABLE UNLESS OTHERWISE SPECIFIED.
 FINISH ROUGHNESS TO BE 125 OR BETTER.

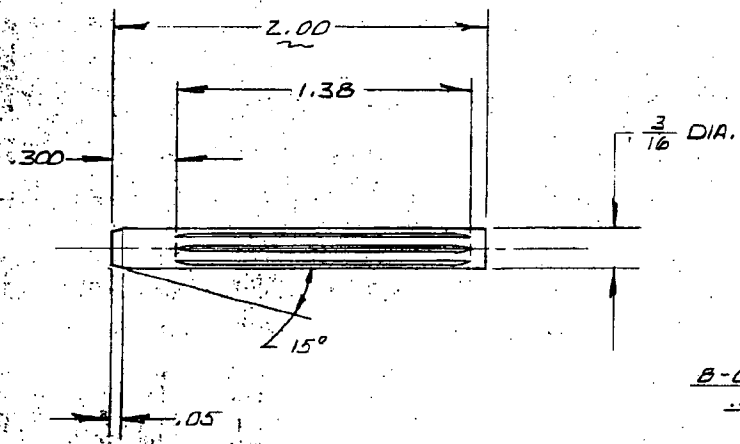

B-GROOVES EQUALLY SPACED
.03 DEEP.

M-700		STOCK REINFORCING PIN	
MODEL	PART NO.	PART USE	
DES. BY DATE F. MARTIN	DRN. BY DATE 30 NOV. 74	CHK. BY DATE	APP. BY DATE
TITLE REINFORCING PIN			
NUMBER B-	SCALE 2 X	SUPERSEDES	REFERENCE
REMINGTON ARMS CO. INC. ILION RESEARCH DIV.			