


WinchesterBarrel/Receiver

This is another two piece design in which the barrel is screwed into the receiver which contains an integral recoil lug. The barrel has iron sights. The front sight is hooded while the rear sight is adjustable for both windage and elevation. The rear sight can also be folded down so that a scope could be used without removing it. The receiver is drilled and tapped for scope mounts. There is one gas vent hole in the right side of the receiver in the lug-way area.

(Photo #1)

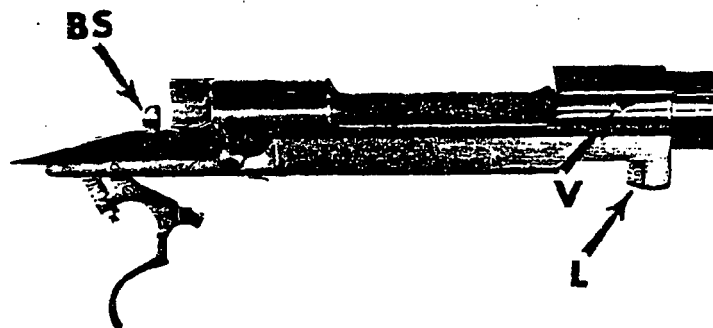

The bolt stop button protrudes up through a small cut in the left side of the receiver tang. (Photo #1) This must be pressed down to remove the bolt, but does not have to be touched when the bolt is inserted back in. However, the bolt does slide in much easier when this button is depressed.