


A plunger type springing ejector is mounted in the bolt face. The extractor is a claw type that is plunger actuated. It slides in a "T" cut in the right locking lug. (Photo #5)

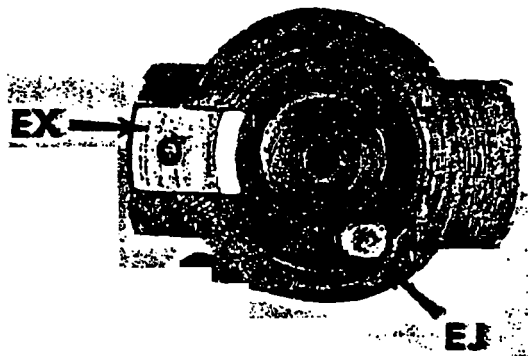

Rotational control of the bolt during opening and closing is controlled by the bolt handle contacting the receiver.