

B-EXP7483

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE (.1) - TOLERANCE $\pm .015$
2 PLACE (.01) - TOLERANCE $\pm .010$
3 PLACE (.001) - TOLERANCE $\pm .001$
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS $\pm 00' 30''$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.


FINISH ROUGHNESS TO BE $\sqrt{125}$ OR BETTER.

MATERIAL AND HEAT TREAT

MATERIAL SAE 1010-1020 OR 1026
HEAT TREAT NONE
HARDNESS Rb 80 MIN
FINISH NONE
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

ALTERATIONS

ALT.	WAS	REF.	BY	DATE
A	REVISED AND REDRAWN		MDK	06-05-01

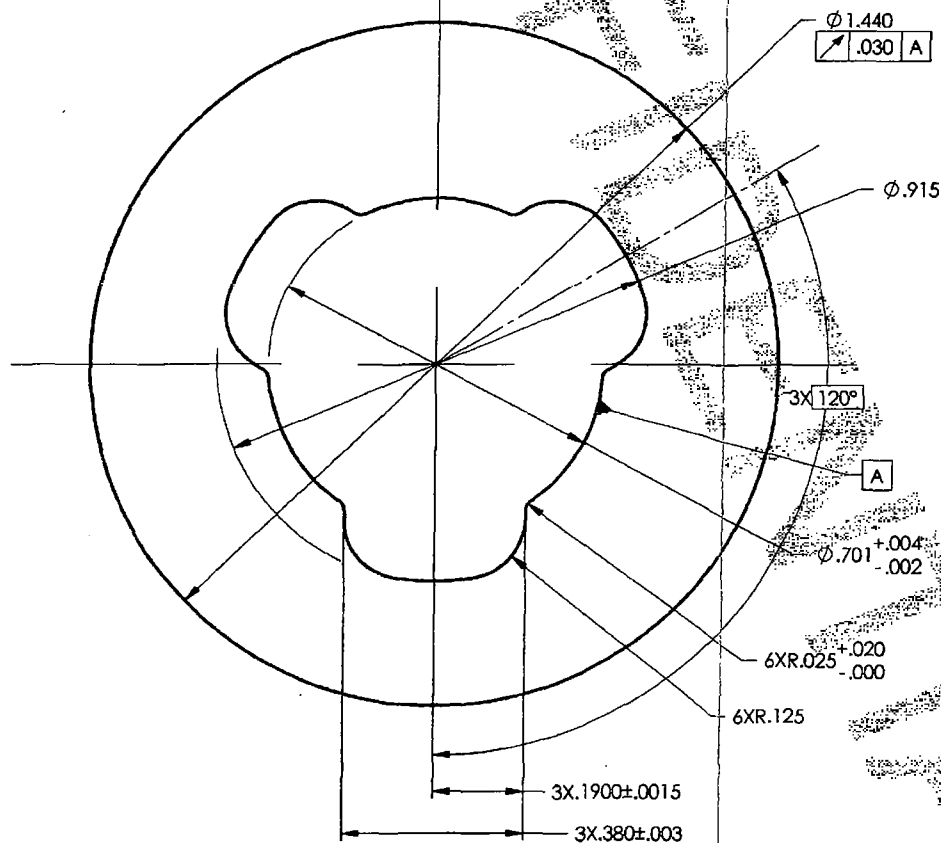

SOLIDWORKS FILE - RemArmsEtr/m/710 Bolt Action Centerfire/SWD-E0000748 Receiver Extrusion B-EXP7483 a

710	RECEIVER EXTRUSION		
MODEL	PART NO.	PART USE	
DES. BY DATE	DRN. BY DATE	CHK. BY DATE	
MDK 06-05-01			
TITLE RECEIVER EXTRUSION			
NUMBER	SCALE	SUPERSEDES	REFERENCE
B- EXP7483	4:1		
Remington			