



RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL... 08-20C Steel
 HEAT TREAT... Cyanide Harden
 HARDNESS... F.L.C. Hard
 COLOR... Torch Draw... Front End
 HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

ON DECIMAL DIMENSIONS ARE $\pm .005$
 & ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
 & ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
 FINISHES ARE DESIGNATED BY ROOT MEAN SQUARE (R.M.S.) MICRO-INCH ROUGHNESS VALUES AND ARE THE MAXIMUM ROUGHNESS ACCEPTABLE, UNLESS OTHERWISE SPECIFIED. FINISH ROUGHNESS TO BE 125 OR BETTER.

SCALE		SUPERSEDES REFERENCE	
5X			
PIN			
DES. BY DATE	DRN. BY DATE	CHK. BY DATE	APP. BY DATE
	11/9/61		VL12/20/61
FOR DETAILS, SEE PROCESS RECORD			
MODEL	PART USE	QUAN.	SEE
XP-100	TRIGGER LINK PIN	2	

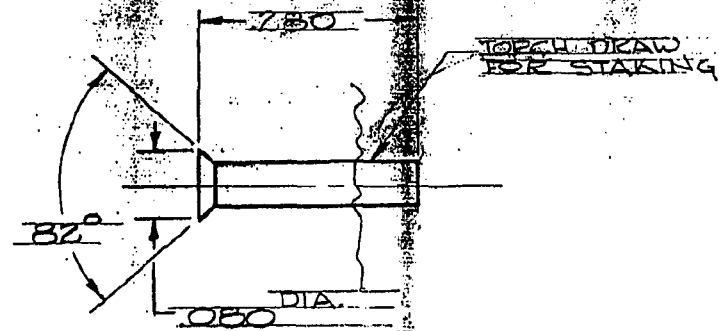

THIS DRAWING OR INFORMATION IS
 PROPRIETARY INFORMATION TO THE
 REMINGTON ARMS COMPANY, INC.

② FOR BLANK DRAWING
 SEE A-16505

2	ADDED	11204	V	5/6/80
1	XP-100	8563	E	12-29-70
ALTERED		WAS	REFERENCE	BY DATE
ALTERATIONS:				

1743 REV. 1

A-15459