


02616-B

DO NOT
UNLESS
TOLERANCES
1 PLACE
2 PLACE
3 PLACE
4 ON FRACTIONAL DIMENSIONS
5 ON ANGULAR DIMENSIONS
FINISHES ARE DESIGNATED BY
SQUARE (R.M.S.) MICRO-INCH FINISHNESS
VALUES AND ARE THE MAXIMUM FINISHNESS
ACCEPTABLE UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE 125 OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL: 08/20 CARB. STEEL
HEAT TREAT
HARDNESS
COLOR
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ALT.	WAB	REF.	BY	DATE
1	ADD USE 72	11667	116	7/8/92

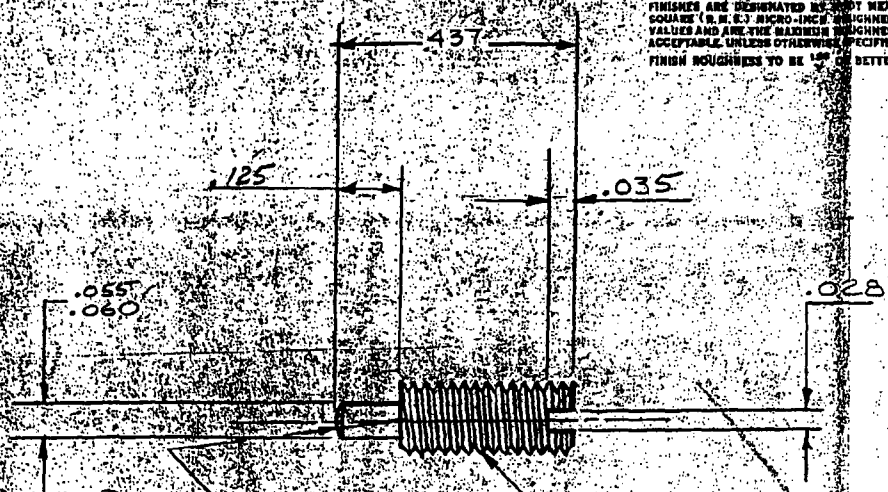

SPHERICAL R. .125

#4-40-NE 2
MAX. OD. 380
MIN. 332
PITCH DIA. MAX. 328
MIN. 294

AUTHORIZED
JAN 2 1993
Product Engineering

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

7LW7	TRIG. SCREW FRONT
600	TRIGGER STOP SCR
700	TRIGGER SC FRONT
800	SEAR BLOCK STOP
900	SCREW
1000	TRIGGER SCR FRONT
MODEL	PART NO.
DATE BY DATE	CHK BY DATE
5-30	5-30
SCREW SCREW	
B-21220	REMINGTON

BARBER - PRESALE R 0120575

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON
BARBER - PRESALE R 0120575
R2521563