

B-

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.

TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE (1/16") TOLERANCE $\pm .015$
2 PLACE (1/32") TOLERANCE $\pm .010$
3 PLACE (1/64") TOLERANCE $\pm .005$
FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS $\pm .00^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.

FINISH ROUGHNESS TO BE $\sqrt{}$ OR BETTER.

MATERIAL AND HEAT TREAT

MATERIAL _____

HEAT TREAT _____


HARDNESS _____

COLOR _____

HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ALTERATIONS

ALT.	REV	REF.	BY	DATE

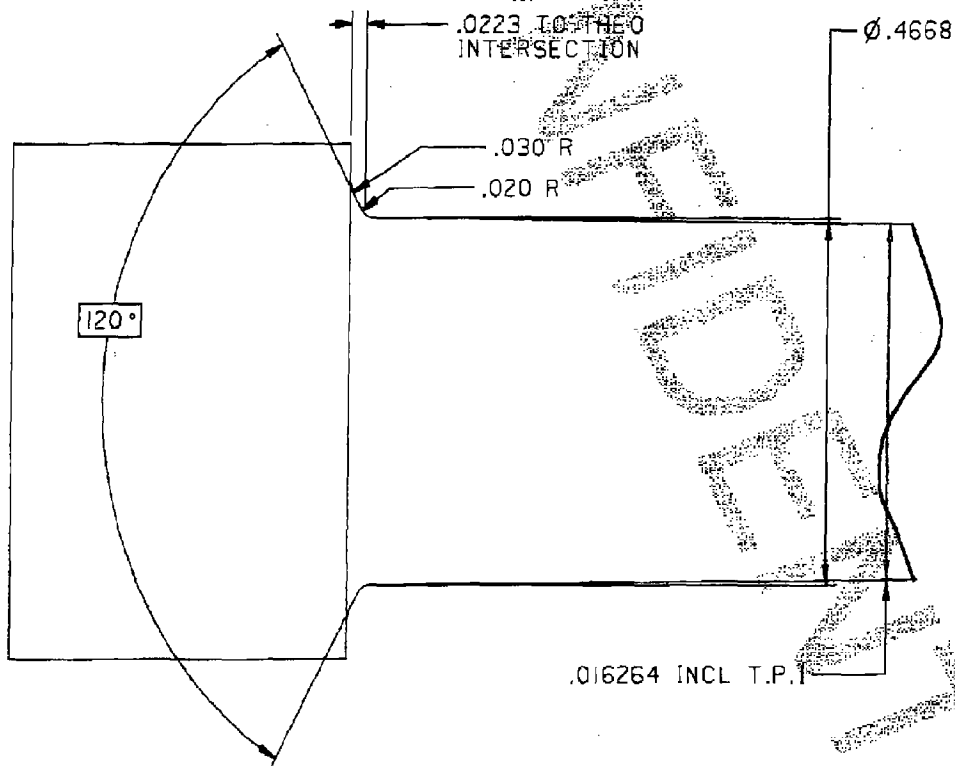

.016264 INCL T.P.1

MODEL	PART NO.	PART USE	
DES. BY DATE	CHK. BY DATE	CHK. BY DATE	APP. BY DATE
TITLE			
NUMBER	SCALE	SUPERSEDES	REFERENCE
B-	REMINGTON ARMS CO. INC. RESEARCH DIV.		

CV FILENAME -

ET36116