

ALTERATIONS				
ALT.	WAS	REV.	BY	DATE



RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL C-1095 SPRING STEEL
 HEAT TREAT R 72-75
 HARDNESS REN 85-87
 COLOR TEMPER


HEAT TREAT AND COLOR TO BE DONE BY
 REMINGTON

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
 UNLESS OTHERWISE NOTED.
 TOLERANCES ON DECIMAL DIMENSIONS ARE:
 1 PLACE (.1) — TOLERANCE ± .015
 2 PLACE (.01) — TOLERANCE ± .010
 3 PLACE (.001) — TOLERANCE ± .004
 4 ON FRACTIONAL DIMENSIONS ± 1/100
 5 ON ANGULAR DIMENSIONS ± 30'—30"
 FINISHES ARE DESIGNATED BY ROOT MEAN
 SQUARE (R.M.S.) MICRO-INCH RAUGHNESS
 VALUES AND ARE THE MAXIMUM RAUGHNESS
 ACCEPTABLE UNLESS OTHERWISE SPECIFIED.
 FINISH RAUGHNESS TO BE 1.0 OR BETTER.

THIS DRAWING OR INFORMATION IS
 PROPRIETARY INFORMATION TO THE
 REMINGTON ARMS COMPANY, INC.

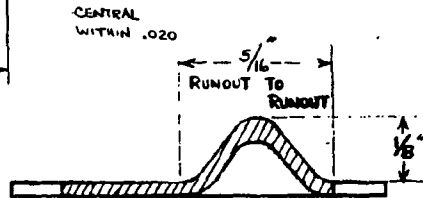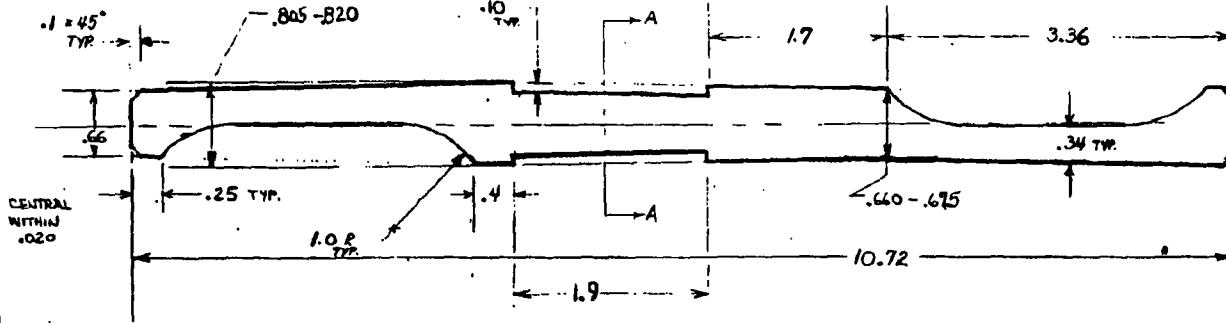

A-A SCALE 5:1

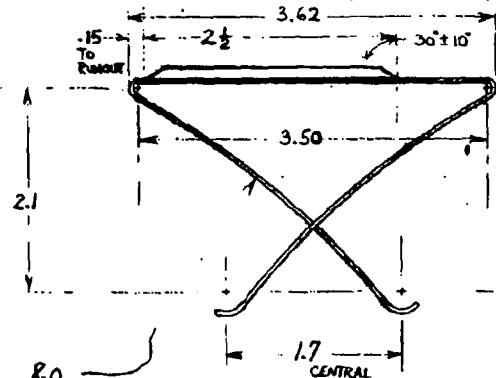

—BEND ($\frac{1}{8}$ " DIA. PIN)

—BEND ($\frac{3}{8}$ " DIA. PIN)

NBAR		PART NO.		PART USE	
DES. BY DATE	REV. BY DATE	DES. BY DATE	REV. BY DATE	DES. BY DATE	REV. BY DATE
TITLE		SCALE		REVISIONS	
MAGAZINE SPRING-FOLLOWER		1:1		EX-1673	
B-EXP-1673		REMINGTON ARMS CO. INC.			
BLANK RESEARCH DIV.					

FOR THE REV. DIV. S.A.A. 10 000