


THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE (.1) — TOLERANCE $\pm .015$
2 PLACE (.01) — TOLERANCE $\pm .010$
3 PLACE (.001) — TOLERANCE $\pm .008$
4 ON FRACTIONAL DIMENSIONS $\pm .004$
5 ON ANGULAR DIMENSIONS $\pm .00^\circ - .30^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt{125}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL C 1020
HEAT TREAT CARBONITRIDE
HARDNESS NITRE-DRAW R_{15N} 88-92
COLOR NONE
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON


ALTERATIONS

ALT	WAS	REF.	BY	DATE

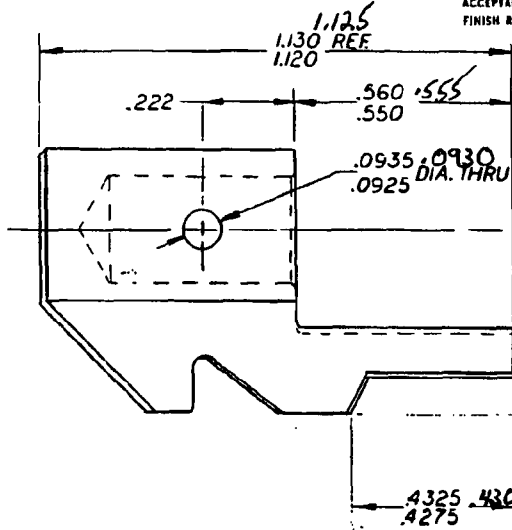

.430 BASIC REF

FOR BLANK DWG. SEE B-92711
FOR EXTRUDED STOCK SEE A-17113

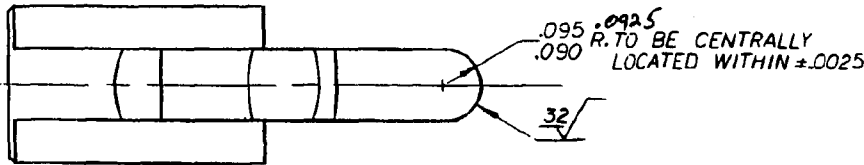

*Change to Font 6
Setup minus S.A. 4.*

700LW		FIRING PIN HEAD	
MODEL	PART NO	PART USE	
DES. BY DATE	DRN. BY DATE	CHK. BY DATE	APP. BY DATE
	RJM	6-1-83	7-6-1-83
TITLE FIRING PIN HEAD			
NUMBER	SCALE	SUPERSEDES	REFERENCE
B-92709	4:1		
REMINGTON ARMS CO. INC. ILION RESEARCH DIV.			