


REMINGTON ARMS CO. INC.			
RESEARCH & DEV. DEPT.			
SCALE	SUPERSEDES-REFERENCE		
5X			
TITLE PIN			
DES. BY DATE	DRN. BY DATE	CHK. BY DATE	APP. BY DATE
	11/9/46		11/12/28/61
FOR DETAILS, SEE PROCESS RECORD			
MODEL	PART USE	QUAN.	SEE
XP-100	TRIGGER LINK PIN	2	

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE. UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

08-20C Steel
Cyanide Harden
File Hard
Torch Draw Front End
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

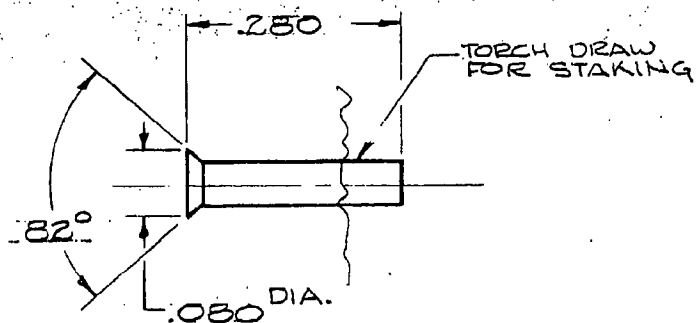

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

2	ADDED	11204	V B	5/6/80
1	XP-700	8563	E	12/29/70
ALT.	WAS	REFERENCE	BY	DATE
ALTERATIONS				

② FOR BLANK DRAWING
SEE A-16505

A-15459

TFA-3 REV. 1