


NUMBER <i>A-14414</i>		REMINGTON ARMS CO. INC. RESEARCH & DEV. DEPT.	
SCALE <i>9:1</i>		SUPERSEDES-REFERENCE	
TITLE <i>PIN</i>			
DES. BY DATE	DRN. BY DATE <i>MARTIN</i> <i>2-16-66</i>	CHK. BY DATE <i>W. S. Sall</i> <i>9-13-66</i>	APP. BY DATE
FOR DETAILS, SEE PROCESS RECORD			
MODEL	PART USE	QUAN.	SEE
<i>15</i>	<i>LINK COMPACTOR PIN</i>	<i>24</i>	<i>24</i>

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL *1010*
HEAT TREAT *CYANIDE*
HARDNESS
COLOR
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON
APPR. BY DATE

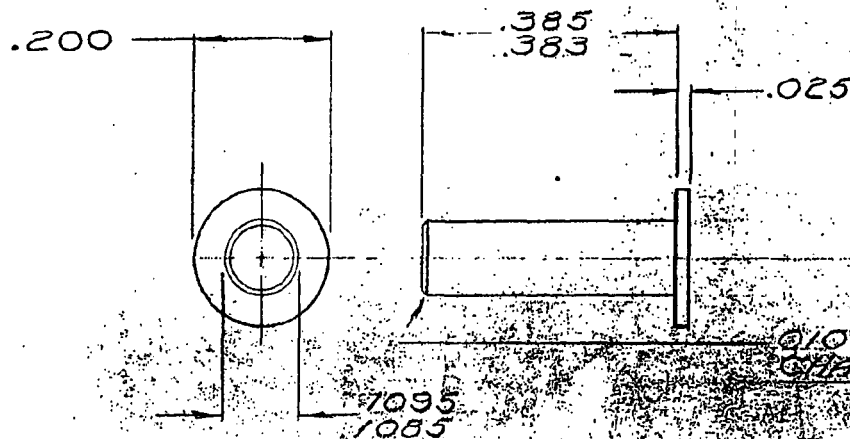

0.10 X 25°
CHAMFER

ALT.	WAS	REFERENCE	BY	DATE
ALTERATIONS				

TFA 3 REV. 1