

NUMBER <i>114632</i>		REMINGTON ARMS CO. INC. RESEARCH & DEV. DEPT.	
SCALE <i>4 X</i>	SUPERSEDES-REFERENCE <i>DCR 7109</i>		
TITLE <i>RIVET</i>			
DES. BY DATE <i>D.D. 16 MAY 66</i>	DRN. BY DATE <i>5/13/67</i>	CHK. BY DATE <i>5/13/67</i>	APP. BY DATE <i>5/13/67</i>
FOR DETAILS, SEE PROCESS RECORD <i>11/13/67</i>			
MODEL	PART USE	QUAN.	SEE
<i>40XB</i>	<i>TRIGGER HOUSING RIVET</i>	<i>4</i>	<i>C30785</i>
<i>40XCF</i>	"	"	<i>C30785</i>
<i>700ADL</i>	"	"	<i>C26655</i>
<i>700BDL</i>	"	"	<i>C26655</i>
<i>700YAR</i>	"	"	<i>C26655</i>
<i>7LWT</i>	"	"	"


DO NOT SCALE THIS DRAWING; WORK TO FIGURES
UNLESS OTHERWISE NOTED, TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ}.30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT	
MATERIAL	<i>STEEL - ALT MATL BUTTER</i>
HEAT TREAT	
HARDNESS	
COLOR	
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON	
APPR. BY DATE	

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

RIVET: AMERICAN STANDARD SMALL SOLID
TYPE: PAN HEAD

NOTE: ALL RADII ARE APPROXIMATE

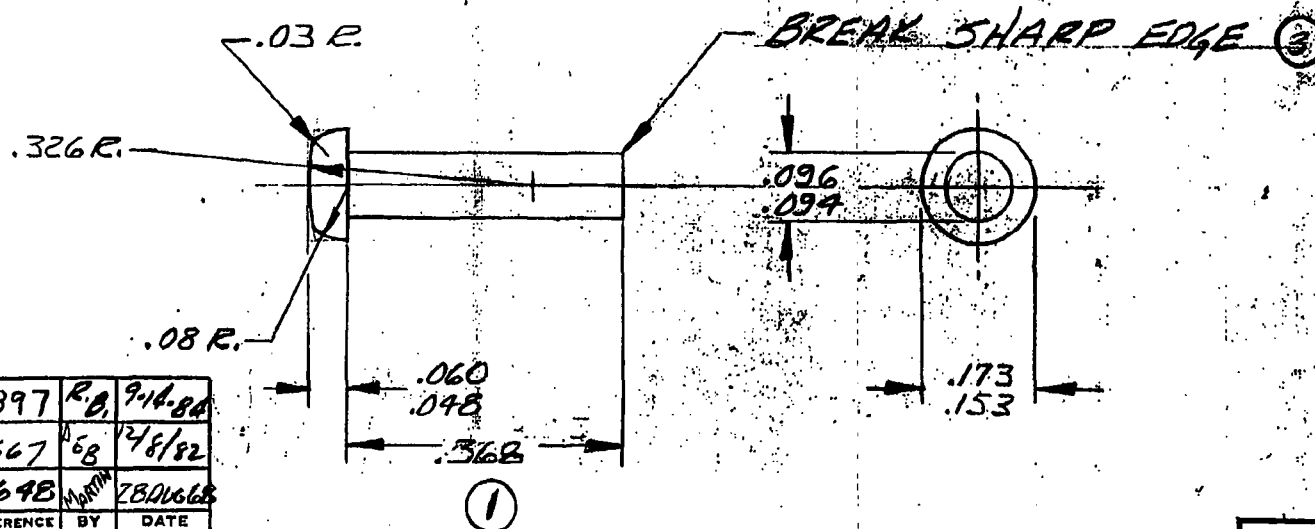

3	ADDED NOTE	11897	R.D.	9-14-80
2	ADD USE 7LWT	11667	58	12/8/82
1	400 E.P.L.	7648	MARTIN	28/10/66
ALT.	WAS	REFERENCE	BY	DATE
ALTERATIONS				

TFA-3 REV. 1

A-14632