



REMINGTON-UMC, INC.			
DESIGN		SUPERSEDED REFERENCE	
PIN			
DES. BY DATE	DRN. BY DATE	CRK. BY DATE	APP. BY DATE
	1/24/61		1/12/28/61
FOR DETAILS, SEE PROCESS RECORD			
MODEL	PART USE	QUAN.	SEE
100	TRIGGER LINK PIN	2	

SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm .00^\circ$ TO 30°
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED, FINISH ROUGHNESS TO BE
125 OR BETTER.

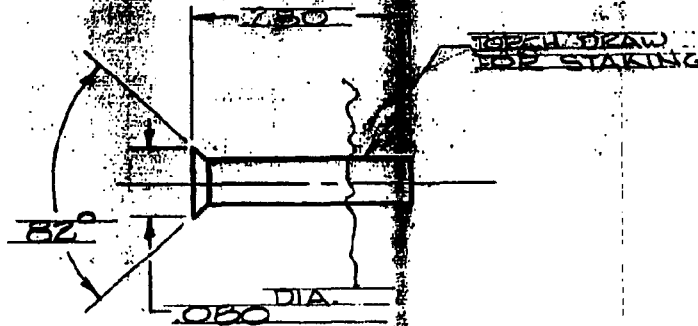

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL... 08-20C Steel
HEAT TREAT... Cyanide Hardened
HARDNESS... File Hard
COLOR... Torch Draw... Front End
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON



2	ADDED	11/20/4	V B	5/16/80
1	EXP. 100	8543	E L	12-29-70
ALTERED BY		REFERENCE	BY	DATE
WAS				
ALTERATIONS:				
REVISIONS:				

② FOR BLANK DRAWING
SEE A-16505

THIS DRAWING (OR INFORMATION)
HEREIN IS LOANED TO YOU BY THE
REMINGTON-UMC COMPANY, INC.

A-15459