


NOTES		REMINGTON ARMS CO. INC.	
45462		RESEARCH & DEV. DEPT.	
SCALE		SUPERSEDES REFERENCE	
FOR DETAILS, SEE PROCESS RECORD			
DATE	BY DATE	CHK. BY DATE	APP. BY DATE
12/21/61		12/21/61	12/21/61
MODEL	PART USE	QUAN.	SEE
1	BEAR BIK. STUD	1	

DO NOT SCALE THIS DRAWING; WORK TO FIGURES
 UNLESS OTHERWISE NOTED. TOLERANCES
 ON DECIMAL DIMENSIONS ARE $\pm .005$
 & ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
 & ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
 FINISHES ARE DESIGNATED BY ROOT MEAN
 SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
 VALUES AND ARE THE MAXIMUM ROUGH-
 NESS ACCEPTABLE. UNLESS OTHERWISE
 SPECIFIED, FINISH ROUGHNESS TO BE
 125 OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL... *08-20 C Steel*
 HEAT TREAT... *None*
 HARDNESS...
 COLOR...
 HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

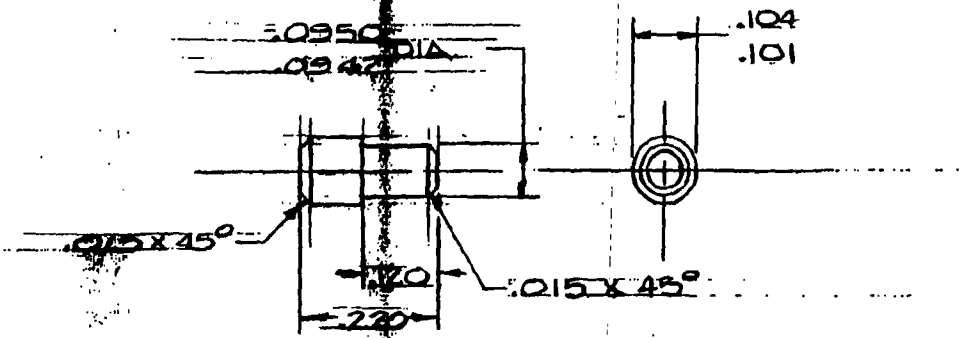

THIS DRAWING OR INFORMATION IS
 PROPRIETARY INFORMATION TO THE
 REMINGTON ARMS COMPANY, INC.

ALT.	WAS	REFERENCE	BY	DATE
1	XP-700	2563	E	12-29-70
ALTERATIONS				

A-15462