

NUMBER A-18758		THE REMINGTON ARMS CO. INC.	
		TECHNICAL DEPT. — ARMS DIV.	
SCALE 4X SIZE		SUPERSEDES REFERENCE	
TITLE PIN		APP. BY DATE DSF 11-3-49	
DES. BY DATE	DRN. BY DATE	IND. BY DATE	CHK. BY DATE
	HART 11-3-49		HART 11-3-49
MATERIAL		HEAT TREATMENT	
FOR DETAILS, SEE PROCESS RECORD			
MODEL	PART No	PART USE	QUAN.
721	18758	BOLT PIN	1
722	"	"	1
725	"	"	1
FOXCR	"	"	1
722	"	"	1
722	"	"	1
XP-700	"	"	1
600	"	"	1
700VAR	"	"	1
660	"	"	1

9	ADDED XC-13	4499	R.S.	1/1/62
8	700 AUL	4005	R.S.	1-14-62
7	700 A	"	"	"
6	ADDED XP-700	2021	RL	1-7-65
5	ADD 700 A	4217	R.S.	5-17-61
4	ADDED N.F.	"	"	"
3	ADDED 40X.C.F.	3941	RL	7-16-60
2	ADDED	"	R.S.	7-28-59
1	.250-.270	500/100	R	2-6-50


ALT.	WAS.	REFERENCE	BY	DATE
ALTERATIONS				

DO NOT SCALE THIS DRAWING; WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .003$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
"V" OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL **C-1157 OR 8090**
HEAT TREAT **NONE**
HARDNESS
COLOR **NONE**
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

Mod	Part No	USE
600	18758	BOLT PIN
7LWT	"	"

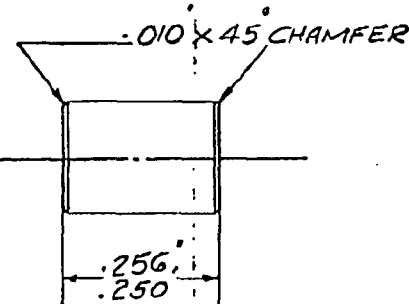

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

A-18758