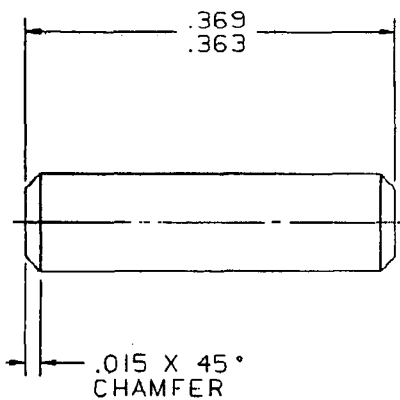



UNLESS SPECIFIED THIS DRAWING WORK TO FIGURES
UNLESS OTHERWISE NOTED
TOLERANCES ON DIMENSIONAL DIMENSIONS ARE
1 PLACE .10 TOLERANCE $\pm$.015
2 PLACE .010 TOLERANCE $\pm$.010
3 PLACE .005 TOLERANCE $\pm$.005
4 ON FRACTIONAL DIMENSIONS $\pm$.10
8 ON ANGULAR DIMENSIONS $\pm$.00 30'
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE IRMS MICRO INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH AND FINISHES TO BE $\sqrt{16}$ IN BETTER

MATERIAL 4340
HEAT TREAT _____
HARDNESS R45N 45 48
COLOR BLACK OXIDE
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

[illegible]

OB Seite

NBAR		FIRING PIN CROSS PIN	
MODEL	PART NO.	PART USE	
DWG BY DATE	DWG BY DATE R.S.M. 11-7-84	CHE BY DATE	APP. BY DATE
TITLE FIRING PIN CROSS PIN			
NUMBER B-1412	SCALE 10X	SUPERSEDES	REFERENCE
REMINGTON ARMS CO. INC. NORJON RESEARCH DIV.			

CV FILENAME RES.DSF NBAR FIRING-PIN-CROSS-PIN