

B-1466

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING WORK TO FIGURES
UNLESS OTHERWISE NOTED
FRACTIONAL DIMENSIONS ARE
1 PLACE .11 TOLERANCE $\pm .05$
2 PLACE .100 TOLERANCE $\pm .010$
3 PLACE .1001 TOLERANCE $\pm .005$
4 ON FRACTIONAL DIMENSIONS $\pm 1/64$
4 ON ANGULAR DIMENSIONS $\pm .003$ 30'
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED,
FINISH ROUGHNESS TO BE $\sqrt[3]{R}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL P.M. PLAIN IRON

HEAT TREAT

HARGNESS 71 MIN. DENSITY

COL GR


HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ATTACHMENTS

[illegible]

NOTES:

1. FOR BLANK DRAWING SEE B-91924.
2. RESIN IMPREGNATE

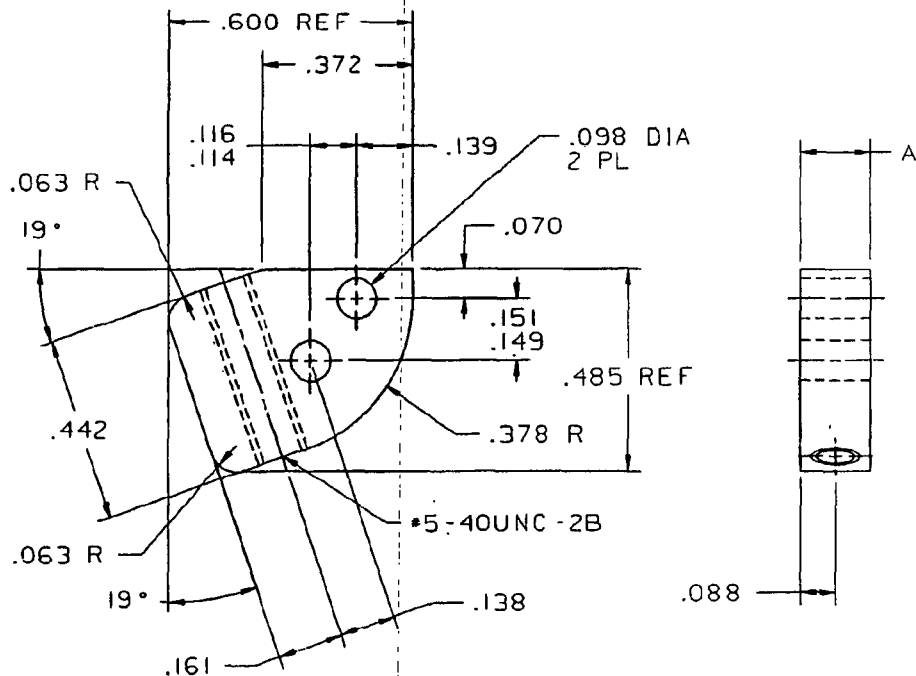

DIM "A"

BLANK DIM	.182/.178
FINISH DIM	.176/.174

NRAR	1466	SPACER. REAR	
MODEL	PART NO	PART USE	
Q'S BY DATE	Q'N BY DATE	Q'N BY DATE	Q'N BY DATE
	MAR 8 14 85		
TITLE SPACER, REAR			
NUMBER	Q'N	SUBSAMPLER	REFERENCE
B-1-166	41		
REYNOLDS ARMS CO. INC. 1104 RESEARCH DIV			

SV FILENAME RES.5MM.NBAR REAR-SPACER

R2522638
BAPBED - DPESAIEB 0434650

R2522638
650