

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL SEE BLANK

HEAT TREAT

HARDNESS


COLOR BLACK OXIDE

HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

APPR. BY DATE

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{32}$
& ON ANGULAR DIMENSIONS $\pm .00430$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

ALTERATIONS				
LET.	WAS	REFERENCE	BY	DATE

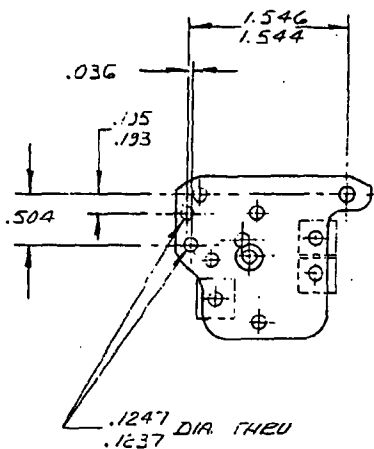

NOTE: MODIFY STANDARD M/700 TRIGGER HOUSING
PART N^o 26655. (BEFORE COLOR)

500 LOT

8.100 TRIGGER HOUSING 1		AL	
MODEL	PART USE	QUAN.	SEE
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE
L.D. 30/1/70			
TITLE TRIGGER HOUSING			
NUMBER	SCALE	SUPERSEDES—REFERENCE	
SLR-1643	FULL	REMINGTON ARMS CO. INC. RESEARCH & DEV. DEPT	

1 REV. 2