


166

LET.	WAB	REFERENCE	BY
A	.375		u m
B	.137 R.		u m
C	.900		u m
D	.700		u m
E	.900		"
F	.030 R		u m
G	REMOVED		u m

FINISHES ARE DESIGNATED BY ROOT MEAN SQUARE (R.M.S.) MICRO-INCH ROUGHNESS VALUES AND ARE THE MAXIMUM ROUGHNESS ACCEPTABLE, UNLESS OTHERWISE SPECIFIED. FINISH ROUGHNESS TO BE

MATERIAL 1010
HEAT TREAT _____
HARDNESS _____
COLOR _____
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON
APPR. BY DATE _____

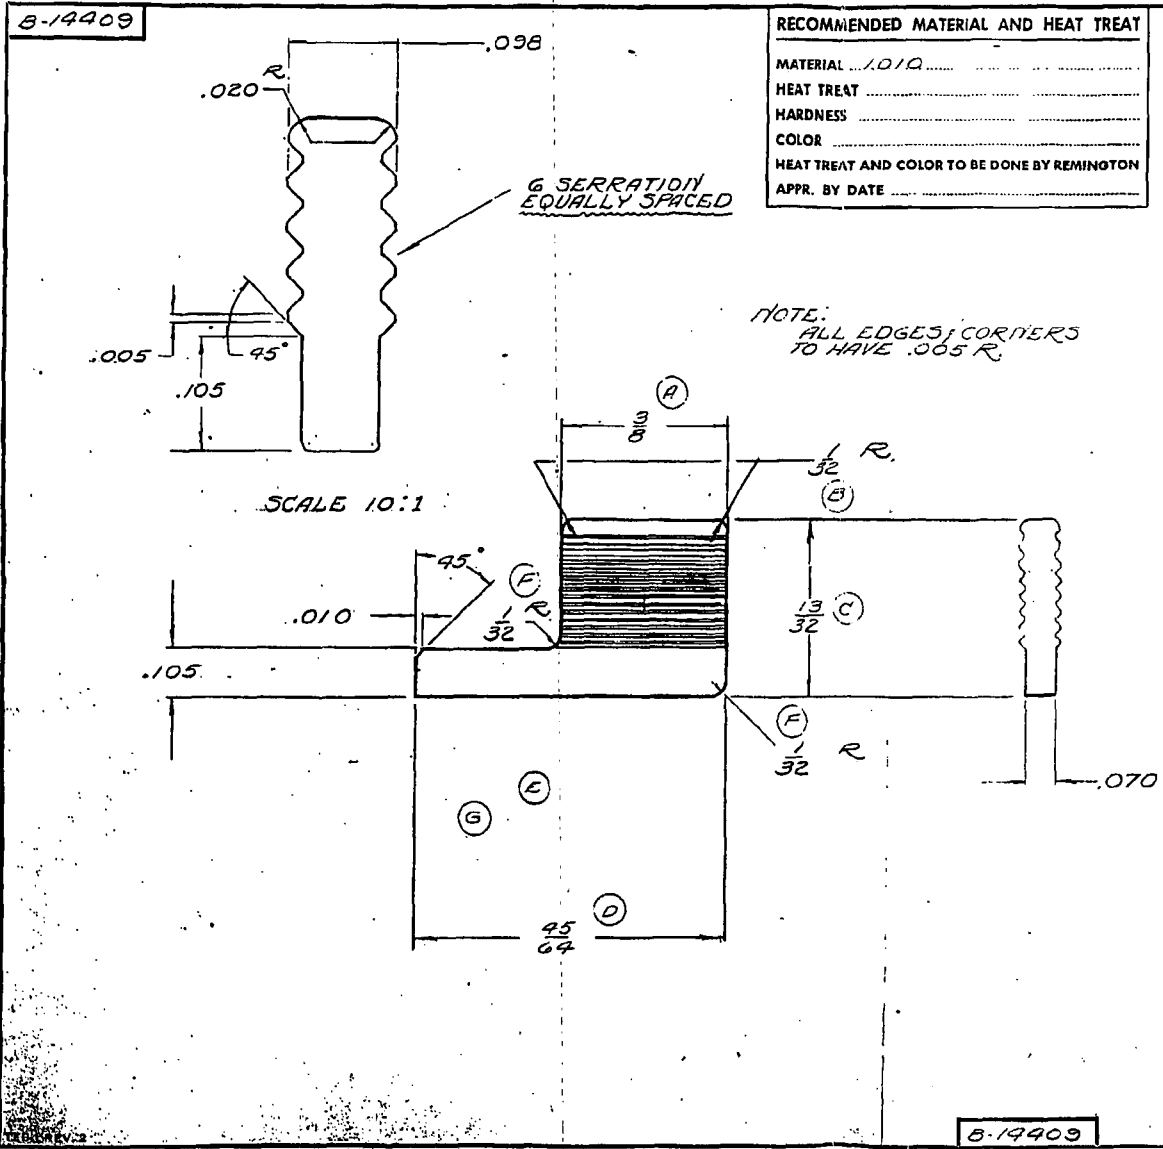

7188		SELECTOR LEVER 1		PL
MODEL		PART USE		QUAN. BI
DES'D BY DATE	DRAWN BY DATE	CHECKED DATE	APPR. BY	
	MARTIN 8-7-66	VON DOLAN 3-13-66		
TITLE LEVER				
NUMBER B-14409		SCALE 9:1	SUPERSEDED-REFERS	
REMINGTON ARMS CO. RESEARCH & DEV. DEPT.				