

B-18758

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING; WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE .111 - TOLERANCE $\pm .015$
2 PLACE .1011 - TOLERANCE $\pm .010$
3 PLACE .10011 - TOLERANCE $\pm .005$
4 ON FRACTIONAL DIMENSIONS $\pm 1/64$
4 ON ANGULAR DIMENSIONS $\pm .00^\circ$ 30'
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt{125}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL C-1137 OR 8640

HEAT TREAT NONE

HARDNESS

COLOR NONE


HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ALTERATIONS

ALT.	DESCRIPTION	REV.	BY	DATE
14	REDRAWN WAS A-18758		W.P.	12-22-85



.1870
.1868

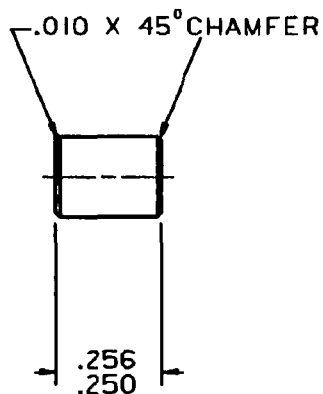

NBAR	18758	BOLT PIN
SEVEN	18758	BOLT PIN
700VAR	18758	BOLT PIN
XP-100	18758	BOLT PIN
700BDL	18758	BOLT PIN
700ADL	18758	BOLT PIN
40XCF	18758	BOLT PIN

MODEL	PART NO.	PART USE
DES. BY DATE	DES. BY DATE	DES. BY DATE
	W.P. 2-22-85	FEM 12-3-85

TITLE BOLT PIN			
SCALE	SUPERSEDES	REFERENCE	
4X	A-18758		
REMINGTON ARMS CO. INC. ILLION RESEARCH DIV.			

CV FILENAME - RES. SMN.NBAR.BOLT-PIN