



B-19

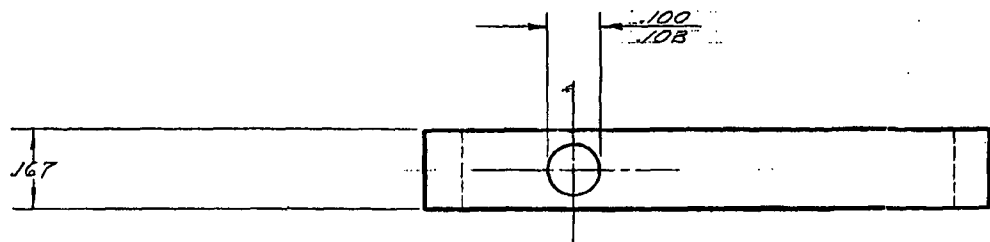

DO NOT SCALE THIS DRAWING; WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm .00^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE. UNLESS OTHERWISE
SPECIFIED, FINISH ROUGHNESS TO BE
125 OR BETTER.

ALTERATIONS

LET.	WAS	REFERENCE	BY	DATE
7	REDRAWN	4652	PL	3-8-62
8	A-19461			
9	FILE MARK	5109	PL	3-24-62
10	ADDED NOTE	5716	PL	4-16-62
11	ADDED USE	6473	DD	3-14-62
12	WAS. 325-329	10245	PL	1 MAY 72

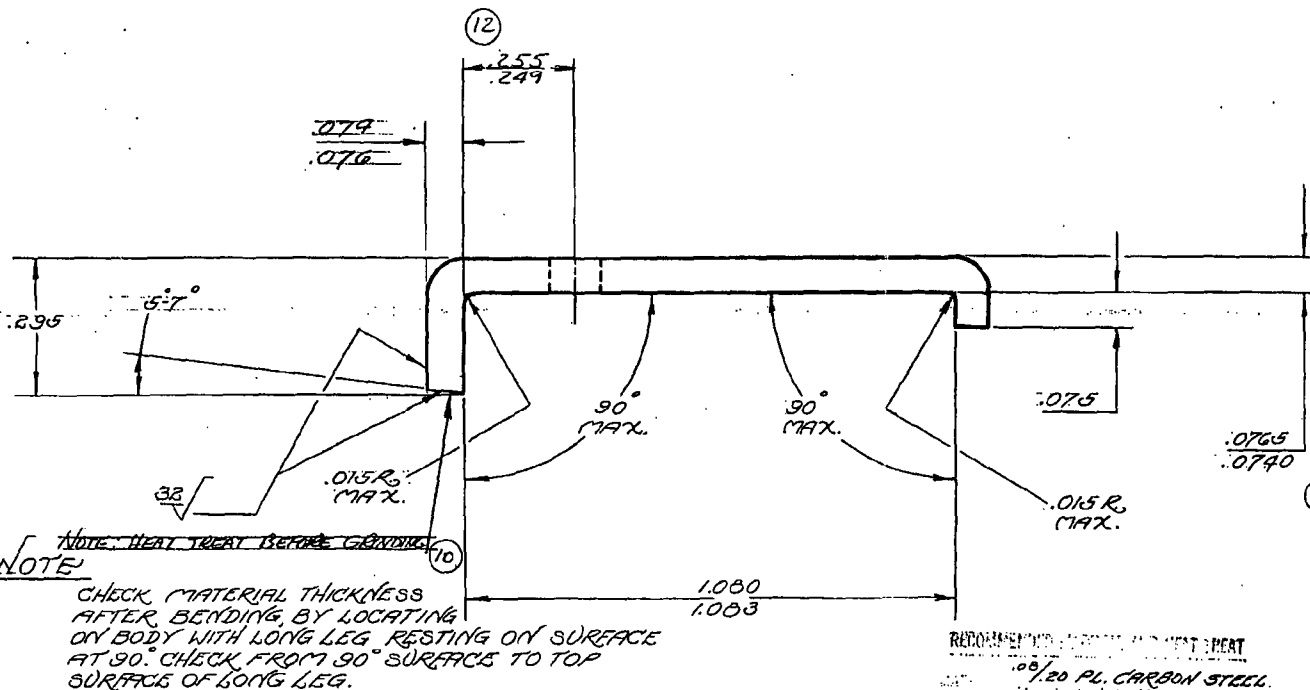

REVISED

REDRAWN
PER DEC 14 1952
DATE 14 Oct 77
48 Martin

RECOMMENDED MATERIAL AND HEAT TREAT
1.20 PL. CARBON STEEL
CYN. 203,100 CASE
R15N - 89-92
NONE
HEAT TREAT AND WASH

MODEL	PART USE	QUAN.	SEE
700VAP	TRIGGER CONNECTOR	P.L.	
700	TRIGGER CONNECTOR		
700	TRIGGER CONNECTOR		
725	TRIGGER CONNECTOR		
722	TRIGGER CONNECTOR		
721	TRIGGER CONNECTOR		
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE
2-8-62	3-8-62	2-9-62	VL 4/16/62
TITLE	CONNECTOR		
NUMBER	B-19461		
SCALE	4:1	SUPERSEDES - REFERENCE	
	4-19461		
REMINGTON ARMS CO. INC.			
RESEARCH & DEV. DEPT.			

BARBER - PRESALE R 0121719