

B-26355

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE .011 - TOLERANCE $\pm .015$
2 PLACE .011 - TOLERANCE $\pm .010$
3 PLACE .0011 - TOLERANCE $\pm .005$
4 ON FRACTIONAL DIMENSIONS $\pm .1/64$
5 ON ANGULAR DIMENSIONS $\pm .01^\circ$ - 30°
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt{}$ OR BETTER.



RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL C-1118
HEAT TREAT CYANIDE
HARDNESS LIMIT FILE HARD
COLOR NITRE BLACK
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ALTERATIONS

ALT.	DATE	REF.	BY	DATE
6	REDRAWN		RAJ	5-1-85

FOR BLANK DRAWING
SEE A-91908

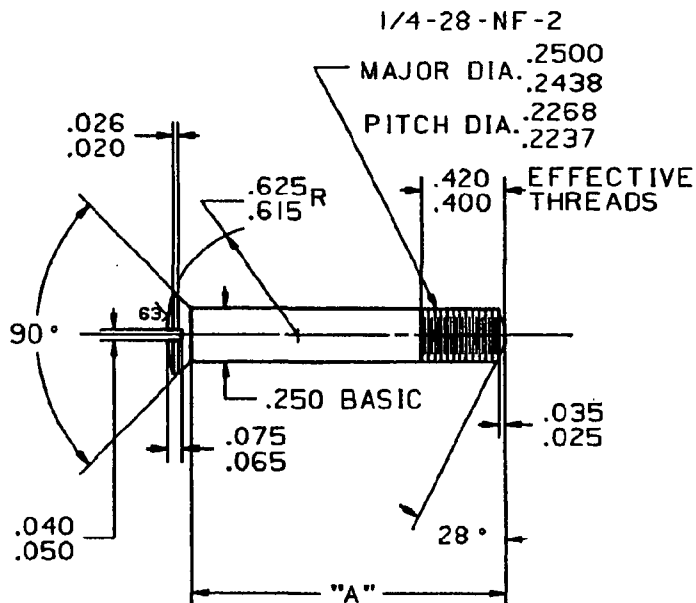

DIM.	PART NO.
	26355
"A"	1.529/ 1.514

NBAR	26355	REAR GUARD SCREW	
40XC	26335	REAR GUARD SCREW	
40XC	26335	TAKE DOWN SCREW (FRONT)	
40XR	26335	TAKE DOWN SCREW (FRONT)	
40XR	26335	REAR GUARD SCREW	
700 VAR	26335	REAR GUARD SCREW	P.L.
40XBCF	26335	REAR GUARD SCREW	P.L.
700 ADL 700 BDL	26335	REAR GUARD SCREW	P.L.
MODEL	PART NO.	PART USE	SEE
DES. BY DATE	REV. BY DATE	CHK. BY DATE	APP. BY DATE
	RAJ 5-1-85	FEM 12-3-85	

TITLE SCREW

NUMBER	SCALE	REPLACES A	REFERENCE
B-26355	2X	A-1000	
REMINGTON ARMS CO. INC. BLIGH RESEARCH DIV.			

CY FILENAME - RES.SMM.NBAR.REAR-GUARD-SCREW