


58592-9

RECOMMENDED MATERIAL AND HEAT TREAT
SEE - C-15370
MATERIAL B-15372
HEAT TREAT CARB. NITRIDE
HARDNESS R15N 881.92
COLOR BLACK OXIDE
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm .30^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
157 OR BETTER.

ALTERATIONS				
LET.	WAR	REFERENCE	BY	DATE
1	700 A	4405	054	1-28-62
2	700 AOL	"	"	"
3	ADDED	"	"	"
4	ADD USE 40X-B	5720	"	1/16/63
5	REDRAWN	1/11/65	"	1/16/65
6	BRAZE	"	"	"
7	ADDED USE	6479	DD	3-14-66
8	B-15372	6956	J.K.B.	1/14/67
9	C-15370	11486	57	1/14/67
10	PICTORIAL CHANGE	11486	57	1/14/67

BUTTON C-91852
(8) (13)

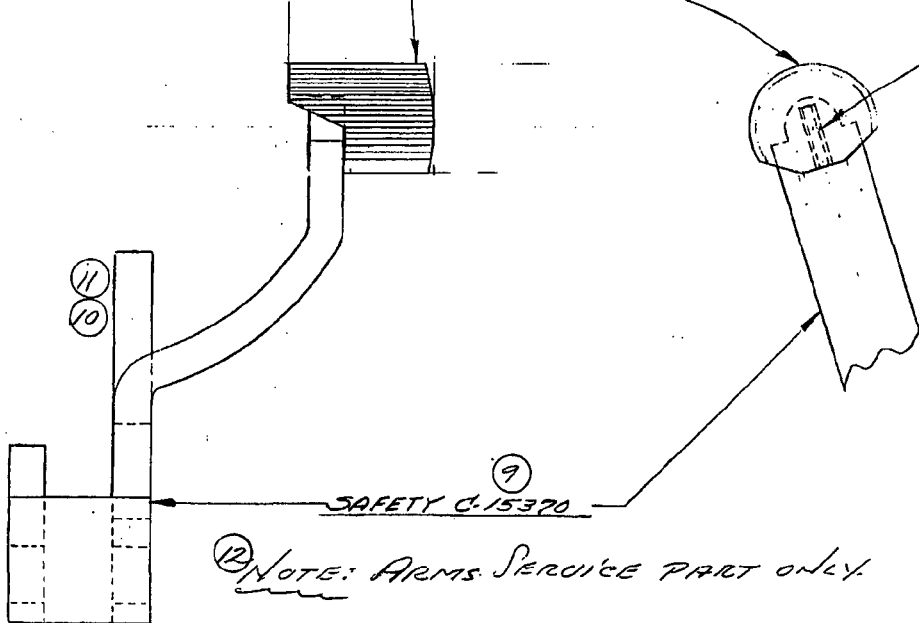

PROJECTION WELD

11	PICTORIAL CHANGE	11534	TF	3/15/62
12	ADDED	"	"	"
13	C-1457B	11783	JB	1-1-61

(12) NOTE: ARMS SERVICE PART ONLY.

THIS DRAWING OR INFORMATION IS
PROPERTY OF REMINGTON ARMS COMPANY, INC.

7	700VAR	SAFETY ASSY.	PL.
40X-B	CF	SAFETY ASSEMBLY	D 27590
4	40X-B	SAFETY ASSEMBLY	1 D-21570
2	700BOL	SAFETY ASSEMBLY	1 D-26745
1	700BOL	"	1 "
MODEL		PART USE	QUAN.
DES'D BY DATE		DRAWN BY DATE	CHECK BY DATE
6 7-11-61		113 7-12-61	7/1/61
APPR. BY DATE			
TITLE			
ASSEMBLY			
NUMBER		SCALE	SUPERSEDES-REFERENCE
B-26585		4X	
REMINGTON ARMS CO. INC.			
RESEARCH & DEV. DEPT.			

B-26585