


B-

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE (.1) - TOLERANCE $\pm .015$
2 PLACE (.01) - TOLERANCE $\pm .005$
3 PLACE (.001) - TOLERANCE $\pm .001$
4 OR FRACTIONAL DIMENSIONS $\pm .1/4$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt{V}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL _____
HEAT TREAT _____
HARDNESS _____
COLOR _____
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

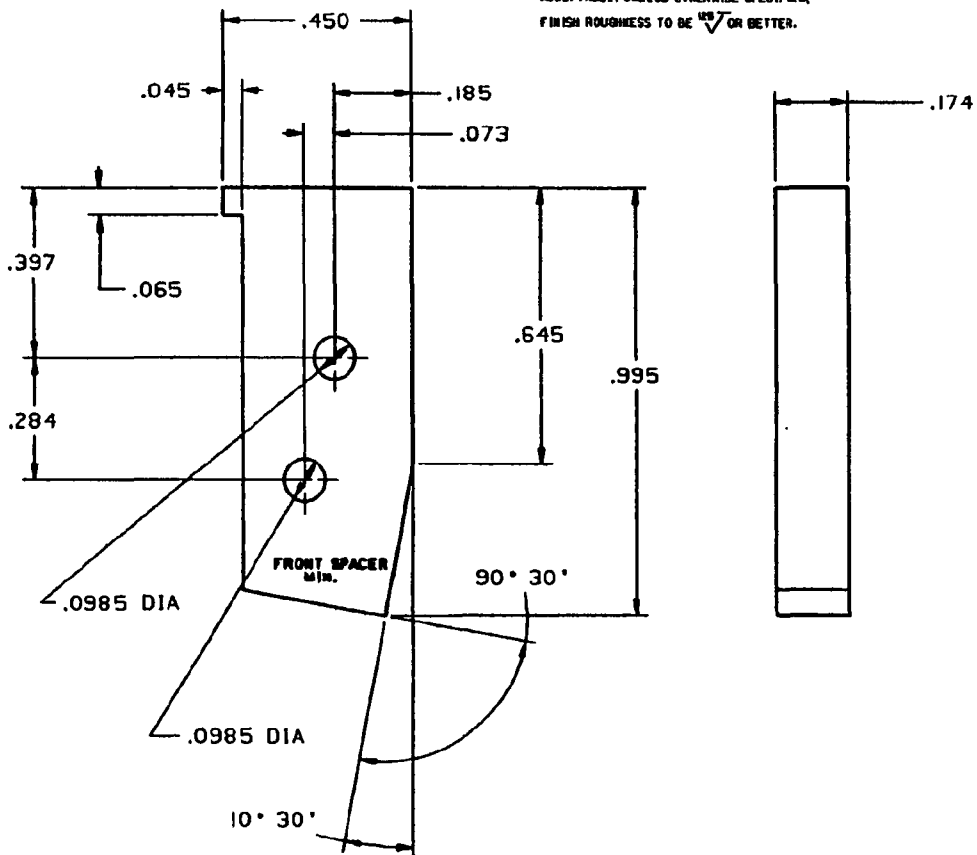

CV FILENAME - RES.NBAR.FRONT-SPACER-MIN.RAW

ALTERATIONS

ALT.	DATE	BY	REF.

NBAR	93635	TRIGG. HOUSING FRONT SPACER-MIN	
MODEL	PART NO.	PART USE	
DES. BY DATE	DES. BY DATE	CHK. BY DATE	APP. BY DATE
TJP 1-5-88			
TITLE SPACER, FRONT-MIN			
NUMBER	QUANTITY	REVISIONS	REFERENCE
B-93635	4X		
REMINGTON ARMS CO. INC. RESEARCH DIV.			