


SEE NOTE

.003 MAX. BOW
ALLOWED IN THIS
DIRECTION ONLY

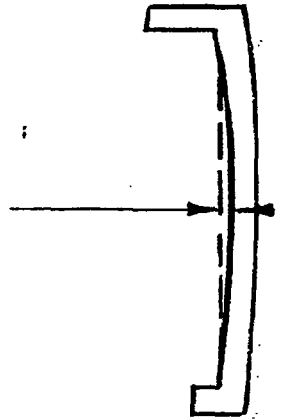

NOTE:

1. INSIDE SURFACE MUST BE SMOOTH
CLEAN AND FREE OF FURRS
2. PART MUST NOT ROCK WHEN INSIDE
SURFACE RESTS ON A FLAT SURFACE.
MAX. BEND TWIST OR BOW
ALLOWED IS .003.

*Superseded by
C-91937
C-92015
C-92016
4-18-80*

M-700	ALL	TRIGGER CONNECTOR
M-700	ALL	TRIGGER CONNECTOR
MODEL	PART NO.	PART USE
DES. BY DATE	DRN. BY DATE	CHK. BY DATE
	4-18-80	4-18-80
TITLE		
CONNECTOR BLANK "B"		
NUMBER	SCALE	SUPERSEDES
C-91937	4X	REPER
REMINGTON ARMS CO		
ILION RESEARCH		

(4)