

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS GRAPH; NORM TO F NUMBER
WHENEVER OTHERWISE NOTED.

TOLERANCES ON DECIMAL DIMENSIONS ARE:

1 PLACE LH - TOLERANCE $\pm .01$
2 PLACE LH - TOLERANCE $\pm .005$
3 PLACE LH - TOLERANCE $\pm .002$
4 OF THE FOLLOWING DIMENSIONS $\pm .001$
1. ALL INTERNAL DIMENSIONS
2. ALL DIMENSIONS BY FIRST ANGLE MOUNTING RULES MICRO-SHOWN DIMENSIONS
3. ALL DIMENSIONS BY FIRST ANGLE MOUNTING RULES MICRO-SHOWN DIMENSIONS

VALUES ARE THE DIMENSION SPECIFIED
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.


INCH DIMENSIONS TO BE $\sqrt{10}$ UNLESS NOTED.

RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL C-1020
HEAT TREAT H5
HARDNESS RC 37-42
COLOR SILVER POLISH
HEAT TREAT AND COLOR TO BE COME BY
RMC INQUIRY 200

[illegible]

1. PIECE MUST BE FLAT AND FREE FROM BURRS. ENTIRE SURFACE OF PART MUST PASS THROUGH .091 SLOT.

2.FOR BLANK DRAWING SEE B-90492

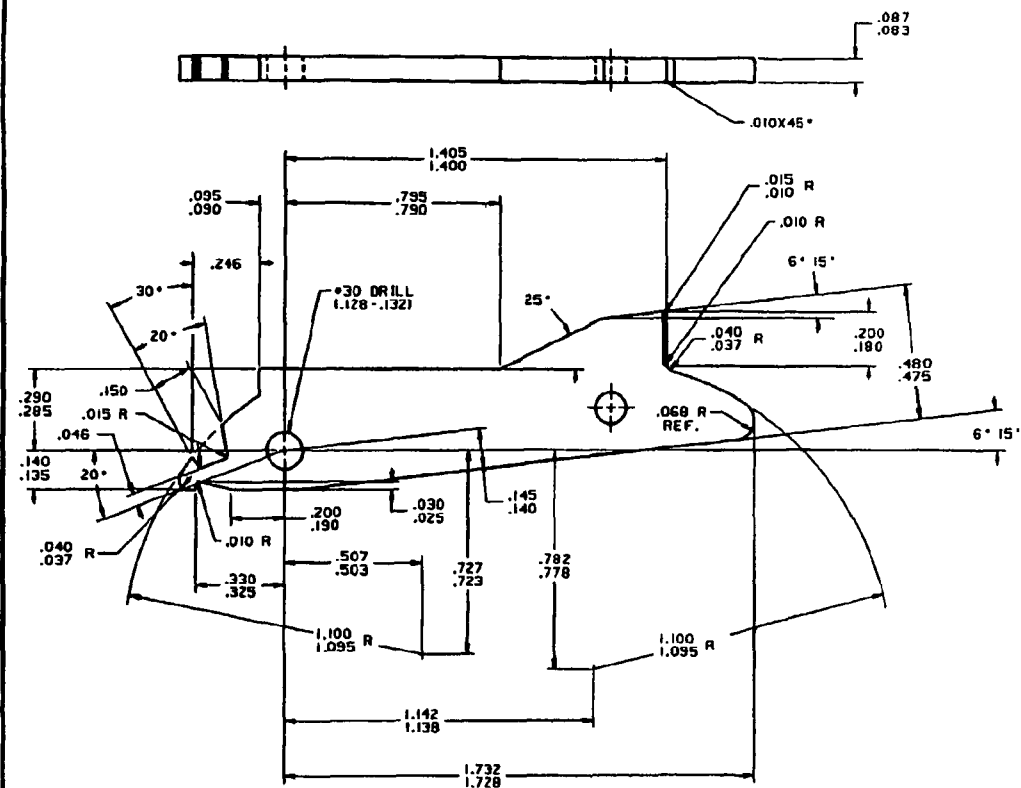

CV FILENAME : READING, POLYTOP, WP

NUMBER	33639	BOLT STOP	
MODEL	PART NO.	PART USE	
STA. OR DATE	STA. OR DATE	STA. OR DATE	STA. OR DATE
SEP 3-4-68			
FILE			
BOLT STOP			
APPROVED	DATE	EXPIRATION	REMARKS
	4/1		
REINTEGRATION ARMS CO. INC.			
4 NEW HAVEN BRANCH CT.			

BARBER - PRESALE R 0121954

R2522942