

059E6-C

NOTES:





1. .015 RAD. PERMISSIBLE ON ALL CORNERS EXCEPT THOSE SPECIFIED.
2. NO BURRS WIDER THAN PART THICKNESS PERMITTED AND PART MUST WORK FREELY IN A .1725 WIDE SLOT.
3. HOLE TO BE DRILLED AND REAMED AFTER FABRICATION.

THIS DRAWING OR INFORMATION TO
PROPERTY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

ON THE SCALE THIS DRAWING IS TO BE
FOR THE DRAWING OFFICE
DATE: 10-10-50
BY: J. H. H. H.
CHECKED BY: J. H. H. H.
APPROVED BY: J. H. H. H.
REVISIONS: 1. 10-10-50
2. 10-10-50
3. 10-10-50
4. 10-10-50
5. 10-10-50
6. 10-10-50
7. 10-10-50
8. 10-10-50
9. 10-10-50
10. 10-10-50

REVISIONS: 1. 10-10-50
2. 10-10-50
3. 10-10-50
4. 10-10-50
5. 10-10-50
6. 10-10-50
7. 10-10-50
8. 10-10-50
9. 10-10-50
10. 10-10-50

REV.	DATE	DESCRIPTION
1	10-10-50	10-10-50
2	10-10-50	10-10-50
3	10-10-50	10-10-50
4	10-10-50	10-10-50
5	10-10-50	10-10-50
6	10-10-50	10-10-50
7	10-10-50	10-10-50
8	10-10-50	10-10-50
9	10-10-50	10-10-50
10	10-10-50	10-10-50

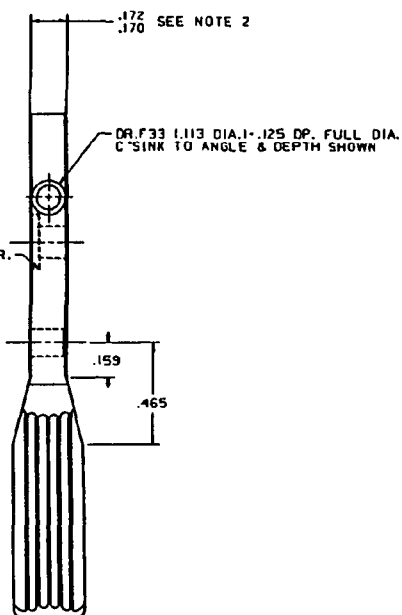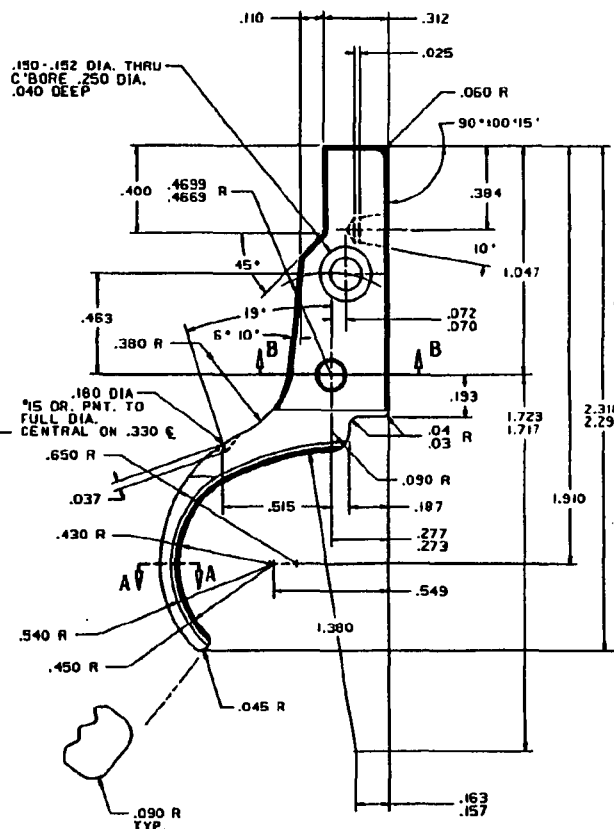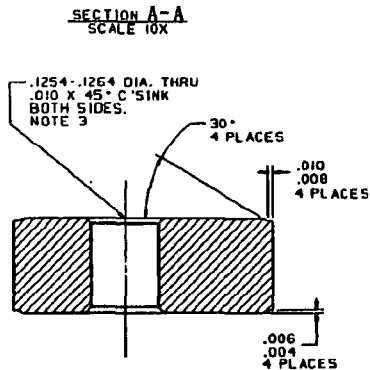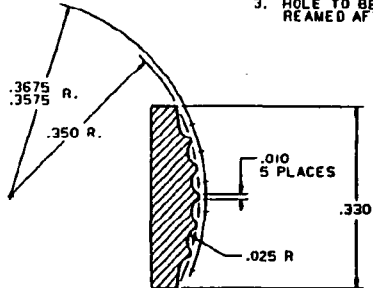

TRIGGER	D-93650
REVISIONS	1. 10-10-50
2. 10-10-50	10-10-50
3. 10-10-50	10-10-50
4. 10-10-50	10-10-50
5. 10-10-50	10-10-50
6. 10-10-50	10-10-50
7. 10-10-50	10-10-50
8. 10-10-50	10-10-50
9. 10-10-50	10-10-50
10. 10-10-50	10-10-50