



M/700 416 Cal Strength 893111  
1989 890891 F3 Pin Star Washer (Dry Cycle)  
892832 17 Cal Endurance  
890411 Sniper / Starter  
890531 Arylon field Function  
890412 Sight Mod.

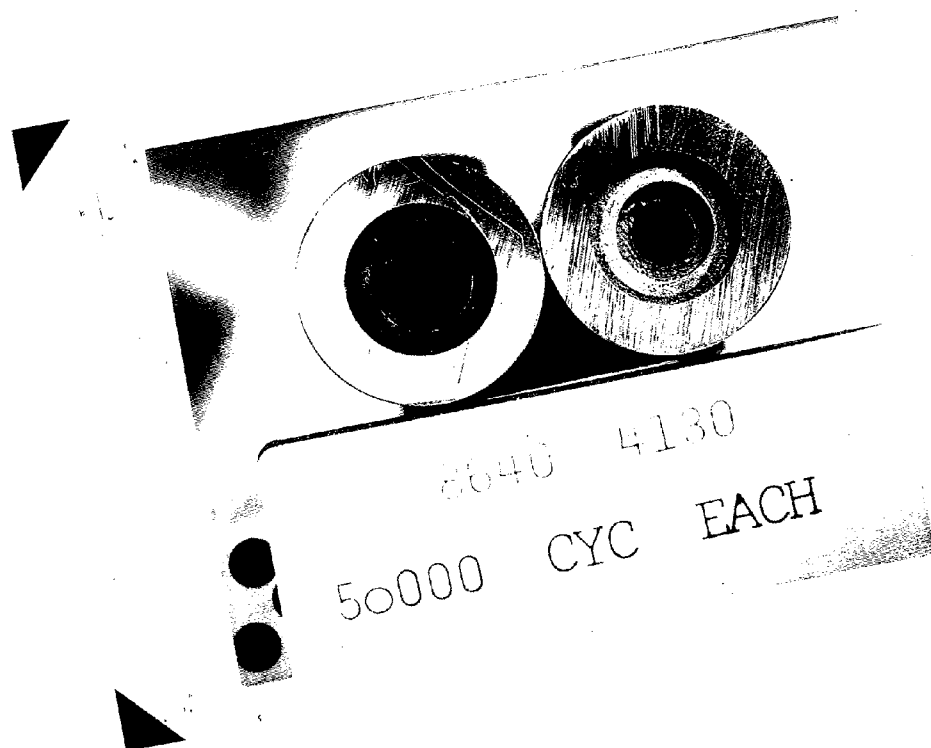

Polaroid

824112A046318

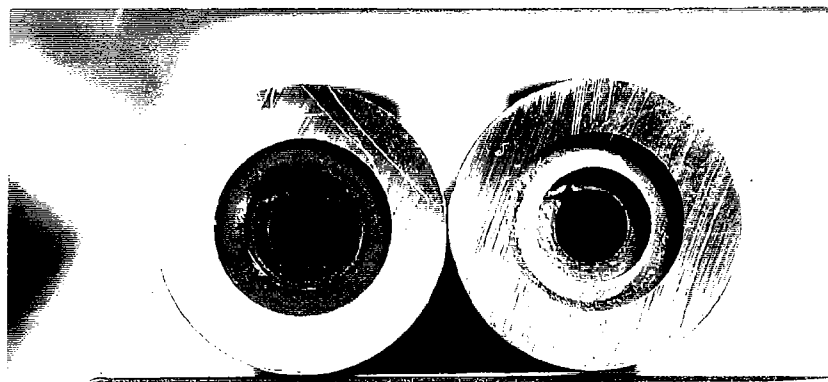

4040 4130

50000 CYC EACH

Polaroid

HA4112A046318

Report No. 890891

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input type="checkbox"/> Developmental <input checked="" type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance		<b>AREA OF TESTING</b> <input type="checkbox"/> Safety Related <input type="checkbox"/> Litigation <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> Warehouse Audit <input type="checkbox"/> New Design <input type="checkbox"/> Cost Reduction <input checked="" type="checkbox"/> Design Change <input type="checkbox"/> Stake _____ <input type="checkbox"/> Plant Assistance <input type="checkbox"/> Other _____	
<b>FIREARM STAT'S.</b> MODEL: <u>M 700</u> CAL. or GAGE: _____ BARREL TYPE: _____ PROOFED: YES <input type="checkbox"/> NO <input type="checkbox"/>		<b>REPORT REQ'D.</b> FORMAL <input checked="" type="checkbox"/> • TEST RESULTS ONLY <input checked="" type="checkbox"/>	
		Ed Owens 443 DATE REQUESTED: <u>3-30-89</u> DATE NEEDED BY: <u>4/30/89</u> REQUESTED BY: <u>Frederick Martin</u> WORK ORDER NO: <u>481153</u>	

## TEST TYPE

<input type="checkbox"/> Strength Test	<input type="checkbox"/> Ammunition Test	<input checked="" type="checkbox"/> Dry Cycle Test	<input type="checkbox"/> Photo/Video
<input type="checkbox"/> Function Test	<input type="checkbox"/> Environmental Test	<input type="checkbox"/> Measurements	<input type="checkbox"/> Other _____
<input type="checkbox"/> Accuracy Test	<input type="checkbox"/> Customer Complaint	<input checked="" type="checkbox"/> Endurance Test	<input type="checkbox"/> _____

**EXPLAIN IN DETAIL THE REASON FOR THIS TEST:** - To EVALUATE A Vendor Suggested MAT'L CHANGE In The Feeder Pin Stop Washer - The MAT'L WAS ~~6640~~ <sup>PRESENT</sup> AND The Vendor Would Like To Change To ~~4130~~ <sup>PROPOSED MAT'L</sup>

Dry Cycle Bores Supplied 10 Present Production 10 Proposed MAT'L Change 250,000 ~~cycles~~ <sup>(PL)</sup> Cycles Section And Inspect For Wear And Or Impact Deformation

(NOTE: 1 OF EACH SAMPLE TO 50,000 CYC)

## GUNS REQUIRED:

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: 5-5-89TEST COMPLETED BY: RWH

REPORT DATE: \_\_\_\_\_

FRI 5 MAY 89

## Reason For Test

TO EVALUATE A SUGGESTED MATERIAL CHANGE IN THE EJECTOR STOP WASHER  
IN THE M/700 BOLT FROM THE CURRENT 8640 TO THE PROPOSED 4130

### EQUIPMENT REQUIRED:

m/700 DRY CHUCK MACHINES, FOR LAB PERSONNEL. TENSILEM OF THE TWO TYPES m/700  
BOLT'S ~~WIPERS~~ WITH TWO

## TEST PROCEDURE!

A. EACH INDIVIDUAL BOLT WAS PLACED IN A M/762 TEST LAB ACTION ~~FOR~~  
IN THE BOLT ACTION COCK AND FIRE DRY CYCLE MACHINE AND CYCLED TO  
THE FOLLOWING. NINE OF EACH TYPE TO AT LEAST 25,000 CYCLES  
EACH AND ONE OF EACH TYPE TO A TOTAL OF 50,000 CYCLES,

B. AFTER DRY CYCLE EACH BOLT, WAS CUT OFF APPROX  $1\frac{5}{8}$ " FROM ~~THE END~~, THE LOCKING LUG END SO THE RETAINER WASHERS COULD BE VISUALLY EVALUATED FOR WEAR AND OR DEFORMATION.

### Test Results

All test samples regardless of dry cycle level showed only slight ~~no~~ visual difference with no apparent wear or deformation.

SEE PICTURES OF TWO 5000 C/P LEVEL SAMPLES ATTACHED.

## TEST AND MEASUREMENT LAB - TEST REPORT

REQUESTER: K. Green                      WRITTEN BY: D.Thomas                      DATE: Nov. 2, 1989  
 REPORT NO: 892832                      WORK ORDER: 481152  
 TEST TYPE: Endurance / Strength

REASON FOR TEST:

To determine the endurance life and the ultimate strength of the 17 caliber barrels made to the upset barrel process.

EQUIPMENT REQUIRED:

8 Model 700, 17 cal. upset barrel process & 1 Model 700, 22/250

Cal.	Serial#	Comment
17	A6863413	Stress Relieved, used in destructive test
17	A6864021	Not Stress Relieved, used in destructive test
17	A6861310	Stress Relieved, endurance gun
17	A6862427	Stress Relieved, endurance gun
17	A6864953	Stress Relieved, endurance gun
17	B6257036	Not Stress Relieved, endurance gun
17	A6862992	Not Stress Relieved, endurance gun
17	A6861855	Not Stress Relieved, endurance gun

1988              C6357962              22/250

48000 rounds Remington 17 cal ammo

3000 rounds Remington 22-250 ammo

1000 rounds Federal 22-250 ammo

Iron Lung

Reloading Equipment

Shooting Room 52-1-A

Protective Shield & lanyard

TEST PROCEDURE:STRENGTH:

Two Barrels, one stress relieved and one non-stress relieved, were used in the destructive test.

The bore was plugged with four 25 gn. bullets ahead of the chamber. Each gun, in turn, was fixtured in the iron lung and had a destructive load shot through the it. The guns were fired remotely by means of a lanyard.

The following destructive load was fired in each gun:

25 gn. 296 powder

25 gn Remington bullet

Remington case

Remington primer

Estimated pressure 150000 psi +

Test # 892832

2

W.O. #481152

TEST PROCEDURE: (cont.)ENDURANCE:

Each gun was endurance tested using the following procedure:

A lanyard was attached to the gun so that the gun could be fired from behind a screen.

A cartridge was loaded in the chamber (The magazine was NOT loaded)

The tester would walk behind the screen and fire the gun.

The gun was fired twenty times using this procedure and then cooled.

Every 100 rounds the bore was cleaned.

TEST RESULTS:STRENGTH:

Neither the stress relieved nor the non-stress relieved barrel failed during the ultimate strength test.

ENDURANCE:

All of the bores showed severe heat checking ahead of the chamber after 500 rounds. Endurance shooting continued until each gun had 8000 rounds shot through it. There were no failures in neither the stress relieved nor the non-stress relieved barrels.

One Model 700, 22-250 caliber, serial # C6357962, was endurance tested 4000 rounds during a previous 17 caliber test (891701). This 22-250 was continued to 8000 rounds with no barrel failure.

Report No. 890411

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input checked="" type="checkbox"/> Developmental <input type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance	<b>AREA OF TESTING</b> <input type="checkbox"/> Safety Related <input type="checkbox"/> Litigation <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> Warehouse Audit <input checked="" type="checkbox"/> New Design <input type="checkbox"/> Cost Reduction <input type="checkbox"/> Design Change <input type="checkbox"/> Stakes <input type="checkbox"/> Plant Assistance <input type="checkbox"/> Other	
<b>FIREARM STAT'S.</b> MODEL: <u>M700 Altered</u> CAL or GAGE: <u>308/300</u> <u>Sniper</u> BARREL TYPE: <u>SPORTER</u> PROOFED: YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>	<b>REPORT REQ'D.</b> FORMAL <input checked="" type="checkbox"/> TEST RESULTS ONLY <input type="checkbox"/>	DATE REQUESTED: <u>2-9-89</u> DATE NEEDED BY: _____ REQUESTED BY: <u>F. MARTIN</u> WORK ORDER NO: _____

## TEST TYPE

<input type="checkbox"/> Strength Test	<input type="checkbox"/> Ammunition Test	<input type="checkbox"/> Dry Cycle Test	<input type="checkbox"/> Photo/Video
<input type="checkbox"/> Function Test	<input type="checkbox"/> Environmental Test	<input type="checkbox"/> Measurements	<input type="checkbox"/> Other
<input type="checkbox"/> Accuracy Test	<input type="checkbox"/> Customer Complaint	<input type="checkbox"/> Endurance Test	

## EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

SHOOT 2 Samples For Accuracy And Repeatability:

Version #1 Sniper Variant Has 2 BARRELS: PROOF EACH AND SHOOT FOR ACCURACY 5-5/200YDS. FOR FINAL GROUP EACH ~~BARREL~~ DISMOUNT BARREL, REMOUNT, AND SHOOT LAST GROUP TO CHECK FOR IMPACT SHIFT.

Version #2 SPORTER VARIANT HAS 1 BARREL PROOF AND PROCEED AS ABOVE EXCEPT SHOOT 100YDS.

## GUNS REQUIRED:

TO BE SUPPLIED/TO BE SHOT FROM SHOULDER - JERRY

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: 3-27-89TEST COMPLETED BY: J. SELANREPORT DATE: 3-27-89

## TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: F.E. MARTIN TESTER: J. SELAN DATE: 3/27/89  
 REPORT NO.: 890411 WORK ORDER NO.: 481009  
 WRITTEN BY: J. SELAN  
 TEST TYPE: DEVELOPMENTAL

FIREARM STAT'S : MODEL: M-700 ALTERED CAL or GAUGE: 308 W.M. - 308-243  
 BARREL TYPE: SNIPER / SPORTER PROOFED: YES ☒ NO ☐

REASON FOR TEST :

ACCURACY IN THE M-700 ALTERED VERSION IN 243 SPORTER,  
 308 & 300 WIN. MAG. SNIPER. AND TO CHECK FOR ROI. SHIFT.

EQUIPMENT REQUIRED :

100 & 200 YD. RANGE.  
 2 ALTERED RIFLES - (243 WIN. SER. # C6229208) 308-300 WIN. MAG SER. # C6247270  
 REM. AMMO: 300 W. MAG. 180 GR. PSR "CORE-LOKT" R-300W2 LOT # 5170C6823  
 308 WIN. MATCH-168 GR. BT HP. R-308W7 LOT "1"  
 243 WIN. 80 GR. "POWER-LOKT" HP R-243W2 KIDMD2622.  
 20X LYMAN ALL AMERICAN SCOPE. / MISC. CLEANING EQUIPMENT.  
 DIGITIZING TABLET. N.P. 9000 COMPUTER. CAL COMP. 9000

TEST PROCEDURE :

- PROOF ALL VERSIONS.
- SHOOT- 5-5 SHOT GROUPS, 100 YDS. - REMOVE BBL. AND REPLACE SHOOT FOR ROI. SHIFT  
 LAST GROUP
- SHOOT- 308 & 300 W. MAG. AT 200 YDS. (5-5 SHOT GROUPS) - AGAIN REMOVE BBL. ON  
 BOTH VERSIONS AND SHOOT LAST GROUP FOR ROI. - SHIFT.
- SHOOT ALL VERSIONS FROM SHOULDER.


TEST RESULTS :

- ORIGINAL BOLTS. ON 243 AND 308 WIN. - BOLT SHROUDS BLEW AT PROOF.  
 REPLACED AND REPROOFED - OK.
- 243 BBL. REMOVED VERY HARD AFTER SHOOTING - FOUR GROUPS.
- AFTER BBLs. REMOVED - ALL VERSIONS - SHOWED AN IMPACT SHIFT  
 AND HORIZONTAL SPREAD.
- TARGETS - INCLUDED. ON FOLLOWING SHEETS.

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B90411.1.1

## CENTERFIRE PATTERNS # 1

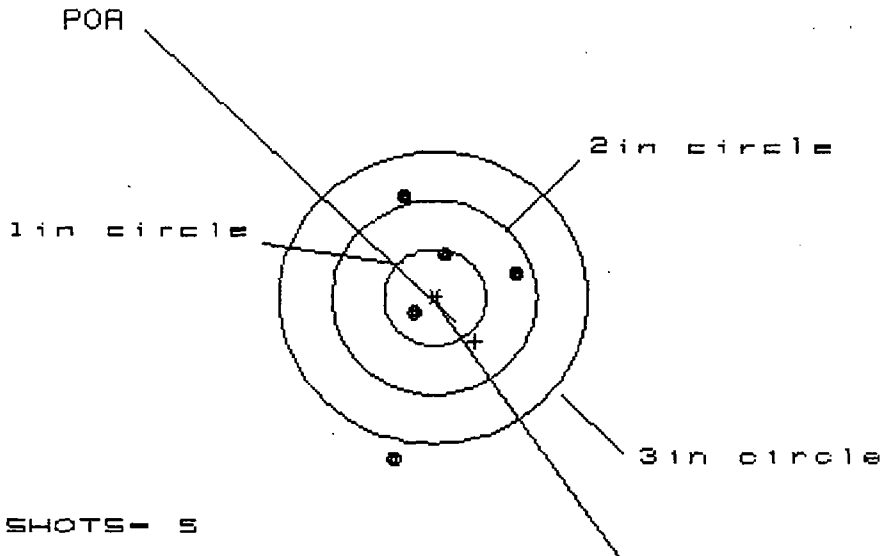

# OF SHOTS - 5

# IN CIR

1 in = 2

2 in = 3

3 in = 4

HS = 1.177

VS = 2.720

GS = 2.723

AVG G.S. = 3.18

AVG M.R. = 1.249

PATTERN # : 1

300 WIN. MAG. VARIANT

SHOTS (BEST OF)	5	4	3
MAXIMUM X	.788	.691	.568
MINIMUM X	-.389	-.369	-.412
MAXIMUM Y	1.090	.683	.269
MINIMUM Y	-1.630	-.567	-.339
CENTROID X	-.400	-.303	-.180
CENTROID Y	.454	.861	.633
POA TO CENTROID in.	.605	.913	.658
MIN RADIUS	.250	.052	.310
MEAN RADIUS	.866	.543	.472
MAX RADIUS	1.675	.776	.572
HORIZONTAL SPREAD	1.177	1.060	.980
VERTICAL SPREAD	2.720	1.250	.608
EXTREME SPREAD	2.723	1.352	1.062
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		3	
NUMBER IN THREE INCH CIRCLE =		4	

Ammo:

180 GR. P.S.P. "CORE-LOKT"

R-300W2

LOT- E170C 6823

SCOPE:

LYMAN ALL AMERICAN


20X

BENCH REST 200 YDS.

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/BS0411.1.1

## CENTERFIRE PATTERNS # 2

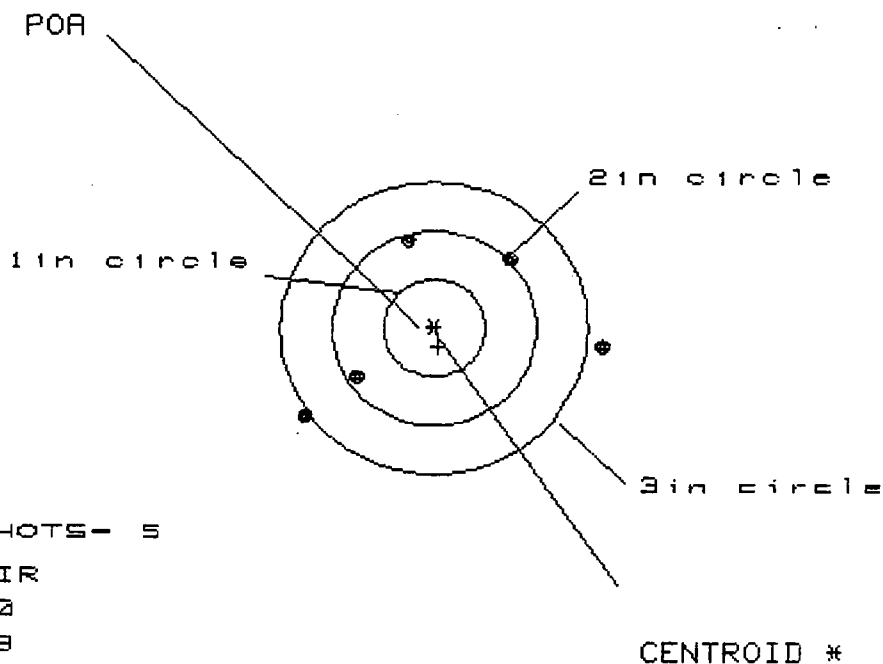

# OF SHOTS- 5

# IN CIR

1 in - 0

2 in - 3

3 in - 3

HS- 2.928

VS- 1.793


GS- 3.002

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.635	1.126	.831
MINIMUM X	-1.293	-.885	-.679
MAXIMUM Y	.916	.863	.553
MINIMUM Y	-.877	-.930	-.850
CENTROID X	-.042	-.450	-.155
CENTROID Y	.193	.246	.556
POA TO CENTROID in.	.197	.513	.577
MIN RADIUS	.930	.662	.574
MEAN RADIUS	1.214	1.025	.848
MAX RADIUS	1.648	1.283	1.087
HORIZONTAL SPREAD	2.928	2.011	1.510
VERTICAL SPREAD	1.793	1.793	1.403
EXTREME SPREAD	3.002	2.530	1.896
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	3		

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B98411.1.1

## CENTERFIRE PATTERNS # 3

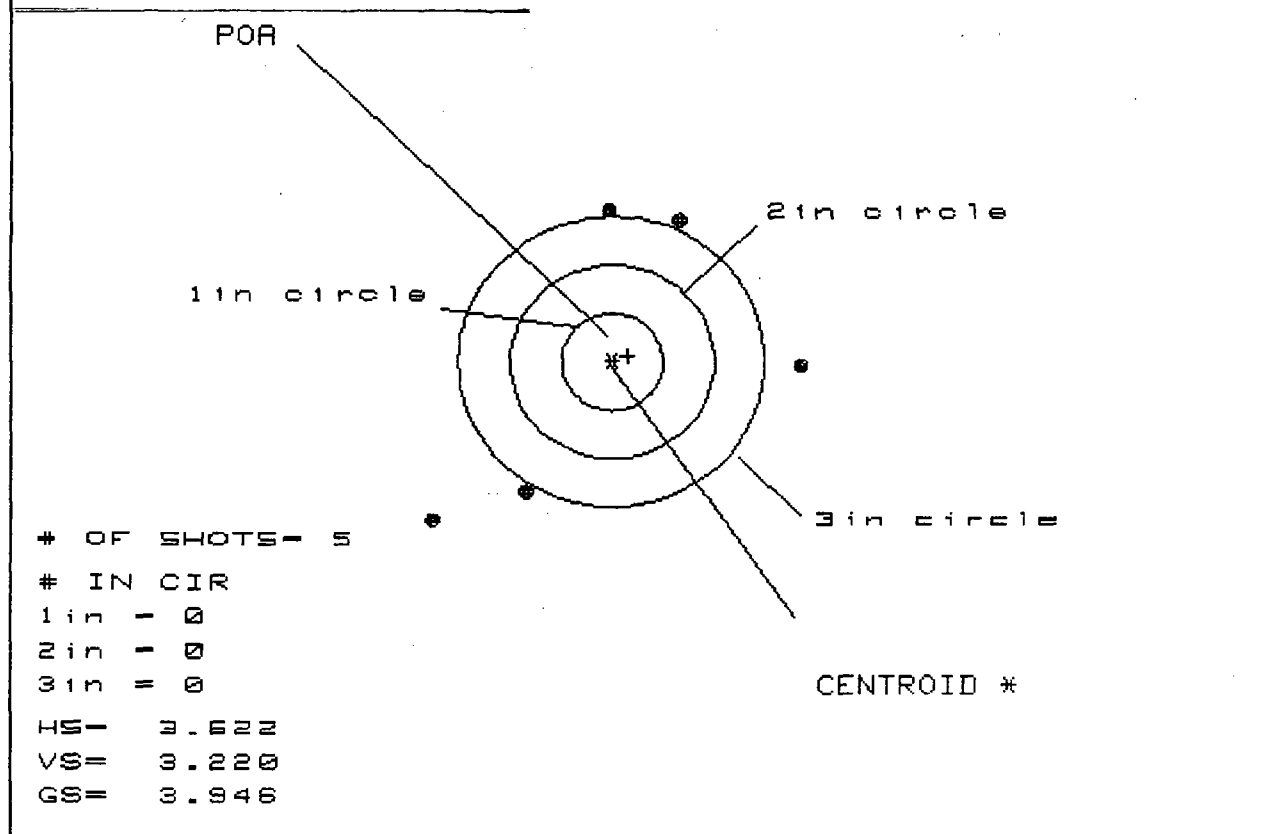


PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	1.902
MINIMUM X	-1.720
MAXIMUM Y	1.599
MINIMUM Y	-1.621
CENTROID X	-.154
CENTROID Y	-.061
POA TO CENTROID in.	.166
MIN RADIUS	1.593
MEAN RADIUS	1.812
MAX RADIUS	2.363
HORIZONTAL SPREAD	3.622
VERTICAL SPREAD	3.220
EXTREME SPREAD	3.946
NUMBER IN ONE INCH CIRCLE =	0
NUMBER IN TWO INCH CIRCLE =	0
NUMBER IN THREE INCH CIRCLE =	0

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B90411.1.1

## CENTERFIRE PATTERNS # 4

POA

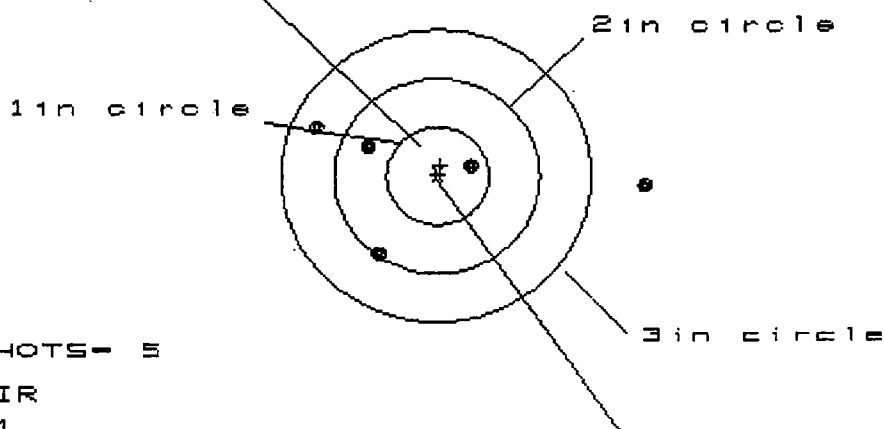

# OF SHOTS = 5

# IN CIR

1in = 1

2in = 3

3in = 4

ME = 3.168

VS = 1.289

GS = 3.227

CENTROID \*

PATTERN #	4	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	2.016	.822	.606
MINIMUM X	-1.152	-.648	-.344
MAXIMUM Y	.486	.454	.442
MINIMUM Y	-.813	-.845	-.694
CENTROID X	-.027	-.531	-.315
CENTROID Y	-.109	-.077	-.228
POA TO CENTROID in.	.112	.536	.389
MIN RADIUS	.344	.318	.561
MEAN RADIUS	1.061	.696	.653
MAX RADIUS	2.020	.846	.741
HORIZONTAL SPREAD	3.168	1.470	.950
VERTICAL SPREAD	1.299	1.299	1.136
EXTREME SPREAD	3.227	1.512	1.282
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		3	
NUMBER IN THREE INCH CIRCLE =		4	

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B98411.1.1

## CENTERFIRE PATTERNS # 5

POA

1in circle +

2in circle

3in circle

CENTROID \*

# OF SHOTS- 5

# IN CIR

1in = 1

2in = 2

3in = 2

HS= 2.917

VS= 2.768


GS= 3.006

PATTERN #	5	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.560	1.514	.926
MINIMUM X	-1.357	-1.403	-.898
MAXIMUM Y	1.898	.569	.585
MINIMUM Y	-.870	-.395	-.379
CENTROID X	1.468	1.514	1.009
CENTROID Y	-.771	-1.246	-1.262
POA TO CENTROID in.	1.658	1.960	1.616
MIN RADIUS	.496	.477	.586
MEAN RADIUS	1.294	1.057	.836
MAX RADIUS	1.907	1.515	.975
HORIZONTAL SPREAD	2.917	2.917	1.824
VERTICAL SPREAD	2.768	.964	.964
EXTREME SPREAD	3.006	2.951	1.832
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	2		
NUMBER IN THREE INCH CIRCLE =	2		

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/890411.1

## CENTERFIRE PATTERNS # 1

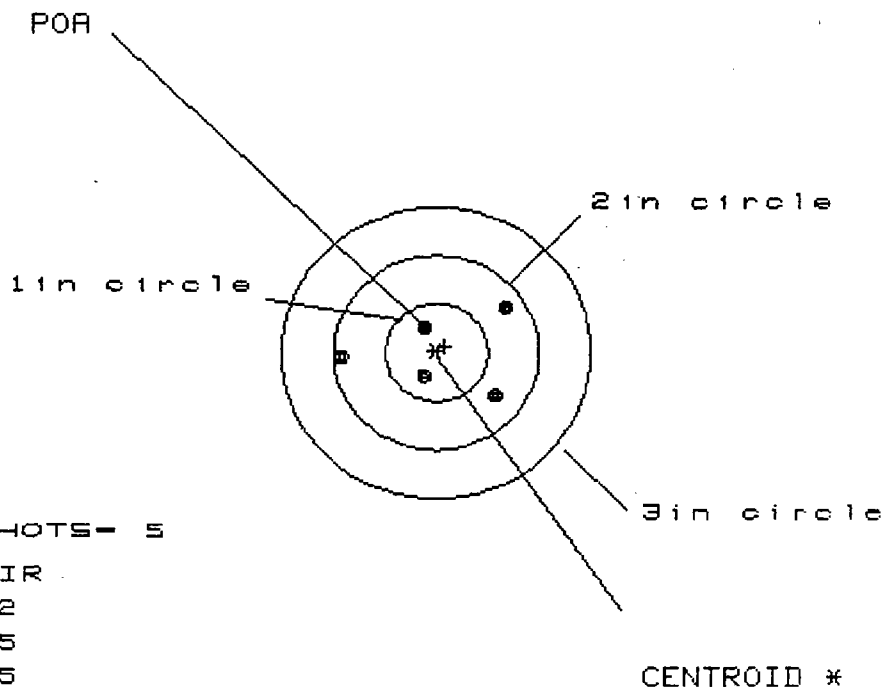

# OF SHOTS- 5

# IN CIR

1 in - 2

2 in - 5

3 in - 5

HS- 1.684

VS- .872

GS- 1.739

AVG. G.S. = 1.96

AVG. M.R. = .6794

PATTERN # : 1

.368 WIN. SNIPER VARIANT.

SHOTS (BEST OF) :

5

4

3

Ammo:

MAXIMUM X :

.721

.481

.458

MATCH. 168GR. BT H.P.

MINIMUM X :

-.963

-.406

-.246

R 308W?

MAXIMUM Y :

.429

.427

.358

LOT "L"

MINIMUM Y :

-.443

-.445

-.302

CENTROID X :

-.076

.164

.004

CENTROID Y :

-.066

-.065

-.207

SCOPE:

POA TO CENTROID in.:

.101

.176

.207

LYMAN ALL AMERICAN

MIN RADIUS :

.237

.422

.219

20X.

MEAN RADIUS :

.602

.515

.401

BENCH REST - 200 YDS.

MAX RADIUS :

.963

.643

.549

HORIZONTAL SPREAD :

1.684

.887

.704

VERTICAL SPREAD :

.872

.872

.660

EXTREME SPREAD :

1.739

1.058

.965

NUMBER IN ONE INCH CIRCLE =

2

NUMBER IN TWO INCH CIRCLE =

5


NUMBER IN THREE INCH CIRCLE =

5

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B98411.1

## CENTERFIRE PATTERNS # 2

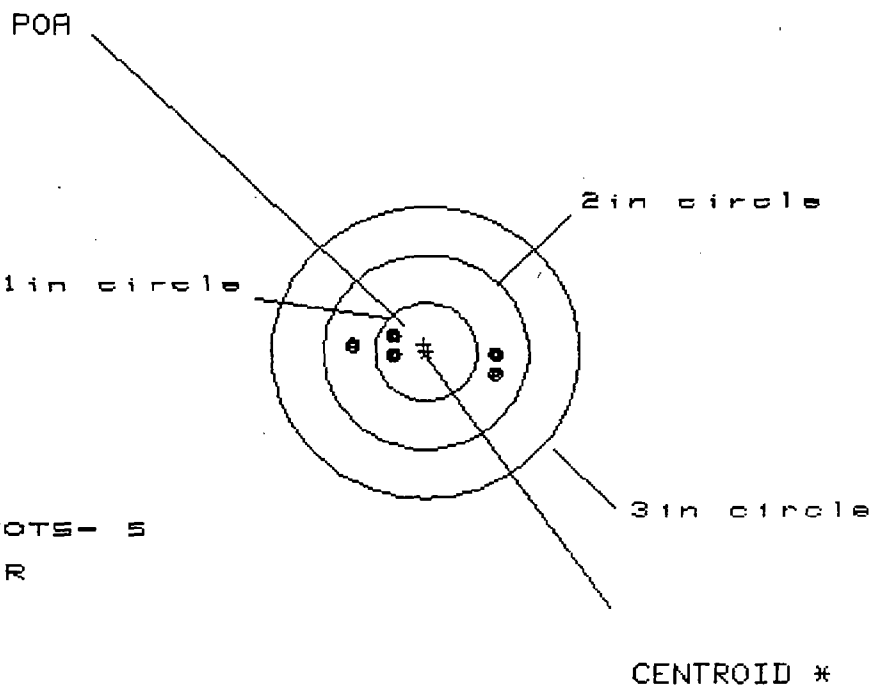

# OF SHOTS - 5

# IN CIR

1in = 2

2in = 5

3in = 5

HS = 1.397

VS = .370


GS = 1.403

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.701	.527	.665
MINIMUM X	-.696	-.540	-.365
MAXIMUM Y	.147	.171	.168
MINIMUM Y	-.223	-.199	-.202
CENTROID X	.020	.194	.018
CENTROID Y	-.071	-.095	-.092
POA TO CENTROID in.	.073	.216	.094
MIN RADIUS	.336	.506	.345
MEAN RADIUS	.562	.526	.469
MAX RADIUS	.702	.542	.695
HORIZONTAL SPREAD	1.397	1.068	1.030
VERTICAL SPREAD	.370	.370	.370
EXTREME SPREAD	1.403	1.069	1.056
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B90411.1

## CENTERFIRE PATTERNS # 3

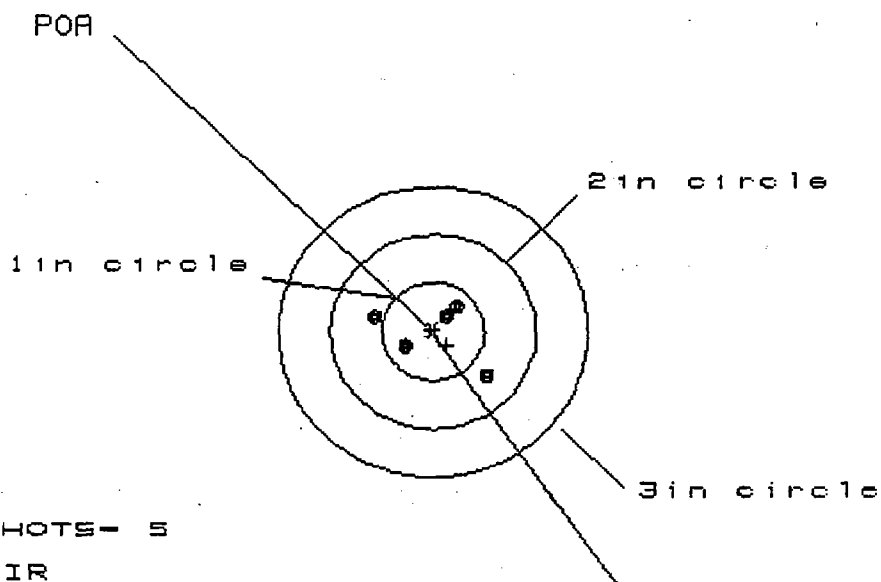

# OF SHOTS- 5

# IN CIR

1in = 3

2in = 5

3in = 5

HS= 1.105

VS= .774

GS= 1.270

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.565	.319	.186
MINIMUM X	-.540	-.398	-.289
MAXIMUM Y	.305	.188	.201
MINIMUM Y	-.469	-.275	-.262
CENTROID X	-.123	-.265	-.132
CENTROID Y	.141	.258	.245
POA TO CENTROID in.	.187	.370	.279
MIN RADIUS	.191	.241	.120
MEAN RADIUS	.435	.332	.261
MAX RADIUS	.735	.400	.390
HORIZONTAL SPREAD	1.105	.717	.475
VERTICAL SPREAD	.774	.463	.463
EXTREME SPREAD	1.270	.732	.663
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		5	

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B90411.1

## CENTERFIRE PATTERNS # 4

POA

1in circle

2in circle

3in circle

CENTROID \*

# OF SHOTS - 5

# IN CIR

1in = 1

2in = 5

3in = 5

HS= 1.171

VS= 1.440

GS= 1.631

PATTERN #	4	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.555	.433	.486
MINIMUM X	-.616	-.738	-.685
MAXIMUM Y	.667	.473	.214
MINIMUM Y	-.773	-.379	-.221
CENTROID X	-.047	.074	.022
CENTROID Y	-.087	.106	-.051
POA TO CENTROID in.	.099	.130	.056
MIN RADIUS	.327	.406	.298
MEAN RADIUS	.637	.526	.500
MAX RADIUS	.914	.740	.718
HORIZONTAL SPREAD	1.171	1.171	1.171
VERTICAL SPREAD	1.440	.852	.435
EXTREME SPREAD	1.631	1.189	1.189
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		5	

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/090411.1

## CENTERFIRE PATTERNS # 5

POA

1 in circle

2 in circle

3 in circle

CENTROID \*

# OF SHOTS- 5

# IN CIR

1 in = 1

2 in = 2

3 in = 3

HS= 3.339

VS= 1.765

GS= 3.777

PATTERN # : 5


*BB1. REMOVED - REMOUNTED.*

SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.905	1.198	.879
MINIMUM X	-1.434	-.958	-.928
MAXIMUM Y	.973	.396	.213
MINIMUM Y	-.792	-.549	-.346
CENTROID X	2.293	1.817	2.136
CENTROID Y	.202	-.041	.142
POA TO CENTROID in.	2.302	1.817	2.141
MIN RADIUS	.130	.485	.141
MEAN RADIUS	1.161	.870	.679
MAX RADIUS	2.139	1.262	.990
HORIZONTAL SPREAD	3.339	2.156	1.807
VERTICAL SPREAD	1.765	.945	.559
EXTREME SPREAD	3.777	2.354	1.891
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		2	
NUMBER IN THREE INCH CIRCLE =		3	

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B98411

## CENTERFIRE PATTERNS # 1

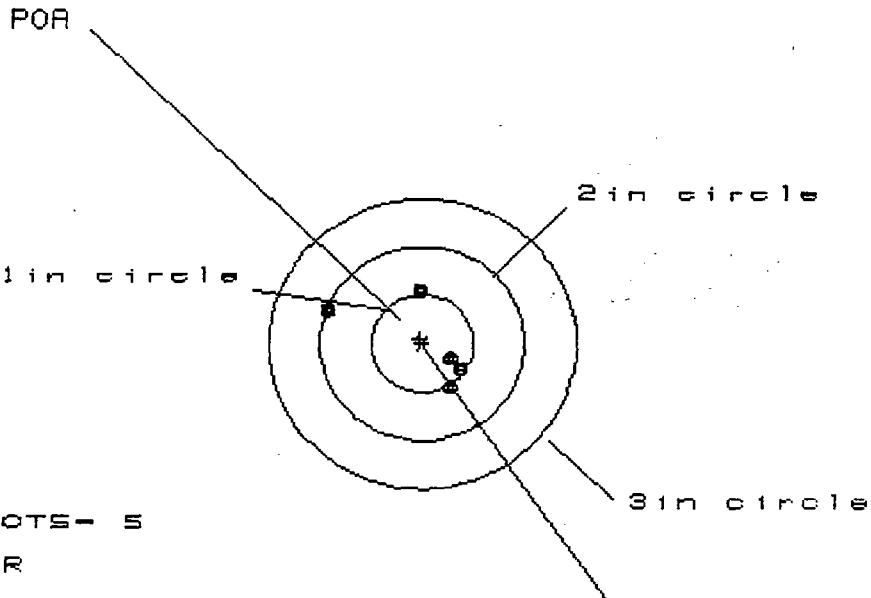

# OF SHOTS - 5

# IN CIR

1in = 3

2in = 5

3in = 5

HS = 1.324

VS = .957

GS = 1.445

CENTROID \*

AVG. G.S. = 1.33

AVG. M.R. = 4986

# C - 6229208

PATTERN # : 1

SHOTS (BEST OF)	5	4
MAXIMUM X	.412	.184
MINIMUM X	-.912	-.267
MAXIMUM Y	.498	.580
MINIMUM Y	-.459	-.377
CENTROID X	.028	.256
CENTROID Y	-.048	-.130
POA TO CENTROID in.	.056	.287
MIN RADIUS	.292	.052
MEAN RADIUS	.555	.330
MAX RADIUS	.968	.638
HORIZONTAL SPREAD	1.324	.451
VERTICAL SPREAD	.957	.957
EXTREME SPREAD	1.445	1.005
NUMBER IN ONE INCH CIRCLE =		3
NUMBER IN TWO INCH CIRCLE =		5
NUMBER IN THREE INCH CIRCLE =		5

.243 WIN. SPORTER VARIANT

Ammo:  
REM. 80GR. 'POWER-LOK' HP.  
R. 243W2  
LOT - KID MD 2622.


SCOPE:  
LYMAN ALL AMERICAN  
20x.

BENCH REST 100 YDS.  
.876

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/890411

## CENTERFIRE PATTERNS # 2

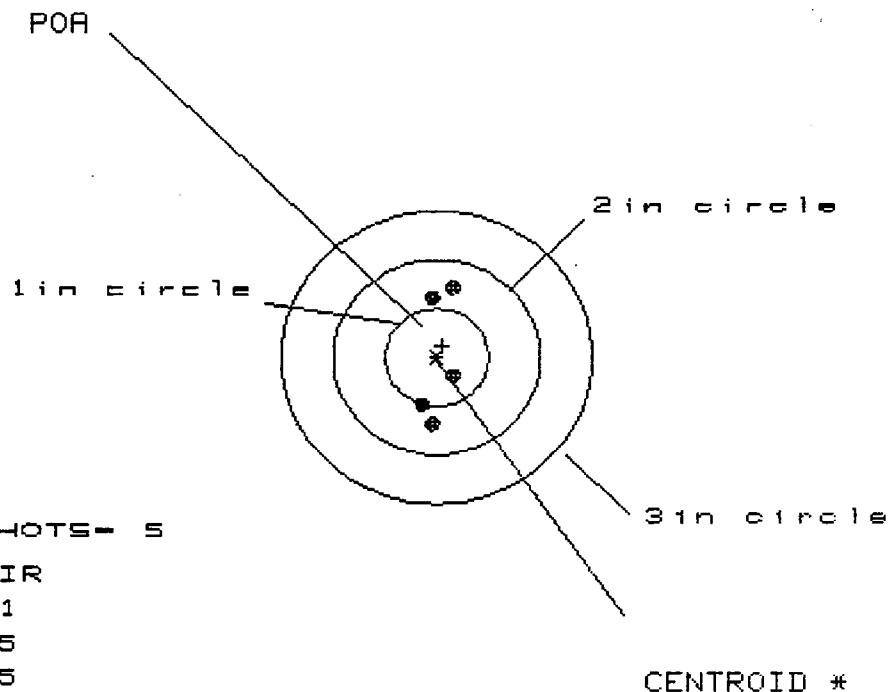

# OF SHOTS- 5

# IN CIR

1 in = 1

2 in = 5

3 in = 5

HS= .297

VS= 1.322

GS= 1.330

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.126	.136	.134
MINIMUM X	-.171	-.140	-.142
MAXIMUM Y	.682	.831	.248
MINIMUM Y	-.640	-.470	-.193
CENTROID X	-.053	-.084	-.082
CENTROID Y	-.118	-.288	-.565
POA TO CENTROID in.	.129	.300	.571
MIN RADIUS	.225	.139	.153
MEAN RADIUS	.550	.450	.209
MAX RADIUS	.693	.831	.282
HORIZONTAL SPREAD	.297	.276	.276
VERTICAL SPREAD	1.322	1.301	.441
EXTREME SPREAD	1.330	1.301	.459
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B30411

## CENTERFIRE PATTERNS # 3

POA

1in circle

2in circle

3in circle

# OF SHOTS- 5

# IN CIR

1in = 3

2in = 5

3in = 5

HS= .926

VS= .663

GS= 1.139

CENTROID \*

PATTERN #	:	3	4	3
SHOTS (BEST OF)	:	5	4	3
MAXIMUM X	:	.448	.328	.290
MINIMUM X	:	-.478	-.312	-.203
MAXIMUM Y	:	.379	.221	.158
MINIMUM Y	:	-.284	-.189	-.226
CENTROID X	:	-.028	.092	-.017
CENTROID Y	:	-.049	-.144	-.081
POA TO CENTROID in.	:	.056	.171	.083
MIN RADIUS	:	.196	.256	.214
MEAN RADIUS	:	.386	.315	.262
MAX RADIUS	:	.610	.379	.331
HORIZONTAL SPREAD	:	.926	.640	.493
VERTICAL SPREAD	:	.663	.410	.384
EXTREME SPREAD	:	1.139	.716	.539
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		5	

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/B90411

## CENTERFIRE PATTERNS # 4

POA

1in circle

2in circle

3in circle

CENTROID \*

# OF SHOTS- 5

# IN CIR

1in = 5

2in = 5

3in = 5

HS= .563

VS= .549


GS= .585

PATTERN #	:	4		
SHOTS (BEST OF)	:	5	4	3
MAXIMUM X	:	.238	.220	.105
MINIMUM X	:	-.325	-.343	-.099
MAXIMUM Y	:	.373	.096	.052
MINIMUM Y	:	-.176	-.083	-.051
CENTROID X	:	.021	.040	.154
CENTROID Y	:	-.127	-.220	-.252
POA TO CENTROID in.	:	.128	.223	.295
MIN RADIUS	:	.130	.036	.052
MEAN RADIUS	:	.260	.187	.089
MAX RADIUS	:	.380	.357	.117
HORIZONTAL SPREAD	:	.563	.563	.204
VERTICAL SPREAD	:	.549	.179	.103
EXTREME SPREAD	:	.585	.568	.211
NUMBER IN ONE INCH CIRCLE	=		5	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		5	

27 Mar 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/890411

## CENTERFIRE PATTERNS # 5

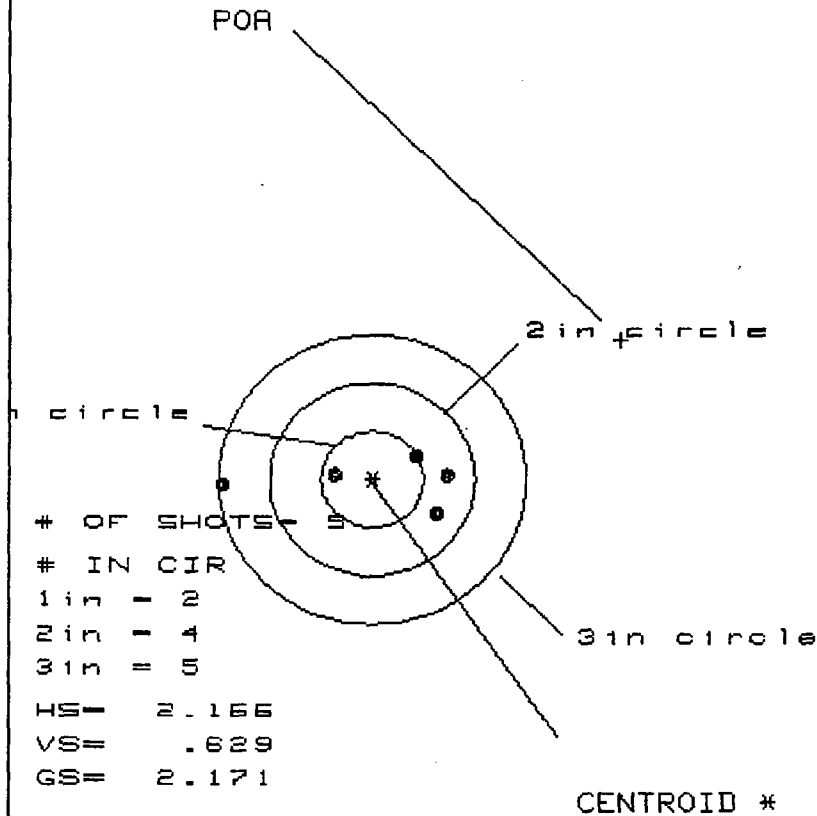

PATTERN #	5	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.735	.377	.393
MINIMUM X	-1.431	-.683	-.557
MAXIMUM Y	.252	.239	.262
MINIMUM Y	-.377	-.390	-.367
CENTROID X	-2.429	-2.071	-2.197
CENTROID Y	-1.450	-1.437	-1.460
POA TO CENTROID in.	2.829	2.521	2.638
MIN RADIUS	.338	.242	.309
MEAN RADIUS	.742	.447	.471
MAX RADIUS	1.432	.687	.567
HORIZONTAL SPREAD	2.166	1.060	.950
VERTICAL SPREAD	.629	.629	.629
EXTREME SPREAD	2.171	1.060	1.060
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

BBL. REMOVED & REMOUNTED  
FOR POI. SHIFT.

Report No. 890531

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input type="checkbox"/> Developmental <input checked="" type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance	<p align="center"><u>AREA OF TESTING</u></p> <table> <tr> <td><input type="checkbox"/> Safety Related</td> <td><input type="checkbox"/> Litigation</td> </tr> <tr> <td><input type="checkbox"/> Competitive Evaluation</td> <td><input type="checkbox"/> Warehouse Audit</td> </tr> <tr> <td><input type="checkbox"/> New Design</td> <td><input type="checkbox"/> Cost Reduction</td> </tr> <tr> <td><input type="checkbox"/> Design Change</td> <td>Stake <input type="text"/></td> </tr> <tr> <td><input checked="" type="checkbox"/> Plant Assistance</td> <td><input type="checkbox"/> Other <input type="text"/></td> </tr> </table>	<input type="checkbox"/> Safety Related	<input type="checkbox"/> Litigation	<input type="checkbox"/> Competitive Evaluation	<input type="checkbox"/> Warehouse Audit	<input type="checkbox"/> New Design	<input type="checkbox"/> Cost Reduction	<input type="checkbox"/> Design Change	Stake <input type="text"/>	<input checked="" type="checkbox"/> Plant Assistance	<input type="checkbox"/> Other <input type="text"/>
<input type="checkbox"/> Safety Related	<input type="checkbox"/> Litigation										
<input type="checkbox"/> Competitive Evaluation	<input type="checkbox"/> Warehouse Audit										
<input type="checkbox"/> New Design	<input type="checkbox"/> Cost Reduction										
<input type="checkbox"/> Design Change	Stake <input type="text"/>										
<input checked="" type="checkbox"/> Plant Assistance	<input type="checkbox"/> Other <input type="text"/>										
<p align="center"><u>FIREARM STAT'S.</u></p> MODEL: <u>700 AS</u> CAL or GAGE: <u>.308</u> BARREL TYPE: <input type="text"/> PROOFED: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>	<p align="center"><u>REPORT REQ'D.</u></p> FORMAL <input type="checkbox"/> TEST RESULTS ONLY <input checked="" type="checkbox"/>	DATE REQUESTED: <u>2/22/89</u> DATE NEEDED BY: <u>2/24/89</u> REQUESTED BY: <u>F.H. Smith</u> WORK ORDER NO: <u>481152</u>									

TEST TYPE

<input type="checkbox"/> Strength Test	<input type="checkbox"/> Ammunition Test	<input type="checkbox"/> Dry Cycle Test	<input type="checkbox"/> Photo/Video
<input checked="" type="checkbox"/> Function Test	<input type="checkbox"/> Environmental Test	<input type="checkbox"/> Measurements	<input type="checkbox"/> Other <input type="text"/>
<input type="checkbox"/> Accuracy Test	<input type="checkbox"/> Customer Complaint	<input type="checkbox"/> Endurance Test	<input type="text"/>

EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

DOUBLE FIELD FUNCTION TEST FOR SHORT ACTION  
 W/700 AS (ARYLON STOCK). TO DETERMINE  
 IF "BDL" MAG. BOX WILL FEED PROPERLY IN ARYLON  
 STOCKS.

GUNS REQUIRED: 10 - W/700 AS GUNS

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: 3-6-89  
 TEST COMPLETED BY: CS  
 REPORT DATE: 3-6-89

## TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: F. Smith TESTER: C. Stephens DATE: 3/6/89  
REPORT NO.: 890531 WORK ORDER NO.: 481152  
WRITTEN BY: C. Stephens  
TEST TYPE: Test Results

FIREARM STAT'S : MODEL: 700 CAL or GAUGE: .308  
BARREL TYPE: \_\_\_\_\_ PROOFED: YES X NO \_\_\_\_\_

REASON FOR TEST : To determine if the "BDL" magazine box will feed properly in the Arylon stocks.

EQUIPMENT REQUIRED : 10 M/700 , Ammunition , Fish & Game Club.

TEST PROCEDURE : Ten M/700 with Arylon stocks and "BDL" magazines were shot for field function at the Ilion Fish & Game Club rifle range.

TEST RESULTS : A total of 1100 rounds were shot with five bolt overrides. This resulted in a .4 % malfunction rate.

## FIELD CYCLE TEST - CENTERFIRE

REPROT NO.: 890531PAGE NO.     PREVIOUS  
ROUNDSDATE: 2/23/89MODEL: 700GAUGE: 308 CAL.SERIAL NO. 4379TEST TITLE: Axlan StockTTL. RDS. FIRED: 110TTL. MALFUNCTIONS: 0MALFUNCTION RATE: 0

## "MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T EJECT	DON'T BLOW BACK	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STICKS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	BEEHIVES	ADJUSTMENTS	REPLACEMENTS	BOLT VELOCITIES	REMARKS (ON BACK)		
								1st LATCH	2nd				HIGH	LOW	RIGHT	LEFT											YES	NO	
R308W1	5	10																											
R308W2	1																												
R308W3	2																												
R308W5	3																												
X3081	4																												
X3084	5																												
X3085	1																												
X3086	2																												
X3087	3																												
308A	4																												
308B	5	↓																											
TOTAL (PER MAL.)																													

## FIELD CYCLE TEST - CENTERFIRE

REPROT NO.: 890531

PAGE NO. \_\_\_\_\_

PREVIOUS  
ROUNDSDATE: 2/23/89MODEL: 700GAUGE: 308 CAL.SERIAL NO. 4879TEST TITLE: Axlon StackTTL. RDS. FIRED: 110TTL. MALFUNCTIONS: 2MALFUNCTION RATE: 1.8%

## "MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T EJECT	DON'T BLOCK BACK	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STAYS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	BREA KAGES	SHELLS LOCK	REPLACEMENTS	BOLT VELOCITIES	REMARKS (ON BACK)	
								1st	2nd				HIGH	LOW	RIGHT	LEFT											YES	NO
R308W1	4	10	-																1									
R308W2	5		-																2									
R308W3	1		OK																									
R308W5	2																											
X3081	3																											
X3084	4																											
X3085	5																											
X3086	1																											
X3087	2																											
308A	3																											
308B	4	✓	✓																									
TOTAL (PER MAL.)																												

## FIELD CYCLE TEST - CENTERFIRE

REPOT NO.: 890531PAGE NO.     DATE: 2/23/89MODEL: 700GAUGE: 308 CAL.SERIAL NO. 4938PREVIOUS  
ROUNDSTEST TITLE: Axlan StockTTL. RDS. FIRED: 110TTL. MALFUNCTIONS: 1MALFUNCTION RATE: .9%

## "MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T EJECT	EJECT BLOW T.M.T. BACK	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STAYS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	FREE EJECTOR	SHELL EJECTS	EJECTOR STAYS	BOLT VELOCITIES	REMARKS (ON BACK)	
								1st	2nd				HIGH	LOW	RIGHT	LEFT											YES	NO
R308W1	3	10	OK																									
R308W2	4		OK																									
R308W3	5																											
R308W5	1		OK																									
X3081	2																											
X3084	3																											
X3085	4																											
X3086	5																											
X3087	1																											
308A	2																											
308B	3	↓	↓																									
TOTAL (PER MAL.)																												

## FIELD CYCLE TEST - CENTERFIRE

REPROT NO.: 890531PAGE NO.     DATE: 2/23/89MODEL: 700GAUGE: 308 CAL.SERIAL NO. 3296PREVIOUS  
ROUNDSTEST TITLE: Axlon StockTTL. RDS. FIRED: 110TTL. MALFUNCTIONS: 0MALFUNCTION RATE: 0"MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T EJECT	DON'T BLOW BACK	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STOPS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	HEADLACES	ADJUSTMENTS	REPLACEMENTS	BOLT VELOCITIES	REMARKS (ON BACK)	
								1st LATCH	2nd				HIGH	LOW	RIGHT	LEFT											YES	NO
R308W1	2	10	OK																									
R308W2	3																											
R308W3	4																											
R308W5	5																											
X3081	1																											
X3084	2																											
X3085	3																											
X3086	4																											
X3087	5																											
308A	1																											
308B	2	↓	↓																									
TOTAL (PER MAL.)																												

## FIELD CYCLE TEST - CENTERFIRE

REPROT NO.: 890531PAGE NO.     DATE: 2/23/89MODEL: 700GAUGE: 308 CAL.SERIAL NO. 4908PREVIOUS  
ROUNDSTEST TITLE: Axlen StockTTL. RDS. FIRED: 110TTL. MALFUNCTIONS: 0MALFUNCTION RATE: 0

## "MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T EJECT	DON'T BLOW BACK	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STUCKS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	SHELL STUCKS	EXTRACTOR STUCK	EJECTOR STUCK	EJECTOR CYCLE	EJECTOR CYCLE	EJECTOR CYCLE	REMARKS (ON BACK)	
								1st	2nd				HIGH	LOW	RIGHT	LEFT													YES	NO
R308W1	1	10	OK																											
R308W2	2																													
R308W3	3																													
R308W5	4																													
X3081	5																													
X3084	1																													
X3085	2																													
X3086	3																													
X3087	4																													
308A	5																													
308B	1	✓	✓																											
TOTAL (PER MAL.)																														

BARBER - PRESALE R 0137306

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

BARBER - PRESALE R 0137306  
K2538294

KINZER V. REMINGTON

## FIELD CYCLE TEST - CENTERFIRE

RECEIVED NO. 1 840531

PAGE NO.

PREVIOUS  
ROUNDS

DATE: 2/23/89

MODEL: 700

GAUGE: 308 CAL.

SERIAL NO. 3872

TEST TITLE: Axlon Stack

TTL. RDS. FIRED: 110

TTL. MALFUNCTIONS: 1

MALFUNCTION RATE: .9%

## "MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T EJECT	DON'T BLOW BACK	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STOPS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	HEADLAGES	ADJUSTMENTS	REPLACEMENTS	BOLT VELOCITIES	REMARKS (ON BACK)	
								1st	2nd				HIGH	LOW	RIGHT	LEFT											YES	NO
R308W1	5	10	OK																									
R308W2	1		OK																									
R308W3	2		OK																									
R308W5	3		OK																									
X3081	4		OK																									
X3084	5		OK																									
X3085	1																											
X3086	2		OK																									
X3087	3		OK																									
308A	4		OK																									
308B	5	↓	OK																									
TOTAL (PER MAL.)																												

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

KINZER V. REMINGTON

BARBER - PRESALE R 0137307

R2538295

BARBER - PRESALE R 0137307

## FIELD CYCLE TEST - CENTERFIRE

REPROT NO.: 890531PAGE NO.    DATE: 2/23/89MODEL: 700GAUGE: 308 CAL.SERIAL NO. 3073PREVIOUS  
ROUNDSTEST TITLE: Axlon StockTTL. RDS. FIRED: 110TTL. MALFUNCTIONS: 0MALFUNCTION RATE: 0"MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T FIRE	DON'T BLOW BACK	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STUCKS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	FEED LAGS	STUCK IN CHAMBER	STUCK IN CHAMBER	BOLT VELOCITIES	REMARKS (ON BACK)	
								1st	2nd				HIGH	LOW	RIGHT	LEFT											YES	NO
R308W1	3	10	OK																									
R308W2	4																											
R308W3	5																											
R308W5	1																											
X3081	2																											
X3084	3																											
X3085	4																											
X3086	5																											
X3087	1																											
308A	2																											
308B	3	↓	↓																									
TOTAL (PER MAL.)																												

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

BARBER - PRESALE R 0137308

BARBER - PRESALE R 0137308

KINZER V. REMINGTON

R2538296

## FIELD CYCLE TEST - CENTERFIRE

REPROT NO.: 890531

PAGE NO. \_\_\_\_\_

DATE: 2/23/89MODEL: 700GAUGE: 308 CAL.SERIAL NO. 3063PREVIOUS  
ROUNDSTEST TITLE: Axlan STICKTTL. RDS. FIRED: 110TTL. MALFUNCTIONS: 1MALFUNCTION RATE: .9%

## "MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T EJECT	DON'T BLOW BACK	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STOPS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	BEEF EJECTS	STUCK IN CHAMBER	REPLACEMENTS	BOLT VELOCITIES	REMARKS (ON BACK)	
								1st	2nd				HIGH	LOW	RIGHT	LEFT											YES	NO
R308W1	2																											
R308W2	3																											
R308W3	4																											
R308W5	5																											
X3081	1																											
X3084	2																											
X3085	3																											
X3086	4	10	-																									
X3087	5																											
308A	1																											
308B	2																											
TOTAL (PER MAL.)																												

BARBER - PRESALE R 0137309

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

BARBER - PRESALE R 0137309 R2538297

KINZER V. REMINGTON

## FIELD CYCLE TEST - CENTERFIRE

REFROT NO.: 890531PAGE NO. 1PREVIOUS  
ROUNDSDATE: 2/23/89MODEL: 700GAUGE: 308 CAL.SERIAL NO. 4384TEST TITLE: Axlan StockTTL. RDS. FIRED: 110TTL. MALFUNCTIONS: 0MALFUNCTION RATE: 0

## "MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T EJECT	DON'T BLOCK T. END	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STOPS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	BREECHING	SHELL STOPS	SHELL JUMPS	SHELL STOPS	SHELL STOPS	REMARKS (ON BACK)	
								1st	2nd				HIGH	LOW	RIGHT	LEFT												YES	NO
R308W1	1	10	OK																										
R308W2	2		OK																										
R308W3	3																												
R308W5	4																												
X3081	5																												
X3084																													
X3085																													
X3086																													
X3087																													
308A																													
308B																													
TOTAL (PER MAL.)																													

BARBER - PRESALE R 0137310

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

BARBER - PRESALE R 0137310  
K2538298

KINZER V. REMINGTON

## FIELD CYCLE TEST - CENTERFIRE

REPROT NO.: 890531

PAGE NO. \_\_\_\_\_

DATE: 2/23/89MODEL: 700GAUGE: 308 CAL.SERIAL NO. 3894PREVIOUS  
ROUNDSTEST TITLE: Axlon StockTTL. RDS. FIRED: 110TTL. MALFUNCTIONS: 0MALFUNCTION RATE: 0

## "MALFUNCTIONS"

AMMUNITION Load Size	SHOOTER	NO. OF ROUNDS FIRED	FIRING	TRAPPED SHELL	DON'T EJECT EJECTOR STUCK BACK	DON'T BLOW BACK	DON'T LOCK OPEN	FEED FROM MAG.		SHELL STUCKS MAG.	POWER OVERRIDE	DON'T LOCK UP	STEM CHAMBER				SHELL JUMPS MAG.	FOLLOWER BINDS	LOADING	BOLT OVERRIDE	ACTION HANG UP	DON'T EXTRACT	BREATHERS	ADJUSTERS	REPLACEMENTS	BOLT VELOCITIES	REMARKS (ON BACK)		
								1st LATCH	2nd				HIGH	LOW	RIGHT	LEFT											YES	NO	
R308W1	4	10	OK																										
R308W2	5																												
R308W3	1																												
R308W5	2																												
X3081	3																												
X3084	4																												
X3085	5																												
X3086	1																												
X3087	2																												
308A	3	✓	✓																										
308B	5/4	10	-		✓																								
TOTAL (PER MAL.)																													

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

BARBER - PRESALE R 0137311

BARBER - PRESALE R 0137311

KINZER V. REMINGTON

R2538299

Report No. 890412

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input checked="" type="checkbox"/> Developmental <input type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance	<b>AREA OF TESTING</b> <input type="checkbox"/> Safety Related <input type="checkbox"/> Litigation <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> Warehouse Audit <input type="checkbox"/> New Design <input checked="" type="checkbox"/> Cost Reduction <input checked="" type="checkbox"/> Design Change <input type="checkbox"/> Stake _____ <input type="checkbox"/> Plant Assistance <input type="checkbox"/> Other _____	
<b>FIREARM STAT'S.</b> MODEL: <u>M 700</u> CAL or GAGE: <u>7mm MAG.</u> BARREL TYPE: <u>Sporter</u> PROOFED: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>	<b>REPORT REQ'D.</b> FORMAL <input checked="" type="checkbox"/> TEST RESULTS ONLY <input type="checkbox"/>	DATE REQUESTED: <u>2-10-89</u> DATE NEEDED BY: _____ REQUESTED BY: <u>F. Martin</u> WORK ORDER NO: <u>481007</u>

## TEST TYPE

<input type="checkbox"/> Strength Test	<input type="checkbox"/> Ammunition Test	<input type="checkbox"/> Dry Cycle Test	<input type="checkbox"/> Photo/Video
<input type="checkbox"/> Function Test	<input type="checkbox"/> Environmental Test	<input type="checkbox"/> Measurements	<input type="checkbox"/> Other _____
<input type="checkbox"/> Accuracy Test	<input type="checkbox"/> Customer Complaint	<input type="checkbox"/> Endurance Test	_____

**EXPLAIN IN DETAIL THE REASON FOR THIS TEST:** TO EVALUATE SIGHT MODIFICATIONS  
SHOOT EACH GUN 100 ROUNDS TO DETERMINE ANY  
SIGHT ASSEMBLY MOVEMENT - MODIFICATION IS  
PLANNED TO BE USED ON CUSTOMER GUNS  
BEING RETURNED FOR SIGHT ASSEMBLY OFF  
CENTER

**GUNS REQUIRED:**To Be Supplied

**NOTE:** NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: \_\_\_\_\_  
 TEST COMPLETED BY: \_\_\_\_\_  
 REPORT DATE: \_\_\_\_\_

TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: F. MARTIN TESTER: Weaver DATE: 2/21/89  
REPORT NO.: 890412 WORK ORDER NO.: 481007  
WRITTEN BY: WEAVER  
TEST TYPE: \_\_\_\_\_

FIREARM STAT'S : MODEL: 700 CAL or GAUGE: 7MM Mag.  
BARREL TYPE: SPORTER PROOFED: YES ☒ NO ☐

REASON FOR TEST :

To evaluate Sight MODIFICATIONS, TO DETERMINE  
any Sight ASSEMBLY MOVEMENT.

EQUIPMENT REQUIRED :

(3) M/700 RIFLES. SERIAL NOS. (C6336226)-(C6337244)(C6338062)  
AMMUNITION USED R7MM3  
JACK FUNCTIONING IN STATION #1 IN SHOOTING ROOM.

TEST PROCEDURE :

Lines WERE SCRIBED AROUND REAR AND FRONT  
SIGHTS, TO help identify ANY MOVEMENT OF SIGHTS.  
100 ROUNDS OF R7MM3 AMMO WAS FIRED IN EACH  
GUN. COOLING TOOK PLACE AFTER EACH 20 ROUNDS  
FIRED.

TEST RESULTS :

No VISUAL MOVEMENT APPEARED  
ON ANY OF THE THREE GUNS  
TESTED.

JACK FUNCTION - CENTERFIRE

DATE: 2-21-89

MODEL: 700 S&W

CALIBER

SERIAL NO. C6338062

PREVIOUS  
HOURS

TEST TITLE: Sight movement

0

TTL. RDS. FIRED:  
TTL. MALFUNCTIONS:  
MALFUNCTION DATE:

"MALFUNCTIONS"

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

PAGE NO. 1

DETROIT NO. 1

CALIBER  
7MM REM MAG

SERIAL NO. C6336226

TTL, RM, FIRED: \_\_\_\_\_  
TTL, MALFUNCTIONS: \_\_\_\_\_  
MALFUNCTION RATE: \_\_\_\_\_

- CENTER LINE

## JACK FUNCTION

MODEL: 700 SPORTER

DATE: 2-21-89

TEST TITLE, Sight Movement

**PREVIOUS  
NOMINATIONS**



**"MALFUNCTIONS"**

[illegible]

PAGE NO. 1

REMARK NO. 1

CALIBER

7MM REM MAG

SERIAL NO. C6337244

MODEL: 700 SPORTER

DATE: 2-21-89

TEST TITLE: SIGHT MOVEMENT

TTL. RND. FIRED:  
TTL. MALFUNCTIONS:  
MALFUNCTION RATE:

"MALFUNCTIONS"

PREVIOUS  
ROUND  
0

R7MM3		SECOND		NO. OF ROUNDS FIRED		FIRE		TOTAL ROUNDS FIRED		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN		DOWN	
-------	--	--------	--	---------------------	--	------	--	--------------------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--

## TEST AND MEASUREMENT LAB

## - TEST REPORT

REPORT # 893111  
REQUESTER: F.E. Schmidt & G.Hill  
WRITTEN BY: D. Thomas  
TEST TYPE: Accelerated endurance/ strength

W.O.# 481152  
DATE: 12/6/89

FIREARM STAT'S: MODEL: 700 CAL: 416

REASON FOR TEST:

- 1) To determine the ultimate strength of the non-heat treated 416 cal. barrels.
- 2) To perform an accelerated endurance test on heat treated and non-heat treated barrels to determine if a fatigue failure would occur.

EQUIPMENT REQUIRED:

Three Model 700's with non-heat treated barrels for destructive test.  
Serial #'s C6446367, C6446970, and C6446907  
Four Model 700's barrels with a "flaw" intentionally machined into the chamber with the wire EDM.  
400 rounds of 416 cal. field ammunition.  
50 rounds of 416 cal proof ammunition.

TEST PROCEDURE:

- 1) The barrels of the three standard guns were each plugged with four bullets just in front of the chamber. The guns, one at a time, were fixtured in the iron lung and subjected to the following high pressure load.

90 gns. of Winchester 296 powder  
400 gn. bullet with a Remington case and primer  
Estimated pressure in excess of 150000 psi

- 2)A) The four Model 700's with the manufactured "flaw" in the chamber were each subjected to 100 rounds of standard ammunition. Two of these guns were heat treated (C6446378 & C6446364) and two were non-heat treated (C6445138 & C6445222).

- 2)B) After the 100 round test each gun was subjected to 10 proof rounds.

- 2)C) Next two guns ( C6445138 no heat treat & C6446378 heat treated) were selected from the four to be shot at -20 deg. F. Each gun in turn was placed in the freezer at -20 deg.F for a period of four hours. The proof ammunition to be shot was also placed in the freezer. After four hours each gun, in turn, was removed from the freezer along with one proof round. Before the gun can warm the proof round was fired through it. This procedure was repeated until each gun was fired five times.

NOTE: All of the shooting in 2A,B & C was done in the 52-1-A shooting room using the protective shield and a lanyard.

REPORT # 893111

2

W.O.# 481152

TEST PROCEDURE: (cont.)

2)D) The two guns not used in test 2C (C6445222 no heat treat and C6446364 heat treated) were subjected to the same ultimate strength test as the guns in test 1. The barrels were plugged with four 416 cal. bullets just ahead of the chamber and the destructive load listed above was used. This test was done in the iron lung .

TEST RESULTS:

1) The barrels of the three standard production guns with no heat treat (Serial #'s C6446367, C6446970, and C6446907) did not fail. The damage to each gun is listed below.

C6446367            Bolt locked up due to the expansion of the brass shell into the Bolt shroud. There was a one inch split in the top of the Receiver through the scope mount holes.

C6446970            Same as C6446367

C6446907            Bolt locked up due to the expansion of the brass shell into the Bolt shroud.

2) A,B,C ) All four guns with the "flaw " machined into the chamber had 100 standard and 10 proof rounds shot through them with no failure. Guns C6445138 and C6446378 were shot five times each at extreme cold with cold ammunition and there were no failures.

2)D) Both guns (C6445222 no heat treat & C6446364 with heat treat) with the "flaw" machined into the chamber failed when subjected to a high pressure load with the barrel plugged. Both barrels experienced similar barrel bursts in the chamber area. These two barrels were turned over to F.E. Schmidt for analysis.

700

883411 Ejector Pin D.A.  
883561 Police Sniper T&P  
890201 300 Savage D.A.  
890611 22-250 Anytown T&P  
890721 Classic T&P 300wby  
890891 Es. Pin Stop Washer D.A.

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
F.E. Martin  
F.R. Wrisley  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 883411  
W.O.# 018761  
FEBRUARY 6, 1989

MODEL 700 EJECTOR RETAINING PIN DESIGN ACCEPTANCE

Report# 883411

2

Work Order# 018761

MODEL 700 EJECTOR RETAINING PIN DESIGN ACCEPTANCE

ABSTRACT:



Research and Development finds the Design change of the Model 700 Ejector Retaining Pin to be acceptable. The design was changed from a solid pin to a spiral pin to increase reliability and reduce scrap. The evaluation consisted of dry cycle and endurance. The sample consisted of six rifles for endurance and six bolts for dry cycle.

Prepared by: D.R. Thomas  
Date Prepared: February 6, 1989

proofread and cleared by:

J.R. SNEDEKER,  
Staff Engineer

W.H. COLEMAN, II  
New Products Research Lab Director

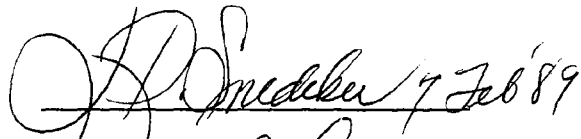 J.R. Snedeker 7 Feb 89  
 W.H. Coleman 2/23/89

Report# 883411

3

Work Order# 018761

MODEL 700 EJECTOR RETAINING PIN DESIGN ACCEPTANCE

TO: J.R. Snedeker  
FROM: D.R. Thomas

**INTRODUCTION:**

On December 13, 1988 the Research Test Lab received a request from F.R. Wrisley to conduct a Design Acceptance Evaluation of the Spiral Ejector Pin. The evaluation consisted of dry cycle and endurance.

**SCOPE OF THE TEST:**

To determine if the Spiral Ejector Pin would work loose or wear excessively during dry cycle and endurance.

**TEST RESULTS:**

The sample of the Spiral Ejector Pin was found to be acceptable in all phases of the Design Acceptance Evaluation. The results of each phase of testing were as follows:

**DRY CYCLE:**

There was no sign of wear or deformation in any of the bolts.

**ENDURANCE:**

There was no sign of wear or deformation in any of the Spiral Ejector Retaining Pins. There were no malfunctions in 15,000 rounds of endurance shooting.

Report# 883411

4

Work Order# 018761

**REPORT TEXT:**

**GENERAL:**

Six bolts were used for the dry cycle phase of the test:  
Three control and three with spiral pins.

The following six rifles were used for the endurance phase of the Design Acceptance Evaluation:

C6326860      C6327200      C6328322      C6328540      C6326866      C6327314

The following two SWS rifles were also used for endurance testing:

C6284074      C6269697

**TEST PROCEDURE:**

**DRY CYCLE:**

Each of the six test bolts were placed in a dry cycle machine capable of depressing and releasing the Ejector repeatedly.  
Two controls and two bolts with a Spiral Ejector Pin were dry cycled 10,000 cycles each. One control and one bolt with a Spiral Ejector Pin was dry cycled 20,000 cycles.  
All six Ejector Pins were examined after dry cycling and were found to have no wear or deformation.

**ENDURANCE:**

All six test guns had the Spiral Ejector Pin in them.  
500 rounds were shot through each of the six rifles.  
500 additional rounds were shot through the four rifles listed below.

C6326860  
C6328322  
C6328540  
C6326866

In addition, two SWS rifles with the Spiral Ejector Pin were endured to 5000 rounds each.

The ammunition used in the endurance was Remington R3006R2 & R3006R4.  
The endurance test was shot from the jacks in the shooting room located in 52-1-A. Government ammunition was used in the SWS rifles.

There were no malfunctions in the endurance testing.

After the endurance was shot the Spiral Ejector Pins were removed and examined. There was no sign of wear or deformation in any of the test parts.

DES. BY DATE	DRN. BY DATE	CHK. BY DATE	APP. BY DATE
	F. MARTIN 1-25-89		KD 2/1/89
TITLE PIN - SPIROL			
NUMBER	SCALE	SUPERSEDES	REFERENCE
A-94555	~		DCR 12342
REMINGTON ARMS CO. INC. ILION RESEARCH DIV.			
MODEL	PART NO.	PART USE	SEE
M700		EJECTOR PIN	
XP 100		" "	
Seven		" "	
M40XB		" "	

DO NOT SCALE THIS DRAWING: WORK TO FIGURES  
UNLESS OTHERWISE NOTED.

TOLERANCES ON DECIMAL DIMENSIONS ARE:

- 1 PLACE (.1) — TOLERANCE  $\pm .015$
- 2 PLACE (.01) — TOLERANCE  $\pm .010$
- 3 PLACE (.001) — TOLERANCE  $\pm .005$

& ON FRACTIONAL DIMENSIONS  $\pm 1/64$   
& ON ANGULAR DIMENSIONS  $\pm 00^{\circ}-30'$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS  
VALUES AND ARE THE MAXIMUM ROUGHNESS  
ACCEPTABLE. UNLESS OTHERWISE SPECIFIED.

FINISH ROUGHNESS TO BE  $125$  OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL \_\_\_\_\_  
HEAT TREAT \_\_\_\_\_  
HARDNESS \_\_\_\_\_  
COLOR \_\_\_\_\_  
~~HEAT TREAT AND COLOR TO BE DONE BY~~  
REMINGTON

THIS DRAWING OR INFORMATION IS  
PROPRIETARY INFORMATION TO THE  
REMINGTON ARMS COMPANY, INC.

PURCHASE

SPIROL PIN

5/64" DIA.

3/8" LONG

STANDARD DUTY

1070-1095 CARBON STEEL

PLAIN FINISH (BLACK)

VENDOR SPEC. #13423

5/64 x 3/8" MBK

FROM: CEM CO. INC.  
DANIELSON, CONN.

ALT.	WAS	REF.	BY	DATE
ALTERATIONS				

A-94555

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
D.R. Thomas  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 883501  
WO# 486209  
JANUARY 13, 1989

TRIAL AND PILOT  
MODEL 700 POLICE SNIPER RIFLE  
223 CALIBER FUNCTION AND ACCURACY VERIFICATION

Report# 883501

2

Work Order# 486209

TRIAL AND PILOT  
MODEL 700 POLICE SNIPER RIFLE  
223 CALIBER FUNCTION AND ACCURACY VERIFICATION

**ABSTRACT:**


Research finds the Trial and Pilot Evaluation of the 223 caliber, Model 700 Police Sniper Rifles to be acceptable. The Trial and Pilot Evaluation consisted of Field Function and Accuracy. Six rifles were used for the evaluation.

Prepared by: D.R. Thomas  
Date Prepared: JANUARY 13, 1989

proofread and cleared by:

J.R. Snedeker  
Staff Engineer

W.H. Coleman, II  
New Products Research Lab Director

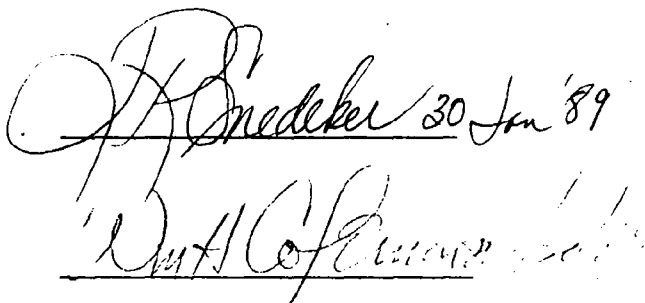  
W.H. Coleman, II

Report# 883501

3

Work Order# 486209

TRIAL AND PILOT  
MODEL 700 POLICE SNIPER RIFLE  
223 CALIBER FUNCTION AND ACCURACY VERIFICATION

TO: J.R. Snedeker  
FROM: D.R. Thomas

**INTRODUCTION:**

On December 15, 1988 the Test Lab received a request to perform a Trial and Pilot Evaluation on the Model 700 Police Sniper Rifle. The evaluation used six rifles. The evaluation consisted of Field Function and Accuracy testing.

**SCOPE OF THE TEST:**

To determine if the production run samples would meet Remington Specifications set by the Research Design Section.

**TEST RESULTS:**

The production sample of the 223 caliber, Model 700 Police Sniper Rifles, was found to be acceptable. The results of the testing were as follows:

**ACCURACY:**

The average group size was 1.094 inches.

**FUNCTION:**

There were no malfunctions on any of the six rifles tested.

Report# 883501

4

Work Order# 486209

TRIAL AND PILOT  
MODEL 700 POLICE SNIPER RIFLE  
223 CALIBER FUNCTION AND ACCURACY VERIFICATION

**REPORT TEXT:****GENERAL:**

The following six rifles were used throughout the accuracy and function test.

B6853171    B6853262    B6853179    B6853052    B6853592    B6853351

**ACCURACY:**

The results showed that the 223 caliber, Model 700 Police Sniper Rifles tested met the Remington specification (1.5 inches) for group size.

All six of the rifles were used for the 100 yard accuracy testing and the following results were obtained:

**100 YARD ACCURACY RESULTS**

<u>SERIAL NUMBER</u>	<u>GROUP 1</u> (in.)	<u>GROUP 2</u> (in.)	<u>GROUP 3</u> (in.)	<u>AVERAGE</u> (in.)
B6853171	.98	1.13	.78	.96
B6853262	1.39	.89	1.22	1.16
B6853179	.97	1.71	1.26	1.31
B6853052	.78	1.46	.98	1.07
B6853351	.88	.98	1.38	1.08
B6853592	1.12	.90	.92	.98

**FUNCTION:**

All six rifles were fired 60 rounds each in a function test conducted at the Ilion Fish and Game Club.

No malfunctions occurred.

Report# 883501

5

Work Order# 486209

TRIAL AND PILOT  
MODEL 700 POLICE SNIPER RIFLE  
223 CALIBER FUNCTION AND ACCURACY VERIFICATION

**TEST PROCEDURE:****ACCURACY:**

Three, five shot groups were shot with each of the six rifles selected for 100 yard accuracy. The accuracy was shot by J.E. Selan in the Research and Development 100 yard range located in building 52-1A.

Remington ammunition code R223R2 (lot# T051D0358) 55 grain "Power Lokt" hollow point was used for the accuracy testing.

Standard short action Leupold bases and rings were used in conjunction with a 20X Lyman scope.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

**FUNCTION:**

All six of the rifles were subjected to the loading and firing of 10 rounds each of six different ammunition types.

Remington R223R1	(lot# U04H D2016)	55 grain Pointed Soft Point
Remington R223R3	(lot# A 06I D1136)	55 grain Metal Case
Federal No. 223A	(lot# 3A-2322)	55 grain Soft Point
Federal No. 223B	(lot# 3A-2312)	55 grain Metal Case Boat Tail
Winchester X223R	(lot# 52TK31)	55 grain Pointed Soft Point
Winchester X223R1	(lot# 38SM90)	65 grain Full Metal Case

C.S. Stephens and A. Cooper conducted the Field Function phase of the test.

The Field Function Test was conducted at the Ilion Fish and Game Club.

Shooters were alternated every five rounds throughout the field function testing.

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
F.E. Martin  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 890201  
W.O.# 481152  
FEBRUARY 27, 1989

MODEL 700 CLASSIC 300 SAVAGE CALIBER DESIGN ACCEPTANCE

Report# 890201

2

Work Order# 481152

MODEL 700 CLASSIC 300 SAVAGE CALIBER DESIGN ACCEPTANCE

ABSTRACT:



Research and Development finds the Design Acceptance Evaluation of the Model 700 Classic rifle in 300 Savage caliber to be acceptable. The evaluation consisted of Accuracy, Field Function and High Pressure Strength. A problem, not design related, was found in the six rifle sample, provided by F.E.Martin. When the problem was corrected the sample was found to be within Remington specifications for each phase of the Design Acceptance Evaluation.

Prepared by: D.R. Thomas  
Date Prepared: February 27, 1989

proofread and cleared by:

J.R. SNEDEKER  
Staff Engineer

W.H. COLEMAN, II  
New Products Research Lab Director

 3/5/89  
 3/5/89

Report# 890201

3

Work Order# 481152

**MODEL 700 CLASSIC 300 SAVAGE CALIBER DESIGN ACCEPTANCE**

TO: J.R. Snedeker  
FROM: D.R. Thomas

**INTRODUCTION:**

In February of 1989 a request to conduct a Design Acceptance Evaluation of the Model 700 Classic Rifle in 300 Savage caliber was received by the Test Lab. The evaluation used six rifles and consisted of Accuracy, Field Function and High Pressure Strength.

**SCOPE OF THE TEST:**

To determine if the 300 Savage caliber sample would meet the Remington Specifications for accuracy, field function and strength.

**TEST RESULTS:**

**ACCURACY:**

The average group size was 1.73 inches well within the 3.5 inch specification.

**FIELD FUNCTION:**

The rifles failed the first Field function test with a 41% malfunction rate. It was discovered that three of the rifles had Bolts with the Ejector Retaining Pin Hole out of position. This caused an extremely high rate of "Ejector drops shell" malfunctions in these three guns. When the bolts were replaced and the Field Function shot again, there were no malfunctions.

**STRENGTH:**

One rifle with a plugged bore was subjected to a high pressure round. The resulting damage was typical of all caliber Model 700 rifles subjected to this test.

Report# 890201

4

Work Order# 481152

MODEL 700 CLASSIC 300 SAVAGE CALIBER DESIGN ACCEPTANCE

REPORT TEXT:

GENERAL:

The following six rifles were used for the Design Acceptance Evaluation:

B6772505 B6772494 B6772508 B6685216 B6323372 B6772464

ACCURACY:

Five rifles were used in the accuracy test.

Remington 150gn. PSP "CORE-LOKT" Code R30SV2 Lot # J18D-C6805 was used for accuracy.

A Lyman "All American" 20X scope was used.

Accuracy results per individual rifle are located in the appendix of this report.

FIELD FUNCTION:

All six rifles were used in the first Field Function Test. One of the rifles was used for the Strength Test before the second Field Function Test. Five rifles were used for the second Field Function Test.

The rifles were fired 70 rounds each in each of the Field Function Tests conducted at the Ilion Fish and Game Club.

The following ammo types were used in the Field Function Testing:

Remington R30SV3 & R30SV2  
Federal 300A & 300B  
Winchester X3001, X3003 & X3004

FIRST FIELD FUNCTION

Two of the rifles experienced no malfunctions.  
Rifle B6772505 had three doesn't eject malfunctions.  
Rifle B6772494 had 65 ejector drops shell malfunctions.  
Rifle B6685216 had 24 ejector sticks back malfunctions.  
Rifle B6323372 had 55 doesn't eject malfunctions.

FIELD FUNCTION AFTER ALL BOLTS WERE REPLACED

All five remaining rifles were fired 70 rounds each without a malfunction.

Report# 890201

5

Work Order# 481152

MODEL 700 CLASSIC 300 SAVAGE CALIBER DESIGN ACCEPTANCE

**REPORT TEXT: (cont.)**

**STRENGTH:**

Rifle B6685216 was used for the high pressure strength test.

**TEST PROCEDURE:**

**ACCURACY:**

Three, five shot groups were shot with each of the five rifles. The accuracy was shot by J.E. Selan in the Research and Development 100 yard range located in building 52-1A.

Remington ammunition code R30SV2 lot# J18D-C6805 was used for the accuracy testing.

Standard short action Leupold bases and rings were used in conjunction with a 20X All-American Lyman scope.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

**FIELD FUNCTION:**

The rifles were subjected to the loading and firing of 70 rounds of Remington and competitive 300 Savage ammunition in a field function test conducted at the Ilion Fish and Game Club. A round robin method of shooting, alternating shooters and ammunition types every ten rounds, was used throughout the field function testing.

**STRENGTH:**

Four bullets were lodged in the bore of rifle B6685216. A high pressure round was developed by C. Stephens using the reloading and P&V facilities. The high pressure load consisted of 40gns. of 4227 powder and a 180gn. bullet. The high pressure round was fired in the "Iron Lung" in the measurement lab. Estimated pressure for the destructive load was 210,000 psi.

Report# 890201

6

Work Order# 481152

MODEL 700 CLASSIC 300 SAVAGE CALIBER DESIGN ACCEPTANCE

**APPENDIX**

Report# 890201

7

Work Order# 481152

## MODEL 700 CLASSIC 300 SAVAGE CALIBER DESIGN ACCEPTANCE

## 100 YARD ACCURACY RESULTS

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
B6772464	2.244	1.709	2.508	2.15
B6772494	1.337	1.799	1.777	1.64
B6772505	1.805	2.530	1.298	1.81
B6772508	1.141	1.426	1.720	1.43
B6323372	1.881	1.397	1.603	1.63

overall average = 1.73

xc: W.H. Coleman,II/File  
T.C. Douglas  
L.B. Bosquet  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 890611  
W.O.# 481152  
MARCH 30, 1989

MODEL 700 RIFLE ARYLON STOCK 22-250 CALIBER  
TRIAL AND PILOT EVALUATION

Report# 890611

2

Work Order# 481152

MODEL 700 RIFLE ARYLON STOCK 22-250 CALIBER  
TRIAL AND PILOT EVALUATION

ABSTRACT:

Research and Development finds the Trial and Pilot Evaluation of the Model 700 Arylon Stock rifles in 22-250 caliber to be acceptable. The Trial and Pilot Evaluation consisted of Visual Inspection, Field Function and Accuracy. The 10 rifle sample, randomly selected from the Ilion warehouse, was found to be within Remington specifications for each phase of the Trial and Pilot Evaluation.

Prepared by: D.R. Thomas  
Date Prepared: March 30, 1989

proofread and cleared by:

J.R. SNEDEKER  
Staff Engineer

W.H. COLEMAN, II  
New Products Research Lab Director

*James R. Snecker* 3 April 1989  
*W.H. Coleman II* 4/4/89

Report# 890611

3

Work Order# 481152

MODEL 700 RIFLE ARYLON STOCK 22-250 CALIBER  
TRIAL AND PILOT EVALUATION

TO: J.R. Snedeker  
FROM: D.R. Thomas

**INTRODUCTION:**

On March 2, 1989 a request to conduct a Trial and Pilot Evaluation of the Model 700 Arylon Stock, 22-250 caliber, rifles was received by the Test Lab. The evaluation was based on 10 rifles randomly selected from the Ilion warehouse, and consisted of Visual Inspection, Field Function, and Accuracy at ambient, cold and hot temperatures.

**SCOPE OF THE TEST:**

To determine if the production run sample would meet the Remington Specifications set by the Research Design Section.

**TEST RESULTS:**

The production sample of the Model 700 Arylon Stock Rifles in 22-250 caliber was found to be acceptable in all phases of the Trial and Pilot Evaluation. The results of each phase of testing are as follows:

**VISUAL:**

The overall appearance of the rifles was good.

**ACCURACY:**

Remington specification for accuracy is 2.2 inches. The average group sizes for the Model 700 Arylon in 22-250 are as follows:

AMBIENT	1.31 inches
+150°F	1.35 inches
-22°F	1.41 inches

**FIELD FUNCTION:**

Eight of the ten rifles tested functioned with no malfunctions. Two of the ten rifles each had one feeding malfunction out of forty rounds of field testing for a 2.5% malfunction rate. The overall malfunction rate for the Field Function test is .5%.

Report# 890611

4

Work Order# 481152

MODEL 700 RIFLE ARYLON STOCK 22-250 CALIBER  
TRIAL AND PILOT EVALUATION

## REPORT TEXT:

GENERAL:

The following ten rifles were randomly selected from the Ilion warehouse for the Trial and Pilot Evaluation:

C6358617	C6360604	C6360424	C6360603	C6360321
C6360504	C6360496	C6360594	C6360617	C6360464

VISUAL INSPECTION:

The visual inspection committee finds the overall visual appearance of the Trial and Pilot sample to be acceptable.

The visual inspection committee consisted of J.E. Selan, L.B. Bosquet, R.F. Leskovar, and D.R. Thomas.

All ten of the rifles were used in the Visual Inspection.

Comments on each rifle are located in the appendix.

FIELD FUNCTION:

All ten of the rifles were fired 40 rounds each in a field function test conducted at the Ilion Fish and Game Club.

The following ammunition types were used in the field function test:

Remington	R22501
Remington	R22502
Winchester	X222501
Federal	P22250B

The following rifles were shot 40 rounds each with no malfunctions:

C6360594	C6360603	C6360321	C6360496
C6360504	C6360604	C6360424	C6358617

Rifle # C6360617 was shot 40 rounds and had one "bolt override" with R22502 for a 2.5% malfunction rate.

Rifle # C6360464 was shot 40 rounds and had one "stems chamber low" with R22501 for a 2.5% malfunction rate.

The overall malfunction rate for the sample is .5%.

Report# 890611

5

Work Order# 481152

MODEL 700 RIFLE ARYLON STOCK 22-250 CALIBER  
TRIAL AND PILOT EVALUATION

REPORT TEXT: (cont.)

ACCURACY:

The results showed that the Model 700 Arylon Rifles, 22-250 caliber, met the Remington specification (2.2 inches) for group size.

The following five rifles were used in the accuracy test:

C6360496      C6360464      C6360504      C6360594      C6360424

Remington ammunition code R22501 (22-250 PSP) lot# T21H D3710 was used for the accuracy testing.

Standard long action Leupold bases and rings were used in conjunction with a 20X Lyman All American scope.

Remington specification for accuracy is 2.2 inches.

The average group sizes for the Model 700 Arylon in 22-250 are as follows:

AMBIENT	1.31 inches
+150° F	1.35 inches
-22° F	1.41 inches

Accuracy results per individual rifle are located in the appendix of this report.

TEST PROCEDURE:VISUAL INSPECTION:

All ten rifles were examined.

Each rifle was wiped down with a clean white Coyne towel and examined by each committee member. All comments were recorded.

FIELD FUNCTION:

All ten rifles were subjected to the loading and firing of 40 rounds in a field function test conducted at the Ilion Fish and Game Club. A round robin method of shooting, alternating shooters every ten rounds, was used throughout the field function testing.

Each of the ten guns had ten rounds each of R22501, R22502, X222501, and P22250B ammunition shot through it.

Report# 890611

6

Work Order# 481152

MODEL 700 RIFLE ARYLON STOCK 22-250 CALIBER  
TRIAL AND PILOT EVALUATION

ACCURACY:

The accuracy was shot by J.E. Selan in the Research and Development 100 yard range located in building 52-1A.

At room temperature, three, five shot groups were shot with each of the five rifles selected for 100 yard accuracy.

The five rifles were placed in an oven for 24 hours at 150 Degrees Fahrenheit, then removed and allowed to return to room temperature. At this time the 100 yard accuracy test was reshot.

The five rifles were placed in a freezer for 24 hours at -22 Degrees Fahrenheit, then removed and allowed to return to room temperature. At this time the 100 yard accuracy was reshot.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

Report# 890611

7

Work Order# 481152

MODEL 700 RIFLE ARYLON STOCK 22-250 CALIBER  
TRIAL AND PILOT EVALUATION

**APPENDIX**

Report# 890611

8

Work Order# 481152

MODEL 700 RIFLE ARYLON STOCK 22-250 CALIBER  
TRIAL AND PILOT EVALUATION

## VISUAL INSPECTION:

## GENERAL COMMENTS:

The appearance of the 22-250 caliber, Model 700 Rifles, with Arylon stocks was good.

There were no visual defects severe enough to reject the sample however, the following items were noted in the visual inspection:

All stocks have a seam or parting line.

## COMMENTS PER INDIVIDUAL RIFLE:

C6358617	Glue on grip cap Space between grip cap and stock Mold line on stock
C6360604	Glue on grip cap Slight mar on barrel Space between butt pad and stock
C6360424	Poor fit butt pad Paint chipped from floor plate
C6360603	1/8 inch margin at tang Poor fit butt pad Paint chipped around take down screws
C6360321	Poor fit butt pad Slight gouge front of bolt handle slot
C6360504	Poor fit butt pad Flashing rear of bolt handle slot Poor color bow of trigger guard
C6360496	Poor fit butt pad Slight mar on bolt plug Slight crush right side of barrel channel
C6360594	Glue on grip cap Barrel off center in groove Upset on bolt handle where it contacts cam surface
C6360464	Flashing rear of bolt handle slot
C6360617	Gouge in bolt handle slot

Report# 890611

9

Work Order# 481152

MODEL 700 RIFLE ARYLOX STOCK 22-250 CALIBER  
TRIAL AND PILOT EVALUATION

100 YARD ACCURACY RESULTS  
(Remington specification 2.2 inches)

AMBIENT

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
C6360496	.988	1.566	1.284	1.28
C6360464	1.190	1.722	1.166	1.36
C6360504	1.096	1.771	1.465	1.44
C6360594	.837	1.454	1.343	1.21
C6360424	1.522	1.540	.669	1.24
		<u>AVERAGE 1.31</u>		

150°F

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
C6360496	1.412	1.257	1.672	1.45
C6360464	1.034	1.174	1.501	1.24
C6360504	.997	1.034	1.422	1.15
C6360594	1.417	1.775	1.606	1.60
C6360424	.765	1.949	1.161	1.30
		<u>AVERAGE 1.35</u>		

-22°F

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
C6360496	1.307	1.237	1.697	1.41
C6360464	1.804	1.632	1.177	1.54
C6360504	.643	1.574	1.310	1.18
C6360594	1.835	2.080	1.292	1.74
C6360424	1.052	1.330	1.114	1.17
		<u>AVERAGE 1.408</u>		

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 890721  
W.O.# 486209  
MARCH 16, 1989

MODEL 700 CLASSIC RIFLE 300 WEATHERBY CALIBER  
TRIAL AND PILOT EVALUATION

Report# 890721

2

Work Order# 486209

MODEL 700 CLASSIC RIFLE 300 WEATHERBY CALIBER  
TRIAL AND PILOT EVALUATION

ABSTRACT:

Research and Development finds the Trial and Pilot Evaluation of the 300 Weatherby caliber, Model 700 Classic Rifles to be acceptable. The Trial and Pilot Evaluation consisted of Visual Inspection, Field Function and Accuracy. The 10 rifle sample, randomly selected from a 20 rifle sample, was found to be within Remington specifications for each phase of the Trial and Pilot Evaluation.

Prepared by: D.R. Thomas  
Date Prepared: March 16, 1989

proofread and cleared by:

J.R. SNEDEKER  
Staff Engineer

W.H. COLEMAN, II  
New Products Research Lab Director

*J.R. Snedeker 16 Mar '89*  
*W.H. Coleman II 3/17/89*

Report# 890721

3

Work Order# 486209

**MODEL 700 CLASSIC RIFLE 300 WEATHERBY CALIBER  
TRIAL AND PILOT EVALUATION**

TO: J.R. Snedeker  
FROM: D.R. Thomas

**INTRODUCTION:**

On March 13, 1989 a request to conduct a Trial and Pilot Evaluation of the 300 Weatherby caliber, Model 700 Classic Rifles was received by the Test Lab. The evaluation used 10 rifles, randomly selected from a production rifle sample and consisted of Visual Inspection, Accuracy and Field Function.

**SCOPE OF THE TEST:**

To determine if the production run sample would meet the Remington Specifications set by the Research Design Section.

**TEST RESULTS:**

The production sample of the 300 Weatherby caliber, Model 700 Classic Rifles was found to be acceptable in all phases of the Trial and Pilot Evaluation. The results of each phase of testing were as follows:

**VISUAL:**

The overall appearance of the rifles was good.

**ACCURACY:**

The average group size was 1.85 inches.  
Remington specification for accuracy is 3.5 inches.

**FIELD FUNCTION:**

All of the five rifles tested experienced no malfunctions.

Report# 890721

4

Work Order# 486209

MODEL 700 CLASSIC RIFLE 300 WEATHERBY CALIBER  
TRIAL AND PILOT EVALUATION**REPORT TEXT:****GENERAL:**

The following ten rifles were randomly selected from the production sample for the Trial and Pilot Evaluation:

C6329053	C6347818	C6348495	C6348312	C6348343
C6341560	C6348385	C6348296	C6348311	C6347961

**VISUAL INSPECTION:**

The visual inspection committee finds the overall visual appearance of the Trial and Pilot sample to be acceptable.

All ten of the rifles were used in the Visual Inspection.

Comments on each rifle are located in the appendix.

**FIELD FUNCTION:**

Five of the rifles were fired 30 rounds each in a field function test conducted at the Ilion Fish and Game Club and the following results were established:

All five of the rifles experienced no malfunctions.

The following five rifles were used in the field function test:

C6348311	C6348296	C6341560	C6348385	C6347961
----------	----------	----------	----------	----------

**ACCURACY:**

The results showed that the 300 Weatherby caliber, Model 700 Classic Rifles tested met the Remington specification (3.5 inches) for group size.

The following five rifles were used in the accuracy test:

C6329053	C6347818	C6348495	C6348312	C6348343
----------	----------	----------	----------	----------

The average group size for the five rifles used in the accuracy test was 1.85 inches.

Accuracy results per individual rifle are located in the appendix of this report.

Report# 890721

5

Work Order# 486209

MODEL 700 CLASSIC RIFLE 300 WEATHERBY CALIBER  
TRIAL AND PILOT EVALUATION

**TEST PROCEDURE:**

**VISUAL INSPECTION:**

The visual inspection committee consisted of J.E. Selan, R. Howe, M. Paestella, and D.R. Thomas.

All ten rifles were examined.

Each rifle was wiped down with a clean white Coyne towel and examined by each committee member. All comments were recorded.

**FIELD FUNCTION:**

Five of the ten rifles were subjected to the loading and firing of 30 rounds in a field function test conducted at the Iliion Fish and Game Club. A round robin method of shooting, alternating shooters every ten rounds, was used throughout the field function testing.

Each of the five guns had ten rounds each of R300WB2, Weatherby 150gn. and Weatherby 180gn. ammunition shot through it.

**ACCURACY:**

Three, five shot groups were shot with each of the five rifles selected for 100 yard accuracy. The accuracy was shot by J.E. Selan in the Research and Development 100 yard range located in building 52-1A.

Remington ammunition code R300WB2 (220gn. SPCL) lot# K-16K B0623 was used for the accuracy testing.

Standard long action Leupold bases and rings were used in conjunction with a 20X Lyman All American scope.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

Report# 890721

6

Work Order# 486209

**MODEL 700 CLASSIC RIFLE 300 WEATHERBY CALIBER  
TRIAL AND PILOT EVALUATION**

**APPENDIX**

Report# 890721

7

Work Order# 486209

MODEL 700 CLASSIC RIFLE 300 WEATHERBY CALIBER  
TRIAL AND PILOT EVALUATION

## VISUAL INSPECTION:

## GENERAL COMMENTS:

The appearance of the 300 Weatherby caliber, Model 700 Classic Rifle sample was good.

There were no visual defects severe enough to reject the sample however, the following items were noted in the visual inspection:

## COMMENTS PER INDIVIDUAL RIFLE:

C6329053	Finish run on stock
C6347818	Bright spot on barrel
C6348495	Recoil pad spacer chipped at toe
C6348312	Small dent in right panel of stock mar on the top of the bolt handle
C6348343	Chip-out at front swivel Bright spot on bolt plug
C6341560	Chip-out at rear swivel Small white spot in finish Floor plate mars stock when closed
C6348385	Wood torn in barrel channel Small dent in fore-end
C6348296	Poor wood repair in checkering Poor polish on bolt handle Bolt plug marred
C6348311	Small bright mar on barrel
C6347961	Three small mars on stock Bolt plug marred

Report# 890721

8

Work Order# 486209

MODEL 700 CLASSIC RIFLE 300 WEATHERBY CALIBER  
TRIAL AND PILOT EVALUATION100 YARD ACCURACY RESULTS  
(Remington specification 3.5 inches)

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
C6329053	2.13	1.85	1.65	1.88
C6347818	.83	2.11	2.88	1.94
C6348495	1.59	1.40	2.22	1.74
C6348312	1.31	2.50	1.92	1.91
C6348343	1.85	2.17	1.39	1.80

AVERAGE GROUP SIZE 1.85 inches

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
F.E. Martin  
E.R. Owens  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 890891  
W.O.# 481152  
JUNE 26, 1989

MODEL 700 EJECTOR PIN STOP WASHER DESIGN ACCEPTANCE

Report# 890891

2

Work Order# 481152

MODEL 700 EJECTOR PIN STOP WASHER DESIGN ACCEPTANCE

ABSTRACT:


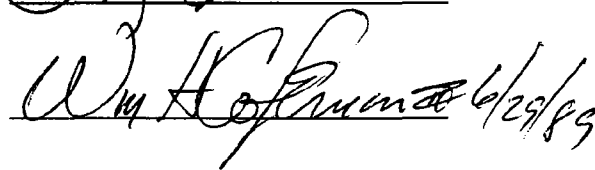
Research and Development finds the material change of the Model 700 Ejector Pin Stop Washer, from 8640 to 4130, to be acceptable. The evaluation consisted of dry cycle testing of twenty Model 700 Bolts. Ten Bolts had Ejector Pin Stop Washers of 8640 material and ten Bolts had Ejector Pin Stop Washers of 4130 material.

Prepared by: D.R. Thomas  
Date Prepared: June 26, 1989

proofread and cleared by:

J.R. SNEDEKER,  
Staff Engineer

W.H. COLEMAN, II  
New Products Research Lab Director

Report# 890891

3

Work Order# 481152

MODEL 700 EJECTOR PIN STOP WASHER DESIGN ACCEPTANCE

TO: J.R. Snedeker  
FROM: D.R. Thomas

**INTRODUCTION:**

On March 3, 1989 the Research Test Lab received a request from F.E. Martin to conduct a Design Acceptance Evaluation of the 4130 material Ejector Pin Stop Washer.

**SCOPE OF THE TEST:**

To determine if the Ejector Pin Stop Washer made from the proposed 4130 material would deform or wear excessively during dry cycle.

**TEST RESULTS:**

The sample of the 4130 Ejector Pin Stop Washers was found to be acceptable with no apparent wear or deformation after dry cycle testing.

Report# 890891

4

Work Order# 481152

MODEL 700 EJECTOR PIN STOP WASHER DESIGN ACCEPTANCE

**REPORT TEXT:**

**GENERAL:**

Twenty bolts were used for the dry cycle test:  
Ten control (8640 material) and ten of 4130 material.  
Testing was done by R.Howe in the dry cycle testing room located in building 52-1-A.

**TEST PROCEDURE:**

**DRY CYCLE:**

Each of the twenty test bolts were placed in a Test Lab action, in the bolt action cock and fire dry cycle machine. Nine of each material type were dry cycled to 25,000 cycles each. One of each material type was dry cycled to 50,000 cycles. All twenty Bolts were cut off approximately 1 5/8 inches from the locking lug end, and the Ejector Pin Stop Washers were examined. All test samples regardless of dry cycle level showed only slight visual difference, with no apparent wear or deformation.

881681 700 Classic 35 Whelen T&P  
881721 700 Safari .416 STrength  
881723 700 Mountain 7x57 D.A.  
882011 700 Mountain 243 Function & Accuracy  
882432 700 300wby Mag SPot Accuracy

882442 700 STrength .458 Win Mag  
883001 700 Laminated Stock (3006)

RD-69-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington.*



*PETERS*



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
B.L. Bosquet  
F.L. Supry  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 881681  
JUNE 17, 1988

MODEL 700 CLASSIC 35 WHELEN CALIBER TRIAL AND PILOT EVALUATION

Report# 881681

2

Work Order# 480257

MODEL 700 CLASSIC 35 WHELEN CALIBER TRIAL AND PILOT EVALUATION

ABSTRACT:


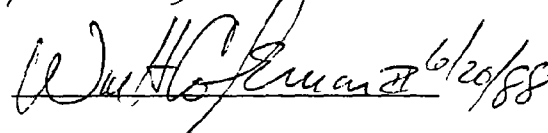
Research and Development finds the Trial and Pilot Evaluation of the 35 Whelen caliber, Model 700 Classic rifles to be acceptable. The Trial and Pilot Evaluation consisted of Visual Inspection, Field Function and Accuracy. The 10 rifle sample, randomly selected from an 20 rifle sample, was found to be within Remington specifications for each phase of the Trial and Pilot Evaluation.

Prepared by: F.L. Supry  
Date Prepared: June 17, 1988

proofread and cleared by:

H.C. MUNSON, Quality Resource

W.H. COLEMAN, II  
New Products Research Lab Director

Report# 881681

3

Work Order# 480257

MODEL 700 CLASSIC 35 WHELEN CALIBER TRIAL AND PILOT EVALUATION

TO: H.C. Munson  
FROM: F.L. Supry

**INTRODUCTION:**

In June, 1988, a request to conduct a Trial and Pilot Evaluation of the 35 Whelen caliber, Model 700 Classic rifles was received by the Test Lab. The evaluation used 10 rifles, randomly selected from a production rifle sample and consisted of Visual Inspection, Pattern Evaluation and Field Function.

**SCOPE OF THE TEST:**

To determine if the production run sample would meet the Remington Specifications set by the Research Design Section.

**TEST RESULTS:**

The production sample of the 35 Whelen caliber, Model 700 Classic rifles was found to be acceptable in all phases of the Trial and Pilot Evaluation. The results of each phase of testing were as follows:

**VISUAL:**

The overall appearance of the rifles was good.

**ACCURACY:**

The average group size was 1.77 inches.

**FIELD FUNCTION:**

Eight of the rifles experienced no malfunctions.

The two rifles that had malfunctions (one DX and two DE on C6241041, and four stem magazine left on C6216053) during the first function test, experienced no malfunctions in an additional 80 round function test after an extractor change and magazine box adjustment respectively.

Report# 881681

4

Work Order# 480257

**REPORT TEXT:****GENERAL:**

The following ten rifles were randomly selected from the production sample for the Trial and Pilot Evaluation:

C6240976	C6241033	C6241047	C6240971	C6241041
C6240958	C6241087	C6216558	C6216053	C6240945

**VISUAL INSPECTION:**

The visual inspection committee finds the overall visual appearance of the Trial and Pilot sample to be acceptable.

All ten of the rifles were used in the Visual Inspection.

Comments on each rifle are located in the appendix.

**FIELD FUNCTION:**

The ten rifles were fired 20 rounds each in a field function test conducted at the Ilion Fish and Game Club and the following results were established:

Eight of the rifles experienced no malfunctions.

Rifle C6241041 had one don't extract and two don't eject malfunctions during the function test. The extractor was replaced on this rifle by production employees and the rifle was fired an additional 80 rounds with no malfunctions.

Rifle C6216053 had four stem magazine left malfunctions during the function test. The magazine box was adjusted by production employees and the rifle was fired an additional 80 rounds with no malfunctions.

**ACCURACY:**

The results showed that the 35 Whelen caliber, Model 700 Classic rifles tested met the Remington specification (3.5 inches) for group size.

The following five rifles were used in the accuracy test:

C6240976	C6241033	C6241047	C6240971	C6241041
----------	----------	----------	----------	----------

The average group size for the five rifles used in the accuracy test was 1.77 inches.

Accuracy results per individual rifle are located in the appendix of this report.

Report# 881681

5

Work Order# 480257

**TEST PROCEDURE:**

**VISUAL INSPECTION:**

The visual inspection committee consisted of R.F. Leskovar, R.W. Howe, F.L. Supry, and D.R. Thomas.

All ten rifles were examined.

Each rifle was wiped down with a clean white Coyne towel and examined by each committee member. All comments were recorded.

**FIELD FUNCTION:**

The ten rifles were subjected to the loading and firing of 20 rounds 250 grain Remington 35 Whelen ammunition in a field function test conducted at the Ilion Fish and Game Club. A round robin method of shooting, alternating shooters every five rounds, was used throughout the field function testing.

**ACCURACY:**

Three, five shot groups were shot with each of the five rifles selected for 100 yard accuracy. The accuracy was shot by D.R. Thomas and J.E. Selan in the Research and Development 100 yard range located in building 52-1A.

Remington ammunition code (J02G-C8905) R35WH2 (250 grain SP) was used for the accuracy testing.

Standard long action Leupold bases and rings were used in conjunction with a 12X Redfield scope.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

Report# 881681

6

Work Order# 480257

MODEL 700 CLASSIC 35 WHELEN CALIBER TRIAL AND PILOT EVALUATION

**APPENDIX**

Report# 881681

7

Work Order# 480257

MODEL 700 CLASSIC 35 WHELEN CALIBER TRIAL AND PILOT EVALUATION

## VISUAL INSPECTION:

## GENERAL COMMENTS:

The appearance of the 35 Whelen caliber, Model 700 Classic sample was good.

There were no visual defects severe enough to reject the sample however, the following items were noted in the visual inspection:

## COMMENTS PER INDIVIDUAL RIFLE:

C6240945	CHATTER MARKS ON BOLT PLUG
C6216558	CHATTER MARKS ON BOLT PLUG LIGHT FILL IN TWO SMALL KNOTS LEFT SIDE OF STOCK
C6240976	CHATTER MARKS ON BOLT PLUG
C6216053	CHATTER MARKS ON BOLT PLUG
C6241033	CHATTER MARKS ON BOLT PLUG BRIGHT MAR ON TRIGGER GUARD OPEN KNOT ON STOCK
C6241087	BRIGHT MAR ON REAR STRAP SCREW PIN HOLES AND DULL AREA ON STOCK
C6241047	CHATTER MARKS ON BOLT PLUG
C6241041	NICE LOOKING WOOD
C6240971	POOR REPAIR AROUND CROSS PIN
C6240958	POOR FILL JOB ON THE STOCK

Report# 881681

8

Work Order# 480257

MODEL 700 CLASSIC 35 WHELEN CALIBER TRIAL AND PILOT EVALUATION

## 100 YARD ACCURACY RESULTS

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
C6240976	1.73	1.58	2.17	1.83
C6241033	1.41	1.53	2.01	1.65
C6241047	1.35	1.70	2.01	1.69
C6240971	2.85	1.90	1.19	1.98
C6241041	1.78	1.05	2.20	1.68

Report No. 881721

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

Developmental <input checked="" type="checkbox"/> Design Acceptance Pre-Pilot Pilot Production Acceptance		<u>AREA OF TESTING</u> Safety Related      Litigation Competitive Evaluation      Warehouse Audit New Design      Cost Reduction <input checked="" type="checkbox"/> Design Change      Stakes Plant Assistance      Other	
<u>FIREARM STAT'S.</u> MODEL: <u>M-700</u> CAL. or GAGE: <u>416 Rem</u> BARREL TYPE: <u>SARARI</u> PROOFED: YES <input checked="" type="checkbox"/> NO		<u>REPORT REQ'D.</u> FORMAL <input checked="" type="checkbox"/> TEST RESULTS ONLY	DATE REQUESTED: <u>6-20-88</u> DATE NEEDED BY: <u>A.S.A.P.</u> REQUESTED BY: <u>F. MARTIN</u> WORK ORDER NO: <u>481152</u>

<u>TEST TYPE</u> <input checked="" type="checkbox"/> Strength Test      Ammunition Test      Dry Cycle Test      Photo/Video Function Test      Environmental Test      Measurements      Other Accuracy Test      Customer Complaint      Endurance Test			
--	--	--	--

EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

On Rifle Supplied Perform Intentional Abuse Test

- 5 Bullet BARREL OBSTRUCTION
- Adequate Load To Destroy

(BARREL PLUGGED 6-22-88 R.W.H.) 4320

Pressure. BARREL ~~IS~~ Has Been Given To Test Lab

GUNS REQUIRED: Supplied

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: \_\_\_\_\_  
 TEST COMPLETED BY: \_\_\_\_\_  
 REPORT DATE: \_\_\_\_\_

## TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: F. Martin TESTER: C. Stephens DATE: 07/14/88  
 REPORT NO.: 881721 WORK ORDER NO.: 481152  
 WRITTEN BY: C. Stephens  
 TEST TYPE: \_\_\_\_\_

FIREARM STAT'S : MODEL: 700 CAL or GAUGE: .416  
 BARREL TYPE: \_\_\_\_\_ PROOFED: YES X NO \_\_\_\_\_

REASON FOR TEST : To determine if a M/700 rifle in .416 caliber will withstand the abuse of a high pressure round.

EQUIPMENT REQUIRED : 700 rifle in .416 caliber. Loading room & dies, P&U Range, Oehler system, PCB transducer, Amplifier, Measurement Lab and Iron lung.

TEST PROCEDURE : The barrel of the rifle was plugged with 4 410gr. bullets. A high pressure round was developed using various powders and loads until an acceptable pressure could be determined. The load consisted of 90gr. 896 powder a 400gr bullet and a Remington case. The gun was placed in the iron lung, loaded and fired.

TEST RESULTS : The results show that the M/700 in .416 caliber will withstand the abuse of a high pressure round.

REMINGTON ARMS COMPANY, INC.  
Illion Research DivisionSUMMARY OF INTENTIONAL GUN ABUSE TESTDATABy C. StephensDate 14 July 88FIREARM:Make RemingtonModel 700

Grade \_\_\_\_\_

Gauge .416Serial Number C6254608

Origin \_\_\_\_\_

Test Number Assigned 881721Comments Barrel Plugged with 4 410gr. bulletsHISTORY:Condition NewPrevious Rounds Fired 0Headspace at Test -Test Date 14 July 88ABUSIVELOAD USED:Powder Type 296Powder Weight 90gr.Case Make and Type Rem.Total Bullet Weight 400gr.

Total Shot Weight \_\_\_\_\_

Estimated Pressure 750+KADDITIONAL  
COMMENTS:Cracked Stock. Broke floor plate off.Cracked top of receiver at front mounting  
holes. Bolt locked up

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington.*



*PETERS*



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
F.E. Martin  
F.L. Supry  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 881723  
JUNE 30, 1988

MODEL 700 MOUNTAIN RIFLE 7X57 CALIBER DESIGN ACCEPTANCE

Report# 881723

2

Work Order# 481156

MODEL 700 MOUNTAIN RIFLE 7X57 CALIBER DESIGN ACCEPTANCE

ABSTRACT:


Research and Development finds the Design Acceptance Evaluation of the Model 700 Mountain Rifle, 7X57 caliber rifles to be acceptable. The evaluation consisted of Accuracy and Field Function. The six rifle sample, provided by F.E.Martin, was found to be within Remington specifications for each phase of the Design Acceptance Evaluation.

Prepared by: F.L. Supry  
Date Prepared: June 30, 1988

proofread and cleared by:

H.C. MUNSON, Quality Resource

W.H. COLEMAN, II  
New Products Research Lab Director

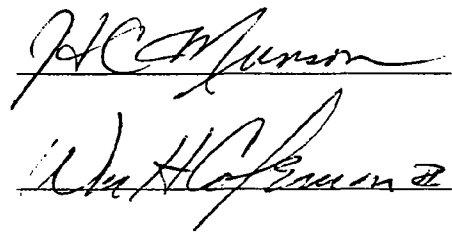The block contains two handwritten signatures. The top signature is 'H.C. Munson' written in cursive over a horizontal line. The bottom signature is 'W.H. Coleman II' also in cursive over a horizontal line.

Report# 881723

3

Work Order# 481156

MODEL 700 MOUNTAIN RIFLE 7X57 CALIBER DESIGN ACCEPTANCE

TO: H.C. Munson  
FROM: F.L. Supry

**INTRODUCTION:**

In June, 1988, a request to conduct a Design Acceptance Evaluation of the Model 700 Mountain Rifle, 7X57 caliber rifles was received by the Test Lab. The evaluation used six rifles and consisted of Accuracy and Field Function.

**SCOPE OF THE TEST:**

To determine if the 7X57 caliber sample would meet the Remington Specifications for accuracy and field function.

**TEST RESULTS:**

The sample of the 7X57 caliber, Model 700 Mountain Rifle was found to be acceptable in all phases of the Design Acceptance Evaluation. The results of each phase of testing were as follows:

The overall appearance of the rifles was good.

**ACCURACY:**

The average group size was 2.250 inches.

**FIELD FUNCTION:**

Four of the rifles experienced no malfunctions.

The two rifles that had malfunctions (one stem chamber on C6252543 and five stem chambers on C6252965) during the first function test, experienced no malfunctions after magazine box adjustments, in an additional 100 round and 200 round function test respectively.

Report# 881723

4

Work Order# 481156

**REPORT TEXT:****GENERAL:**

The following six rifles were used for the Design Acceptance Evaluation:

C6252543    C6252625    C6212166    C6252965    C6252609    C6209218

**ACCURACY:**

The results showed that the Model 700 Mountain Rifle, 7X57 caliber, met the Remington specification (2.7 inches) for group size.

All six rifles were used in the accuracy test.

The average group size for the six rifles used in the accuracy test was 2.250 inches.

The group size for Rifle C6252625 averaged 2.755 inches, which is .055 inches out of specification for a 7X57 caliber rifle. Examination of the rifle showed that the action was not properly bedded in the stock. The action was re-bedded by J.E. Selan and the rifle reshot. The group size for the rifle, after the re-bedding, averaged 1.729 inches.

Accuracy results per individual rifle are located in the appendix of this report.

**FIELD FUNCTION:**

The six rifles were fired 70 rounds each in a field function test conducted at the Ilion Fish and Game Club and the following results were established:

Four of the rifles experienced no malfunctions.

Rifle C6252543 had one stem chamber malfunction with R7MSR 175 grain SP Remington ammunition. The magazine box was adjusted and an additional 100 rounds of R7MSR were fired with no malfunctions.

Rifle C6252965 had one stem chamber malfunction with R7MSR 175 grain SP Remington ammunition and four stem chamber malfunctions with 7A 175 grain Federal ammunition. The magazine was adjusted and 100 rounds of each ammunition type were fired with no malfunctions.

Report# 881723

5

Work Order# 481156

**TEST PROCEDURE:****ACCURACY:**

Three, five shot groups were shot with each of the six rifles. The accuracy was shot by D.R. Thomas and J.E. Selan in the Research and Development 100 yard range located in building 52-1A.

Remington ammunition code (R191-D0000) R7MSR (175 grain SP) was used for the accuracy testing.

Standard long action Leupold bases and rings were used in conjunction with a 20X All-American Lyman scope.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

**FIELD FUNCTION:**

The six rifles were subjected to the loading and firing of 70 rounds of Remington and competitive 7X57 ammunition in a field function test conducted at the Ilion Fish and Game Club. A round robin method of shooting, alternating shooters and ammunition types every ten rounds, was used throughout the field function testing.

The addition function testing was conducted using a shooting jack in the shooting room located in building 52-2A.

The following ammunition types were used in the field test:

REMINGTON	R7MSR1	140 GRAIN POINTED SOFT POINT
	R7MSR	175 GRAIN SOFT POINT
RWS	7X57	162 GRAIN CONE POINT
IMPERIAL	7MM7X57	160 GRAIN SOFT POINT
WINCHESTER	X7MM	175 GRAIN SOFT POINT
FEDERAL	7B	139 GRAIN SOFT POINT
	7A	175 GRAIN SOFT POINT

Report# 881723

6

Work Order# 481156

MODEL 700 MOUNTAIN RIFLE 7X57 CALIBER DESIGN ACCEPTANCE

**APPENDIX**

Report# 881723

7

Work Order# 481156

## MODEL 700 MOUNTAIN RIFLE 7X57 CALIBER DESIGN ACCEPTANCE

## 100 YARD ACCURACY RESULTS

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
C6209218	2.578	2.419	1.495	2.164
C6252965	3.253	2.267	1.380	2.300
C6212166	3.010	3.133	1.647	2.600
C6252609	3.044	2.472	1.443	2.320
C6252543	3.760	1.520	1.885	2.388
C6252625	1.748	2.303	1.135	1.729
		overall average =		2.250

HD-49-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington.*



*PETERS*



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
F.L. Supry  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 882011  
JULY 22, 1988

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

Report# 882011

2

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

**ABSTRACT:**

The Trial and Pilot Evaluation of the Model 700 Mountain Rifle, in the short caliber action, was completed and accepted using the 7MM-08 caliber rifles as the test vehicle. The introduction of the short caliber action also includes the 308 and 243 calibers. As these calibers become available the function and accuracy will be verified by the Research Test and Measurement Laboratory.

The 243 caliber Model 700 Mountain Rifles tested met Remington specifications (2.2 inches) for group size. The five rifles tested shot an average group size of 1.62 inches. There were no malfunctions during the function test.

Prepared by: F.L. Supry  
Date: July 22, 1988

Report# 882011

3

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

TO: H.C. Munson  
FROM: F.L. Supry

**INTRODUCTION:**

In July, 1988, a second request to conduct a Function and Accuracy evaluation of the 243 caliber, Model 700 Mountain Rifles was received by the Test Lab. The first request was received in May, 1988, and that sample was rejected (refer to Report# 881313) because three of the five samples did not meet Remington 100 yard accuracy specifications for 243 caliber rifles.

Each evaluation used five rifles selected from a production rifle sample in the Ilion warehouse.

**SCOPE OF THE TEST:**

To determine if the production run samples would meet Remington Specifications set by the Research Design Section.

**TEST RESULTS:**

The production sample of the 243 caliber, Model 700 Mountain Rifles, was found to be acceptable. The results of the testing were as follows:

**ACCURACY:**

The average group size was 1.62 inches.

**FUNCTION:**

There were no malfunctions on any of the five rifles tested.

Report# 882011

4

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

**REPORT TEXT:****GENERAL:**

The following five rifles were used throughout the accuracy and function test.

C6228993      C6237357      C6237437      C6237431      C6237395

**ACCURACY:**

The results showed that the 243 caliber, Model 700 Mountain Rifles tested met the Remington specification (2.2 inches) for group size.

All five of the rifles were used for the 100 yard accuracy testing and the following results were obtained:

100 YARD ACCURACY RESULTS

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
C6228993	1.21	1.73	1.74	1.56
C6237357	1.87	1.75	2.07	1.90
C6237437	1.97	2.53	1.92	2.14
C6237431	1.32	0.95	1.47	1.25
C6237395	1.02	1.13	1.58	1.24

**FUNCTION:**

All five rifles were fired 20 rounds each in a function test conducted in the R&D 200 yard range.

No malfunctions occurred.

Report# 882011

5

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

**TEST PROCEDURE:**

**ACCURACY:**

Three, five shot groups were shot with each of the five rifles selected for 100 yard accuracy. The accuracy was shot by J.E. Selan and D.R. Thomas in the Research and Development 100 yard range located in building 52-1A.

Remington ammunition code (A18C D3405) R243W3 (100 grain PSP) was used for the accuracy testing.

Standard short action Leupold bases and rings were used in conjunction with a 20X Lyman scope.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

**FUNCTION:**

All five of the rifles were subjected to the loading and firing of 20 rounds 100 grain pointed soft point Remington 243 caliber ammunition in a function test conducted at the R&D 200 yard range.

Report No. 882432  
881271(A)

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input checked="" type="checkbox"/> Developmental <input type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance	<u>AREA OF TESTING</u> <input type="checkbox"/> Safety Related <input type="checkbox"/> Litigation <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> Warehouse Audit <input type="checkbox"/> New Design <input type="checkbox"/> Cost Reduction <input checked="" type="checkbox"/> Design Change      Stake _____ <input type="checkbox"/> Plant Assistance <input type="checkbox"/> Other _____	
<u>FIREARM STAT'S.</u> MODEL: <u>M. 700</u> CAL. or GAGE: <u>300 Wby</u> BARREL TYPE: <u>Mag Sport</u> PROOFED: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>	<u>REPORT REQ'D.</u> FORMAL <input type="checkbox"/> TEST RESULTS ONLY <input checked="" type="checkbox"/>	DATE REQUESTED: <u>8-30-88</u> DATE NEEDED BY: <u>ASAP</u> REQUESTED BY: <u>F. MARTIN</u> WORK ORDER NO: <u>481153</u>

TEST TYPE

<input type="checkbox"/> Strength Test	<input checked="" type="checkbox"/> Ammunition Test	<input type="checkbox"/> Dry Cycle Test	<input type="checkbox"/> Photo/Video
<input type="checkbox"/> Function Test	<input type="checkbox"/> Environmental Test	<input type="checkbox"/> Measurements	<input type="checkbox"/> Other _____
<input checked="" type="checkbox"/> Accuracy Test	<input type="checkbox"/> Customer Complaint	<input type="checkbox"/> Endurance Test	_____

EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

Subsequent To Job # 881271  
 WITH Ammo Supplied from Conoke Shoot  
 Sample Guns For Accuracy 3x5 Per

-GUNS REQUIRED:

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: 10-21-88TEST COMPLETED BY: J. SELANREPORT DATE: 10-24-88

F.E. MARTIN

FILE

## TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: F.E. MARTIN TESTER: J. SELAN - A. COOPER DATE: 10/21/88  
 REPORT NO.: BB2432 WORK ORDER NO.: 481153  
 WRITTEN BY: J. SELAN  
 TEST TYPE: DEVELOPMENTAL

FIREARM STAT'S : MODEL: WEATHERBY MARK-V CAL or GAUGE: 300 WEATHERBY  
700 CLASSIC BARREL TYPE: MAG. SPORT PROOFED: YES ☒ NO ☐ MAG.

REASON FOR TEST :

TO DETERMINE ACCURACY OF AMMO SUPPLIED BY LONKE IN .300  
 WEATHERBY MAG.

EQUIPMENT REQUIRED :

6 - M-700; CLASSICS. \*C6202843 - \*B6896103 - \*B6896067 - \*C6209215 - \*C6209210 - \*B6896118  
 1 MARK-V - WEATHERBY \*23792  
 AMMO: 300 WEATHERBY MAG - 190 GR. PSP.  
 20X LYMAN ALL AMERICAN SCOPE - 1 SCOPE BASE (LEUPOLD-L.A.R.H) - 1 SET - LEUPOLD IEN. (MAG) RINGS.  
 100 YD. RANGE -  
 CLEANING RODS - HOPPE'S #9 SOLVENT. BUSHNELL - BORE SIGHTER. - ASSORTED PATCHES.  
 DIGITIZING BOARD - CALCOMP \*9000 AND - N.A. \*9000

TEST PROCEDURE : 3X5 SHOT GROUPS PER RIFLE.

IN STILL SCOPE. BORE SIGHT.

WIRE BRUSH WITH HOPPE'S #9 SOLVENT. PATCH DRY.

ZERO FOR P.O.I. - RECLEAN

FIRE ONE FOULING SHOT.

SHOOT 5 SHOT GROUP. UNTIL 3 GROUPS COMPLETED.

COOL BETWEEN EACH GROUP

REPEAT - CLEANING AND FIRING PROCEDURE.

TEST RESULTS :

GROUPS	1	2	3	AVG.	MEAN RADIUS	1	2	3	AVG
C6202843 (J.S.)	1.701	2.356	1.577	1.878		.537	.922	.612	.690
B6896103 (A.C.)	2.71	2.232	2.136	2.36		.830	.741	.749	.773
B6896067 (J.S.)	2.077	2.38	1.889	2.115		.831	1.050	.754	.875
C6209215 (J.S.)	.664	1.172	1.633	1.156		.301	.467	.526	.431
C6209210 (J.S.)	1.158	1.584	1.621	1.454		.374	.608	.548	.51
B6896118 (J.S.)	1.302	1.956	1.732	1.663		.484	.759	.529	.591
23792 (J.S.)	3.807	2.653	1.856	2.772		1.137	1.032	.716	.962
WABY-MAG - CONTROL									
AGGRIGATE OF 700 CLASSICS - 2.125						AGGRIGATE OF 700 CLASSICS - .774			

C-

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/002432

## CENTERFIRE PATTERNS # 1

POA

11n circle

21n circle

31n circle

CENTROID #

# OF SHOTS - 5

# IN CIR

11n = 2

21n = 4

31n = 5

HS = .568

VS = 1.700

GS = 1.701

AVG-G.S. = 1.878

A.M.R. = .690

#

C6202843 (J.E.S.)

PATTERN # : 1

SHOTS (BEST OF) : 5

MAXIMUM X : .401

MINIMUM X : -.167

MAXIMUM Y : .550

MINIMUM Y : -1.150

CENTROID X : -.048

CENTROID Y : -.208

POA TO CENTROID in. : .213

MIN RADIUS : .027

MEAN RADIUS : .537

MAX RADIUS : 1.155

HORIZONTAL SPREAD : .568

VERTICAL SPREAD : 1.700

EXTREME SPREAD : 1.701

NUMBER IN ONE INCH CIRCLE =

NUMBER IN TWO INCH CIRCLE =

NUMBER IN THREE INCH CIRCLE =

4

.373

-.194

.263

-.284

-.021

.495

.496

.282

.325

.416

.568

.547

.710

2

4

5

3

.314

-.254

.292

-.197

.039

.408

.410

.206

.307

.387

.568

.489

.688


M/700 "CLASSIC."  
.300 WBY. MAG.  
REM. 190 GR. RSP.LYMAN 20X SCOPE -  
ALL-AMERICAN

100 YDS. SAND BAG REST.

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/882432

## CENTERFIRE PATTERNS # 2

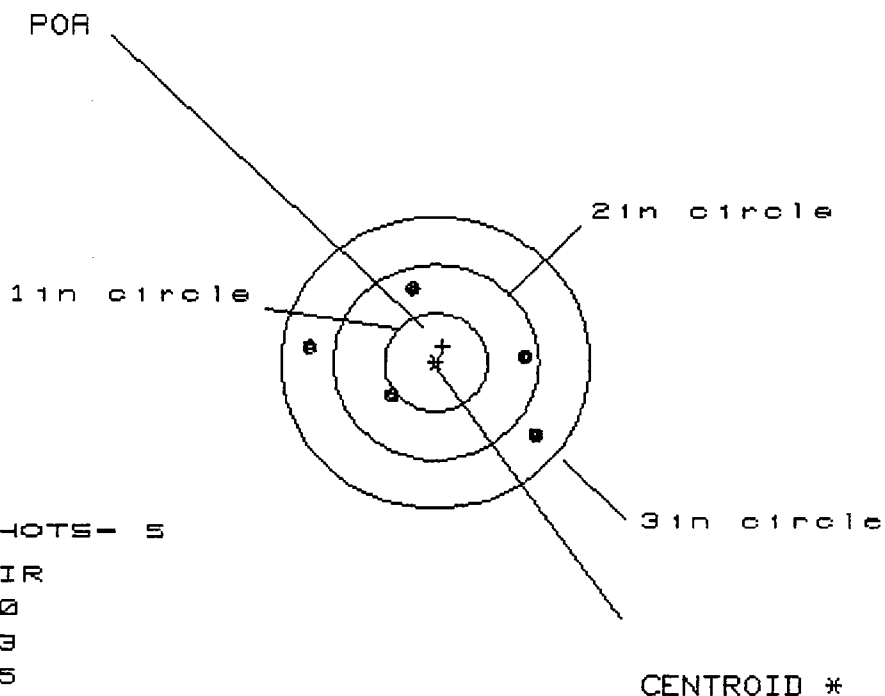

# OF SHOTS - 5

# IN CIR

1 in = 0

2 in = 3

3 in = 5

HS = 2.179

VS = 1.518


GS = 2.356

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.990	1.088	.774
MINIMUM X	-1.189	-.941	-.476
MAXIMUM Y	.794	.613	.609
MINIMUM Y	-.724	-.489	-.493
CENTROID X	-.069	-.317	-.003
CENTROID Y	-.161	.021	.024
POA TO CENTROID in.	.175	.318	.024
MIN RADIUS	.513	.516	.678
MEAN RADIUS	.922	.791	.715
MAX RADIUS	1.227	1.094	.783
HORIZONTAL SPREAD	2.179	2.029	1.250
VERTICAL SPREAD	1.518	1.102	1.102
EXTREME SPREAD	2.356	2.032	1.306
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/882432

## CENTERFIRE PATTERNS # 3

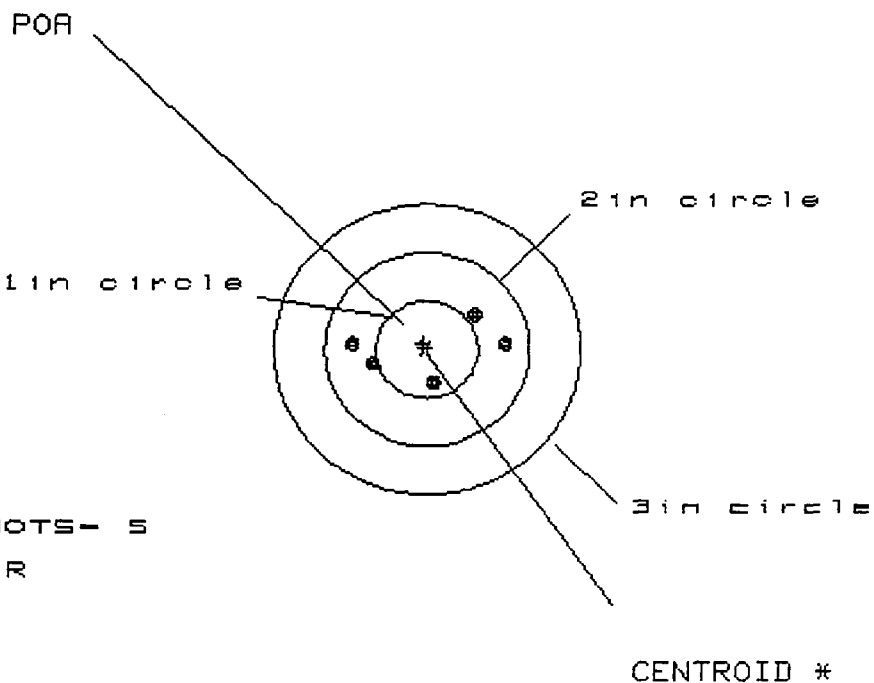

# OF SHOTS - 5

# IN CIR

1in = 1

2in = 5

3in = 5

HS = 1.577

VS = .769

GS = 1.577

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.804	.621	.430
MINIMUM X	-.773	-.572	-.493
MAXIMUM Y	.395	.412	.435
MINIMUM Y	-.374	-.357	-.334
CENTROID X	.033	-.168	.022
CENTROID Y	-.061	-.078	-.101
POA TO CENTROID in.	.070	.186	.103
MIN RADIUS	.377	.327	.340
MEAN RADIUS	.612	.521	.485
MAX RADIUS	.807	.745	.612
HORIZONTAL SPREAD	1.577	1.192	.923
VERTICAL SPREAD	.769	.769	.769
EXTREME SPREAD	1.577	1.240	1.067
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/86896103.1.1

## CENTERFIRE PATTERNS # 1

POA

1 in circle

2 in circle

3 in circle

# OF SHOTS- 5

# IN CIR

1 in = 2

2 in = 3

3 in = 4

HS= 2.636

VS= .899

GS= 2.710

CENTROID \*

AVG. G.S. = 2.36

A.M.R. = .773

B6896103 - (A.C.)

PATTERN #	:	1	4	3
SHOTS (BEST OF)	:	5	4	3
MAXIMUM X	:	1.466	.713	.445
MINIMUM X	:	-1.170	-.804	-.475
MAXIMUM Y	:	.507	.347	.349
MINIMUM Y	:	-.392	-.266	-.264
CENTROID X	:	-.046	-.412	-.144
CENTROID Y	:	.015	-.111	-.113
POA TO CENTROID in.	:	.048	.427	.183
MIN RADIUS	:	.398	.224	.266
MEAN RADIUS	:	.830	.555	.438
MAX RADIUS	:	1.551	.804	.566
HORIZONTAL SPREAD	:	2.636	1.517	.920
VERTICAL SPREAD	:	.899	.613	.613
EXTREME SPREAD	:	2.710	1.555	1.017
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		4	

M-700 "CLASSIC"  
300 W&BY. MAG,  
REM- 190 GR. RSP.


LYMAN ALL-AMERICAN  
20X SCOPE.

100 YDS. SAND BAG REST.

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/86B96103.1.1

## CENTERFIRE PATTERNS # 2

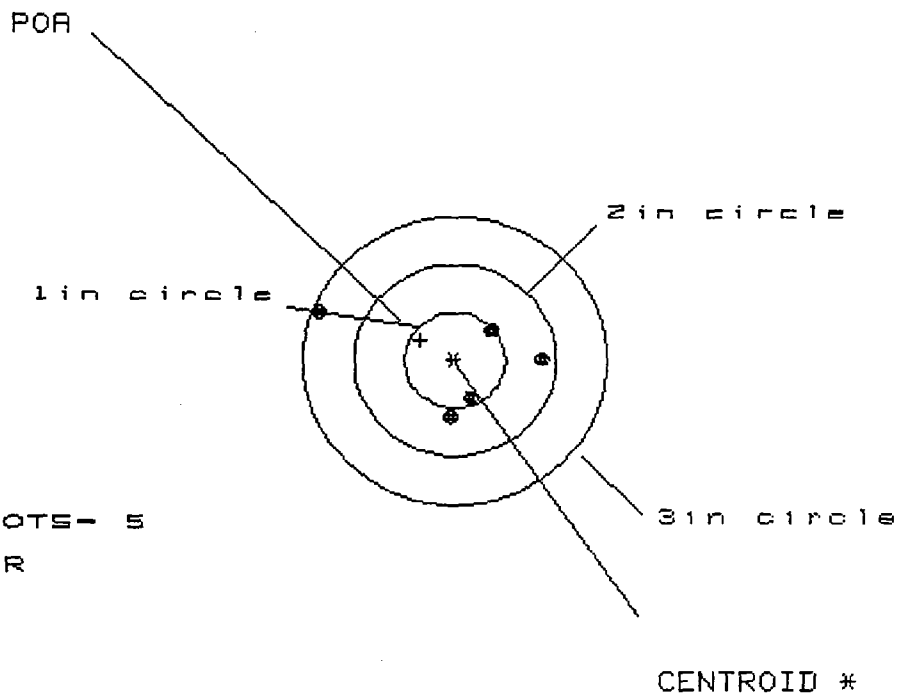

# OF SHOTS- 5

# IN CIR

1 in = 2

2 in = 4

3 in = 5

HS= 2.168

VS= 1.110


GS= 2.232

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.827	.492	.189
MINIMUM X	-1.341	-.351	-.187
MAXIMUM Y	.555	.463	.517
MINIMUM Y	-.555	-.416	-.362
CENTROID X	.342	.677	.513
CENTROID Y	-.214	-.353	-.407
POA TO CENTROID in.	.403	.764	.655
MIN RADIUS	.386	.266	.154
MEAN RADIUS	.741	.448	.371
MAX RADIUS	1.451	.545	.550
HORIZONTAL SPREAD	2.168	.843	.376
VERTICAL SPREAD	1.110	.879	.879
EXTREME SPREAD	2.232	1.022	.956
NUMBER IN ONE INCH CIRCLE	= 2		
NUMBER IN TWO INCH CIRCLE	= 4		
NUMBER IN THREE INCH CIRCLE	= 5		

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/86896103.1.1

## CENTERFIRE PATTERNS # 3

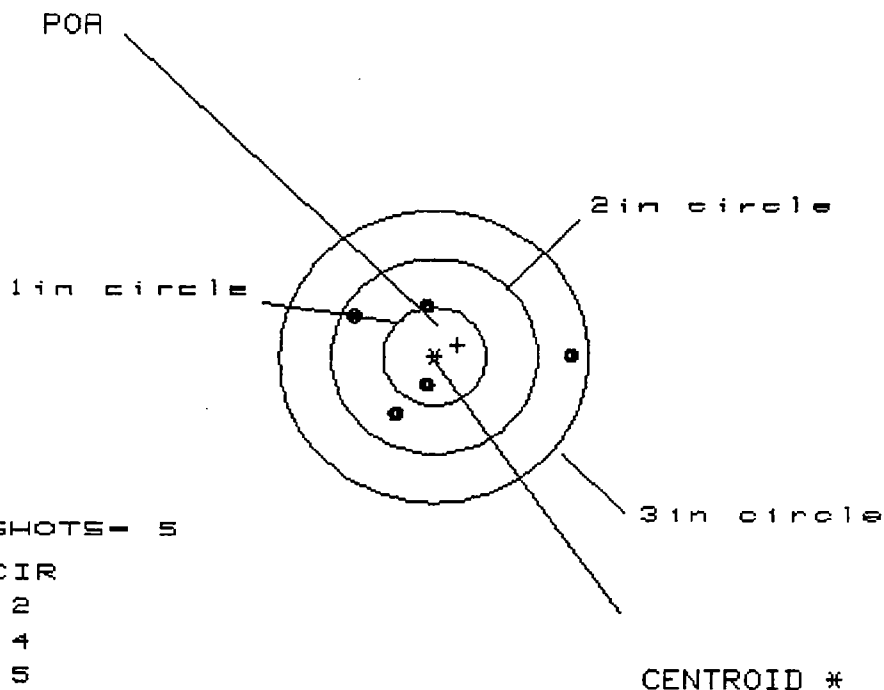

# OF SHOTS= 5

# IN CIR

1 in = 2

2 in = 4

3 in = 5

HS= 2.100

VS= 1.092

GS= 2.136


A

PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	1.322
MINIMUM X	-.778
MAXIMUM Y	.479
MINIMUM Y	-.613
CENTROID X	-.221
CENTROID Y	-.118
POA TO CENTROID in.	.251
MIN RADIUS	.336
MEAN RADIUS	.749
MAX RADIUS	1.322
HORIZONTAL SPREAD	2.100
VERTICAL SPREAD	1.092
EXTREME SPREAD	2.136
NUMBER IN ONE INCH CIRCLE =	2
NUMBER IN TWO INCH CIRCLE =	4
NUMBER IN THREE INCH CIRCLE =	5

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/882432.1

## CENTERFIRE PATTERNS # 1

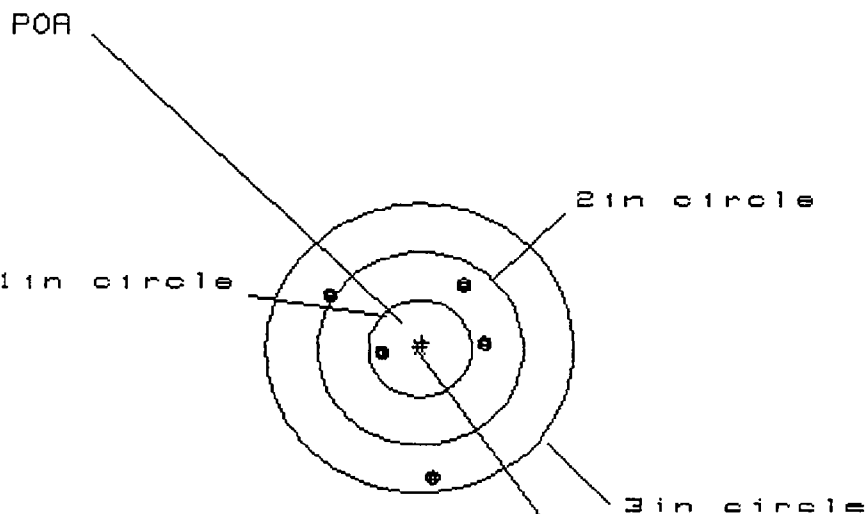

# OF SHOTS - 5

# IN CIR

1 in = 1

2 in = 4

3 in = 5

HS = 1.487

VS = 2.000

GS = 2.077

AVG. G.S. = 2.115

A.V.<sup>m</sup>R. = .875

B6896067 (AES)

PATTERN # : 1

SHOTS (BEST OF)	5	4	3
MAXIMUM X	.644	.681	.412
MINIMUM X	-.843	-.806	-.614
MAXIMUM Y	.710	.388	.459
MINIMUM Y	-1.290	-.320	-.249
CENTROID X	-.022	-.059	.210
CENTROID Y	-.064	.258	.187
POA TO CENTROID in.	.068	.265	.281
MIN RADIUS	.382	.471	.462
MEAN RADIUS	.831	.663	.542
MAX RADIUS	1.298	.834	.663
HORIZONTAL SPREAD	1.487	1.487	1.026
VERTICAL SPREAD	2.000	.708	.708
EXTREME SPREAD	2.077	1.567	1.080
NUMBER IN ONE INCH CIRCLE	= 1		
NUMBER IN TWO INCH CIRCLE	= 4		
NUMBER IN THREE INCH CIRCLE	= 5		

M-700 CLASSIC.

.300 WBY MAG.

REM- 190 GR. ASP.

LYMAN ALL AMERICAN


20X SCOPE

100 YDS. SAND BAG REST.

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/882432.1

## CENTERFIRE PATTERNS # 2

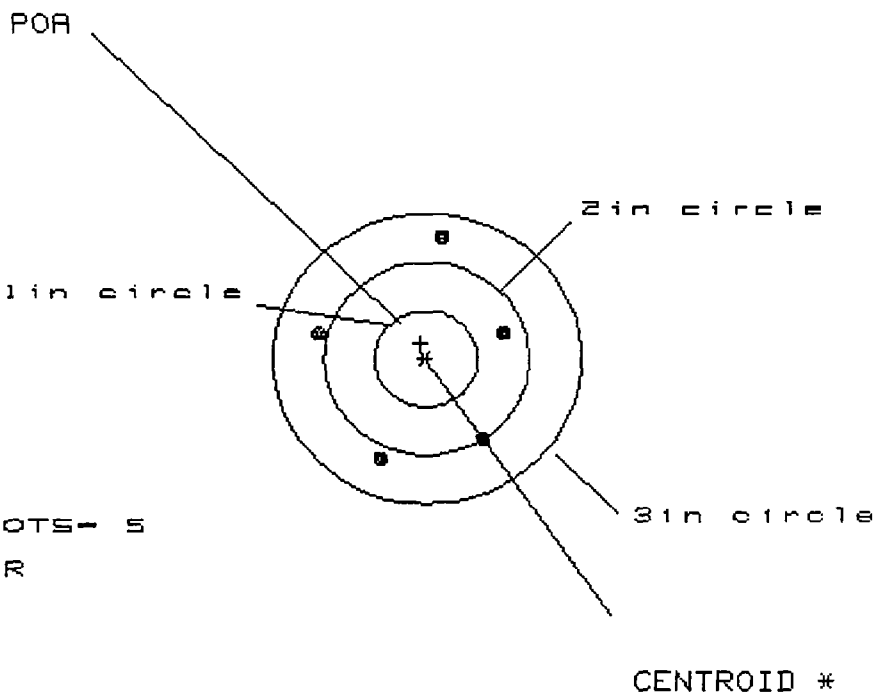


PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.770	.813	.691
MINIMUM X	-1.046	-1.003	-1.125
MAXIMUM Y	1.269	.613	.372
MINIMUM Y	-1.039	-.722	-.723
CENTROID X	-.052	.009	.131
CENTROID Y	-.167	-.484	-.244
POA TO CENTROID in.	.175	.485	.277
MIN RADIUS	.817	.736	.775
MEAN RADIUS	1.050	.931	.934
MAX RADIUS	1.281	1.175	1.185
HORIZONTAL SPREAD	1.816	1.816	1.816
VERTICAL SPREAD	2.308	1.334	1.095
EXTREME SPREAD	2.380	1.905	1.905
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	2		
NUMBER IN THREE INCH CIRCLE =	5		

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/B82432.1

## CENTERFIRE PATTERNS # 3

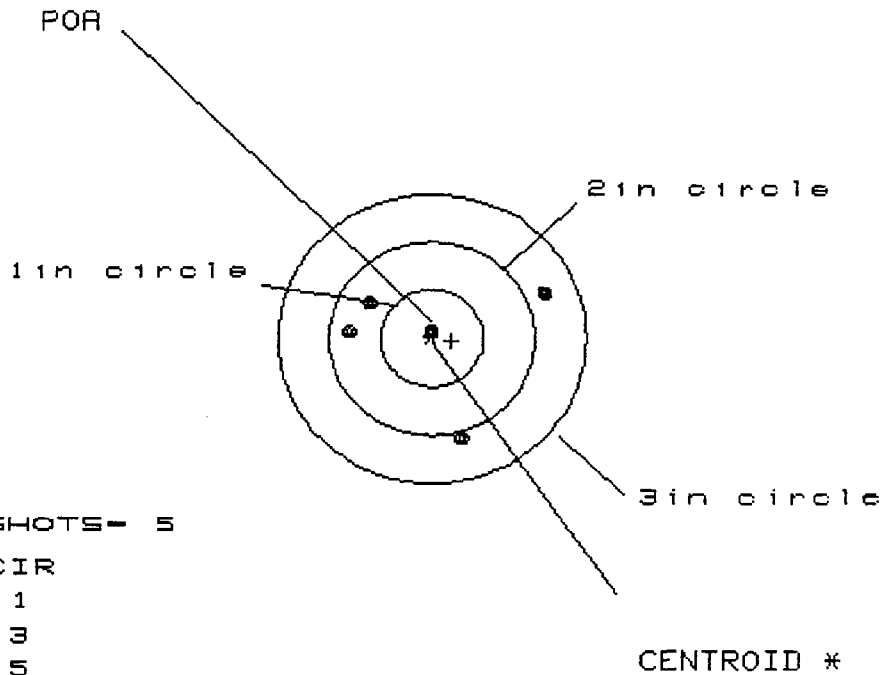

# OF SHOTS= 5

# IN CIR

1in = 1

2in = 3

3in = 5

HS= 1.829

VS= 1.502


GS= 1.889

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.064	.604	.417
MINIMUM X	-.765	-.499	-.298
MAXIMUM Y	.512	.511	.223
MINIMUM Y	-.990	-.862	-.121
CENTROID X	-.193	-.459	-.660
CENTROID Y	.026	-.102	.186
POA TO CENTROID in.	.195	.470	.686
MIN RADIUS	.076	.284	.253
MEAN RADIUS	.754	.616	.335
MAX RADIUS	1.181	1.053	.429
HORIZONTAL SPREAD	1.829	1.103	.715
VERTICAL SPREAD	1.502	1.373	.344
EXTREME SPREAD	1.889	1.655	.715
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/B82432.1.1

## CENTERFIRE PATTERNS # 1

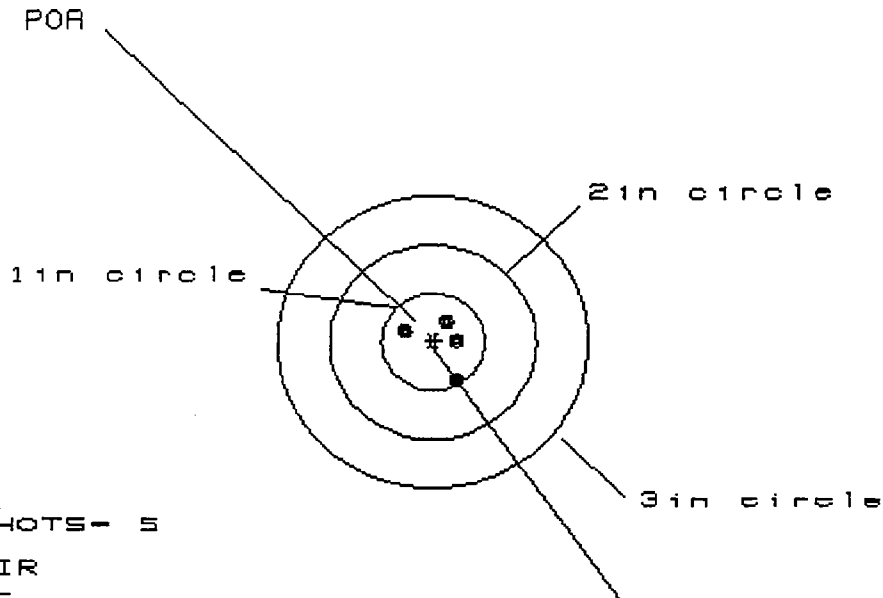

# OF SHOTS- 5

# IN CIR

1in = 5

2in = 5

3in = 5

HS= .481

VS= .649

GS= .664

AVG. G.S. = 1.156

A.M.R. = .431

C6209215 (H.E.S)

PATTERN # : 1

SHOTS (BEST OF) : 5

MAXIMUM X : .208

MINIMUM X : -.273

MAXIMUM Y : .259

MINIMUM Y : -.390

CENTROID X : -.027

CENTROID Y : -.012

POA TO CENTROID in. : .029

MIN RADIUS : .210

MEAN RADIUS : .301

MAX RADIUS : .433

HORIZONTAL SPREAD : .481

VERTICAL SPREAD : .649

EXTREME SPREAD : .664

NUMBER IN ONE INCH CIRCLE = 5

NUMBER IN TWO INCH CIRCLE = 5

NUMBER IN THREE INCH CIRCLE = 5

M-700- 'CLASSIC'

300. WBY. MAG.

REM.- 190 GR. PSP.

LYMAN- ALL AMERICAN

20X SCOPE.

100 YDS. SAND BAG REST.

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/882432.1.1

## CENTERFIRE PATTERNS # 2

POA

1 in circle

2 in circle

3 in circle

# OF SHOTS- 5

# IN CIR

1 in = 3

2 in = 5

3 in = 5

HS- 1.169

VS- .489

GS- 1.172


CENTROID \*

PATTERN #	:	2		
SHOTS (BEST OF)	:	5	4	3
MAXIMUM X	:	.591	.588	.444
MINIMUM X	:	-.578	-.430	-.284
MAXIMUM Y	:	.228	.219	.175
MINIMUM Y	:	-.261	-.270	-.314
CENTROID X	:	-.080	-.068	.076
CENTROID Y	:	-.030	-.021	.023
POA TO CENTROID in.	:	.086	.071	.079
MIN RADIUS	:	.282	.219	.238
MEAN RADIUS	:	.467	.397	.375
MAX RADIUS	:	.592	.615	.465
HORIZONTAL SPREAD	:	1.169	1.018	.728
VERTICAL SPREAD	:	.489	.489	.489
EXTREME SPREAD	:	1.172	1.065	.857
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		5	

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/882432.1.1

## CENTERFIRE PATTERNS # 3

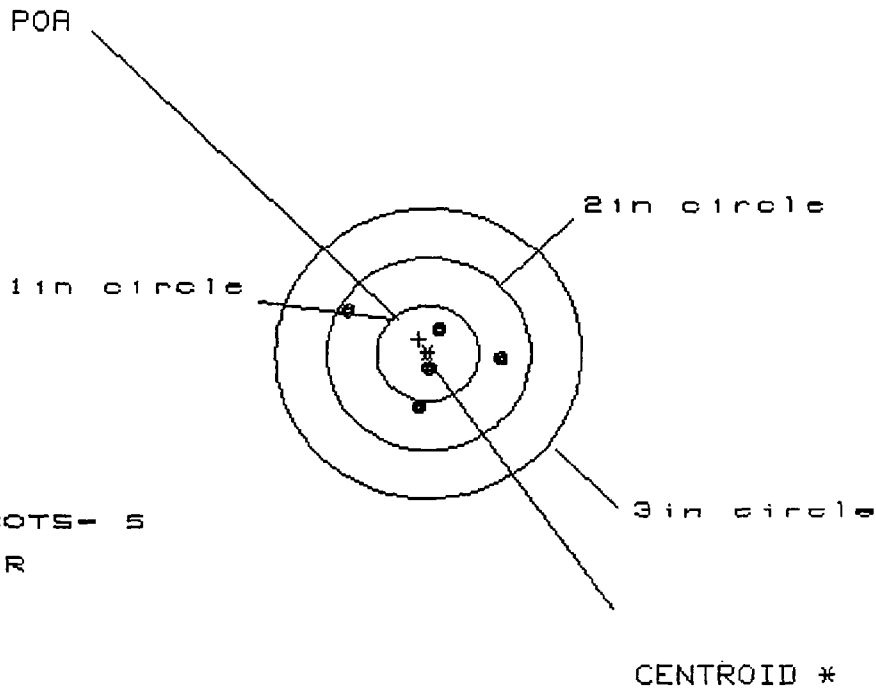

# OF SHOTS- 5

# IN CIR

1 in = 2

2 in = 5

3 in = 5

HS= 1.573

VS= .916

GS= 1.633

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.750	.544	.112
MINIMUM X	-.823	-.294	-.112
MAXIMUM Y	.404	.378	.400
MINIMUM Y	-.512	-.411	-.389
CENTROID X	-.088	.294	.112
CENTROID Y	-.150	-.251	-.273
POA TO CENTROID in.	.174	.386	.295
MIN RADIUS	.135	.184	.010
MEAN RADIUS	.526	.406	.277
MAX RADIUS	.917	.548	.415
HORIZONTAL SPREAD	1.573	.838	.224
VERTICAL SPREAD	.916	.789	.789
EXTREME SPREAD	1.633	.964	.820
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/B82432.1.1.1

## CENTERFIRE PATTERNS # 1

POA

1 in circle

2 in circle

3 in circle

CENTROID \*

# OF SHOTS- 5

# IN CIR

1 in = 4

2 in = 5

3 in = 5

HS= 1.147

VS= .441

GS= 1.158

AVG. G.S. = 1.454

C6209210 (JES)

A.M.R. = .51

PATTERN # : 1

M-700 - CLASSIC

SHOTS (BEST OF) :

5

4

3

.300 W&amp;BY. MAG.

MAXIMUM X :

.493

.329

.222

MINIMUM X :

-.654

-.358

-.248

REM. 180 GR. P.S.P.

MAXIMUM Y :

.257

.211

.187

MINIMUM Y :

-.184

-.105

-.129

CENTROID X :

-.016

.148

.038

CENTROID Y :

.013

.059

.083

LYMAN - ALL AMERICAN

POA TO CENTROID in.:

.020

.159

.091

20X SCOPE.

MIN RADIUS :

.098

.117

.132

MEAN RADIUS :

.374

.251

.224

MAX RADIUS :

.679

.415

.310

100 YDS SAND BAG REST.

HORIZONTAL SPREAD :

1.147

.687

.470

VERTICAL SPREAD :

.441

.316

.316

EXTREME SPREAD :

1.158

.744

.530

NUMBER IN ONE INCH CIRCLE =

4

NUMBER IN TWO INCH CIRCLE =

5


NUMBER IN THREE INCH CIRCLE =

5

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/002432.1.1.1

## CENTERFIRE PATTERNS # 2

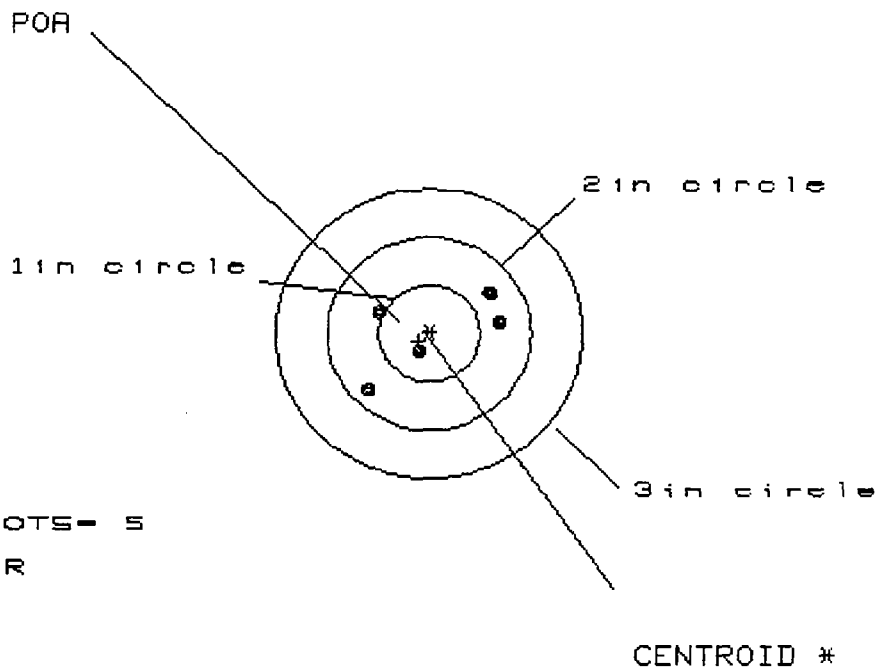

# OF SHOTS = 5

# IN CIR

1 in = 1

2 in = 5

3 in = 5

HS = 1.254

VS = 1.086


GS = 1.584

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.664	.517	.655
MINIMUM X	-.590	-.673	-.535
MAXIMUM Y	.464	.309	.160
MINIMUM Y	-.622	-.336	-.233
CENTROID X	.104	.251	.113
CENTROID Y	.079	.234	.132
POA TO CENTROID in.	.130	.344	.173
MIN RADIUS	.212	.424	.262
MEAN RADIUS	.608	.534	.493
MAX RADIUS	.857	.676	.659
HORIZONTAL SPREAD	1.254	1.190	1.190
VERTICAL SPREAD	1.086	.644	.393
EXTREME SPREAD	1.584	1.193	1.193
NUMBER IN ONE INCH CIRCLE	= 1		
NUMBER IN TWO INCH CIRCLE	= 5		
NUMBER IN THREE INCH CIRCLE	= 5		

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/B82432.1.1.1

## CENTERFIRE PATTERNS # 3

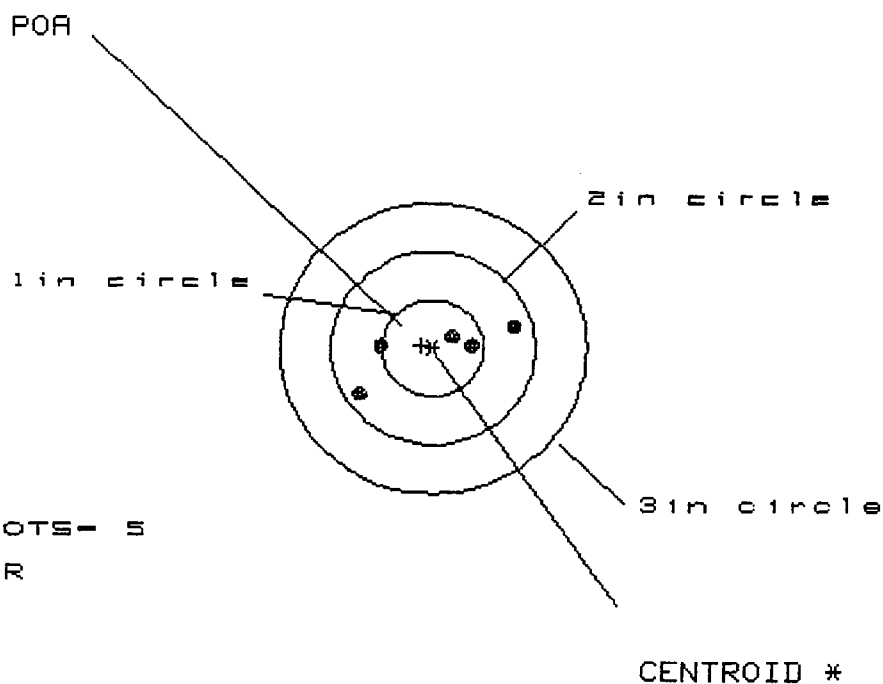

# OF SHOTS - 5

# IN CIR

1 in = 2

2 in = 5

3 in = 5

HS = 1.466

VS = .691


GS = 1.621

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.758	.581	.357
MINIMUM X	-.708	-.716	-.522
MAXIMUM Y	.239	.127	.096
MINIMUM Y	-.452	-.114	-.072
CENTROID X	.116	.293	.099
CENTROID Y	-.029	.083	.041
POA TO CENTROID in.	.119	.304	.107
MIN RADIUS	.223	.061	.191
MEAN RADIUS	.548	.389	.358
MAX RADIUS	.840	.725	.527
HORIZONTAL SPREAD	1.466	1.297	.879
VERTICAL SPREAD	.691	.241	.168
EXTREME SPREAD	1.621	1.319	.880
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/BB2432.1.1.1.1

## CENTERFIRE PATTERNS # 1

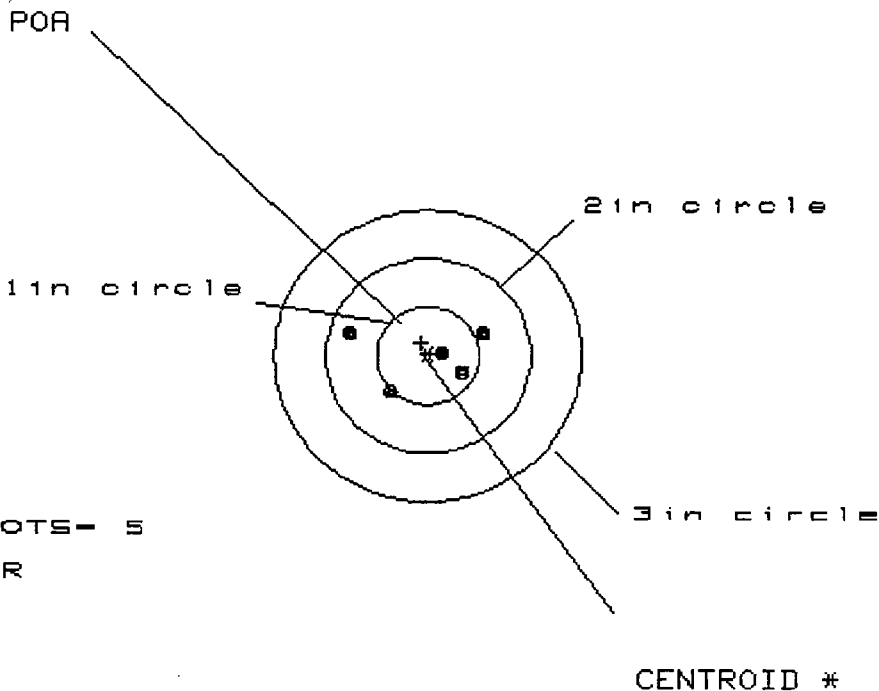

# OF SHOTS - 5

# IN CIR

1in = 3

2in = 5

3in = 5

HS = 1.302

VS = .548

GS = 1.302

AVG. GS = 1.663

A.M.R. = .591

# B6896110 (TES)

PATTERN # : 1

SHOTS (BEST OF) : 5

MAXIMUM X : .562

MINIMUM X : -.740

MAXIMUM Y : .221

MINIMUM Y : -.327

CENTROID X : .065

CENTROID Y : -.131

POA TO CENTROID in. : .146

MIN RADIUS : .173

MEAN RADIUS : .484

MAX RADIUS : .773

HORIZONTAL SPREAD : 1.302

VERTICAL SPREAD : .548

EXTREME SPREAD : 1.302

NUMBER IN ONE INCH CIRCLE =

NUMBER IN TWO INCH CIRCLE =

NUMBER IN THREE INCH CIRCLE =

4

.377

-.546

.256

-.272

.251

-.186

.312

.090

.339

.610

.923

.528

1.063

3

5

5

3

.311

-.421

.174

-.186

.125

-.272

.299

.206

.326

.460

.732

.360

.759

M-700 "CLASSIC"

.300 WBY. MAG.

REM. 190 GR. P.S.P.

LYMAN. ALL AMERICAN


20X SCOPE.

100 YDS. SAND BAG REST

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/B82432.1.1.1.1

## CENTERFIRE PATTERNS # 2

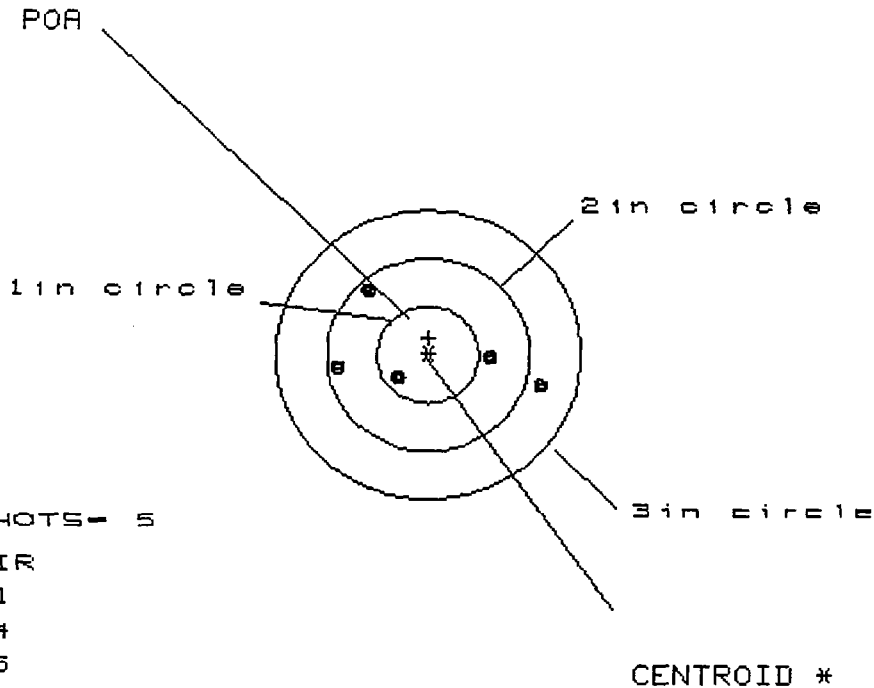

# OF SHOTS- 5

# IN CIR

1in = 1

2in = 4

3in = 5

HS= 1.951

VS= 1.008


GS= 1.956

PATTERN #	2		
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.095	.841	.750
MINIMUM X	-.856	-.583	-.673
MAXIMUM Y	.702	.625	.105
MINIMUM Y	-.306	-.283	-.074
CENTROID X	-.008	-.281	-.191
CENTROID Y	-.176	-.099	-.308
POA TO CENTROID in.	.176	.298	.362
MIN RADIUS	.332	.283	.107
MEAN RADIUS	.759	.610	.513
MAX RADIUS	1.137	.847	.757
HORIZONTAL SPREAD	1.951	1.423	1.423
VERTICAL SPREAD	1.008	.908	.179
EXTREME SPREAD	1.956	1.429	1.429
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/882432.1.1.1.1

## CENTERFIRE PATTERNS # 3

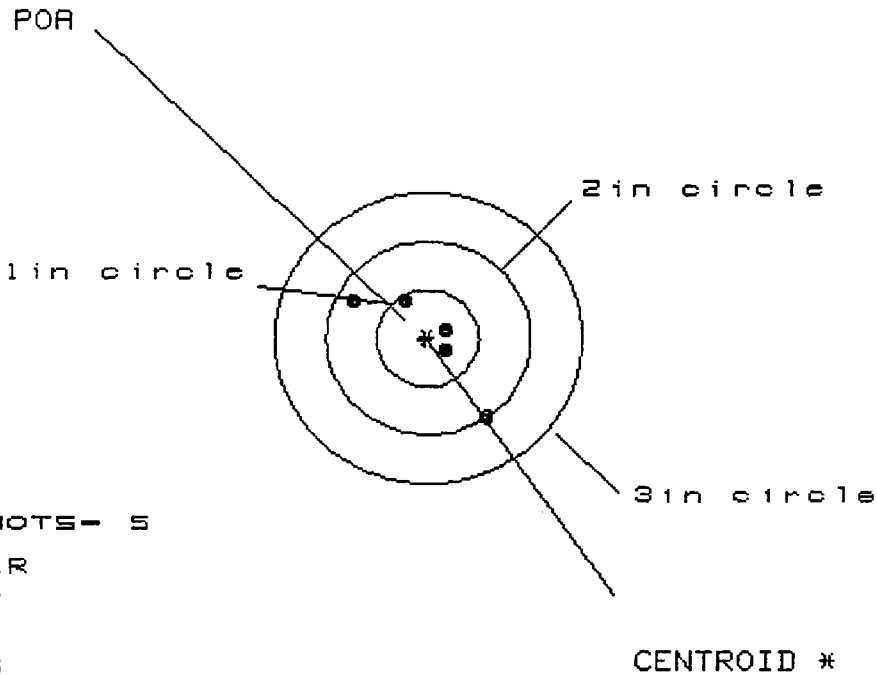

# OF SHOTS- 5

# IN CIR

1 in = 3

2 in = 5

3 in = 5

HS= 1.282

VS= 1.204

GS= 1.732


CENTROID \*

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.556	.349	.154
MINIMUM X	-.726	-.587	-.253
MAXIMUM Y	.430	.236	.302
MINIMUM Y	-.774	-.283	-.217
CENTROID X	-.032	-.107	.088
CENTROID Y	.013	.207	.141
POA TO CENTROID in.	.034	.233	.166
MIN RADIUS	.180	.243	.176
MEAN RADIUS	.529	.413	.270
MAX RADIUS	.953	.619	.394
HORIZONTAL SPREAD	1.282	.936	.407
VERTICAL SPREAD	1.204	.519	.519
EXTREME SPREAD	1.732	1.004	.628
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		5	

21 Oct 1986

FILE:/PATTERNING/CENTERFIRE PATT/882432.1.1.1.1.1

CENTERFIRE PATTERNS # 1

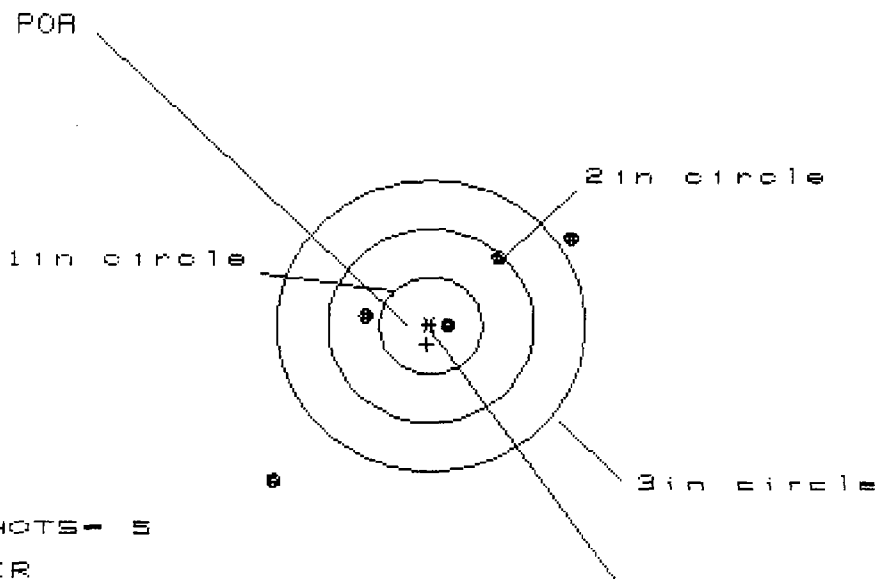

\* OF SHOTS - 5

# IN CIR

1 in - 1

210 - 21

$$\exists n = 0$$

15- 2,301

VS= 2.466

GE= 3.887

$$\text{AVG. G.S.} = 2.772$$

A.M.R. = 962

#23792. (JES)

PATTERN # : 1

SHOTS (BEST OF) : 5

MAXIMUM X : 1.

```
MINIMUM      X      :      -1 .
```

MAXIMUM Y . . . . .

MINIMUM Y : -1.

CENTROID X : .

CENTROID Y : .

POA TO CENTROID in.: .

MIN RADIUS : .

MEAN RADIUS : 1.

MAX RADIUS	:	2.
------------	---	----

HORIZONTAL SPREAD : 2.

VERTICAL SPREAD : 2.

EXTREME      SPREAD      :      3.

NUMBER IN ONE INCH CIRCLE =

NUMBER IN TWO INCH CIRCLE =

NUMBER IN THREE INCH CIRCLE =

WEATHERBY- MARK. V  
300 WHBY. MAG.  
REM. 190 GR. PSP.

.468 LYMAN 20x SCOPE  
-.284 ALL-AMERICAN


100 YDS. SAND BAG REST.

21 Oct 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/882432.1.1.1.1

## CENTERFIRE PATTERNS # 2

POA

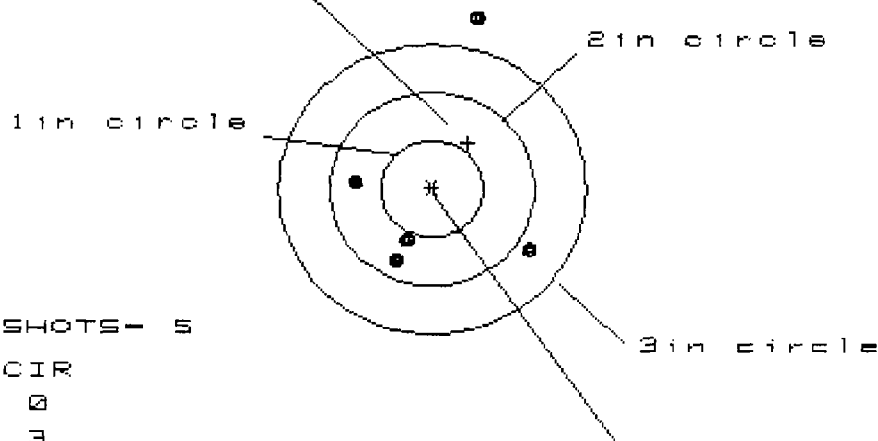

# OF SHOTS- 5

# IN CIR

1 in = 0

2 in = 3

3 in = 4

HS= 1.716

VS= 2.527

GS= 2.653

CENTROID \*


PATTERN #	2	3	4	5
SHOTS (BEST OF)	3	4	5	
MAXIMUM X	.220	1.067	.961	
MINIMUM X	-.294	-.650	-.755	
MAXIMUM Y	.449	.492	1.815	
MINIMUM Y	-.301	-.258	-.712	
CENTROID X	-.810	-.455	-.349	
CENTROID Y	-.884	-.927	-.473	
POA TO CENTROID in.	1.199	1.032	.588	
MIN RADIUS	.265	.171	.608	
MEAN RADIUS	.370	.610	1.032	
MAX RADIUS	.536	1.074	1.863	
HORIZONTAL SPREAD	.514	1.716	1.716	
VERTICAL SPREAD	.750	.750	2.527	
EXTREME SPREAD	.835	1.825	2.653	
NUMBER IN ONE INCH CIRCLE =	0	0		
NUMBER IN TWO INCH CIRCLE =	3	3		
NUMBER IN THREE INCH CIRCLE =	4	4		

21 Oct 1988

FILE:PA

CENTERFIRE\_PATT/882432/1.1.1.1

## CENTERFIRE PATTERNS # 3

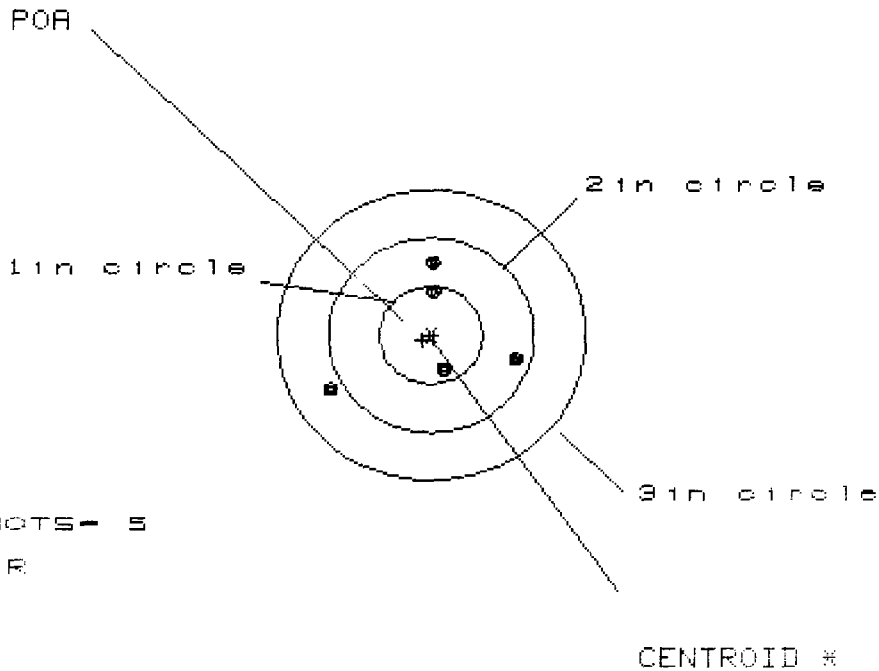

# OF SHOTS - 5

# IN CIR

1 in = 2

2 in = 4

3 in = 5

HS = 1.831

VS = 1.305

GS = 1.856

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.825	.574	.109
MINIMUM X	-1.006	-.258	-.067
MAXIMUM Y	.746	.606	.473
MINIMUM Y	-.559	-.494	-.627
CENTROID X	.080	.331	.140
CENTROID Y	.047	.187	.320
POA TO CENTROID in.	.093	.380	.349
MIN RADIUS	.393	.385	.167
MEAN RADIUS	.716	.559	.426
MAX RADIUS	1.151	.698	.636
HORIZONTAL SPREAD	1.931	.832	.176
VERTICAL SPREAD	1.305	1.100	1.100
EXTREME SPREAD	1.856	1.289	1.110
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

Report No. 882442

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input checked="" type="checkbox"/> Developmental <input type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance		<u>AREA OF TESTING</u> <input type="checkbox"/> Safety Related <input type="checkbox"/> Litigation <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> Warehouse Audit <input type="checkbox"/> New Design <input type="checkbox"/> Cost Reduction <input type="checkbox"/> Design Change <input type="checkbox"/> Stake _____ <input checked="" type="checkbox"/> Plant Assistance <input type="checkbox"/> Other _____	
<u>FIREARM STAT'S</u> MODEL: <u>700</u> CAL or GAGE: <u>45B WIN MAG</u> BARREL TYPE: _____ PROOFED: YES <input type="checkbox"/> NO <input type="checkbox"/>	<u>REPORT REQ'D.</u> FORMAL _____ TEST RESULTS ONLY <input checked="" type="checkbox"/>	DATE REQUESTED: <u>8-31-88</u> DATE NEEDED BY: <u>9-6-88</u> REQUESTED BY: <u>Tim McCormack</u> <sup>EXT 258</sup> WORK ORDER NO: <u>018488</u>	

TEST TYPE

<input checked="" type="checkbox"/> Strength Test	<input type="checkbox"/> Ammunition Test	<input type="checkbox"/> Dry Cycle Test	<input type="checkbox"/> Photo/Video
<input type="checkbox"/> Function Test	<input type="checkbox"/> Environmental Test	<input type="checkbox"/> Measurements	<input type="checkbox"/> Other _____
<input type="checkbox"/> Accuracy Test	<input type="checkbox"/> Customer Complaint	<input type="checkbox"/> Endurance Test	_____

EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

Plug BBL and perform a high pressure strength test.  
 BBL has a different contour and has been  
 slotted for a  $\frac{1}{4}$  rib.

GUNS REQUIRED:

Supplied by custom shop 1 action...

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: 9/9/88TEST COMPLETED BY: DT RHREPORT DATE: 9/12/88

## TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: T. McCormack TESTER: D.T. & R.H. DATE: 9/12/88  
REPORT NO.: 882442 WORK ORDER NO.: 018488  
WRITTEN BY: D. Thomas  
TEST TYPE: Developmental

FIREARM STAT'S : MODEL: 700 with experimental Barrel CAL or GAUGE: .458  
BARREL TYPE: \_\_\_\_\_ PROOFED: YES \_\_\_\_\_ NO \_\_\_\_\_

REASON FOR TEST :

To determine if the experimental barrel with a  $\frac{1}{4}$  inch rib brazed into a slot over the chamber can survive a high Pressure strength Test.

EQUIPMENT REQUIRED :

- 1 experimental barrelled action
- reloading equipment
- Iron Lung
- Strain gage equipment

TEST PROCEDURE :

The barrel was plugged with 4-510gn, .458 m dia. bullets. A strain gage was applied in the chamber area to determine peak Pressure. The gun was then installed in the iron lung and a high Pressure round was fired in it. The destructive round consisted of 80gn of Win 296 Powder and a 510gn soft Point bullet loaded in a win Case & Primer.

TEST RESULTS :

The barrel burst in the chamber area. The brass color in the cross sectional area of the slot shows that the failure started there.

L. J. Parker

File

## TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: D. Parker TESTER: D.T. & J.S. DATE: 10/26/88  
REPORT NO.: 883001 WORK ORDER NO.: \_\_\_\_\_  
WRITTEN BY: D. Thomas  
TEST TYPE: \_\_\_\_\_

FIREARM STAT'S : MODEL: 700 CAL or GAUGE: 30-06  
BARREL TYPE: \_\_\_\_\_ PROOFED: YES \_\_\_\_\_ NO ☒

REASON FOR TEST :

To determine if the apparent split at the front take down hole in the laminated stock will spread with use.

EQUIPMENT REQUIRED : stereomicroscope

4 - M/700's with laminated stocks (serial #'s C6311744, C6311097, C6311500, C631144)  
400 rounds of 30-06 ammo (Various types)

TEST PROCEDURE : Two of the stocks were sanded with 600 grit paper in the area of the split. The split disappeared before the finish was sanded through.

The stocks were examined under a microscope and the ends of the splits were marked. The guns were then proofed and reexamined. After proof 100 rounds were shot through each gun and they were again examined to see if the split opened or spread.

TEST RESULTS :

In all four stocks the split did not open or spread after proof and 100 rounds.

880051 700 Synthetic Stock Evaluation (3006)  
 880181 700 Synthetic Stock Evaluation (3006)  
 880281 700 Rynite Stock with Barrel Pad (270)  
 880281A 700 SAME  
 880611 700 Rynite stock insert Design Verification  
 880761 700 STrength .338 cal.  
 880782 700 STrength Kevlar Stock  
 881031 700 Accuracy D.C. Brennan vs GFH (3006)  
 881032 700 Dry Cycle Zinc Phos. on Fire Controls  
 881281 700 No 'V' Rynite Stock Design Verif.  
 881311 700 Mountain 7MOB T&P  
 881312 700 Mountain 308 Function & Accuracy  
 881313 700 Mountain 243 Function & Accuracy

F. H. Smith  
File (2)

## TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: F. H. Smith TESTER: D.T. DATE: 1/7/88  
REPORT NO.: 880051 WORK ORDER NO.: 481151  
WRITTEN BY: D. Thomas  
TEST TYPE: Evaluation

FIREARM STAT'S : MODEL: 700 CAL or GAUGE: 30-06  
BARREL TYPE: \_\_\_\_\_ PROOFED: YES ☒ NO ☐

REASON FOR TEST :

Synthetic Stock Evaluation  
Check recoil lug for damage or set back

EQUIPMENT REQUIRED :

1- M/700 with Synthetic Stock  
102 rds 30-06 Proof Ammo  
Freezer

TEST PROCEDURE :

The stock was examined before & after 100 Proof rounds were fired thru the gun.

The gun was then placed in the freezer at -40°C overnight. 2 Proof rounds were shot while the gun was cold.

TEST RESULTS :

There was no damage to the stock throughout the test.

Report No. 880051

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input type="checkbox"/> Developmental <input checked="" type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance	<p align="center"><u>AREA OF TESTING</u></p> <table> <tr> <td><input type="checkbox"/> Safety Related</td> <td><input type="checkbox"/> Litigation</td> </tr> <tr> <td><input checked="" type="checkbox"/> Competitive Evaluation</td> <td><input type="checkbox"/> Warehouse Audit</td> </tr> <tr> <td><input type="checkbox"/> New Design</td> <td><input type="checkbox"/> Cost Reduction</td> </tr> <tr> <td><input type="checkbox"/> Design Change</td> <td>Stake <input type="text"/></td> </tr> <tr> <td><input type="checkbox"/> Plant Assistance</td> <td><input type="checkbox"/> Other <input type="text"/></td> </tr> </table>	<input type="checkbox"/> Safety Related	<input type="checkbox"/> Litigation	<input checked="" type="checkbox"/> Competitive Evaluation	<input type="checkbox"/> Warehouse Audit	<input type="checkbox"/> New Design	<input type="checkbox"/> Cost Reduction	<input type="checkbox"/> Design Change	Stake <input type="text"/>	<input type="checkbox"/> Plant Assistance	<input type="checkbox"/> Other <input type="text"/>
<input type="checkbox"/> Safety Related	<input type="checkbox"/> Litigation										
<input checked="" type="checkbox"/> Competitive Evaluation	<input type="checkbox"/> Warehouse Audit										
<input type="checkbox"/> New Design	<input type="checkbox"/> Cost Reduction										
<input type="checkbox"/> Design Change	Stake <input type="text"/>										
<input type="checkbox"/> Plant Assistance	<input type="checkbox"/> Other <input type="text"/>										
<p align="center"><u>FIREARM STAT'S.</u></p> MODEL: <u>700</u> CAL. or GAGE: <u>30-06</u> BARREL TYPE: <u>BDL</u> PROOFED: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>	<p align="center"><u>REPORT REQ'D.</u></p> FORMAL <input type="checkbox"/> TEST RESULTS ONLY <input checked="" type="checkbox"/>										

DATE REQUESTED: 1-5-88  
 DATE NEEDED BY: 1-15-88  
 REQUESTED BY: F. H. SMITH  
 WORK ORDER NO: 481151

<u>TEST TYPE</u>			
<input checked="" type="checkbox"/> Strength Test	<input type="checkbox"/> Ammunition Test	<input type="checkbox"/> Dry Cycle Test	<input type="checkbox"/> Photo/Video
<input type="checkbox"/> Function Test	<input type="checkbox"/> Environmental Test	<input type="checkbox"/> Measurements	<input type="checkbox"/> Other <input type="text"/>
<input type="checkbox"/> Accuracy Test	<input type="checkbox"/> Customer Complaint	<input type="checkbox"/> Endurance Test	<input type="text"/>

EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

SHOOT 100 Proof Ros.  
 - CHECK RECOIL LUG FOR DAMAGE OR SET BACK  
 - SYNTHETIC STOCK EVALUATION

-GUNS REQUIRED: W/700 W/SYN. STOCK

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the Designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: 1/7/88  
 TEST COMPLETED BY: DS  
 REPORT DATE: 1/7/88

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington.*



*PETERS*



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
J.R. Snedeker  
H.C. Munson  
F.H. Smith  
F.L. Supry

RESEARCH TEST AND MEASUREMENT REPORT  
REPORT# 880181  
MARCH 21, 1988

MODEL 700 SYNTHETIC LONG STOCK EVALUATION

RP# 880181

WO# 481157

MODEL 700 SYNTHETIC LONG STOCK EVALUATION

ABSTRACT:

The Test and Measurement Laboratory evaluated Model 700 long stocks made of Arylon, Rynite, and Fiberglas. The testing consisted of 100 yard accuracy, proof strength and drop testing. The accuracy consisted of three, five shot groups; at ambient, after 24 hours of -40 degrees and after 12 hours of +250 degrees Fahrenheit with each rifle. The proof strength consisted of firing 25 standard factory rounds and 75 high pressure proof rounds with each rifle. The drop test was conducted per SAAMI specifications and then each rifle used was dropped at heights above the SAAMI specifications.

The Arylon and Rynite stocks were as good as or better than the Fiberglas stocks in every phase of the test. The Fiberglas stocks swelled and cracked during the +250 degree Fahrenheit phase of the accuracy test. However, the accuracy results were not adversely affected.

Prepared by: F.L. Supry  
Date Prepared: March 21, 1987

RP# 880181

WO# 481157

## MODEL 700 SYNTHETIC LONG STOCK EVALUATION

To: F.H. Smith  
From: F.L. Supry

## INTRODUCTION:

A request was received from F.H. Smith on January 18, 1988 to evaluate Arylon, Rynite and Fiberglas synthetic long stocks assembled on the Model 700 30-06 caliber rifles. The testing consisted of 100 yard accuracy, proof strength and drop testing. The accuracy consisted of three, five shot groups; at ambient, after 24 hours of -40 degrees and after 12 hours of +250 degrees Fahrenheit with each rifle. The proof strength consisted of assembling Model 700 338 Win. Mag. caliber actions into two stocks of each material and firing 25 standard factory rounds and 75 high pressure proof rounds. The drop test was conducted, per SAAMI specifications, on three Arylon, two Rynite and two Fiberglas stocks, assembled with the 30-06 caliber actions and then each was dropped at heights above the SAAMI specifications for additional information.

## SCOPE OF TEST:

To determine if the Model 700 rifles assembled in the experimental stocks would meet the Remington specifications for 100 yard accuracy and SAAMI drop testing. Also, to compare the affects of extreme heat and cold on 100 yard accuracy and to compare the strength of the internal bearing surfaces of each stock material.

## TEST RESULTS:

There was no deformation of the internal bearing surfaces on any of the stocks tested.

All the rifles tested passed the SAAMI and extended drop test.

The Fiberglas stocks swelled and cracked during the +250 degree Fahrenheit phase of the accuracy test. However, all the rifles tested were within Remington specifications of 3.5 inches for the 100 yard accuracy in each phase of the accuracy test. The following average group sizes were established:

STOCK TYPE	----- ACCURACY RESULTS -----			(in.)
	AMBIENT (in.)	+250 degrees F.	-40 degrees F. (in.)	
RYNITE	1.77	2.23	2.00	
Arylon	2.38	2.03	1.98	
FIBERGLAS	1.98	1.83	2.22	

RP# 880181

WO# 481157

**REPORT TEXT:**

**ACCURACY:**

Eleven rifles were shot (two with Rynite stocks, six with Arylon stocks and 3 with Fiberglas stocks) with three, five shot groups fired for each rifle.

Remington 180 grain bronze point ammunition (R30066 code H20 MC2825) was used throughout the test.

The three Fiberglas stocks swelled and cracked during the +250 degree Fahrenheit phase of the accuracy test. The cracks were covered with Duct-tape and the accuracy test continued.

Individual accuracy results are listed in the appendix of this report.

**PROOF STRENGTH:**

Two stocks of each material were used to test the deformation of internal bearing surfaces, when the rifle was subjected to the loading and firing of 338 Win. Mag. (25 standard and 75 proof rounds) ammunition. There was no deformation on the bearing surfaces of any of the stocks tested.

**DROP TEST:**

The drop test was conducted, per SAAMI specifications, on three Arylon, two Rynite and two Fiberglas stocks, assembled with the 30-06 caliber actions. Then each rifle was dropped at heights above the SAAMI specifications for additional information. All the rifles tested passed the SAAMI and extended drop test.

**TEST PROCEDURE:**

**ACCURACY:**

The accuracy was shot by D.R. Thomas and J.E. Selan in the R&D 100 yard range located in building 52-1.

Standard long action Leupold bases and Leupold rings were used, in conjunction with a 20X All-American scope.

A total of three, five shot groups, were shot for each rifle. The rifles were cooled and cleaned between each group, and one fouling shot fired before the next group was shot. The procedure was repeated after the rifles were placed in an industrial oven at +250 degrees Fahrenheit

RP# 880181

WO# 481157

**TEST PROCEDURE:** (continued)

**ACCURACY:** (continued)

for 12 hours and then allowed to return to ambient, and again after the rifles were placed in an industrial freezer at -40 degrees Fahrenheit for 24 hours and then allowed to return to ambient.

The targets were analyzed for group size, using the HP 9000 computer and digitizing tablet.

**PROOF STRENGTH:**

The proof strength test was conducted by C.J. Stephens in the R&D shooting room located in building 52-1A.

Two stocks of each material were randomly selected, the 30-06 actions removed and the internal bearing surfaces examined. Then the 338 Win Mag. actions were assembled to the stocks. Each of the rifles was placed in a shooting jack and 25 standard factory rounds were fired; then, using a lanyard and the portable shield, 75 proof rounds were fired. Next the actions were removed and the internal bearing surfaces re-examined.

**DROP TEST:**

The drop test was conducted by R.W. Howe and J.E. Selan in the R&D drop test area located in building 52-1A.

The following SAAMI specifications were used:

All drops were on an one inch 85 Durometer Shore A rubber mat backed by concrete.

**POSITIONS OF DROP:**

- |               |               |               |                 |
|---------------|---------------|---------------|-----------------|
| 1. Vertical   | - muzzle up   | 4. Horizontal | - bottom down   |
| 2. Vertical   | - muzzle down | 5. Horizontal | - left side up  |
| 3. Horizontal | - bottom up   | 6. Horizontal | - right side up |

**JAR OFF:**

SAAMI specification - 12 inch drop in all six positions with the safety in the off position.

HEIGHTS USED: 12, 18, and 24 inches.

RP# 880181

WO# 481157

TEST PROCEDURE: (continued)

DROP TEST: (continued)

DROP:

SAAMI specification - 48 inch drop in all six positions with  
safety in the on position.

HEIGHTS USED: 48 and 54 inches.

Three Arylon, two Rynite and two Fiberglas stocks, assembled with the 30-06 caliber actions were used in the drop test. Then, for additional information, each rifle was dropped at heights above the SAAMI specifications. All the rifles tested passed the SAAMI and extended drop test.

RP# 880181

WO# 481157

## APPENDIX

MODEL 700 SYNTHETIC LONG STOCK EVALUATION  
INDIVIDUAL RIFLE ACCURACY RESULTS

SERIAL NUMBER	TYPE OF STOCK	TEMP. (°F)	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
B6893419	F	A	2.477	2.248	1.983	2.236
		+250	1.689	2.037	2.387	2.038
		-40	2.093	1.892	2.147	2.044
B6892908	F	A	1.324	1.814	1.784	1.640
		+250	1.964	1.589	1.981	1.845
		-40	2.541	2.429	2.850	2.607
B6893598	F	A	1.891	1.898	2.438	2.075
		+250	1.805	1.446	1.604	1.618
		-40	1.374	2.391	2.274	2.012
C6203696	R	A	1.092	1.615	1.662	1.456
		+250	2.307	2.624	2.229	2.387
		-40	2.352	1.410	1.184	1.649
B6862427	R	A	1.651	2.358	2.258	2.089
		+250	2.124	2.120	1.968	2.071
		-40	1.557	2.788	2.689	2.345
C6213564	A	A	2.114	1.970	2.659	2.248
		+250	2.294	1.353	2.175	1.941
		-40	0.668	2.766	1.760	1.731
B6887194	A	A	3.079	2.773	3.200	3.017
		+250	1.008	2.342	1.921	1.757
		-40	1.417	2.283	2.147	1.949
C6200125	A	A	2.107	3.778	1.550	2.478
		+250	1.674	1.994	2.003	1.890
		-40	2.165	1.904	2.067	2.045
B6829937	A	A	2.522	3.026	1.115	2.221
		+250	2.672	1.162	1.443	1.259
		-40	2.639	2.472	1.748	2.286
B6835137	A	A	1.995	1.182	1.980	1.719
		+250	3.204	2.704	1.097	2.335
		-40	1.511	1.988	1.982	1.827
B6829419	A	A	2.624	2.350	2.777	2.584
		+250	3.015	1.897	2.561	2.491
		-40	1.345	3.046	1.641	2.011

## TEST AND MEASUREMENT LAB

## - TEST REPORT

REQUESTER: B. BOSQUET  
REPORT NO.: 880281  
WRITTEN BY: F.L. SUPRY

TESTER: J. SELAN

DATE: 28 JANUARY 1988  
WORK ORDER NO.:

TEST TYPE: 100 YARD ACCURACY

FIREARM STAT'S:MODEL: 700BARREL TYPE: STDCAL OR GAGE: 270 WINPROOFED: YESREASON FOR TEST:

To test the accuracy of a Model 700, 270 Win caliber action, in a vendor supplied Rynite stock with barrel pads vs. the same action in a standard Rynite stock.

EQUIPMENT REQUIRED:

100 yard range, 270 Win caliber (130 grain PSP and 150 grain SP) ammunition, standard Rynite stock, Model 700 270 Win caliber action in the vendor stock/pads, digitizing tablet, HP 9000 computer, and personnel.

TEST PROCEDURE:

Three five shot groups were fired with each of the ammo weights, using the Rynite stock with pads. Then, the action was removed and assembled to the standard Rynite stock, and the accuracy tests were repeated. The targets were analyzed using the HP 9000 computer and digitizing tablet, and the results were recorded.

TEST RESULTS:

The 100 yard accuracy results with the action in the Rynite stock with pads, was as good as or better than the accuracy results with the action in the standard Rynite stock. The attached sheet shows the individual group results.

080281

270 WIN. RY NITE STOCK. W/ PAD.

# B6865734.

130 GR. RSP. E-24LB7325

150 GR. S.P. E-23FB1807.

1. 1.528

1. 1.456

2. 1.250

2. 1.112

3. 1.604

3. 1.555

AVG = 1.460.

AVG = 1.374.

270 - WIN. STD. RINITE STOCK.

# B 6865734.

130 GR. RSP. E-24LB7325

150 GR. S.P. E-23FB1807.

1. 1.336

1. 1.696

2. 1.685

2. 1.693

3. 2.270

3. 1.991

AVG. = 1.764

AVG = 1.793.

## TEST AND MEASUREMENT LAB

## TEST REPORT

REQUESTER: B. BOSQUET  
REPORT NO.: 880281A  
WRITTEN BY: F.L. SUPRY

TESTER: J. SELAN  
SUPPLEMENT TO 880281

DATE: 09 FEBRUARY 1988  
WORK ORDER NO.:

TEST TYPE: 100 YARD ACCURACY

FIREARM STAT'S:

MODEL: 700  
BARREL TYPE: STD

CAL OR GAGE: 270 WIN  
PROOFED: YES

REASON FOR TEST:

To test the accuracy of a Model 700, 270 Win caliber action, in a Desert-Camo Rynite stock with barrel pads vs. the test results of same action from test number 880281.

EQUIPMENT REQUIRED:

100 yard range, 270 Win caliber (130 grain PSP and 150 grain SP) ammunition, Desert-Camo Rynite stock/pads, Model 700 270 Win caliber action (#B6865734), digitizing tablet, HP 9000 computer, and personnel.

TEST PROCEDURE:

Three five shot groups were fired with each of the ammo weights, using the Desert-Camo Rynite stock with pads. The targets were analyzed using the HP 9000 computer and digitizing tablet, and the results were recorded.


TEST RESULTS:

The 100 yard accuracy results with the action in the Desert-Camo Rynite stock with pads, was comparable to the accuracy results from previous testing. The attached sheet shows the individual group results.

8 Feb 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/880281

## CENTERFIRE PATTERNS # 1

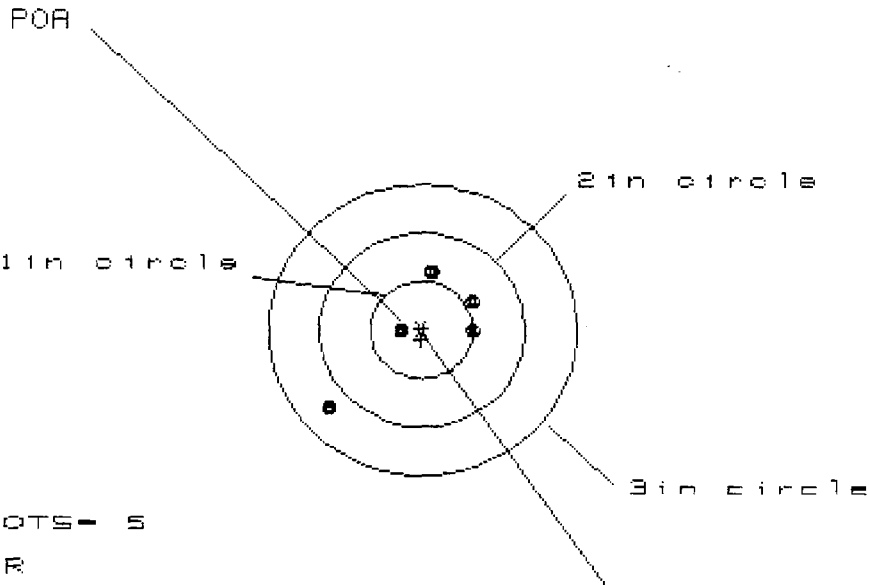

# OF SHOTS - 5

# IN CIR

1 in - 2

2 in - 4

3 in = 5

HS = 1.349

VS = 1.393

GS = 1.786

Avg = 1.494

CENTROID \*

"DESERT CAMO."

\* B - 6865734.

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.485	.269	.347
MINIMUM X	-.864	-.443	-.353
MAXIMUM Y	.552	.342	.382
MINIMUM Y	-.841	-.258	-.218
CENTROID X	.007	.223	.133
CENTROID Y	.100	.310	.270
POA TO CENTROID in.	.100	.382	.301
ANGLE POA CENTROID	85.988	54.270	63.747
MIN RADIUS	.232	.294	.382
MEAN RADIUS	.613	.372	.393
MAX RADIUS	1.206	.513	.415
HORIZONTAL SPREAD	1.349	.712	.700
VERTICAL SPREAD	1.393	.600	.600
EXTREME SPREAD	1.786	.806	.702
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		


REM. 130 GR.  
P.S.P. 270 WIN.  
E-24-LB7325

LYMAN - 20X SCOPE  
100 YDS. SAND BAG REST.

8 Feb 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/B802B1

## CENTERFIRE PATTERNS # 2

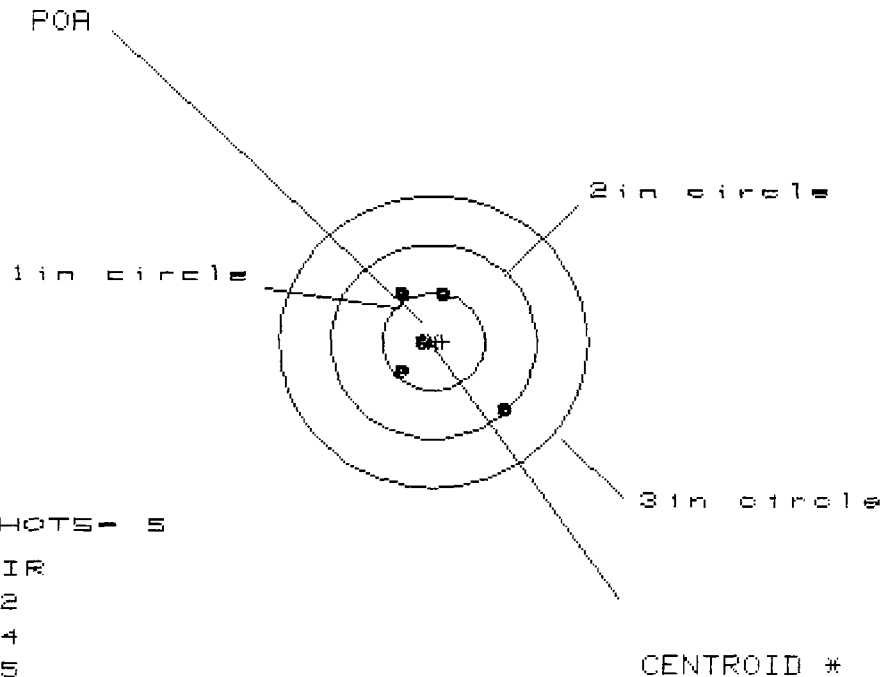

# OF SHOTS - 5

# IN CIR

1 in = 2

2 in = 4

3 in = 5

HS = 1.079

VS = 1.240

GS = 1.644


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.736	.279	.226
MINIMUM X	-.343	-.159	-.197
MAXIMUM Y	.515	.334	.437
MINIMUM Y	-.725	-.525	-.414
CENTROID X	-.087	-.271	-.218
CENTROID Y	-.063	.179	.067
POA TO CENTROID in.	.087	.325	.228
ANGLE POA CENTROID	181.839	123.347	107.140
MIN RADIUS	.168	.136	.037
MEAN RADIUS	.562	.370	.329
MAX RADIUS	1.033	.545	.492
HORIZONTAL SPREAD	1.079	.438	.423
VERTICAL SPREAD	1.240	.859	.851
EXTREME SPREAD	1.644	.950	.950
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

8 Feb 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/880281

## CENTERFIRE PATTERNS # 3

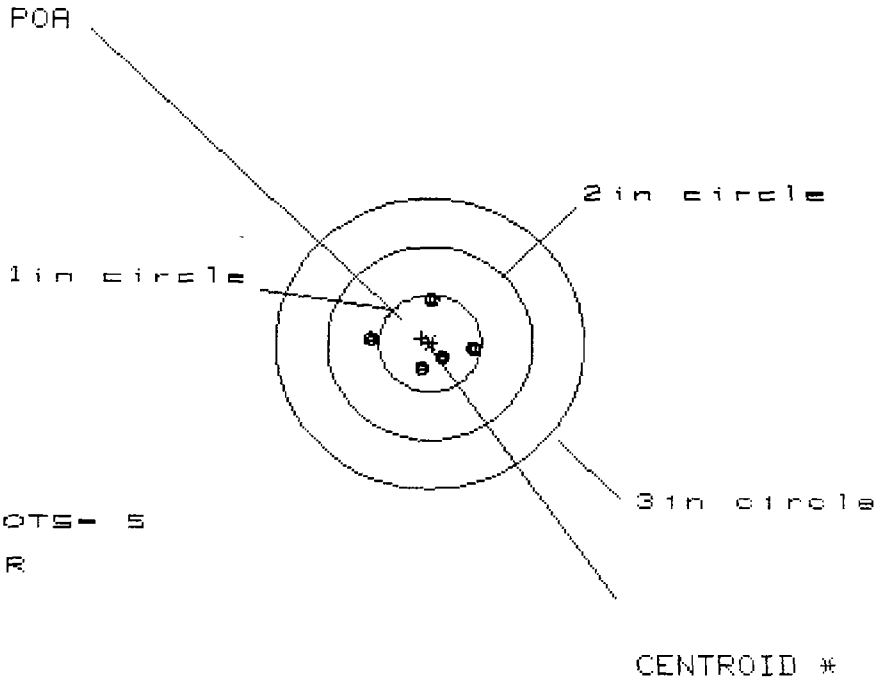

# OF SHOTS - 5

# IN CIR

1 in = 4

2 in = 5

3 in = 5

HS = 1.051

VS = .617


GS = 1.052

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.454	.304	.096
MINIMUM X	-.597	-.185	-.083
MAXIMUM Y	.400	.407	.402
MINIMUM Y	-.217	-.210	-.215
CENTROID X	.081	.231	.129
CENTROID Y	-.050	-.057	-.052
POA TO CENTROID in.	.096	.238	.139
ANGLE POA CENTROID	301.560	283.934	291.903
MIN RADIUS	.220	.182	.210
MEAN RADIUS	.382	.297	.281
MAX RADIUS	.598	.423	.402
HORIZONTAL SPREAD	1.051	.489	.179
VERTICAL SPREAD	.617	.617	.617
EXTREME SPREAD	1.052	.621	.621
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

8 Feb 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/B802B1.1

## CENTERFIRE PATTERNS # 1

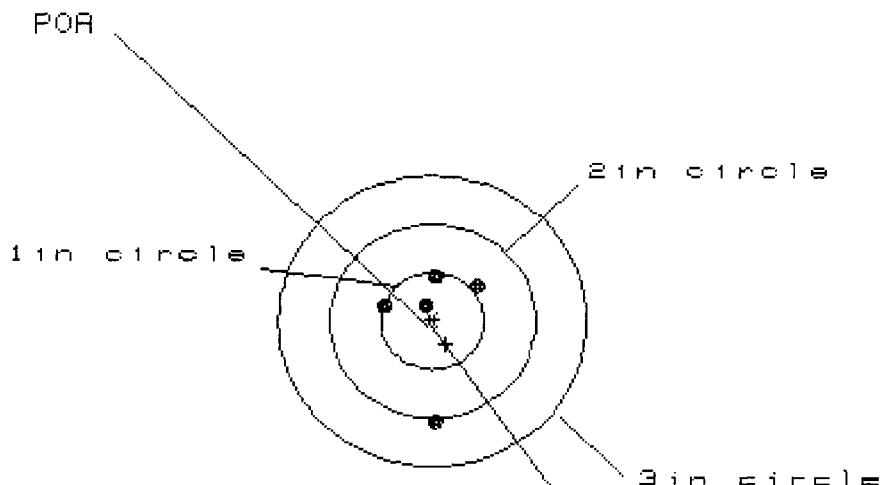

# OF SHOTS - 5

# IN CIR

1 in = 3

2 in = 4

3 in = 5

HS = .904

VS = 1.530

GS = 1.531

AVG = 2.089

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.455	.471	.182
MINIMUM X	-.449	-.433	-.276
MAXIMUM Y	.445	.174	.197
MINIMUM Y	-1.085	-.146	-.123
CENTROID X	-.132	-.148	-.305
CENTROID Y	.238	.509	.486
POA TO CENTROID in.	.272	.530	.574
ANGLE POA CENTROID	150.872	163.780	147.889
MIN RADIUS	.191	.115	.120
MEAN RADIUS	.551	.306	.230
MAX RADIUS	1.086	.476	.302
HORIZONTAL SPREAD	.904	.904	.458
VERTICAL SPREAD	1.530	.320	.320
EXTREME SPREAD	1.531	.929	.559
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

"DESERT CAMP"

150GR. S.P. REM.

270 WIN.

\* E23F B1807.

LYMAN 20X SCOPE

SAND BAG REST

100 YDS.

8 Feb 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/8802B1.1

## CENTERFIRE PATTERNS # 2

POA

1in circle

2in circle

3in circle

# OF SHOTS - 5

# IN CIR

1in = 3

2in = 5

3in = 5

HS = 1.7000

VS = .645

GS = 1.807


CENTROID #

PATTERN #	2		
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.837	.590	.369
MINIMUM X	-.871	-.661	-.405
MAXIMUM Y	.169	.050	.049
MINIMUM Y	-.476	-.094	-.095
CENTROID X	-.017	-.227	-.006
CENTROID Y	.102	.221	.222
POA TO CENTROID in.	.103	.317	.222
ANGLE POA CENTROID	170.319	134.264	178.368
MIN RADIUS	.175	.207	.060
MEAN RADIUS	.565	.430	.283
MAX RADIUS	.963	.661	.416
HORIZONTAL SPREAD	1.708	1.251	.774
VERTICAL SPREAD	.645	.144	.144
EXTREME SPREAD	1.807	1.252	.787
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		5	

8 Feb 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/880281.1

## CENTERFIRE PATTERNS # 3

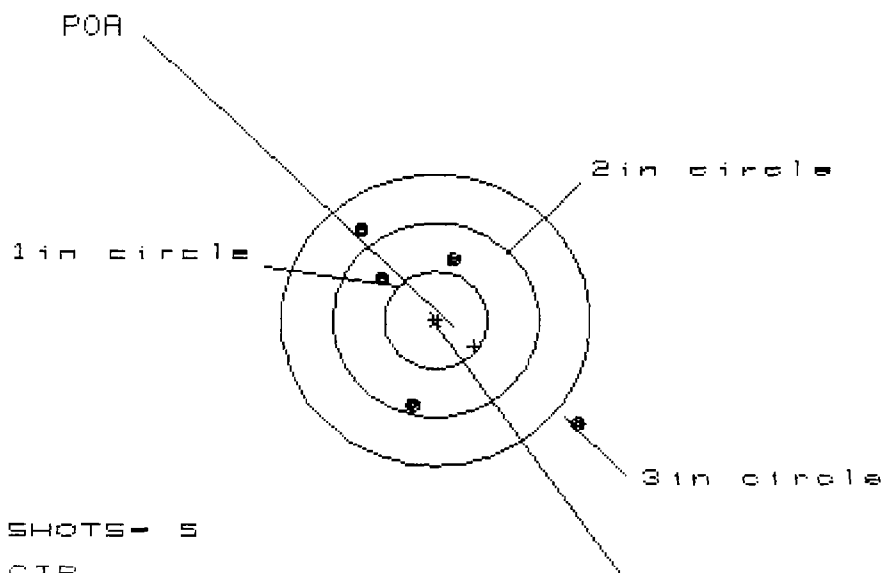

# OF SHOTS- 5

# IN CIR

1 in = 0

2 in = 3

3 in = 4

HS= 2.113

VS= 2.030

GS= 2.930

PATTERN #	5	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.379	.503	.373
MINIMUM X	-.734	-.389	-.353
MAXIMUM Y	.917	.639	.577
MINIMUM Y	-1.113	-1.120	-.907
CENTROID X	-.377	-.722	-.592
CENTROID Y	.272	.550	.337
POA TO CENTROID in.	.465	.908	.682
ANGLE POA CENTROID	125.795	127.312	119.661
MIN RADIUS	.661	.252	.483
MEAN RADIUS	1.035	.687	.693
MAX RADIUS	1.772	1.126	.908
HORIZONTAL SPREAD	2.113	.892	.726
VERTICAL SPREAD	2.030	1.759	1.484
EXTREME SPREAD	2.930	1.828	1.535
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	4		

RD 89-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington.*



*PETERS*



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
J.R. Snedeker  
H.C. Munson  
B.L. Bosquet  
F.L. Supry

RESEARCH TEST AND MEASUREMENT REPORT  
REPORT# 880611  
MARCH 15, 1988

MODEL 700 (RYNITE STOCK INSERT) DESIGN VERIFICATION

RP# 880611

WO# 480257-001800

MODEL 700 (RYNITE STOCK INSERT) DESIGN VERIFICATION

ABSTRACT:

The Test and Measurement Laboratory finds the Design Verification of the Model 700, Rynite stock insert, to be acceptable. The testing consisted of 100 yard accuracy, comparing the results of the actions shot in the experimental Rynite stocks to the results of the same actions shot in a standard wood stock.



Ten rifles were used for the Design Verification test. The accuracy was shot by D.R. Thomas and J.E. Selan. All the rifles tested were within Remington 100 yard accuracy specifications.

Prepared by: F.L. Supry  
Date Prepared: March 15, 1987

proofread and cleared by:

H.C. MUNSON, Quality Resource

W.H. COLEMAN, II  
New Products Research Lab Director

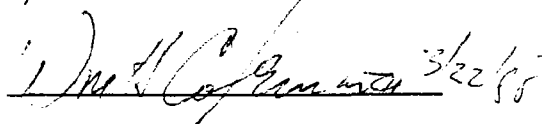RP# 880611

WO# 480257-001800

To: H.C. Munson  
From: F.L. Supry

## INTRODUCTION:

A request was received from B.L. Bosquet on March 01, 1988 to conduct a design verification test on the Model 700 30-06 caliber Rifles assembled in Rynite stocks with experimental barrel alignment inserts. The experimental barrel alignment inserts were attached to the stocks by Remington personnel. If the barrel alignment inserts are successful, Choate will incorporate them in the mold for the Rynite stocks.

## SCOPE OF TEST:

To determine if the Model 700 rifles assembled in the experimental stocks would meet the Remington 100 yard accuracy specifications. And, to make a direct comparison of those accuracy results to the results of shooting the same actions assembled in a standard wood stock.

## TEST RESULTS:

All the rifles tested were within Remington specifications for 100 yard accuracy. The following average group sizes were established:

STOCK TYPE	REMINGTON SPECIFICATIONS	ACCURACY RESULTS
RYNITE W/INSERTS	3.5 inches	1.941 inches
WOOD	3.5 inches	1.949 inches

RP# 880611

WO# 480257-001800

REPORT TEXT:

Ten rifles were shot, with three groups shot for each rifle consisting of five shots per group.

Remington 180 grain bronze point ammunition (R30066 code H20 MC2825) was used throughout the test.

Individual accuracy results are listed in the appendix of this report.

TEST PROCEDURE:

The accuracy was shot by D.R. Thomas and J.E. Selan in the R&D 100 yard range, located in building 52-1.

Standard long action Leupold bases and Leupold rings were used, in conjunction with a 20X All-American scope.

A total of three, five shot groups, were shot for each rifle. The rifles were cooled and cleaned between each group, and one fouling shot fired before the next group was shot. After three groups were shot with the rifle in the Rynite stock, the action was removed and reassembled in the wood stock and the accuracy procedure repeated.

The targets were analyzed for group size, using the HP 9000 computer and digitizing tablet.

RP# 880611

WO# 480257-001800

## APPENDIX

## MODEL 700 (RYNITE STOCK INSERT) DESIGN VERIFICATION

SERIAL NUMBER	TYPE OF STOCK	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
B6889568	R	2.597	1.664	2.003	2.088
	W	2.485	1.346	1.172	1.668
B6889854	R	2.434	1.580	1.458	1.824
	W	2.135	2.902	2.280	2.439
B6889601	R	1.939	2.223	3.141	2.438
	W	2.356	0.898	1.625	1.626
B6887819	R	0.916	1.290	2.536	1.581
	W	1.951	1.606	4.528	2.695
B6889548	R	2.265	2.121	2.108	2.165
	W	1.625	1.473	1.215	1.438
B6889880	R	2.150	1.516	1.924	1.763
	W	2.962	2.004	2.194	2.387
B6889562	R	2.193	2.371	1.929	2.164
	W	1.619	2.212	2.104	1.978
B6889478	R	1.686	3.156	1.839	2.227
	W	2.068	1.590	2.369	2.009
B6889538	R	1.848	1.992	1.567	1.802
	W	1.268	1.850	1.242	1.453
C6204413	R	1.639	1.556	0.885	1.360
	W	1.712	1.939	1.727	1.793
OVERAGE AVERAGE	R	-----	-----	-----	1.941
	W	-----	-----	-----	1.949

Report No. 880761

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input type="checkbox"/> Developmental <input type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input checked="" type="checkbox"/> Production Acceptance		<u>AREA OF TESTING</u> <input type="checkbox"/> Safety Related <input type="checkbox"/> Litigation <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> Warehouse Audit <input type="checkbox"/> New Design <input type="checkbox"/> Cost Reduction <input type="checkbox"/> Design Change <input type="checkbox"/> Stake _____ <input checked="" type="checkbox"/> Plant Assistance <input type="checkbox"/> Other _____	
<u>FIREARM STAT'S.</u> MODEL: _____ CAL. or GAGE: _____ BARREL TYPE: _____ PROOFED: YES _____ NO _____	<u>REPORT REQ'D.</u> FORMAL _____ TEST RESULTS ONLY _____	DATE REQUESTED: <u>3-16-88</u> DATE NEEDED BY: <u>3-19-88</u> REQUESTED BY: <u>G Barnes / 234</u> WORK ORDER NO: <u>019281</u>	
<u>TEST TYPE</u> <input checked="" type="checkbox"/> Strength Test <input type="checkbox"/> Ammunition Test <input type="checkbox"/> Dry Cycle Test <input type="checkbox"/> Photo/Video <input type="checkbox"/> Function Test <input type="checkbox"/> Environmental Test <input type="checkbox"/> Measurements <input type="checkbox"/> Other _____ <input type="checkbox"/> Accuracy Test <input type="checkbox"/> Customer Complaint <input type="checkbox"/> Endurance Test      _____			

EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

High Pressure Blow up on Two 338  
Model 700 Rifles.

- Plug barrels ahead of chamber  
record pressure -

NO ROLLMARKS ON THESE GUNS

-GUNS REQUIRED:

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: 17 March 88  
 TEST COMPLETED BY: CS  
 REPORT DATE: 17 March 88

## TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: G. Barnes TESTER: C. Stephens DATE: 3/17/88  
 REPORT NO.: 880761 WORK ORDER NO.: 019281  
 WRITTEN BY: C. Stephens  
 TEST TYPE: \_\_\_\_\_

FIREARM STAT'S : MODEL: 700 CAL or GAUGE: .338 Win Mag  
 BARREL TYPE: \_\_\_\_\_ PROOFED: YES X NO \_\_\_\_\_

REASON FOR TEST : Check strength of current production  
 700 rifles in .338 caliber.

EQUIPMENT REQUIRED : 2 .338 Win Mag rifles. Handloading equipment.  
 Iron lung, 1

TEST PROCEDURE : The high pressure load was determined by using  
 data from previous testing and two high pressure rounds  
 loaded. The two rifles were plugged with 4 800 gr.  
 bullets so that the high pressure round would touch  
 the last bullet. The rifles were placed in the iron lung  
 and shot.

## TEST RESULTS :

Results showed that the current production rifles  
 were as good as previous production runs.

REMINGTON ARMS COMPANY, INC.  
Ilion Research Division

SUMMARY OF INTENTIONAL GUN ABUSE TESTDATABy C. StephensDate 17 March 88FIREARM:Make Remington Model 700Grade \_\_\_\_\_ Gauge 338 Win Serial Number C6243200

Origin \_\_\_\_\_

Test Number Assigned \_\_\_\_\_

Comments Barrel plugged with 4 200gr bullets  
so that live round touchesHISTORY:Condition NewPrevious Rounds Fired -Headspace at Test -Test Date 17 March 88ABUSIVE  
LOAD USED:Powder Type 4198Powder Weight 70Case Make and Type WinTotal Bullet Weight 200 gr.

Total Shot Weight \_\_\_\_\_

Estimated Pressure In Excess of 750KADDITIONAL  
COMMENTS:Cracked Stock. Locked up Bolt.

REMINGTON ARMS COMPANY, INC.  
Ilion Research Division

SUMMARY OF INTENTIONAL GUN ABUSE TESTDATABy C. StephensDate 17 March 88

FIREARM: Make Remington Model 700  
Grade \_\_\_\_\_ Gauge .338 Win Mag Serial Number C6245441  
Origin \_\_\_\_\_  
Test Number Assigned \_\_\_\_\_  
Comments Barrel plugged with 4 200gr. bullets  
so that live round touches.

HISTORY: Condition New  
Previous Rounds Fired -  
Headspace at Test -  
Test Date 17 March 88

ABUSIVE Powder Type 4198  
LOAD USED: Powder Weight 70gr.  
Case Make and Type Win  
Total Bullet Weight 200gr.  
Total Shot Weight \_\_\_\_\_  
Estimated Pressure In Excess of 750K

ADDITIONAL  
COMMENTS: Cracked Stock. Locked up Bolt  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## TEST AND MEASUREMENT LAB TEST RESULTS

4/28/88

REQUESTER: D.C. BRENNAN - MARY SCHRAM TESTER: MAJ BRUCE WINCENTSEN DATE: 4/12/88  
 REPORT NO.: 881031 WORK ORDER NO.: 481153  
 WRITTEN BY: J. SELAN  
 TEST TYPE: EXPERIMENTAL ACCURACY

FIREARM STAT'S : MODEL: 700 CAL or 30-06  
 BARREL TYPE: STD. CONTOUR PROOFED: YES ☒ NO ☐

REASON FOR TEST : TO DETERMINE ACCURACY OF D.C. BRENNAN PROCESS  
 VS. REMINGTON G.M. BARRELS. (ALL RIFLES SHOT BY D.C. BRENNAN'S  
 SHOOTER, (RET.) MAJOR BRUCE WINCENTSEN)

EQUIPMENT REQUIRED : 100 YD. RANGE AND SHOOTING BENCH.

THREE (3) AMMO TYPES: REM. 150 GR. PSP. LOT- C10G D0339  
 REM. 180 GR. B2. PT. LOT- H20MC2825  
 FEDERAL - 165 GR. SP. B.T. LOT 1A-7709

2 SCOPES. ONE (1) SUPPLIED BY B. WINCENTSEN 16X LEUPOLD

ONE 1 SUPPLIED BY D.C. BRENNAN - 3.8 X 12 VARIABLE LEUPOLD

10 RIFLES. 700. 5 CONTROL. 5 ALTERED BY D.C. BRENNAN (SERIAL NO'S ON ATTACHED SHEETS)

## TEST PROCEDURE :

- 1) DISGUISE RIFLES BY PRINTING AND TAPING DBLS. AT JOINT; TAPING FRONT SIGHT HOLES AND SERIAL NUMBERS. AND CODE RIFLES AS TO MASK IDENTITY OF MFG. FROM SHOOTER
- 2) CLEAN RIFLES BEFORE START OF TEST WITH HOPPE'S SOLVENT, WIRE BRUSH AND PATCH DRY
- 3) INSTALL SCOPES AND BORE SIGHT.
- 4) SHOOTER (B. WINCENTSEN) WOULD ZERO RIFLE. SHOOT 3X5 SHOT GROUPS. PER AMMO TYPE
- 5) COOL AND CLEAN BETWEEN GROUPS.

## TEST RESULTS :

150 GR. PSP. (REM.)  
 AVG. 5 GROUPS

REM. - 1.925

DCB. - 2.164

AVG. MEAN RADIUS

REM. - .6712

DCB. - .7761

180 GR. B2. PT. (REM.)  
 AVG. 5 GROUPS

REM. 2.221

DCB - 1.948

AVG. MEAN RADIUS

REM. .7947

DCB - .699

165 GR. SP. B.T. (FEDERAL)  
 AVG. 5 GROUPS

REM. - 2.43

DCB. 2.195

AVG. MEAN RADIUS

REM. - .9289

DCB. - .7675

TARGETS BN FILE WITH WRITER.

TEST AND MEASUREMENT LAB TEST RESULTS

REQUESTER: \_\_\_\_\_ TESTER: \_\_\_\_\_ DATE: \_\_\_\_/\_\_\_\_/\_\_\_\_  
REPORT NO.: \_\_\_\_\_ WORK ORDER NO.: \_\_\_\_\_  
WRITTEN BY: \_\_\_\_\_  
TEST TYPE: \_\_\_\_\_

FIREARM STAT'S : MODEL: \_\_\_\_\_ CAL or GAUGE: \_\_\_\_\_  
BARREL TYPE: \_\_\_\_\_ PROOFED: YES \_\_\_\_ NO \_\_\_\_

REASON FOR TEST :

EQUIPMENT REQUIRED :

ONE (1) H.P. 9000 COMPUTER AND DIGITIZING TABLET.  
MISC. CLEANING EQUIPMENT. (CLEANING RODS. HOPPE'S SOLVENT. PATCHES. WIRE BRUSH.)  
ONE BORE-SIGHTER (BUSHNELL)

TEST PROCEDURE :

TEST RESULTS :

D.C. BRENNAN vs. REMINGTON - ACCU  
SHOOTER: MAJ (RETIRED) BRUCE WIN

P.S.P. EXTREME SPREAD		← 150 GRAIN REMINGTON →		P.S.P. EXTREME MEAN RADIUS	
RIFLE SERIAL NUMBER.					
1					
2	A R	8481		1.74	.316
3					
4	F DCB	7884		2.477	.8336
5					
6	H R	8073		2.274	.9323
7					
8	J DCB	8873		2.052	.7053
9					
10	M. R	8094		1.874	.6943
11					
12	O R	8096		2.018	.79
13					
14	Q DCB	8860		1.954	.8556
15					
16	S DCB	8037		2.335	.834
17					
18	C DCB	8547		2.044	.652
19					
20	D R	8889		1.698	.6236
21					
22					
23					
24					
25					
26				AVG <sup>5</sup> GROUPS	AVG-M.R.
27					
28				R: 1.925	R: .6712
29					
30				DCB-2.164	DCB-.776
31					
32					
33					
34				DIFFERENCE	.239
35					.1049
36					
37					
38					
39					
40					

REM. RIFLES

D.C. BRENNAN

ACCURACY TEST.

WINCENTSEN.

← 100 GR. REMINGTON →			← 165 GR. FEDERAL →		
BR. PT.			SR. BT.		
EXTREME	MEAN		EXTREME	MEAN	
SPREAD	RADIUS		SPREAD	RADIUS	
2.50	.971		2.381	.94	
2.099	.756		2.407	.8546	
1.778	.671		2.116	.793	
1.429	.4836		2.741	.8913	
2.949	.8853		2.242	.7713	
2.178	.7636		2.342	.8213	
1.913	.6553		1.525	.5923	
1.652	.6123		2.22	.7513	
2.649	.988		2.086	.748	
1.701	.6826		3.072	1.319	
AVG. 5 GROUPS    AVG. M.R.			AVG. 5 GROUPS    AVG. M.R.		
R- 2.221	R- .7947		R- 2.43	R- .9289	
OCB- 1.948	OCB- .699		OCB- 2.195	OCB- .7675	
.273	.0957		.235	.1614	

REM. RIFLES  
D.S. BRENNAN

D.C. BRENNAN VS. REMINGTON - ACCURACY TEST  
SHOOTER: MAJ. (RETIRED) BRUCE WILCENTSEN

RIFLE CALIBER	RIFLE SERIAL NUMBER	150 GRAIN REMINGTON		100 GRAIN REMINGTON		165 GR. FEDERAL	
		P.S.P. EXTREME	MEAN	EXTREME	MEAN	EXTREME	MEAN
		SPREAD	RADIUS	SPREAD	RADIUS	SPREAD	RADIUS
A R	8481	1.74	.316	2.50	.971	2.381	.94
F DCB	7884	2.477	.8336	2.099	.756	2.407	.8546
H R	8073	2.274	.9323	1.778	.671	2.116	.793
J DCB	8873	2.052	.7053	1.429	.4836	2.741	.6913
M. R	8094	1.874	.6943	2.949	.8853	2.242	.7713
O R	8096	2.018	.79	2.178	.7636	2.342	.8213
Q DCB	8860	1.954	.8556	1.913	.6553	1.525	.5923
S DCB	8037	2.335	.834	1.652	.6123	2.22	.7513
C DCB	8547	2.044	.652	2.649	.988	2.086	.748
D R	8889	1.698	.6236	1.701	.6826	3.072	1.319
		AVG. 5 GROUPS AVG. M.R.		AVG. 5 GROUPS AVG. M.R.		AVG. 5 GROUPS AVG. M.R.	
		R- 1.925	R- .6712	R- 2.221	R- .7947	R- 2.43	R- .9289
		DCB- 2.164	DCB- .7761	DCB- 1.948	DCB- .699	DCB- 2.195	DCB- .7675
		DIFFERENCE .239 .1049		.273 .0957		.235 .1614	

Report No. 881032

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input checked="" type="checkbox"/> Developmental <input type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance	AREA OF TESTING <input type="checkbox"/> Safety Related <input type="checkbox"/> Litigation <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> Warehouse Audit <input type="checkbox"/> New Design <input type="checkbox"/> Cost Reduction <input type="checkbox"/> Design Change <input type="checkbox"/> Stake _____ <input type="checkbox"/> Plant Assistance <input checked="" type="checkbox"/> Other <u>MATERIAL COATING CHANGE</u>	
FIREARM STAT'S. MODEL: <u>700</u> CAL or GAGE: <u>.411</u> BARREL TYPE: _____ PROOFED: YES <input type="checkbox"/> NO <input type="checkbox"/>	REPORT REQ'D. FORMAL <input type="checkbox"/> TEST RESULTS ONLY <input checked="" type="checkbox"/>	DATE REQUESTED: <u>4/12/88</u> DATE NEEDED BY: <u>4/20/88</u> REQUESTED BY: <u>JS/283</u> WORK ORDER NO: <u>481011</u>
TEST TYPE <input type="checkbox"/> Strength Test <input type="checkbox"/> Ammunition Test <input type="checkbox"/> Dry Cycle Test <input type="checkbox"/> Photo/Video <input type="checkbox"/> Function Test <input type="checkbox"/> Environmental Test <input type="checkbox"/> Measurements <input checked="" type="checkbox"/> Other <u>DRY CYCLE</u> <input type="checkbox"/> Accuracy Test <input type="checkbox"/> Customer Complaint <input type="checkbox"/> Endurance Test <u>VISUAL</u>		

EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

Dry cycle - 6 Fire controls with zinc phosphate coating to 10,000 cycles  
 visually inspect -  
 continue to 20,000 level  
 and repeat visual inspection

-GUNS REQUIRED:

SIX SAMPLES RETURNED TO J. SNEDKER FOR FURTHER TESTING.

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: 4-28-88  
 TEST COMPLETED BY: R.W. HOWE  
 REPORT DATE: \_\_\_\_\_

TEST & MEASUREMENTS LAB  
TEST RESULTS  
TESTER R.W. HOWE

REQUESTER - J. SHODAKER

DATE 4-28-88

REPORT # 881032

WORK ORDER NO. 481011

TEST TYPE - DRY CYCLE "DEVELOPMENTAL"

FIRE ARMS STAFFS. M/700

REASON FOR TEST.

TO CHECK THE FEASIBILITY OF USING ZINK PHOSPHATE COATING ON M/700  
FIRE CONTROL HOUSINGS.

EQUIPMENT REQUIRED.

SIX M/700 FIRE CONTROLS WITH ZINK PHOSPHATE  
COATING. TEST LAB M/700 COCK-FIRE AND SAFE LEVER  
CYCLING DRY CYCLE MACHINE AND TEST LAB M/700  
TEST RIFLE.

TEST PROCEDURE.

INDIVIDUAL M/700 FIRE CONTROL ASSEMBLIES NOS. 1 THRU 6  
WERE PLACED IN TEST RIFLE IN DRY CYCLE MACHINE  
AND CYCLED TO A TOTAL OF 20,000 CYCLES EACH OF  
COCK + FIRE WITH SAFETY LEVER BEING CYCLED  
"OFF-ON-OFF" ONCE EVERY FIFTEEN CYCLES.

ALL FIRE CONTROLS WERE VISUALLY CHECKED AT  
10 AND 20,000 CYCLE LEVELS.

TOTAL SAFE "OFF ON OFF" CYCLES = 1,333 FOR 20,000.

TEST RESULTS

SEE ATTACHED SHEET.

## TEST RESULTS:

REPORT # 881032

SLIGHT DETERIORATION (WEAR) OF THE ZINC PHOSPHATE COATING OCCURED AT RIGHT SIDE REAR OF FIRE CONTROL SIDE PLATE (AT SAFE ARM CONTACT AREA). NO FIRE CONTROL RELATED MALFUNCTIONS OCCURED IN ANY TEST SAMPLES DURING THE ENTIRE TEST.

TEST SAMPLE	VISUAL OBSERVATION 10,000 CYC.	VISUAL OBSERVATION 20,000 CYC.
# 1	OK	COATING SLIGHT WEAR AT REAR RIGHT PLATE, AT SAFE ARM CONTACT POINT (BRIGHT)
# 2	OK	" " "
# 3	OK	" " "
# 4	BRIGHT SPOT AT REAR RIGHT PLATE AT SAFE ARM CONTACT POINT	MORE BRIGHTNESS (COATING WEAR) ALSO AT LOWER DETENT BALL COUNTER BORG EDGE
# 5	OK	SLIGHT COATING WEAR AT REAR OF RIGHT PLATE. AT SAFE ARM CONTACT AREA (BRIGHT) ALSO AT LOWER DETENT BALL COUNTER BORG EDGE
# 6	OK	" " "

NOTE: BEFORE BEGINNING OF TEST SOME RUST WAS NOTICED AT THE CONTACT AREA BETWEEN THE FRONT SPACER AND TWO SIDE PLATES OF THE HOUSING SUB ASSM.

RD-49-B

**REMINGTON ARMS COMPANY, INC.**

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington*



*PETERS*



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
B.L. Bosquet  
F.L. Supry

File

RESEARCH TEST AND MEASUREMENT REPORT  
REPORT# 881281  
MAY 24, 1988

MODEL 700 (NO V-BLOCK RYNITE STOCK INSERT) DESIGN VERIFICATION

RP# 881281

WO# 480257-001800

MODEL 700 (NO V-BLOCK RYNITE STOCK INSERT) DESIGN VERIFICATION

ABSTRACT:



The Test and Measurement Laboratory finds the Design Verification of the Model 700, Rynite stock insert without the V-block, to be acceptable. The testing consisted of 100 yard accuracy, comparing the results of the actions shot in the "No V-block" experimental Rynite stocks to the results of the same actions shot previously in test 880611.

Five rifles were used for the Design Verification test. The accuracy was shot by J.E. Selan in the Research and Development 100 yard range. All the rifles tested were within the Remington 100 yard accuracy specifications.

Prepared by: F.L. Supry  
Date Prepared: May 24, 1987

proofread and cleared by:

H.C. MUNSON, Quality Resource

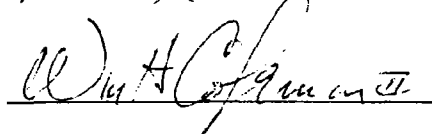W.H. COLEMAN, II  
New Products Research Lab Director

RP# 881281

WO# 480257-001800

To: H.C. Munson  
From: F.L. Supry

## INTRODUCTION:

A request was received from L.B. Bosquet on May 07, 1988 to conduct a design verification test on the Model 700 30-06 caliber Rifles assembled in Rynite stocks with experimental "No V-block" barrel alignment inserts. The experimental barrel alignment inserts were attached to the stocks by Remington personnel. If the barrel alignment inserts are successful, Choate will incorporate them in the mold for the Rynite stocks instead of the inserts from test 880611.

## SCOPE OF TEST:

To determine if the Model 700 rifles assembled in the experimental stocks would meet the Remington 100 yard accuracy specifications. And, to make a direct comparison of those accuracy results to the results of previously shooting the same actions in test 880611.

## TEST RESULTS:

All the rifles tested were within Remington specifications for 100 yard accuracy. The following average group sizes were established:

STOCK TYPE	REMINGTON SPECIFICATIONS	ACCURACY RESULTS
RYNITE NO V-BLOCK INSERT	3.5 inches	1.662 inches
RYNITE W/INSERTS (880611)	3.5 inches	1.941 inches
WOOD (880611)	3.5 inches	1.949 inches

RP# 881281

WO# 480257-001800

REPORT TEXT:

Five rifles were shot, with three groups shot for each rifle consisting of five shots per group.

Remington 180 grain bronze point ammunition (R30066 code H20 MC2825) was used throughout the test.

Individual accuracy results are listed in the appendix of this report.

TEST PROCEDURE:

The accuracy was shot by J.E. Selan in the R&D 100 yard range, located in building 52-1.

Standard long action Leupold bases and Leupold rings were used, in conjunction with a 20X All-American scope.

A total of three, five shot groups, were shot for each rifle. The rifles were cooled and cleaned between each group, and one fouling shot fired before the next group was shot.

The targets were analyzed for group size, using the HP 9000 computer and digitizing tablet.

RP# 881281

WO# 480257-001800

## APPENDIX

## MODEL 700 (NO V-BLOCK RYNITE STOCK INSERT) DESIGN VERIFICATION

SERIAL NUMBER	TYPE OF STOCK	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
B6889601	NO V	1.198	1.636	1.478	1.437
	R	1.939	2.223	3.141	2.438
	W	2.356	0.898	1.625	1.626
B6887819	NO V	2.253	2.563	2.270	2.362
	R	0.916	1.290	2.536	1.581
	W	1.951	1.606	4.528	2.695
B6889880	NO V	1.114	0.985	0.955	1.018
	R	2.150	1.516	1.924	1.763
	W	2.962	2.004	2.194	2.387
B6889538	NO V	0.986	2.144	1.551	1.563
	R	1.848	1.992	1.567	1.802
	W	1.268	1.850	1.242	1.453
C6204413	NO V	2.645	1.542	1.613	1.933
	R	1.639	1.556	0.885	1.360
	W	1.712	1.939	1.727	1.793
OVERALL AVERAGE:					
	NO V	-----	-----	-----	1.663
	R	-----	-----	-----	1.941
	W	-----	-----	-----	1.949

RD-89-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington.*



*PETERS*



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
F.L. Supry  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 881311  
JULY 19, 1988

MODEL 700 MOUNTAIN RIFLE 7MM-08 CALIBER TRIAL AND PILOT EVALUATION

Report# 881311

2

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE 7MM-08 CALIBER TRIAL AND PILOT EVALUATION

ABSTRACT:


Research and Development finds the Trial and Pilot Evaluation of the 7MM-08 caliber, Model 700 Mountain Rifles to be acceptable. The Trial and Pilot Evaluation consisted of Visual Inspection, Field Function and Accuracy. The 10 rifle sample, randomly selected from a 40 rifle sample, was found to be within Remington specifications for each phase of the Trial and Pilot Evaluation.

Prepared by: F.L. Supry  
Date Prepared: July 19, 1988

proofread and cleared by:

H.C. MUNSON, Quality Resource

W.H. COLEMAN, II  
New Products Research Lab Director

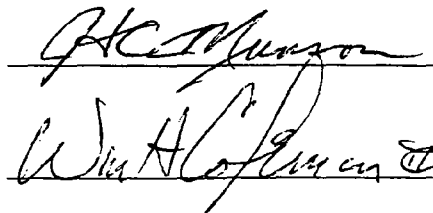The block contains two handwritten signatures. The top signature is for H.C. Munson, and the bottom signature is for W.H. Coleman, II. Both signatures are written in dark ink and are positioned to the right of their respective printed names.

Report# 881311

3

Work Order# 480257

**MODEL 700 MOUNTAIN RIFLE 7MM-08 CALIBER TRIAL AND PILOT EVALUATION**

TO: H.C. Munson  
FROM: F.L. Supry

**INTRODUCTION:**

In May, 1988, a request to conduct a Trial and Pilot Evaluation of the 7MM-08 caliber, Model 700 Mountain Rifles was received by the Test Lab. The evaluation used 10 rifles, randomly selected from a production rifle sample and consisted of Visual Inspection, Accuracy and Field Function. The short caliber introduction will also include 243 and 308 caliber rifles. These additional calibers will be tested for function and accuracy as they become available.

**SCOPE OF THE TEST:**

To determine if the production run sample would meet the Remington Specifications set by the Research Design Section.

**TEST RESULTS:**

The production sample of the 7MM-08 caliber, Model 700 Mountain Rifles was found to be acceptable in all phases of the Trial and Pilot Evaluation. The results of each phase of testing were as follows:

**VISUAL:**

The overall appearance of the rifles was good.

**ACCURACY:**

The average group size was 2.18 inches.

**FIELD FUNCTION:**

Four of the five rifles tested experienced no malfunctions.

One rifle had one Don't Extract malfunction.

Report# 881311

4

Work Order# 480257

## REPORT TEXT:

GENERAL:

The following ten rifles were randomly selected from the production sample for the Trial and Pilot Evaluation:

B6897015	B6897053	B6898043	B6897048	B6898064
B6897128	B6898055	B6897064	B6897073	B6897107

VISUAL INSPECTION:

The visual inspection committee finds the overall visual appearance of the Trial and Pilot sample to be acceptable.

All ten of the rifles were used in the Visual Inspection.

Comments on each rifle are located in the appendix.

FIELD FUNCTION:

Five of the rifles were fired 20 rounds each in a field function test conducted at the Ilion Fish and Game Club and the following results were established:

Four of the rifles experienced no malfunctions.

Rifle B6897053 had one don't extract malfunction.

The following five rifles were used in the field function test:

B6897015	B6897053	B6898043	B6897048	B6898064
----------	----------	----------	----------	----------

ACCURACY:

The results showed that the 7MM-08 caliber, Model 700 Mountain Rifles tested met the Remington specification (2.7 inches) for group size.

The following five rifles were used in the accuracy test:

B6897015	B6897053	B6898043	B6897048	B6898064
----------	----------	----------	----------	----------

The average group size for the five rifles used in the accuracy test was 2.18 inches.

Accuracy results per individual rifle are located in the appendix of this report.

Report# 881311

5

Work Order# 480257

**TEST PROCEDURE:**

**VISUAL INSPECTION:**

The visual inspection committee consisted of L.B. Bosquet, C.J. Stephens, F.L. Supry, and D.R. Thomas.

All ten rifles were examined.

Each rifle was wiped down with a clean white Coyne towel and examined by each committee member. All comments were recorded.

**FIELD FUNCTION:**

Five of the ten rifles were subjected to the loading and firing of 20 rounds 140 grain pointed soft point Remington 7MM-08 caliber ammunition in a field function test conducted at the Ilion Fish and Game Club. A round robin method of shooting, alternating shooters every five rounds, was used throughout the field function testing.

**ACCURACY:**

Three, five shot groups were shot with each of the five rifles selected for 100 yard accuracy. The accuracy was shot by C.J. Stephens in the Research and Development 100 yard range located in building 52-1A.

Remington ammunition code (R02 0D0963) R7M081 (140 grain PSP) was used for the accuracy testing.

Standard short action Leupold bases and rings were used in conjunction with a 12X Redfield scope.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

Report# 881311

6

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE 7MM-08 CALIBER TRIAL AND PILOT EVALUATION

APPENDIX

Report# 881311

7

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE 7MM-08 CALIBER TRIAL AND PILOT EVALUATION

VISUAL INSPECTION:

GENERAL COMMENTS:

The appearance of the 7MM-08 caliber, Model 700 Mountain Rifle sample was good.

There were no visual defects severe enough to reject the sample however, the following items were noted in the visual inspection:

COMMENTS PER INDIVIDUAL RIFLE:

B6898064	POOR BBL POLISH IN THE CHAMBER AREA
B6897107	LOOSE FORE-END CAP
B6897015	GOOD LOOKING RIFLE
B6897073	BRIGHT MAR ON THE FLOOR PLATE RELEASE PIN
B6898043	POOR BBL POLISH IN THE CHAMBER AREA
B6897064	POOR BBL POLISH IN THE CHAMBER AREA
B6898055	DIRTY (MOLYKOTE ON THE FINISH)
B6897048	GOOD LOOKING RIFLE
B6897053	GOOD LOOKING RIFLE
B6897128	FINISH BUBBLES IN THE RIGHT SIDE OF THE STOCK NEAR THE RAIL

Report# 881311

8

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE 7MM-08 CALIBER TRIAL AND PILOT EVALUATION

## 100 YARD ACCURACY RESULTS

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
B6897015	2.30	3.29	1.91	2.50
B6897053	1.59	2.25	3.50	2.45
B6898043	1.93	1.31	1.42	1.55
B6897048	1.80	2.61	2.53	2.31
B6898064	2.16	1.30	2.82	2.09

FD-66-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington.*



*PETERS*



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
F.L. Supry  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 881312  
JULY 21, 1988

MODEL 700 MOUNTAIN RIFLE  
308 CALIBER FUNCTION AND ACCURACY VERIFICATION

Report# 881312

2

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
308 CALIBER FUNCTION AND ACCURACY VERIFICATION

**ABSTRACT:**

The Trial and Pilot Evaluation of the Model 700 Mountain Rifle, in the short caliber action, was completed and accepted using the 7MM-08 caliber rifles as the test vehicle. The introduction of the short caliber action also includes the 308 and 243 calibers. As these calibers become available the function and accuracy will be verified by the Research Test and Measurement Laboratory.

The 308 caliber Model 700 Mountain Rifles tested met Remington specifications (3.5 inches) for group size. The five rifles tested shot an average group size of 2.5 inches. There were no malfunctions during the function test.

Prepared by: F.L. Supry  
Date: July 21, 1988

Report# 881312

3

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
308 CALIBER FUNCTION AND ACCURACY VERIFICATION

TO: H.C. Munson  
FROM: F.L. Supry

**INTRODUCTION:**

In May, 1988, a request to conduct a Function and Accuracy evaluation of the 308 caliber, Model 700 Mountain Rifles was received by the Test Lab. The evaluation used five rifles selected from a production rifle sample in the Ilion warehouse.

**SCOPE OF THE TEST:**

To determine if the production run samples would meet Remington Specifications set by the Research Design Section.

**TEST RESULTS:**

The production sample of the 308 caliber, Model 700 Mountain Rifles, was found to be acceptable. The results of the testing were as follows:

**ACCURACY:**

The average group size was 2.5 inches.

**FUNCTION:**

There were no malfunctions on any of the five rifles tested.

Report# 881312

4

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
308 CALIBER FUNCTION AND ACCURACY VERIFICATION

**REPORT TEXT:****GENERAL:**

The following five rifles were used throughout the accuracy and function test.

C6227982      C6228937      C6237401      C6226948      C6237381

**ACCURACY:**

The results showed that the 308 caliber, Model 700 Mountain Rifles tested met the Remington specification (3.5 inches) for group size.

All five of the rifles were used for the 100 yard accuracy testing and the following results were obtained:

100 YARD ACCURACY RESULTS

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
C6227982	1.90	1.97	2.30	2.06
C6228937	2.25	3.87	3.04	3.05
C6237381	3.21	2.58	2.74	2.84
C6237401	1.40	2.58	3.19	2.39
C6226948	1.75	1.96	2.34	2.02

**FUNCTION:**

All five rifles were fired 20 rounds each in a function test conducted in the R&D 200 yard range.

No malfunctions occurred.

Report# 881312

5

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
308 CALIBER FUNCTION AND ACCURACY VERIFICATION

**TEST PROCEDURE:**

**ACCURACY:**

Three, five shot groups were shot with each of the five rifles selected for 100 yard accuracy. The accuracy was shot by C.J. Stephens and D.R. Thomas in the Research and Development 100 yard range located in building 52-1A.

Remington ammunition code (C13 TC6305) R308W3 (180 grain PSP) was used for the accuracy testing.

Standard short action Leupold bases and rings were used in conjunction with a 12X Redfield scope.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

**FUNCTION:**

All five of the rifles were subjected to the loading and firing of 20 rounds 180 grain pointed soft point Remington 308 caliber ammunition in a function test conducted at the R&D 200 yard range.

RD-69-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington.*



*PETERS*



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
L.B. Bosquet  
F.L. Supry  
File

RESEARCH TEST AND MEASUREMENT REPORT

REPORT# 881313  
JULY 22, 1988

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

REJECTED SAMPLE

Report# 881313

2

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

**ABSTRACT:**

The testing on the production sample of the 243 caliber Model 700 Mountain Rifle was stopped and the five rifles returned to production.

The 243 caliber Model 700 Mountain Rifles tested did not meet Remington specifications (2.2 inches) for group size. The five rifles tested shot an average group size of 2.36 inches, with three of the five rifles shooting erratic groups.

Another function and accuracy test will be conducted with a production sample when the sample becomes available.

Prepared by: F.L. Supry  
Date: July 22, 1988

Report# 881313

3

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

TO: H.C. Munson  
FROM: F.L. Supry

**INTRODUCTION:**

In May, 1988, a request to conduct a Function and Accuracy evaluation of the 243 caliber, Model 700 Mountain Rifles was received by the Test Lab. The first request was received in May, 1988, and that sample was rejected because three of the five samples did not meet Remington 100 yard accuracy specifications for 243 caliber rifles.

Each evaluation used five rifles selected from a production rifle sample in the Ilion warehouse.

**SCOPE OF THE TEST:**

To determine if the production run samples would meet Remington Specifications set by the Research Design Section.

**TEST RESULTS:**

The production sample of the 243 caliber, Model 700 Mountain Rifles, was found to be unacceptable. The results of the testing were as follows:

**ACCURACY:**

The average group size was 2.36 inches.

**FUNCTION:**

There were no malfunctions on any of the five rifles tested.

Report# 881313

4

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

**REPORT TEXT:****GENERAL:**

The following five rifles were used throughout the accuracy and function test.

C6237399      C6237389      C6237386      C6237435      C6233183

**ACCURACY:**

The results showed that this sample of the 243 caliber, Model 700 Mountain Rifles tested did not meet the Remington specification (2.2 inches) for group size.

All five of the rifles were used for the 100 yard accuracy testing and the following results were obtained:

100 YARD ACCURACY RESULTS

<u>SERIAL NUMBER</u>	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
C6237435	1.67	1.86	2.31	1.95
C6237399	2.58	2.03	3.03	2.55
C6237389	2.54	2.48	3.62	2.88
C6233183	1.66	1.85	1.95	1.82
C6237386	2.40	2.90	2.44	2.58

**FUNCTION:**

All five rifles were fired 20 rounds each in a function test conducted in the R&D 200 yard range.

No malfunctions occurred.

Report# 881313

5

Work Order# 480257

MODEL 700 MOUNTAIN RIFLE  
243 CALIBER FUNCTION AND ACCURACY VERIFICATION

**TEST PROCEDURE:**

**ACCURACY:**

Three, five shot groups were shot with each of the five rifles selected for 100 yard accuracy. The accuracy was shot by C.J. Stephens in the Research and Development 100 yard range located in building 52-1A.

Remington ammunition code (A18C D3405) R243W3 (100 grain PSP) was used for the accuracy testing.

Standard short action Leupold bases and rings were used in conjunction with a 20X Lyman scope.

The targets were analyzed for group size using the HP 9000 computer and digitizing tablet.

**FUNCTION:**

All five of the rifles were subjected to the loading and firing of 20 rounds 100 grain pointed soft point Remington 243 caliber ammunition in a function test conducted at the R&D 200 yard range.

RYNITE INSTALS  
Model 700  
880611

RD-61-A

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY"\_\_\_\_\_

xc: W.H. Coleman, II/File  
T.C. Douglas  
J.R. Snedeker  
H.C. Munson  
B.L. Bosquet  
F.L. Supry

RESEARCH TEST AND MEASUREMENT REPORT  
REPORT# 880611  
MARCH 15, 1988

MODEL 700 (RYNITE STOCK INSERT) DESIGN VERIFICATION

RP# 880611

WO# 480257-001800

MODEL 700 (RYNITE STOCK INSERT) DESIGN VERIFICATION

ABSTRACT:

The Test and Measurement Laboratory finds the Design Verification of the Model 700, Rynite stock insert, to be acceptable. The testing consisted of 100 yard accuracy, comparing the results of the actions shot in the experimental Rynite stocks to the results of the same actions shot in a standard wood stock.



Ten rifles were used for the Design Verification test. The accuracy was shot by D.R. Thomas and J.E. Selan. All the rifles tested were within Remington 100 yard accuracy specifications.

Prepared by: F.L. Supry  
Date Prepared: March 15, 1987

proofread and cleared by:

H.C. MUNSON, Quality Resource

W.H. COLEMAN, II  
New Products Research Lab Director

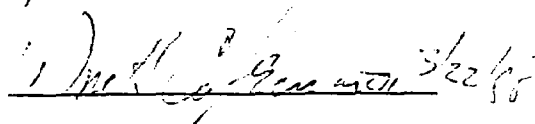

RP# 880611

WO# 480257-001800

To: H.C. Munson  
From: F.L. Supry

## INTRODUCTION:

A request was received from B.L. Bosquet on March 01, 1988 to conduct a design verification test on the Model 700 30-06 caliber Rifles assembled in Rynite stocks with experimental barrel alignment inserts. The experimental barrel alignment inserts were attached to the stocks by Remington personnel. If the barrel alignment inserts are successful, Choate will incorporate them in the mold for the Rynite stocks.

## SCOPE OF TEST:

To determine if the Model 700 rifles assembled in the experimental stocks would meet the Remington 100 yard accuracy specifications. And, to make a direct comparison of those accuracy results to the results of shooting the same actions assembled in a standard wood stock.

## TEST RESULTS:

All the rifles tested were within Remington specifications for 100 yard accuracy. The following average group sizes were established:

STOCK TYPE	REMINGTON SPECIFICATIONS	ACCURACY RESULTS
RYNITE W/INSERTS	3.5 inches	1.941 inches
WOOD	3.5 inches	1.949 inches

RP# 880611

WO# 480257-001800

REPORT TEXT:

Ten rifles were shot, with three groups shot for each rifle consisting of five shots per group.

Remington 180 grain bronze point ammunition (R30066 code H20 MC2825) was used throughout the test.

Individual accuracy results are listed in the appendix of this report.

TEST PROCEDURE:

The accuracy was shot by D.R. Thomas and J.E. Selan in the R&D 100 yard range, located in building 52-1.

Standard long action Leupold bases and Leupold rings were used, in conjunction with a 20X All-American scope.

A total of three, five shot groups, were shot for each rifle. The rifles were cooled and cleaned between each group, and one fouling shot fired before the next group was shot. After three groups were shot with the rifle in the Rynite stock, the action was removed and reassembled in the wood stock and the accuracy procedure repeated.

The targets were analyzed for group size, using the HP 9000 computer and digitizing tablet.

RP# 880611

WO# 480257-001800

## APPENDIX

## MODEL 700 (RYNITE STOCK INSERT) DESIGN VERIFICATION

SERIAL NUMBER	TYPE OF STOCK	GROUP 1 (in.)	GROUP 2 (in.)	GROUP 3 (in.)	AVERAGE (in.)
B6889568	R	2.597	1.664	2.003	2.088
	W	2.485	1.346	1.172	1.668
B6889854	R	2.434	1.580	1.458	1.824
	W	2.135	2.902	2.280	2.439
B6889601	R	1.939	2.223	3.141	2.438
	W	2.356	0.898	1.625	1.626
B6887819	R	0.916	1.290	2.536	1.581
	W	1.951	1.606	4.528	2.695
B6889548	R	2.265	2.121	2.108	2.165
	W	1.625	1.473	1.215	1.438
B6889880	R	2.150	1.516	1.924	1.763
	W	2.962	2.004	2.194	2.387
B6889562	R	2.193	2.371	1.929	2.164
	W	1.619	2.212	2.104	1.978
B6889478	R	1.686	3.156	1.839	2.227
	W	2.068	1.590	2.369	2.009
B6889538	R	1.848	1.992	1.567	1.802
	W	1.268	1.850	1.242	1.453
C6204413	R	1.639	1.556	0.885	1.360
	W	1.712	1.939	1.727	1.793
OVERAGE AVERAGE	R	-----	-----	-----	1.941
	W	-----	-----	-----	1.949

45-606 EYE-EASE  
45-706 20/20 BUFF  
Made in U.S.A.

		1	2	3	4	5	6	
	RIFLE #	RYNITE STOCK		WOOD STOCK				
1	B6P8 9568	2.088		1.668				1
2	B688 9601	2.438		1.626				2
3								3
4	7819	1.581		2.695				4
5	B688 9538	1.802		1.453				5
6								6
7	9854	1.824		2.439				7
8	9478	2.227		2.009				8
9								9
10	9548	2.165		1.438				10
11	9562	2.164		1.978				11
12								12
13	C 620 4413	1.360		1.793				13
14	9F80	1.743		2.387				14
15								15
16	AUG =	1.911		1.949				16
17								17
18								18
19								19
20								20
21								21
22								22
23								23
24								24
25								25
26								26
27								27
28								28
29								29
30								30
31								31
32								32
33								33
34								34
35								35
36								36
37								37
38								38
39								39
40								40

Report No. 880611

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input type="checkbox"/> Developmental <input checked="" type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance		<b>AREA OF TESTING</b> <input type="checkbox"/> Safety Related <input type="checkbox"/> Litigation <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> Warehouse Audit <input type="checkbox"/> New Design <input type="checkbox"/> Cost Reduction <input checked="" type="checkbox"/> Design Change <input type="checkbox"/> Stake <input checked="" type="checkbox"/> Plant Assistance <input type="checkbox"/> Other	
<b>FIREARM STAT'S.</b> MODEL: <u>700</u> CAL or GAGE: <u>30-06</u> BARREL TYPE: _____ PROOFED: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>		<b>REPORT REQ'D.</b> SEMI - FORMAL <input checked="" type="checkbox"/> TEST RESULTS ONLY <input type="checkbox"/>	
		DATE REQUESTED: <u>3/1/88</u> DATE NEEDED BY: <u>3/22/88</u> REQUESTED BY: <u>Bosquet</u> WORK ORDER NO: <u>480257</u>	
<b>TEST TYPE</b> <input type="checkbox"/> Strength Test <input type="checkbox"/> Ammunition Test <input type="checkbox"/> Dry Cycle Test <input type="checkbox"/> Photo/Video <input type="checkbox"/> Function Test <input type="checkbox"/> Environmental Test <input type="checkbox"/> Measurements <input type="checkbox"/> Other <input checked="" type="checkbox"/> Accuracy Test <input type="checkbox"/> Customer Complaint <input type="checkbox"/> Endurance Test			

EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

Shot 3, 5 shot groups, with each rifle.  
 shot <sup>3</sup> additional 5 shot groups with each action in  
 the wooden stock provided.

(180 gr bp)

-GUNS REQUIRED:

Ten rifles with special bedding at the fore-end (choate stocks)  
 one wooden stock

NOTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: 3/12/88TEST COMPLETED BY: LABREPORT DATE: 3/15/88

180gr BP

<del>9880</del>	Rynite	DT	1.8
<del>9913</del>	Rynite	JS	1.3
<del>9880</del>	Wood	DT	2.0
<del>9913</del>	Wood	JS	1.8

<del>9562</del>	Rynite	DT	1.9
<del>9548</del>	Rynite	JS	2.0
<del>9562</del>	Wood	DT	1.9
<del>9548</del>	Wood	JS	1.3

<del>9478</del>	Rynite	DT	2.0
<del>9854</del>	RYNITE	J.S.	1.9

(1.7 EST. DT)

<del>9478</del>	Wood	DT	2.0
-----------------	------	----	-----

<del>9854</del>	Wood	J.S.	2.7
-----------------	------	------	-----

(2.3 EST. DT. (BLIND))

<del>9538</del>	Rynite	DT	1.5
-----------------	--------	----	-----

<del>7019</del>	RYNITE - J.S.		1.5
-----------------	---------------	--	-----

<del>9538</del>	Wood	DT	1.3
-----------------	------	----	-----

<del>7017</del>	Wood	JS	1.5
-----------------	------	----	-----

<del>9601</del>	Rynite	DT	2.3
-----------------	--------	----	-----

<del>9568</del>	RYNITE	J.S.	1.9
-----------------	--------	------	-----

<del>9601</del>	Wood	DT	1.8
-----------------	------	----	-----


<del>9068</del>	Wood	JS	1.5
-----------------	------	----	-----

1

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/4413MJS

## CENTERFIRE PATTERNS # 1

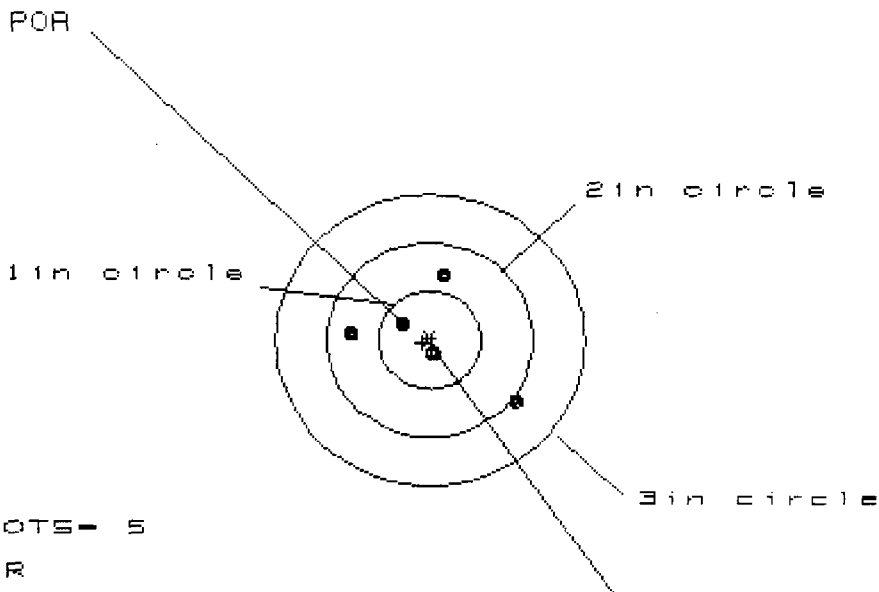

# OF SHOTS- 5

# IN CIR

1in = 2

2in = 4

3in = 5

HS= 1.561

VS= 1.333

GS= 1.712

CENTROID \*


1.793

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.811	.317	.135
MINIMUM X	-.750	-.547	-.211
MAXIMUM Y	.656	.486	.438
MINIMUM Y	-.677	-.347	-.395
CENTROID X	.070	-.133	.049
CENTROID Y	.030	.200	.248
POA TO CENTROID in.	.076	.240	.253
ANGLE POA CENTROID	23.595	146.293	78.823
MIN RADIUS	.186	.029	.215
MEAN RADIUS	.590	.402	.359
MAX RADIUS	1.057	.581	.458
HORIZONTAL SPREAD	1.561	.864	.346
VERTICAL SPREAD	1.333	.833	.833
EXTREME SPREAD	1.712	1.070	.835
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/4413NJS

## CENTERFIRE PATTERNS # 2

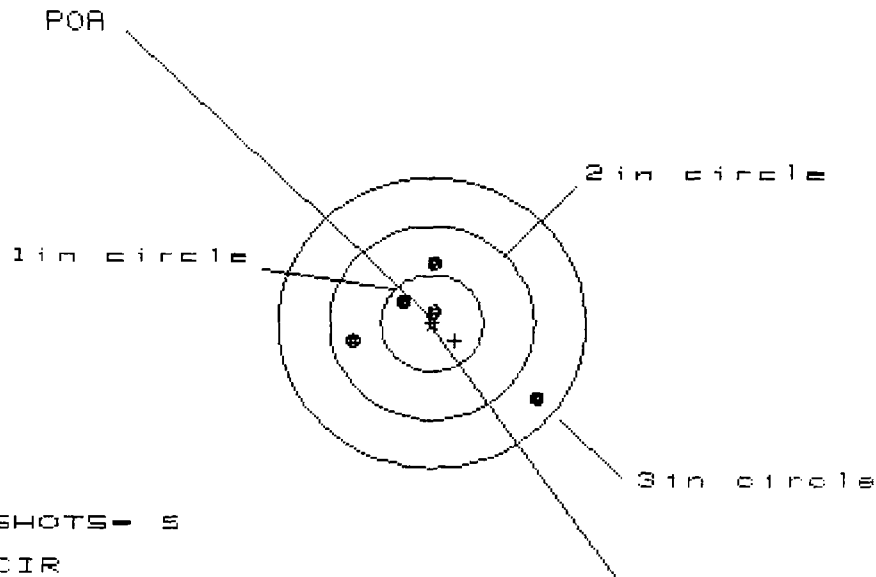

# OF SHOTS - 5

# IN CIR

1 in = 2

2 in = 4

3 in = 5

HS = 1.023

VS = 1.456

GS = 1.939


CENTROID #

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.024	.328	.147
MINIMUM X	-.799	-.542	-.229
MAXIMUM Y	.641	.437	.317
MINIMUM Y	-.815	-.358	-.231
CENTROID X	-.226	-.482	-.302
CENTROID Y	.178	.382	.502
POA TO CENTROID in.	.288	.616	.585
ANGLE POA CENTROID	128.238	128.387	148.980
MIN RADIUS	.117	.059	.245
MEAN RADIUS	.653	.391	.282
MAX RADIUS	1.309	.650	.328
HORIZONTAL SPREAD	1.823	.870	.376
VERTICAL SPREAD	1.456	.795	.548
EXTREME SPREAD	1.939	1.132	.552
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/4413NJS

## CENTERFIRE PATTERNS # 3

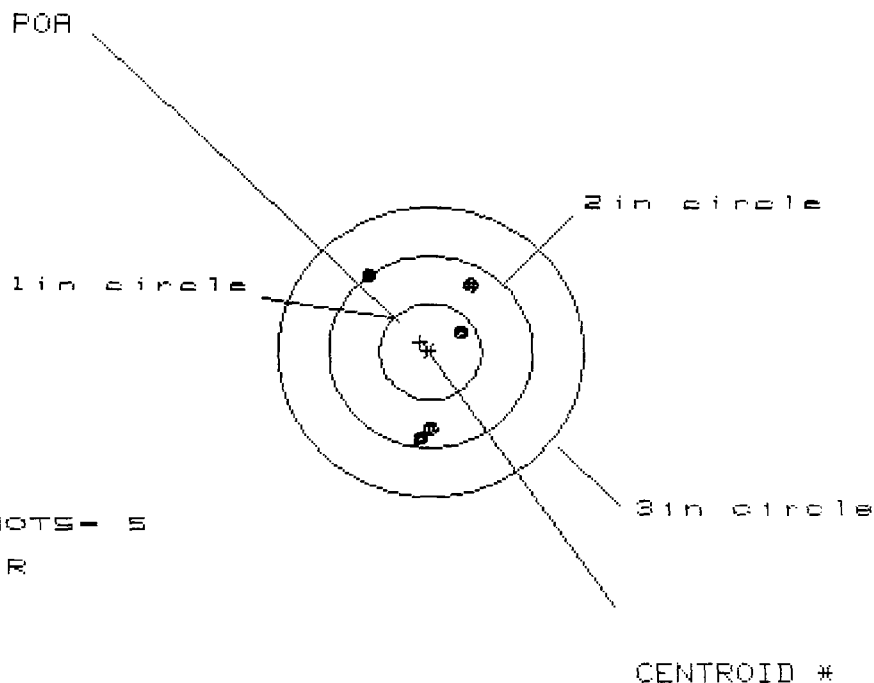

# OF SHOTS - 5

# IN CIR

1in = 1

2in = 5

3in = 5

HS = 1.029

VS = 1.646


GS = 1.727

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.412	.258	.174
MINIMUM X	-.617	-.249	-.191
MAXIMUM Y	.752	.887	.652
MINIMUM Y	-.894	-.706	-.847
CENTROID X	.099	.254	.337
CENTROID Y	-.100	-.288	-.053
POA TO CENTROID in.	.141	.384	.341
ANGLE POA CENTROID	315.344	318.695	279.002
MIN RADIUS	.350	.441	.195
MEAN RADIUS	.767	.684	.579
MAX RADIUS	.973	.924	.868
HORIZONTAL SPREAD	1.029	.507	.365
VERTICAL SPREAD	1.646	1.593	1.499
EXTREME SPREAD	1.727	1.672	1.543
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1986

FILE:/PATTERNING/CENTERFIRE\_PATT/4413RJS

## CENTERFIRE PATTERNS # 1

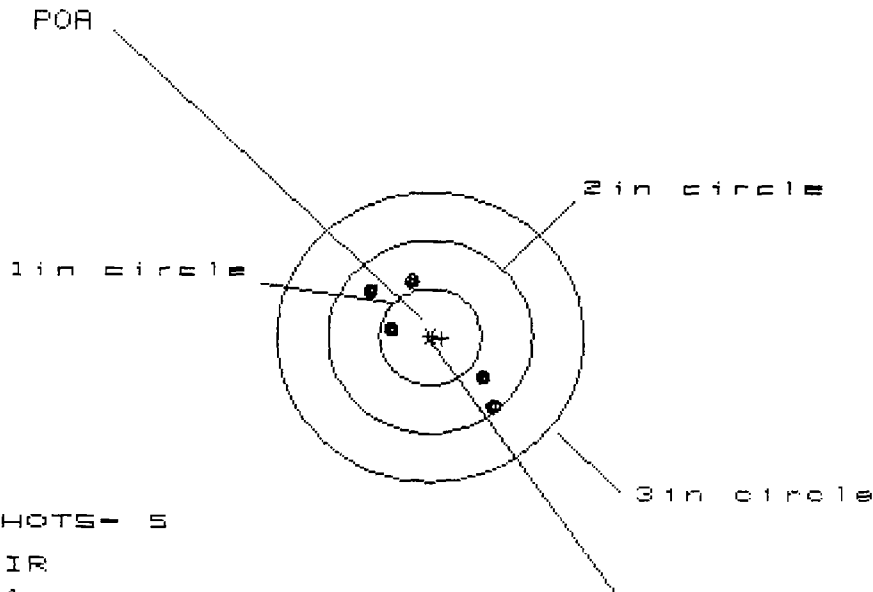

# OF SHOTS- 5

# IN CIR

1 in = 1

2 in = 5

3 in = 5

HS= 1.147

VS= 1.288

GS= 1.639

CENTROID #


1.360

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.578	.709	.568
MINIMUM X	-.569	-.424	-.421
MAXIMUM Y	.575	.396	.490
MINIMUM Y	-.713	-.605	-.512
CENTROID X	-.116	-.261	-.120
CENTROID Y	.017	.196	.102
POA TO CENTROID in.	.118	.326	.157
ANGLE POA CENTROID	99.406	126.835	130.536
MIN RADIUS	.438	.289	.422
MEAN RADIUS	.678	.531	.566
MAX RADIUS	.918	.932	.765
HORIZONTAL SPREAD	1.147	1.133	.989
VERTICAL SPREAD	1.288	1.002	1.002
EXTREME SPREAD	1.639	1.438	1.230
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

13 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/4413RT5

## CENTERFIRE PATTERNS # 2

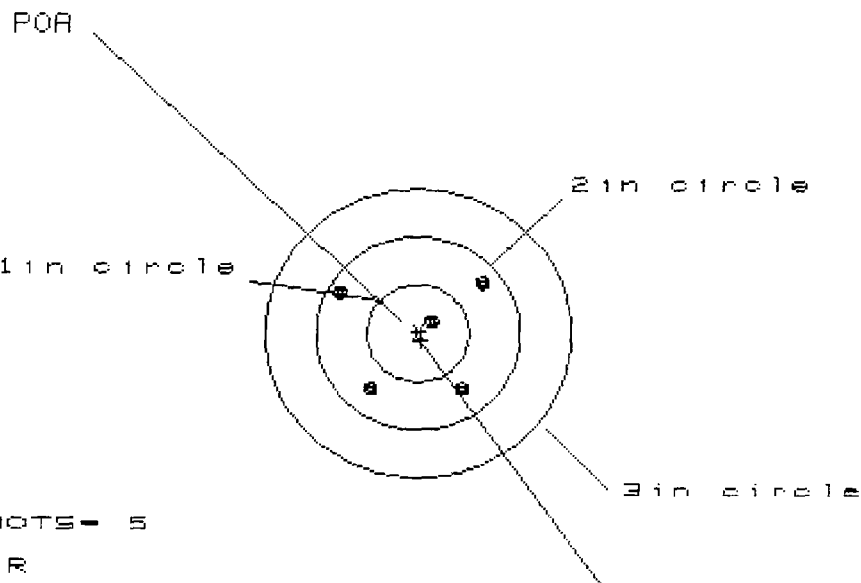

# OF SHOTS- 5

# IN CIR

1in = 1

2in = 5

3in = 5

HS= 1.348

VS= 1.162


GS= 1.556

PATTERN #	2	3	4	5
SHOTS (BEST OF)	5	4	3	5
MAXIMUM X	.617	.597	.405	.597
MINIMUM X	-.731	-.576	-.505	-.731
MAXIMUM Y	.574	.524	.493	.574
MINIMUM Y	-.588	-.445	-.270	-.588
CENTROID X	-.030	-.185	.007	-.030
CENTROID Y	.074	-.070	-.244	.074
POA TO CENTROID in.	.080	.197	.244	.080
ANGLE POA CENTROID	157.667	200.615	358.281	157.667
MIN RADIUS	.223	.433	.486	.223
MEAN RADIUS	.668	.616	.514	.668
MAX RADIUS	.843	.779	.553	.843
HORIZONTAL SPREAD	1.348	1.173	.910	1.348
VERTICAL SPREAD	1.162	.969	.763	1.162
EXTREME SPREAD	1.556	1.521	.939	1.556
NUMBER IN ONE INCH CIRCLE =	1	1	1	1
NUMBER IN TWO INCH CIRCLE =	5	5	5	5
NUMBER IN THREE INCH CIRCLE =	5	5	5	5

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/4413RJS

## CENTERFIRE PATTERNS # 3

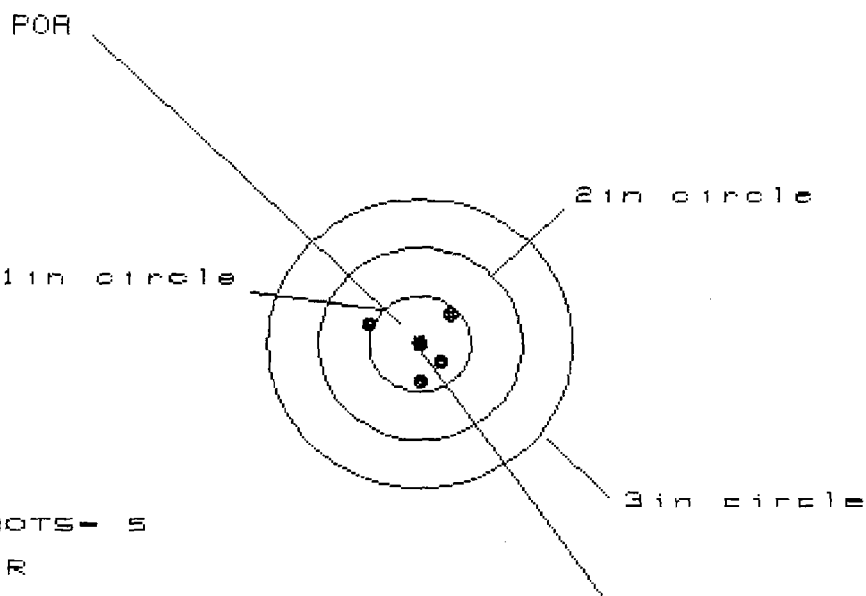

# OF SHOTS- 5

# IN CIR

1in = 4

2in = 5

3in = 5

HS= .872

VS= .719

GS= .885


CENTROID \*

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.335	.201	.143
MINIMUM X	-.537	-.139	-.072
MAXIMUM Y	.346	.395	.192
MINIMUM Y	-.373	-.325	-.193
CENTROID X	-.000	.134	.067
CENTROID Y	-.013	-.061	-.193
POA TO CENTROID in.	.013	.147	.204
ANGLE POA CENTROID	268.238	294.694	340.944
MIN RADIUS	.013	.151	.143
MEAN RADIUS	.343	.275	.185
MAX RADIUS	.571	.443	.206
HORIZONTAL SPREAD	.872	.340	.215
VERTICAL SPREAD	.719	.719	.385
EXTREME SPREAD	.885	.795	.385
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9538NDT

## CENTERFIRE PATTERNS # 1

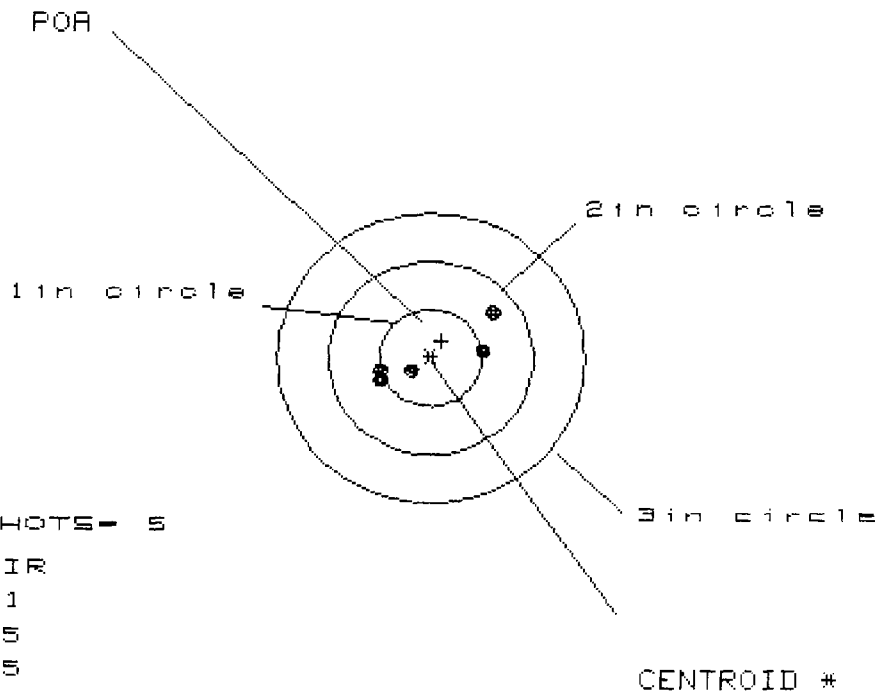

# OF SHOTS = 5

# IN CIR

1in = 1

2in = 5

3in = 5

HS = 1.124

VS = .687

GS = 1.268


1.453

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.616	.658	.540
MINIMUM X	-.508	-.353	-.413
MAXIMUM Y	.444	.170	.171
MINIMUM Y	-.243	-.133	-.132
CENTROID X	-.107	-.262	-.144
CENTROID Y	-.176	-.286	-.287
POA TO CENTROID in.	.206	.388	.321
ANGLE POA CENTROID	238.549	227.612	243.382
MIN RADIUS	.221	.039	.132
MEAN RADIUS	.504	.349	.377
MAX RADIUS	.759	.679	.566
HORIZONTAL SPREAD	1.124	1.011	.953
VERTICAL SPREAD	.687	.303	.303
EXTREME SPREAD	1.268	1.025	1.000
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9538NDT

## CENTERFIRE PATTERNS # 2

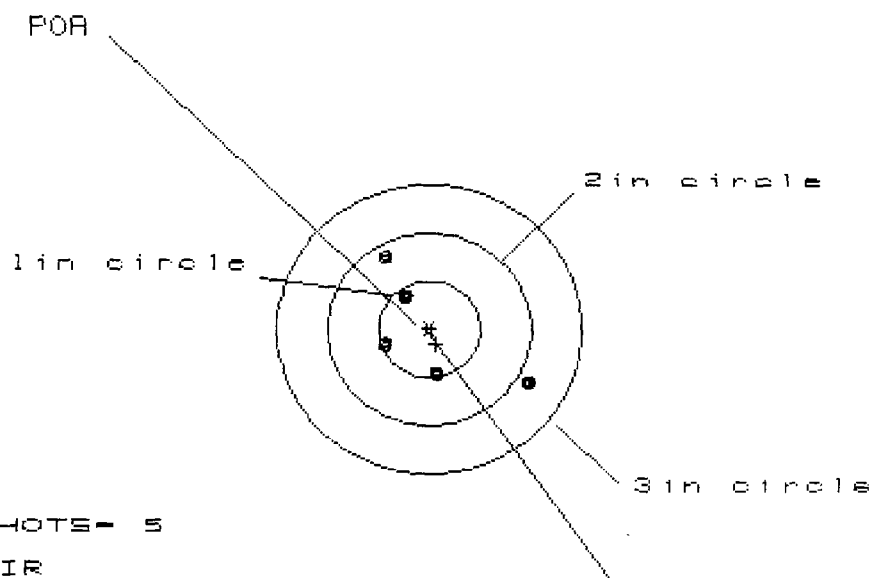

# OF SHOTS- 5

# IN CIR

1in = 3

2in = 4

3in = 5

HS= 1.366

VS= 1.274


GS= 1.850

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.939	.326	.270
MINIMUM X	-.427	-.193	-.249
MAXIMUM Y	.731	.595	.458
MINIMUM Y	-.543	-.605	-.407
CENTROID X	-.069	-.303	-.247
CENTROID Y	.151	.287	.089
POA TO CENTROID in.	.166	.418	.263
ANGLE POA CENTROID	155.596	133.423	109.722
MIN RADIUS	.442	.262	.254
MEAN RADIUS	.657	.471	.400
MAX RADIUS	1.084	.687	.488
HORIZONTAL SPREAD	1.366	.519	.519
VERTICAL SPREAD	1.274	1.200	.865
EXTREME SPREAD	1.850	1.298	.913
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9538NDT

## CENTERFIRE PATTERNS # 3

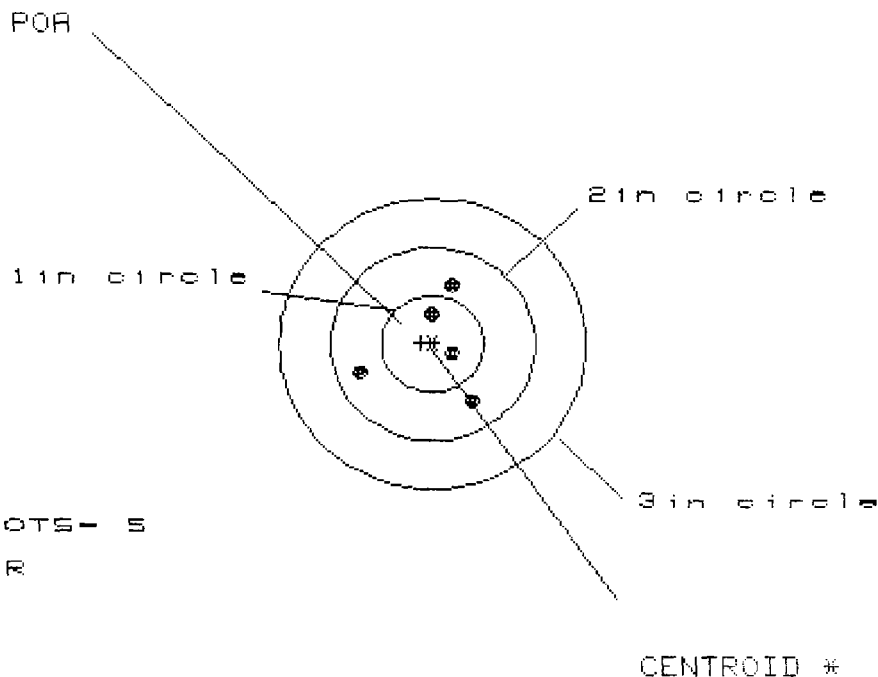

# OF SHOTS - 5

# IN CIR

1 in = 2

2 in = 5

3 in = 5

HS = 1.152

VS = 1.166


GS = 1.242

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.436	.257	.064
MINIMUM X	-.716	-.200	-.114
MAXIMUM Y	.593	.516	.300
MINIMUM Y	-.573	-.649	-.342
CENTROID X	.110	.289	.203
CENTROID Y	-.013	.064	.280
POA TO CENTROID in.	.111	.296	.346
ANGLE POA CENTROID	276.546	12.403	54.058
MIN RADIUS	.165	.127	.121
MEAN RADIUS	.522	.418	.258
MAX RADIUS	.778	.699	.348
HORIZONTAL SPREAD	1.152	.457	.178
VERTICAL SPREAD	1.166	1.166	.642
EXTREME SPREAD	1.242	1.202	.642
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/95388DT

## CENTERFIRE PATTERNS # 1

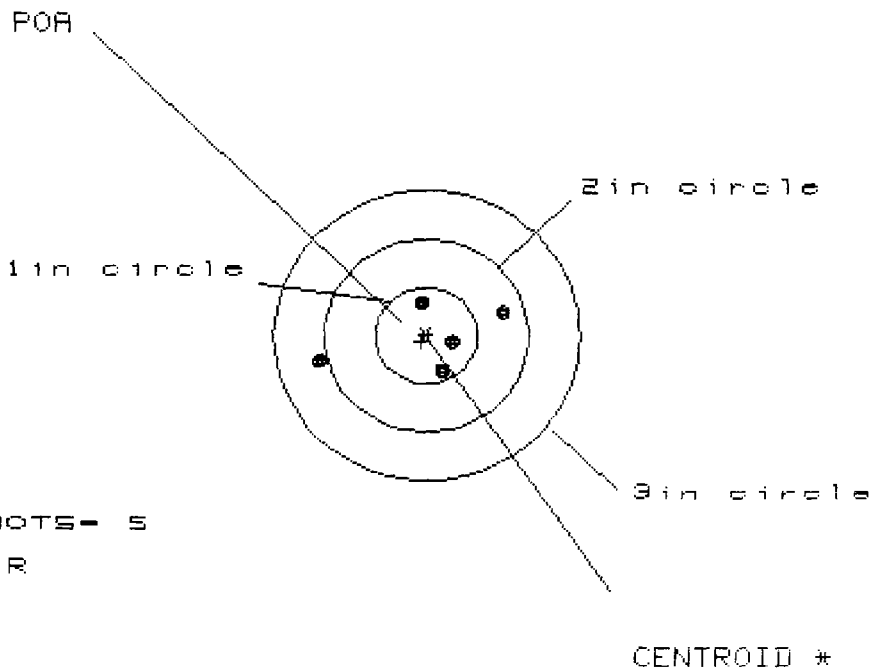

# OF SHOTS- 5

# IN CIR

1 in = 3

2 in = 4

3 in = 5

HS= 1.803

VS= .690


GS= 1.848

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.755	.493	.122
MINIMUM X	-1.048	-.347	-.183
MAXIMUM Y	.368	.315	.362
MINIMUM Y	-.322	-.376	-.328
CENTROID X	.048	.310	.146
CENTROID Y	.057	.111	.063
POA TO CENTROID in.	.075	.329	.159
ANGLE POA CENTROID	49.979	19.604	23.451
MIN RADIUS	.222	.091	.126
MEAN RADIUS	.561	.365	.289
MAX RADIUS	1.070	.513	.405
HORIZONTAL SPREAD	1.803	.840	.305
VERTICAL SPREAD	.690	.690	.690
EXTREME SPREAD	1.848	.858	.732
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/8538.RDT

## CENTERFIRE PATTERNS # 2

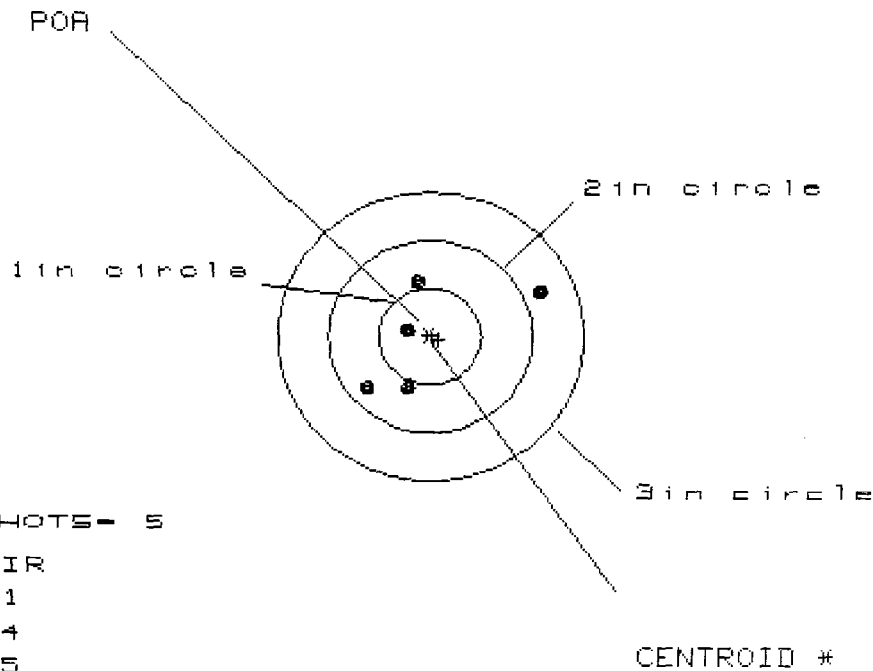

HS= 1.704

VS= 1.130


GS= 1.992

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.100	.188	.078
MINIMUM X	-.604	-.329	-.066
MAXIMUM Y	.556	.670	.517
MINIMUM Y	-.574	-.460	-.524
CENTROID X	-.079	-.354	-.244
CENTROID Y	.032	-.082	.071
POA TO CENTROID in.	.085	.363	.254
ANGLE POA CENTROID	112.051	193.080	106.203
MIN RADIUS	.184	.187	.014
MEAN RADIUS	.662	.456	.355
MAX RADIUS	1.191	.696	.528
HORIZONTAL SPREAD	1.704	.517	.144
VERTICAL SPREAD	1.130	1.130	1.041
EXTREME SPREAD	1.992	1.243	1.051
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9538RDT

## CENTERFIRE PATTERNS # 3

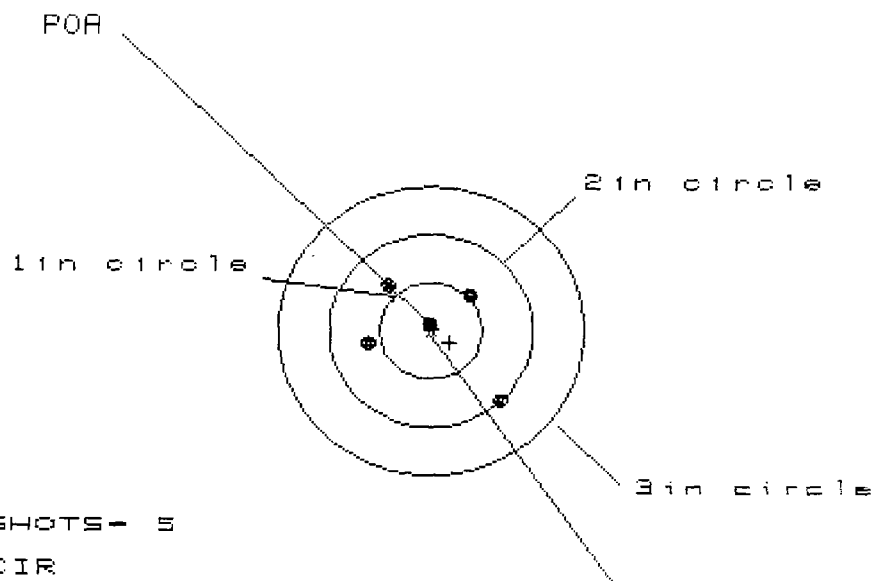

# OF SHOTS - 5

# IN CIR

1in = 2

2in = 5

3in = 5

HS = 1.254

VS = 1.124

GS = 1.567

PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	.662
MINIMUM X	-.602
MAXIMUM Y	.437
MINIMUM Y	-.687
CENTROID X	-.184
CENTROID Y	.123
POA TO CENTROID in.	.222
ANGLE POA CENTROID	123.790
MIN RADIUS	.054
MEAN RADIUS	.546
MAX RADIUS	.955
HORIZONTAL SPREAD	1.264
VERTICAL SPREAD	1.124
EXTREME SPREAD	1.567
NUMBER IN ONE INCH CIRCLE =	2
NUMBER IN TWO INCH CIRCLE =	5
NUMBER IN THREE INCH CIRCLE =	5

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9478MDT

## CENTERFIRE PATTERNS # 1

POA

1in circle

2in circle

3in circle

# OF SHOTS - 4

# IN CIR

1in = 0

2in = 1

3in = 4

HS = 1.960

VS = 1.811

GS = 2.068

2.009


CENTROID \*

PATTERN #	1	2	3
SHOTS (BEST OF)	4	3	2
MAXIMUM X	1.214	.468	.108
MINIMUM X	-.746	-.342	-.108
MAXIMUM Y	.733	.757	.231
MINIMUM Y	-1.078	-1.054	-.230
CENTROID X	.345	-.059	-.293
CENTROID Y	-1.349	-1.373	-.847
POA TO CENTROID in.	1.392	1.375	.896
ANGLE POA CENTROID	345.632	267.540	250.908
MIN RADIUS	.596	.322	.255
MEAN RADIUS	.984	.769	.255
MAX RADIUS	1.216	1.153	.255
HORIZONTAL SPREAD	1.960	.810	.216
VERTICAL SPREAD	1.811	1.811	.461
EXTREME SPREAD	2.068	1.984	.509
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	1		
NUMBER IN THREE INCH CIRCLE =	4		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/8478NDT

## CENTERFIRE PATTERNS # 2

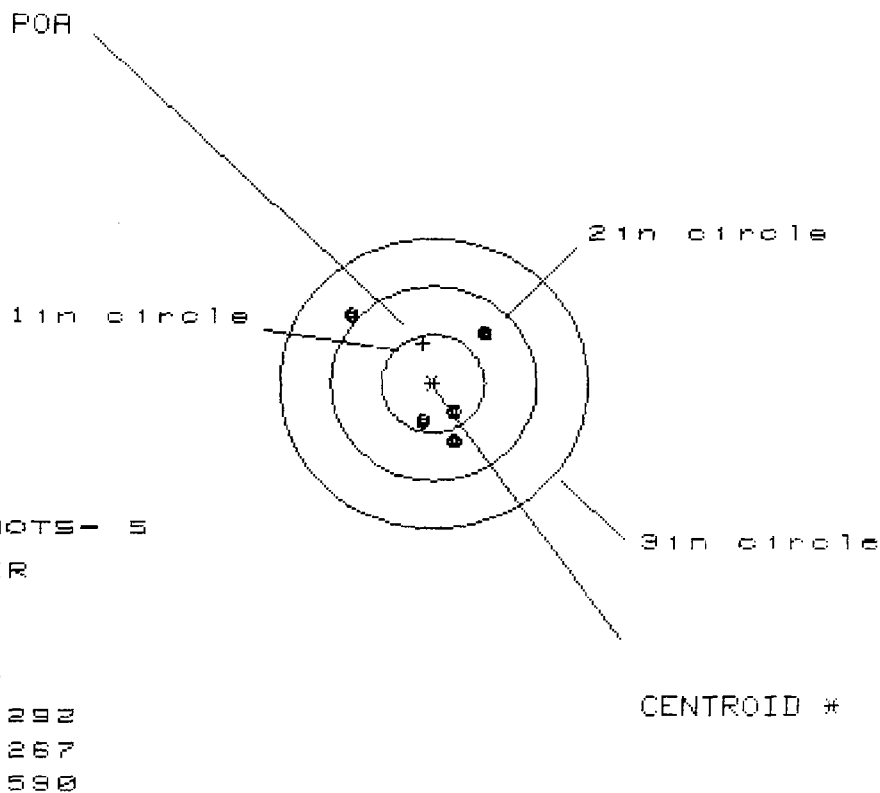


PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.498	.299	.090
MINIMUM X	-.794	-.258	-.158
MAXIMUM Y	.711	.669	.155
MINIMUM Y	-.556	-.378	-.155
CENTROID X	.098	.297	.197
CENTROID Y	-.412	-.590	-.813
POA TO CENTROID in.	.424	.661	.837
ANGLE POA CENTROID	346.606	333.309	346.384
MIN RADIUS	.310	.068	.158
MEAN RADIUS	.612	.380	.169
MAX RADIUS	1.066	.733	.180
HORIZONTAL SPREAD	1.292	.557	.248
VERTICAL SPREAD	1.267	1.047	.310
EXTREME SPREAD	1.590	1.098	.311
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9478NDT

## CENTERFIRE PATTERNS # 3

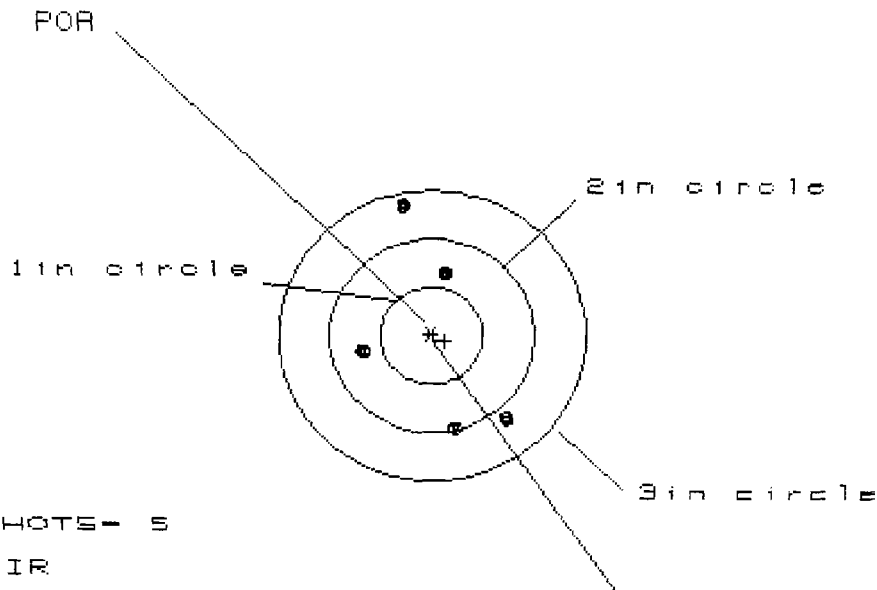

# OF SHOTS- 5

# IN CIR

1in = 0

2in = 3

3in = 5

HS= 1.360

VS= 2.270


GS= 2.369

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.687	.613	.310
MINIMUM X	-.673	-.748	-.543
MAXIMUM Y	1.316	.974	.805
MINIMUM Y	-.954	-.626	-.795
CENTROID X	-.125	-.050	-.255
CENTROID Y	.055	-.273	-.104
POR TO CENTROID in.	.137	.278	.275
ANGLE POR CENTROID	113.835	259.539	202.150
MIN RADIUS	.654	.634	.543
MEAN RADIUS	.950	.793	.745
MAX RADIUS	1.349	.975	.853
HORIZONTAL SPREAD	1.360	1.360	.853
VERTICAL SPREAD	2.270	1.600	1.600
EXTREME SPREAD	2.369	1.602	1.602
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9478RDT

## CENTERFIRE PATTERNS # 1

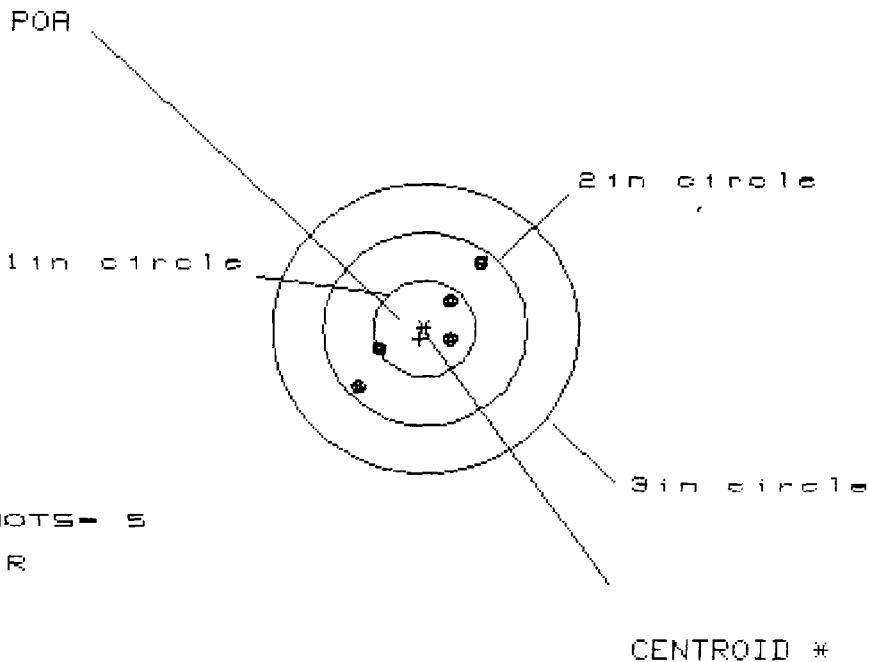

# OF SHOTS - 5

# IN CIR

1 in = 3

2 in = 5

3 in = 5

HS= 1.161

VS= 1.223

GS= 1.686


2.227

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.543	.397	.236
MINIMUM X	-.618	-.482	-.457
MAXIMUM Y	.649	.416	.278
MINIMUM Y	-.574	-.412	-.166
CENTROID X	.052	-.084	.077
CENTROID Y	.102	-.060	.078
POA TO CENTROID in.	.115	.103	.109
ANGLE POA CENTROID	63.078	215.505	45.247
MIN RADIUS	.295	.298	.262
MEAN RADIUS	.562	.473	.368
MAX RADIUS	.846	.634	.486
HORIZONTAL SPREAD	1.161	.879	.693
VERTICAL SPREAD	1.223	.828	.444
EXTREME SPREAD	1.686	1.197	.810
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		5	

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9478RDT

## CENTERFIRE PATTERNS # 2

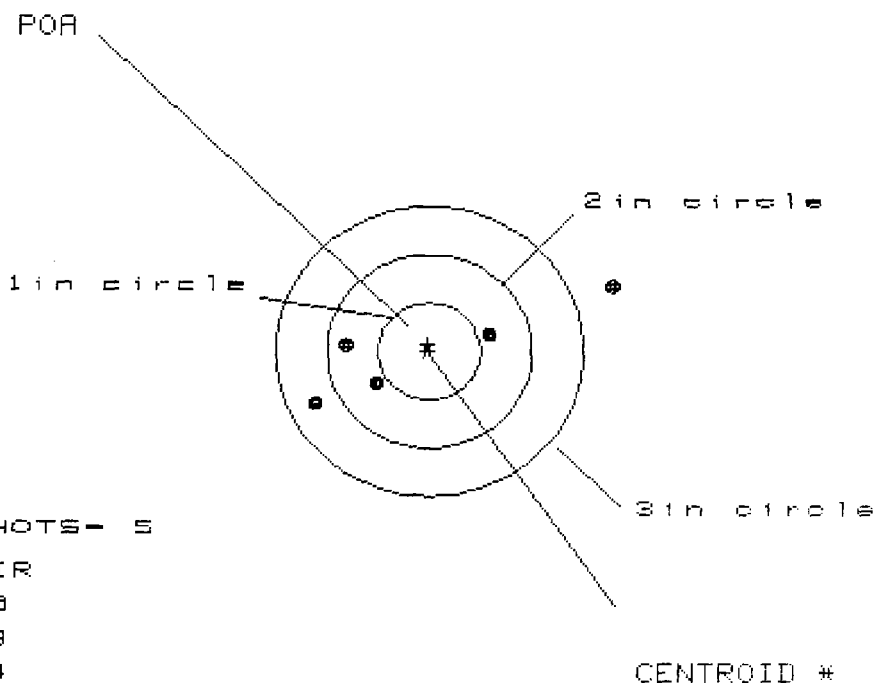

HS= 2.935

VS= 1.159


GS= 3.156

PATTERN #	2	3	4	5
SHOTS (BEST OF)	3	4	5	
MAXIMUM X	.799	1.015	1.830	
MINIMUM X	-.579	-.648	-1.105	
MAXIMUM Y	.183	.308	.625	
MINIMUM Y	-.332	-.377	-.534	
CENTROID X	-.230	-.446	.011	
CENTROID Y	-.103	-.229	-.072	
POA TO CENTROID in.	.252	.501	.073	
ANGLE POA CENTROID	204.055	207.128	351.027	
MIN RADIUS	.399	.207	.578	
MEAN RADIUS	.605	.618	1.031	
MAX RADIUS	.820	1.061	1.933	
HORIZONTAL SPREAD	1.378	1.663	2.935	
VERTICAL SPREAD	.515	.686	1.159	
EXTREME SPREAD	1.378	1.799	3.156	
NUMBER IN ONE INCH CIRCLE	0	0		
NUMBER IN TWO INCH CIRCLE	3	3		
NUMBER IN THREE INCH CIRCLE	4	4		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/94788RDT

## CENTERFIRE PATTERNS # 3

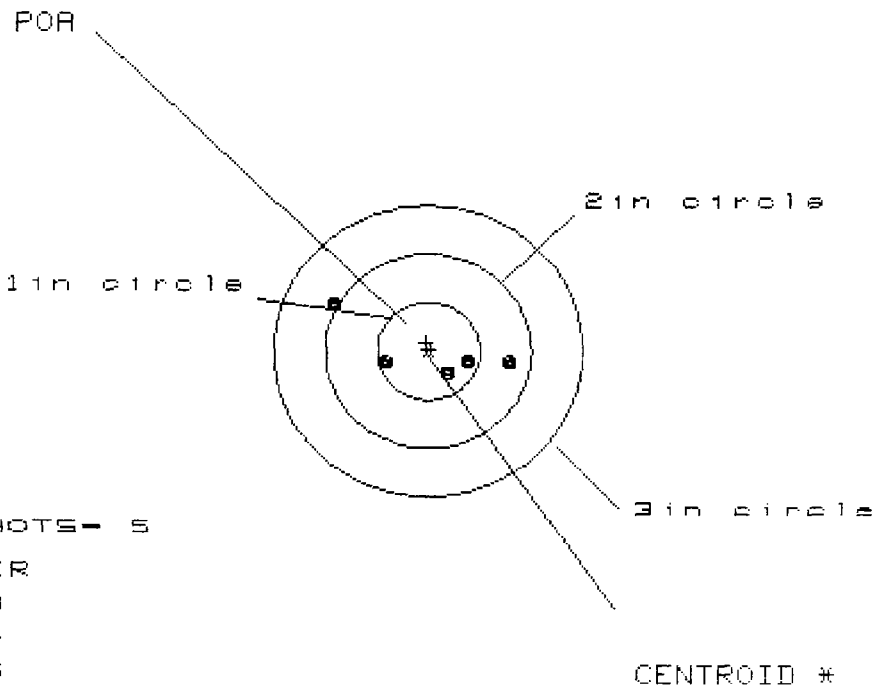

# OF SHOTS- 5

# IN CIR

1in = 3

2in = 4

3in = 5

HS= 1.741

VS= .698


GS= 1.839

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.813	.581	.312
MINIMUM X	-.928	-.605	-.411
MAXIMUM Y	.507	.040	.048
MINIMUM Y	-.191	-.065	-.051
CENTROID X	.018	.249	.056
CENTROID Y	-.087	-.213	-.227
POA TO CENTROID in.	.088	.328	.233
ANGLE POA CENTROID	348.512	310.521	346.202
MIN RADIUS	.235	.115	.111
MEAN RADIUS	.574	.356	.279
MAX RADIUS	1.057	.605	.413
HORIZONTAL SPREAD	1.741	1.186	.723
VERTICAL SPREAD	.698	.105	.099
EXTREME SPREAD	1.839	1.186	.724
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9562NDT

## CENTERFIRE PATTERNS # 1

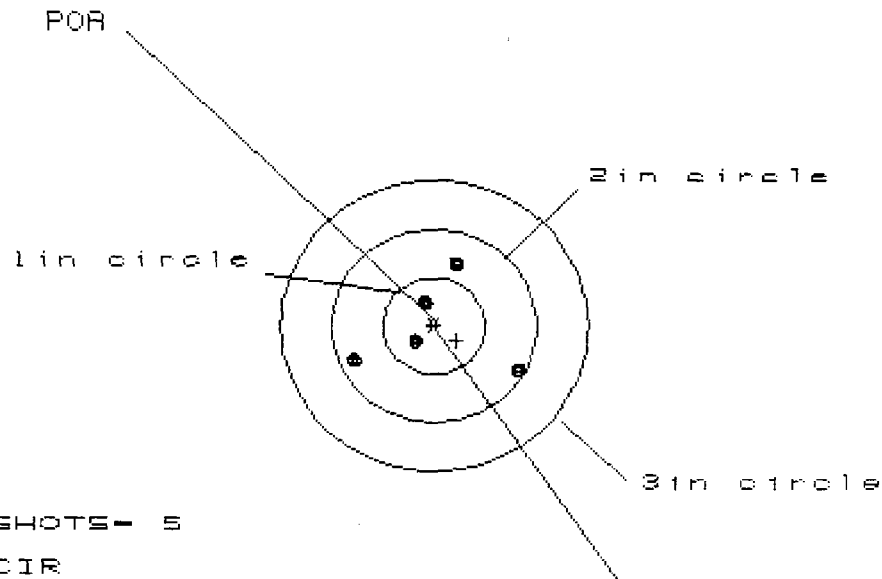

# OF SHOTS- 5

# IN CIR

1in = 2

2in = 5

3in = 5

HS= 1.617

VS= 1.089

GS= 1.619

CENTROID \*


1.978

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.841	.447	.258
MINIMUM X	-.776	-.566	-.196
MAXIMUM Y	.651	.541	.386
MINIMUM Y	-.438	-.465	-.385
CENTROID X	-.218	-.428	-.239
CENTROID Y	.151	.261	.416
POA TO CENTROID in.	.265	.501	.479
ANGLE POA CENTROID	124.794	121.366	150.102
MIN RADIUS	.248	.199	.062
MEAN RADIUS	.604	.466	.319
MAX RADIUS	.948	.733	.465
HORIZONTAL SPREAD	1.617	1.013	.454
VERTICAL SPREAD	1.089	1.006	.771
EXTREME SPREAD	1.619	1.428	.895
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9562NDT

## CENTERFIRE PATTERNS # 2

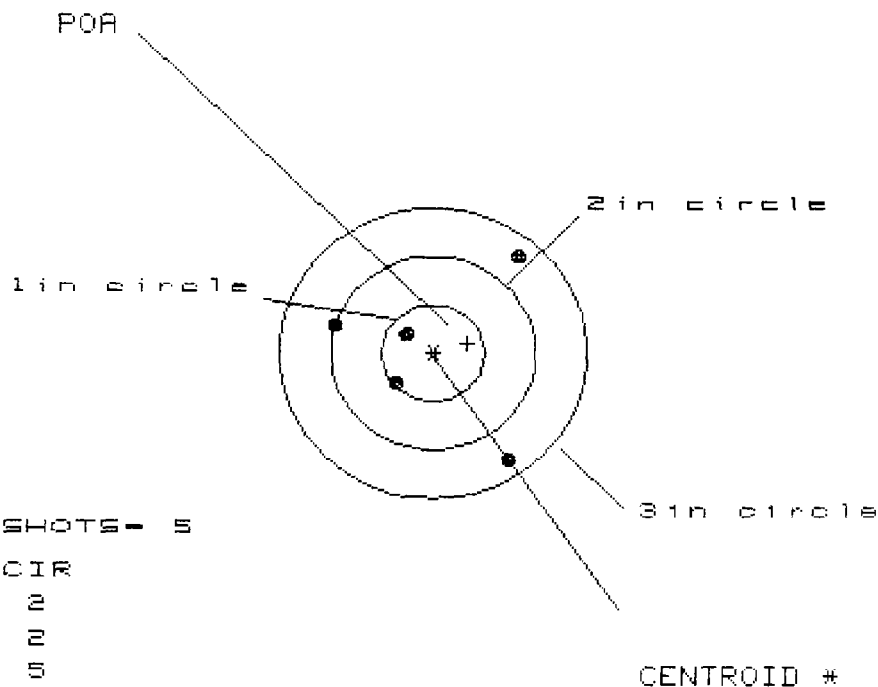

# OF SHOTS - 5

# IN CIR

1 in - 2

2 in - 2

3 in - 5

HS = 1.832

VS = 2.100


GS = 2.212

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.845	1.026	.257
MINIMUM X	-.987	-.806	-.464
MAXIMUM Y	.953	.666	.189
MINIMUM Y	-1.147	-.580	-.358
CENTROID X	-.339	-.520	-.862
CENTROID Y	-.099	.188	-.034
POA TO CENTROID in.	.353	.553	.863
ANGLE POA CENTROID	196.217	109.892	182.236
MIN RADIUS	.355	.100	.308
MEAN RADIUS	.887	.681	.407
MAX RADIUS	1.357	1.223	.501
HORIZONTAL SPREAD	1.832	1.832	.721
VERTICAL SPREAD	2.100	1.246	.547
EXTREME SPREAD	2.212	1.961	.865
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	2		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9562NDT

## CENTERFIRE PATTERNS # 3

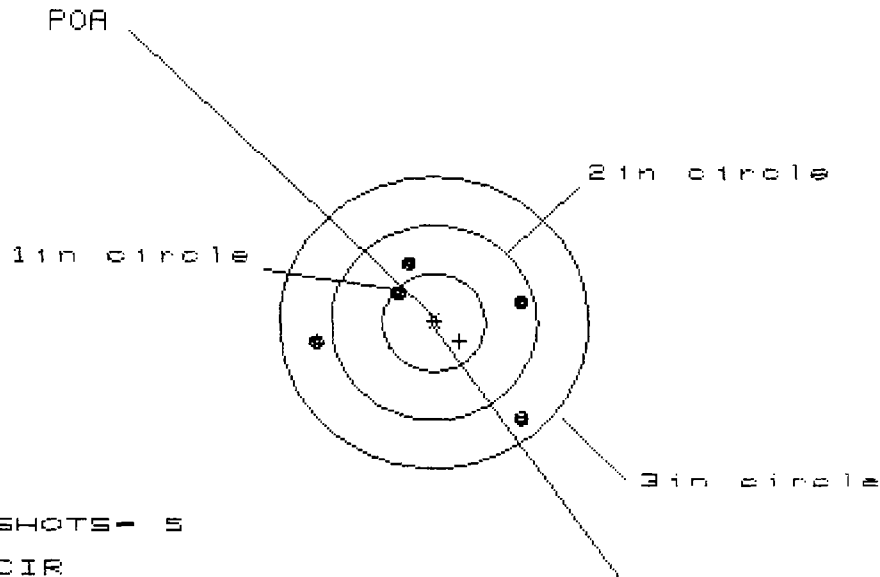

# OF SHOTS - 5

# IN CIR

1 in = 1

2 in = 3

3 in = 5

HS = 1.977

VS = 1.565

GS = 2.104


CENTROID \*

PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	.875
MINIMUM X	-1.102
MAXIMUM Y	.618
MINIMUM Y	-.947
CENTROID X	-.249
CENTROID Y	.190
POA TO CENTROID in.	.313
ANGLE POA CENTROID	127.332
MIN RADIUS	.468
MEAN RADIUS	.886
MAX RADIUS	1.275
HORIZONTAL SPREAD	1.977
VERTICAL SPREAD	1.565
EXTREME SPREAD	2.104
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	3
NUMBER IN THREE INCH CIRCLE =	5

11 Mar 1986

FILE:/PATTERNING/CENTERFIRE\_PATT/9562RDT

## CENTERFIRE PATTERNS # 1

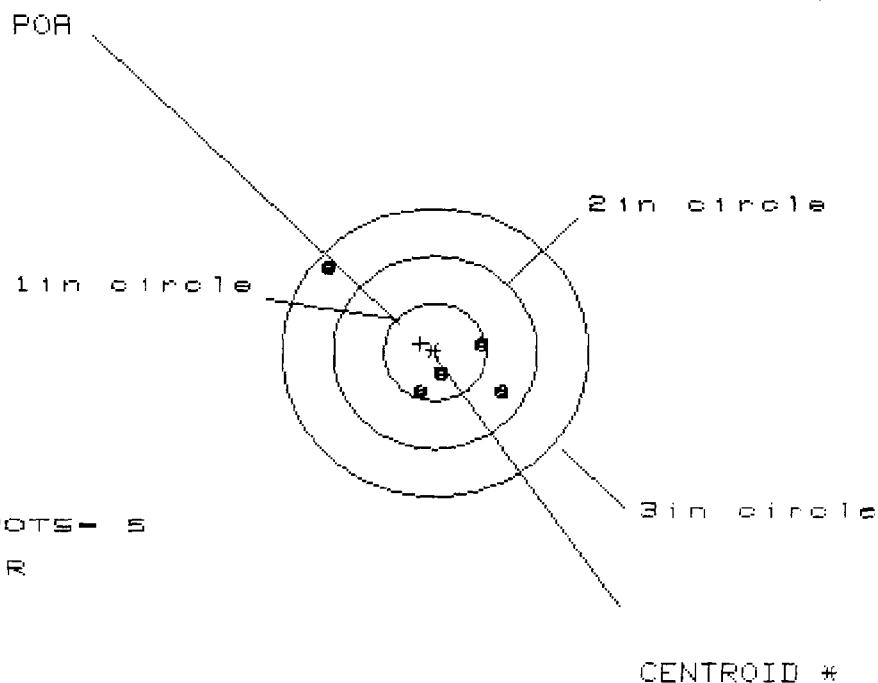

# OF SHOTS - 5

# IN CIR

1in = 3

2in = 4

3in = 5

HS = 1.718

VS = 1.363


GS = 2.193

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.655	.389	.306
MINIMUM X	-1.063	-.376	-.246
MAXIMUM Y	.922	.342	.272
MINIMUM Y	-.441	-.210	-.257
CENTROID X	.144	.410	.280
CENTROID Y	-.088	-.319	-.249
POA TO CENTROID in.	.169	.519	.374
ANGLE POA CENTROID	301.487	307.880	311.608
MIN RADIUS	.191	.198	.062
MEAN RADIUS	.655	.361	.276
MAX RADIUS	1.407	.442	.409
HORIZONTAL SPREAD	1.718	.765	.552
VERTICAL SPREAD	1.363	.552	.529
EXTREME SPREAD	2.193	.765	.765
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/8562RDT

## CENTERFIRE PATTERNS # 2

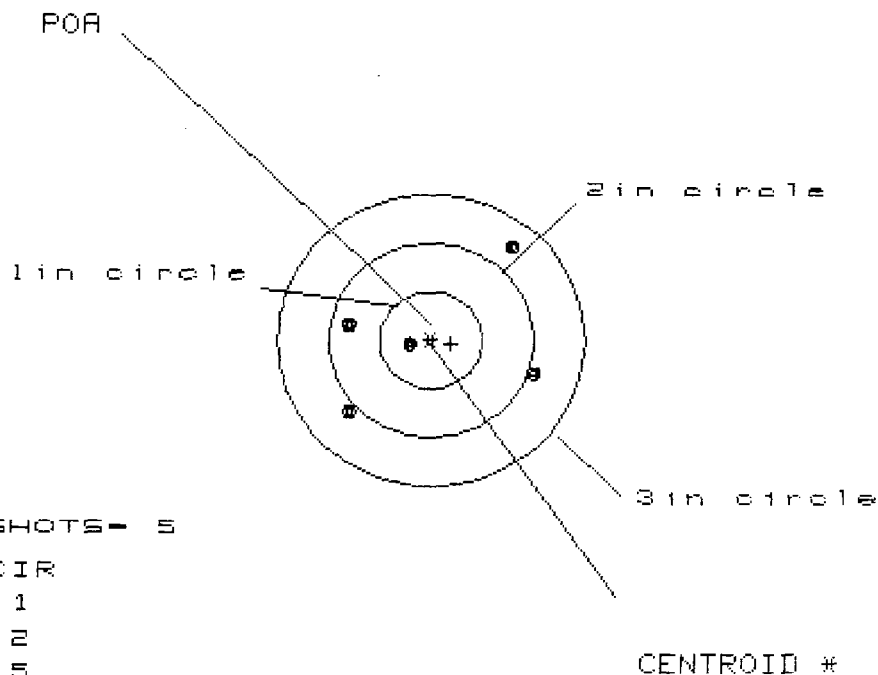

HS= 1.829  
 VS= 1.730  
 GS= 2.371


PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.990	1.197	1.000
MINIMUM X	-.839	-.632	-.829
MAXIMUM Y	1.000	.385	.225
MINIMUM Y	-.730	-.480	-.232
CENTROID X	-.198	-.405	-.208
CENTROID Y	.036	-.214	-.054
POA TO CENTROID in.	.201	.458	.215
ANGLE POA CENTROID	100.351	207.839	194.445
MIN RADIUS	.200	.170	.172
MEAN RADIUS	.893	.717	.686
MAX RADIUS	1.297	1.199	1.027
HORIZONTAL SPREAD	1.829	1.829	1.829
VERTICAL SPREAD	1.730	.865	.457
EXTREME SPREAD	2.371	1.885	1.885
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	2		
NUMBER IN THREE INCH CIRCLE =	5		

13 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9562RDT

## CENTERFIRE PATTERNS # 3

POA

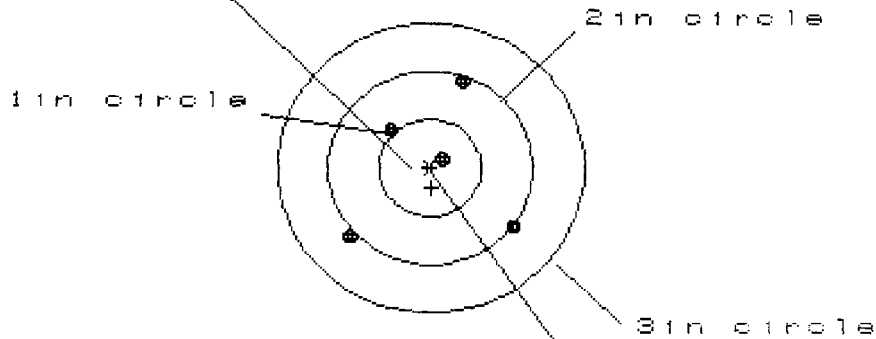

# OF SHOTS - 5

# IN CIR

1in - 1

2in - 4

3in = 5

HS= 1.595

VS= 1.586

GS= 1.929


CENTROID \*

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.777	.573	.266
MINIMUM X	-.818	-.570	-.379
MAXIMUM Y	.874	.696	.438
MINIMUM Y	-.712	-.773	-.392
CENTROID X	-.015	.190	-.001
CENTROID Y	.206	.384	.642
POA TO CENTROID in.	.207	.428	.642
ANGLE POA CENTROID	175.839	63.749	179.881
MIN RADIUS	.133	.156	.381
MEAN RADIUS	.730	.606	.434
MAX RADIUS	1.085	.962	.513
HORIZONTAL SPREAD	1.595	1.142	.645
VERTICAL SPREAD	1.586	1.469	.830
EXTREME SPREAD	1.929	1.551	.844
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9860NDT

## CENTERFIRE PATTERNS # 1

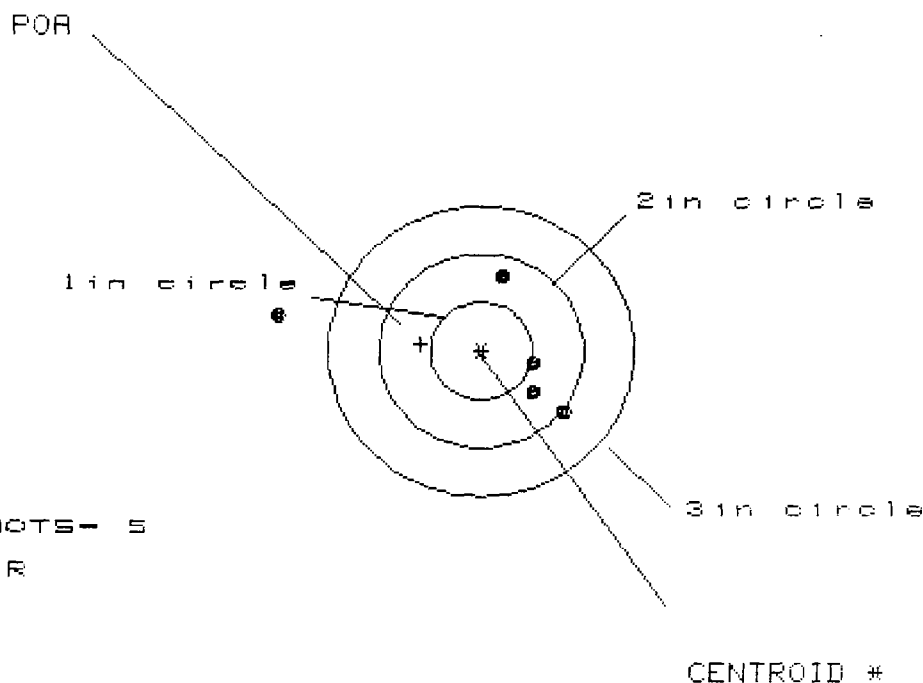

# OF SHOTS- 5

# IN CIR

1in = 1

2in = 3

3in = 4

HS= 2.799

VS= 1.408

GS= 2.962


2387

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.799	.299	.084
MINIMUM X	-2.000	-.246	-.146
MAXIMUM Y	.792	.881	.705
MINIMUM Y	-.616	-.528	-.530
CENTROID X	-.593	1.093	.993
CENTROID Y	-.070	-.159	.017
POA TO CENTROID in.	.597	1.104	.993
ANGLE POA CENTROID	276.751	278.251	1.000
MIN RADIUS	.492	.016	.193
MEAN RADIUS	1.001	.473	.482
MAX RADIUS	2.031	.914	.720
HORIZONTAL SPREAD	2.799	.545	.230
VERTICAL SPREAD	1.408	1.408	1.235
EXTREME SPREAD	2.962	1.510	1.253
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	4		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9888NDT

## CENTERFIRE PATTERNS # 2

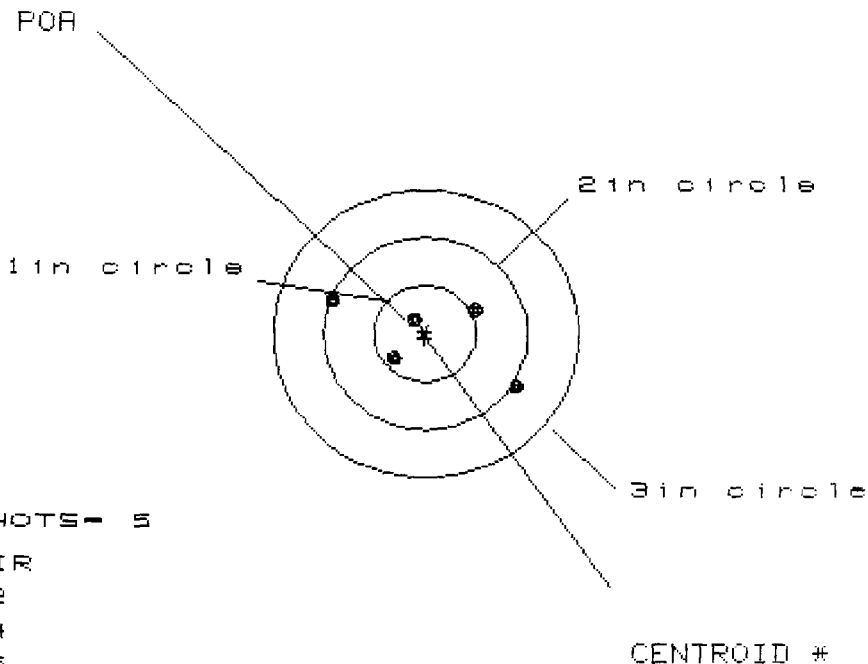

# OF SHOTS- 5

# IN CIR

1in = 2

2in = 4

3in = 5

HS= 1.818

VS= .844


GS= 2.004

PATTERN #	2	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.897	.720	.487
MINIMUM X	-.921	-.697	-.333
MAXIMUM Y	.332	.204	.173
MINIMUM Y	-.512	-.354	-.285
CENTROID X	.009	-.215	.017
CENTROID Y	.049	.177	.108
POA TO CENTROID in.	.049	.279	.110
ANGLE POA CENTROID	79.737	129.318	81.254
MIN RADIUS	.226	.089	.191
MEAN RADIUS	.636	.477	.382
MAX RADIUS	1.033	.727	.517
HORIZONTAL SPREAD	1.818	1.416	.820
VERTICAL SPREAD	.844	.558	.458
EXTREME SPREAD	2.004	1.420	.939
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/98BOND1

## CENTERFIRE PATTERNS # 3

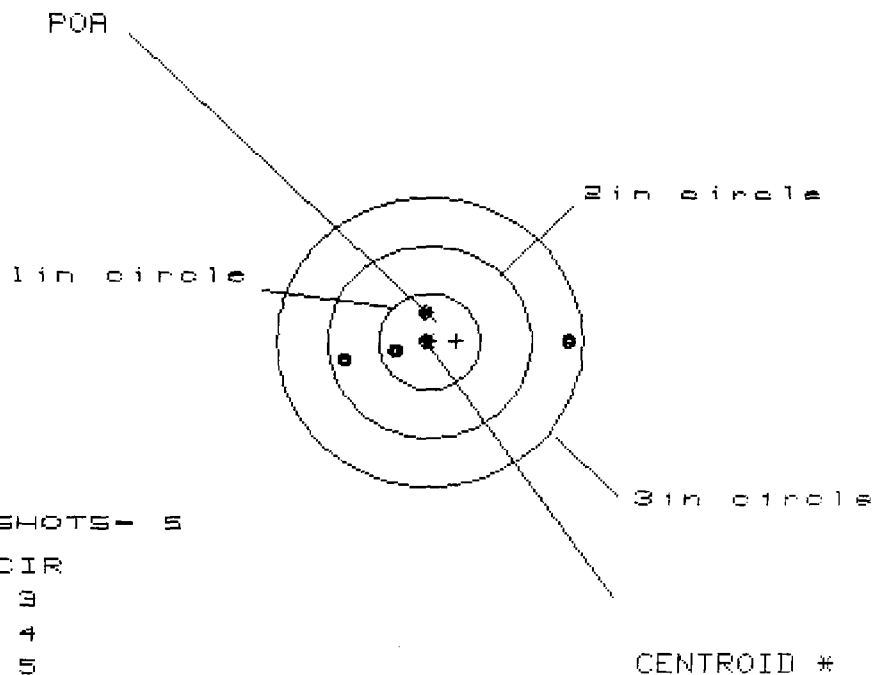

# OF SHOTS- 5

# IN CIR

1 in = 3

2 in = 4

3 in = 5

HS= 2.176

VS= .523


GS= 2.194

PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	1.314
MINIMUM X	-.862
MAXIMUM Y	.287
MINIMUM Y	-.236
CENTROID X	-.263
CENTROID Y	-.009
POA TO CENTROID in.	.264
ANGLE POA CENTROID	182.044
MIN RADIUS	.070
MEAN RADIUS	.593
MAX RADIUS	1.315
HORIZONTAL SPREAD	2.176
VERTICAL SPREAD	.523
EXTREME SPREAD	2.194
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	4
NUMBER IN THREE INCH CIRCLE =	5

01 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/88BORDT

## CENTERFIRE PATTERNS # 1

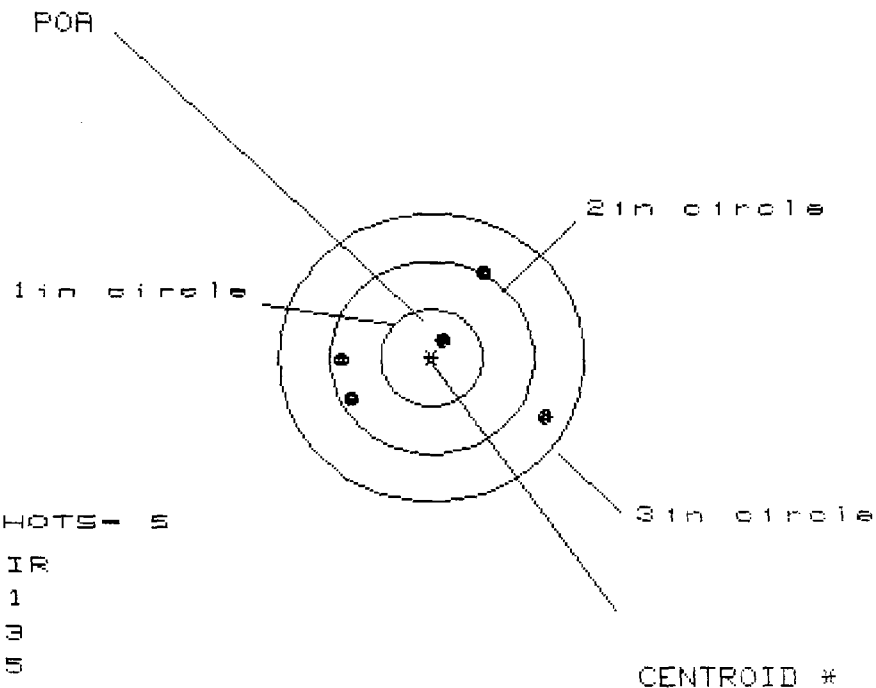

HS= 2.083

VS= 1.504

GS= 2.150

1.763


PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.154	.751	.643
MINIMUM X	-.929	-.641	-.390
MAXIMUM Y	.910	.761	.287
MINIMUM Y	-.594	-.586	-.332
CENTROID X	-.111	-.399	-.650
CENTROID Y	-.184	-.036	-.289
POA TO CENTROID in.	.215	.401	.711
ANGLE POA CENTROID	238.945	185.081	204.006
MIN RADIUS	.210	.394	.393
MEAN RADIUS	.873	.727	.505
MAX RADIUS	1.298	1.070	.704
HORIZONTAL SPREAD	2.083	1.392	1.033
VERTICAL SPREAD	1.504	1.347	.619
EXTREME SPREAD	2.150	1.840	1.088
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/988808DT

## CENTERFIRE PATTERNS # 2

POA

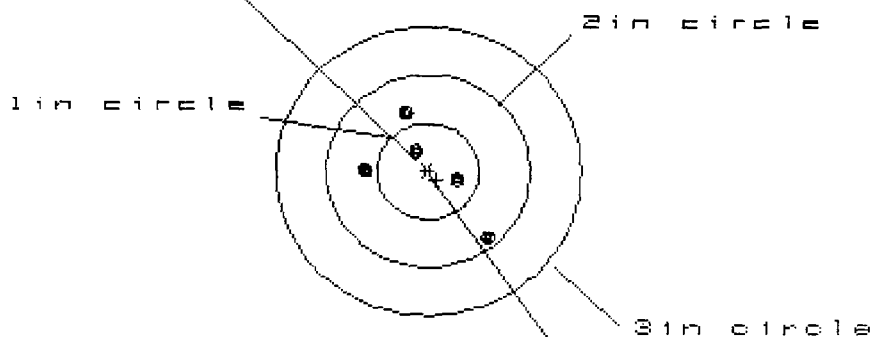

# OF SHOTS - 5

# IN CIR

1 in = 2

2 in = 5

3 in = 5

HS = 1.296

VS = 1.286

GS = 1.516

CENTROID #

PATTERN #	2
SHOTS (BEST OF)	5
MAXIMUM X	.631
MINIMUM X	-.665
MAXIMUM Y	.574
MINIMUM Y	-.712
CENTROID X	-.083
CENTROID Y	.086
POA TO CENTROID in.	.119
ANGLE POA CENTROID	136.155
MIN RADIUS	.212
MEAN RADIUS	.544
MAX RADIUS	.951
HORIZONTAL SPREAD	1.296
VERTICAL SPREAD	1.286
EXTREME SPREAD	1.516
NUMBER IN ONE INCH CIRCLE	2
NUMBER IN TWO INCH CIRCLE	5
NUMBER IN THREE INCH CIRCLE	5

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9880RDT

## CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

# OF SHOTS - 5

# IN CIR

1 in = 1

2 in = 3

3 in = 5

HS = 1.761

VS = 1.746

GS = 1.924


CENTROID \*

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.514	.202	.238
MINIMUM X	-1.247	-.487	-.451
MAXIMUM Y	.918	.917	.453
MINIMUM Y	-.828	-.829	-.523
CENTROID X	-.002	.310	.274
CENTROID Y	-.077	-.077	-.382
POA TO CENTROID in.	.077	.320	.471
ANGLE POA CENTROID	268.803	283.851	324.340
MIN RADIUS	.294	.250	.457
MEAN RADIUS	.809	.641	.511
MAX RADIUS	1.247	.924	.565
HORIZONTAL SPREAD	1.761	.689	.689
VERTICAL SPREAD	1.746	1.746	.976
EXTREME SPREAD	1.924	1.747	.976
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/7819NJ5

## CENTERFIRE PATTERNS # 1

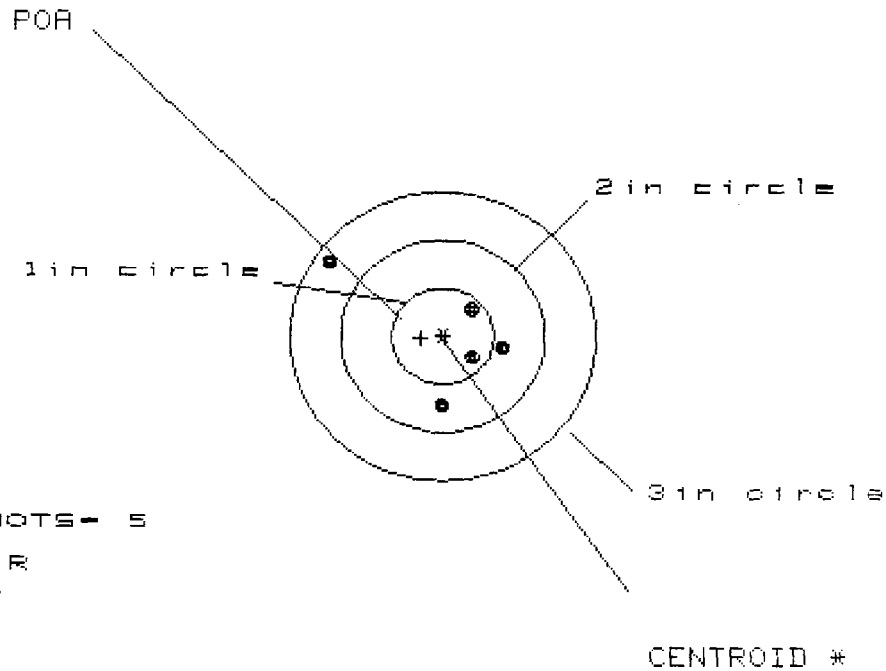


PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.619	.335	.241
MINIMUM X	-1.135	-.282	-.128
MAXIMUM Y	.739	.472	.296
MINIMUM Y	-.715	-.530	-.189
CENTROID X	.213	.497	.591
CENTROID Y	.018	-.167	.009
POA TO CENTROID in.	.214	.524	.591
ANGLE POA TO CENTROID	4.719	288.599	.905
MIN RADIUS	.330	.023	.220
MEAN RADIUS	.682	.360	.269
MAX RADIUS	1.355	.600	.322
HORIZONTAL SPREAD	1.754	.617	.369
VERTICAL SPREAD	1.454	1.002	.485
EXTREME SPREAD	1.951	1.032	.546
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/7819MTS

## CENTERFIRE PATTERNS # 2

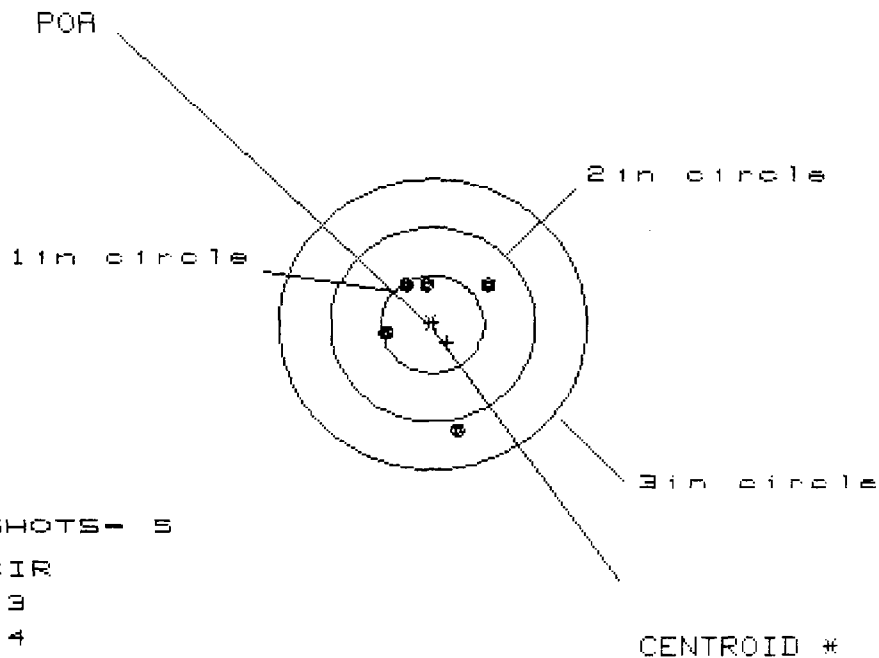

# OF SHOTS- 5

# IN CIR

1in = 3

2in = 4

3in = 5

HS= .912

VS= 1.564

GS= 1.606


CENTROID \*

PATTERN #	2	2	2
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.505	.571	.157
MINIMUM X	-.407	-.341	-.151
MAXIMUM Y	.429	.145	.185
MINIMUM Y	-1.135	-.356	-.316
CENTROID X	-.143	-.209	-.399
CENTROID Y	.188	.472	.432
POA TO CENTROID in.	.236	.516	.589
ANGLE POA CENTROID	142.771	156.116	137.272
MIN RADIUS	.413	.149	.132
MEAN RADIUS	.625	.361	.242
MAX RADIUS	1.165	.583	.350
HORIZONTAL SPREAD	.912	.912	.308
VERTICAL SPREAD	1.564	.501	.501
EXTREME SPREAD	1.606	1.028	.588
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/7819NJS

## CENTERFIRE PATTERNS # 3

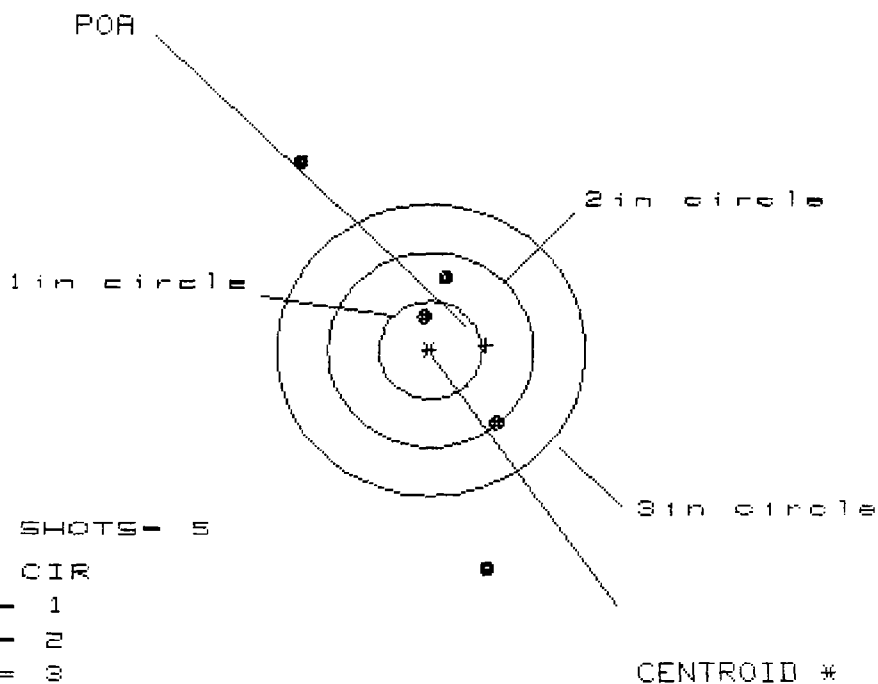

# OF SHOTS - 5

# IN CIR

1 in = 1

2 in = 2

3 in = 3

HS = 1.877

VS = 4.173

GS = 4.528


CENTROID \*

PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	.639
MINIMUM X	-1.238
MAXIMUM Y	1.931
MINIMUM Y	-2.242
CENTROID X	-.541
CENTROID Y	-.049
POA TO CENTROID in.	.543
ANGLE POA CENTROID	185.221
MIN RADIUS	.364
MEAN RADIUS	1.339
MAX RADIUS	2.301
HORIZONTAL SPREAD	1.877
VERTICAL SPREAD	4.173
EXTREME SPREAD	4.528
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	2
NUMBER IN THREE INCH CIRCLE =	3

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/7819RJS

## CENTERFIRE PATTERNS # 1

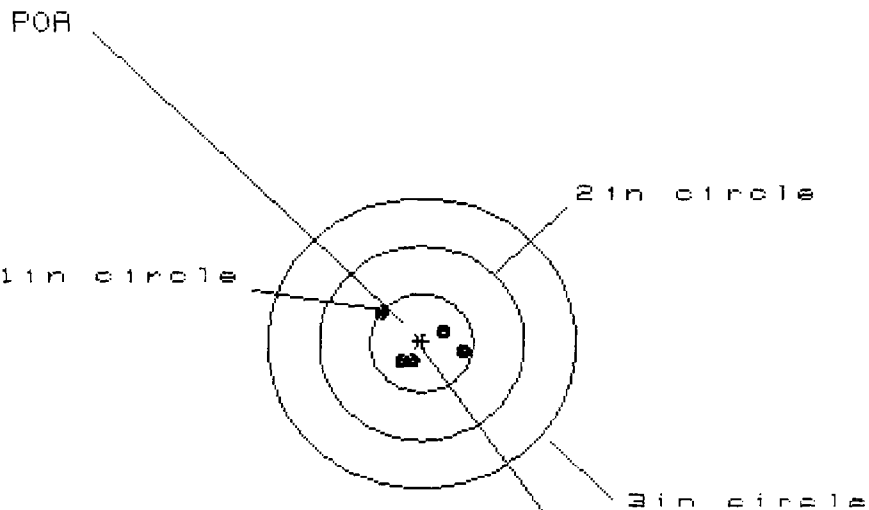

# OF SHOTS- 5

# IN CIR

1in = 4

2in = 5

3in = 5

HS= .785

VS= .544

GS= .916

1.581

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.431	.342	.202
MINIMUM X	-.354	-.257	-.143
MAXIMUM Y	.359	.164	.156
MINIMUM Y	-.105	-.095	-.103
CENTROID X	-.010	.079	-.035
CENTROID Y	-.019	-.109	-.101
POA TO CENTROID in.	.022	.134	.107
ANGLE POA CENTROID	242.959	324.153	250.777
MIN RADIUS	.160	.180	.080
MEAN RADIUS	.310	.246	.171
MAX RADIUS	.504	.343	.256
HORIZONTAL SPREAD	.785	.599	.345
VERTICAL SPREAD	.544	.259	.259
EXTREME SPREAD	.916	.603	.431
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/7819RJ5

## CENTERFIRE PATTERNS # 2

POA

1in circle

2in circle

3in circle

# OF SHOTS- 5

# IN CIR

1in = 2

2in = 5

3in = 5

HS= .618

VS= 1.289

GS= 1.290


CENTROID #

PATTERN #	2	2	2
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.339	.280	.168
MINIMUM X	-.279	-.338	-.168
MAXIMUM Y	.748	.686	.568
MINIMUM Y	-.541	-.354	-.345
CENTROID X	-.037	.022	.134
CENTROID Y	-.127	-.314	-.196
POA TO CENTROID in.	.133	.315	.238
ANGLE POA CENTROID	253.698	356.041	325.620
MIN RADIUS	.293	.120	.280
MEAN RADIUS	.547	.401	.406
MAX RADIUS	.784	.741	.593
HORIZONTAL SPREAD	.618	.618	.336
VERTICAL SPREAD	1.289	1.040	.913
EXTREME SPREAD	1.290	1.210	.928
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/7819RTJ5

## CENTERFIRE PATTERNS # 3

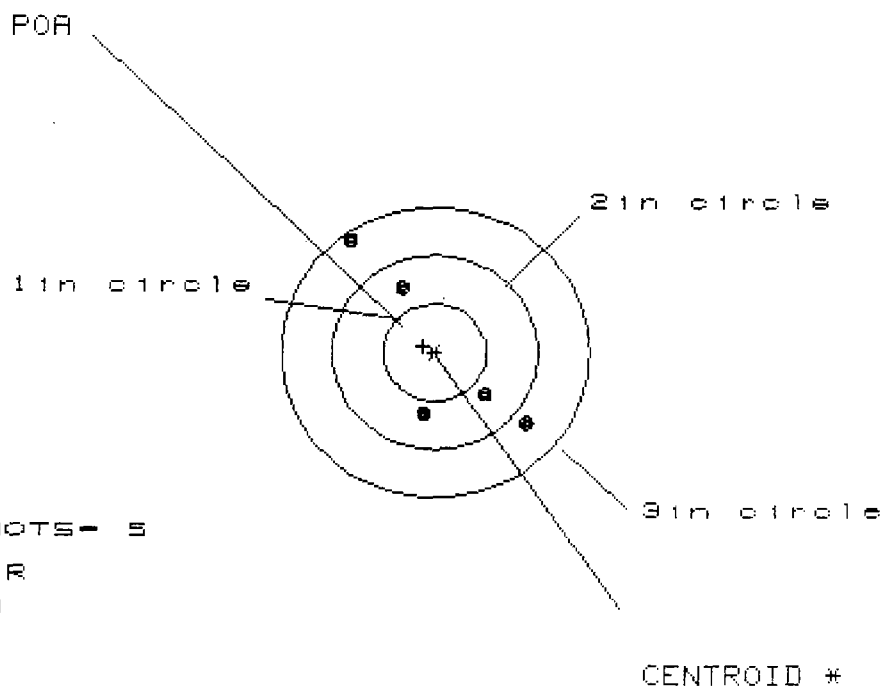

# OF SHOTS - 5

# IN CIR

1 in = 0

2 in = 3


3 in = 5

HS = 1.664


VS = 1.914

GS = 2.536

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.858	.657	.482
MINIMUM X	-.806	-.565	-.346
MAXIMUM Y	1.144	.988	.827
MINIMUM Y	-.770	-.484	-.525
CENTROID X	.116	.317	.098
CENTROID Y	-.068	-.354	-.193
POA TO CENTROID in.	.134	.476	.217
ANGLE POA CENTROID	300.496	318.154	333.001
MIN RADIUS	.631	.298	.542
MEAN RADIUS	.928	.690	.669
MAX RADIUS	1.399	1.138	.897
HORIZONTAL SPREAD	1.664	1.222	.828
VERTICAL SPREAD	1.914	1.472	1.352
EXTREME SPREAD	2.536	1.913	1.400
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

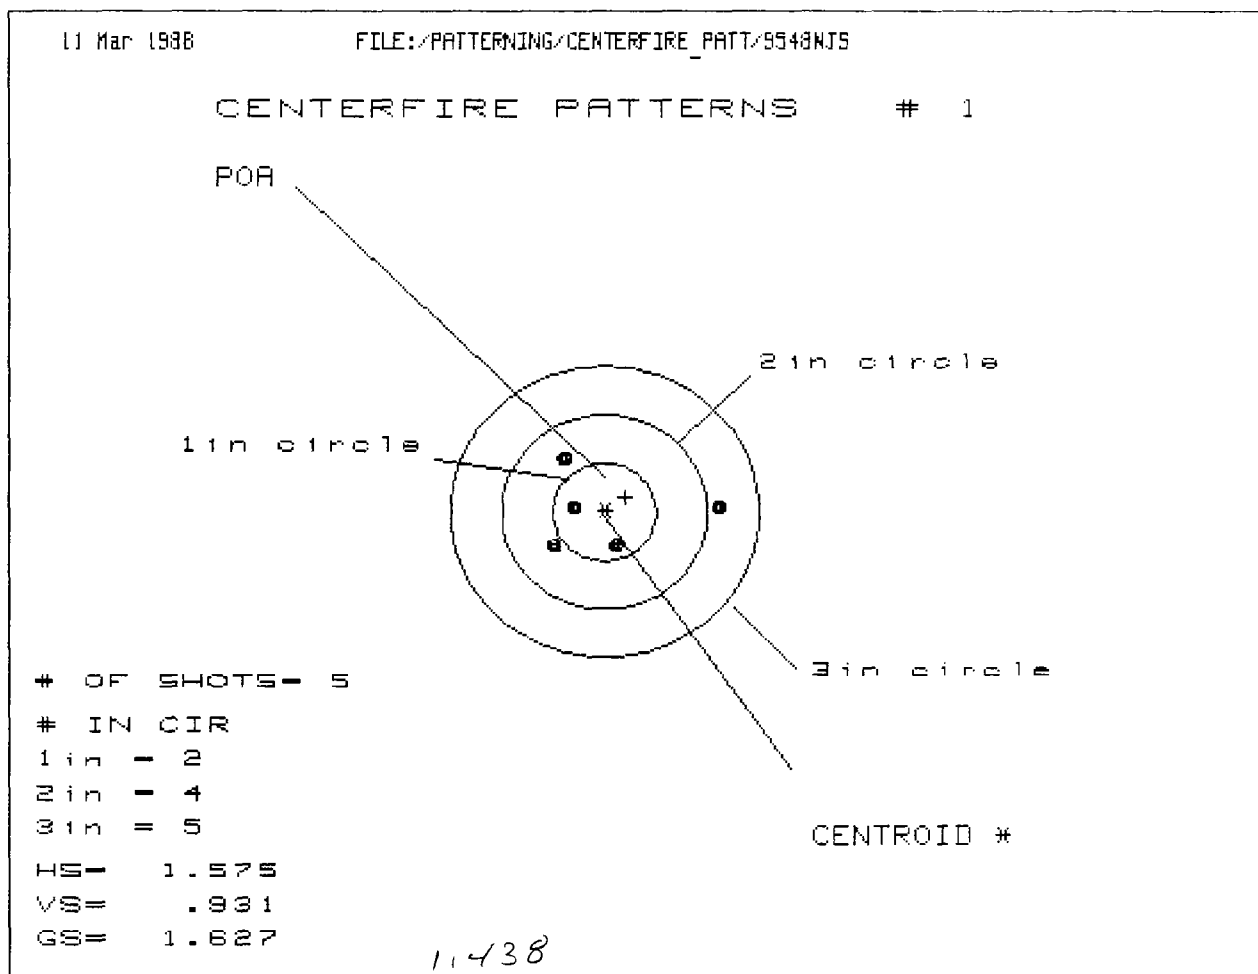

PATTERN #	1	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.074	.414	.361
MINIMUM X	-.501	-.233	-.286
MAXIMUM Y	.562	.572	.291
MINIMUM Y	-.369	-.359	-.169
CENTROID X	-.207	-.475	-.422
CENTROID Y	-.156	-.166	-.356
POA TO CENTROID in.	.259	.503	.552
ANGLE POA CENTROID	216.958	199.227	220.177
MIN RADIUS	.304	.103	.301
MEAN RADIUS	.612	.411	.338
MAX RADIUS	1.075	.594	.381
HORIZONTAL SPREAD	1.575	.647	.647
VERTICAL SPREAD	.931	.931	.460
EXTREME SPREAD	1.627	1.055	.649
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

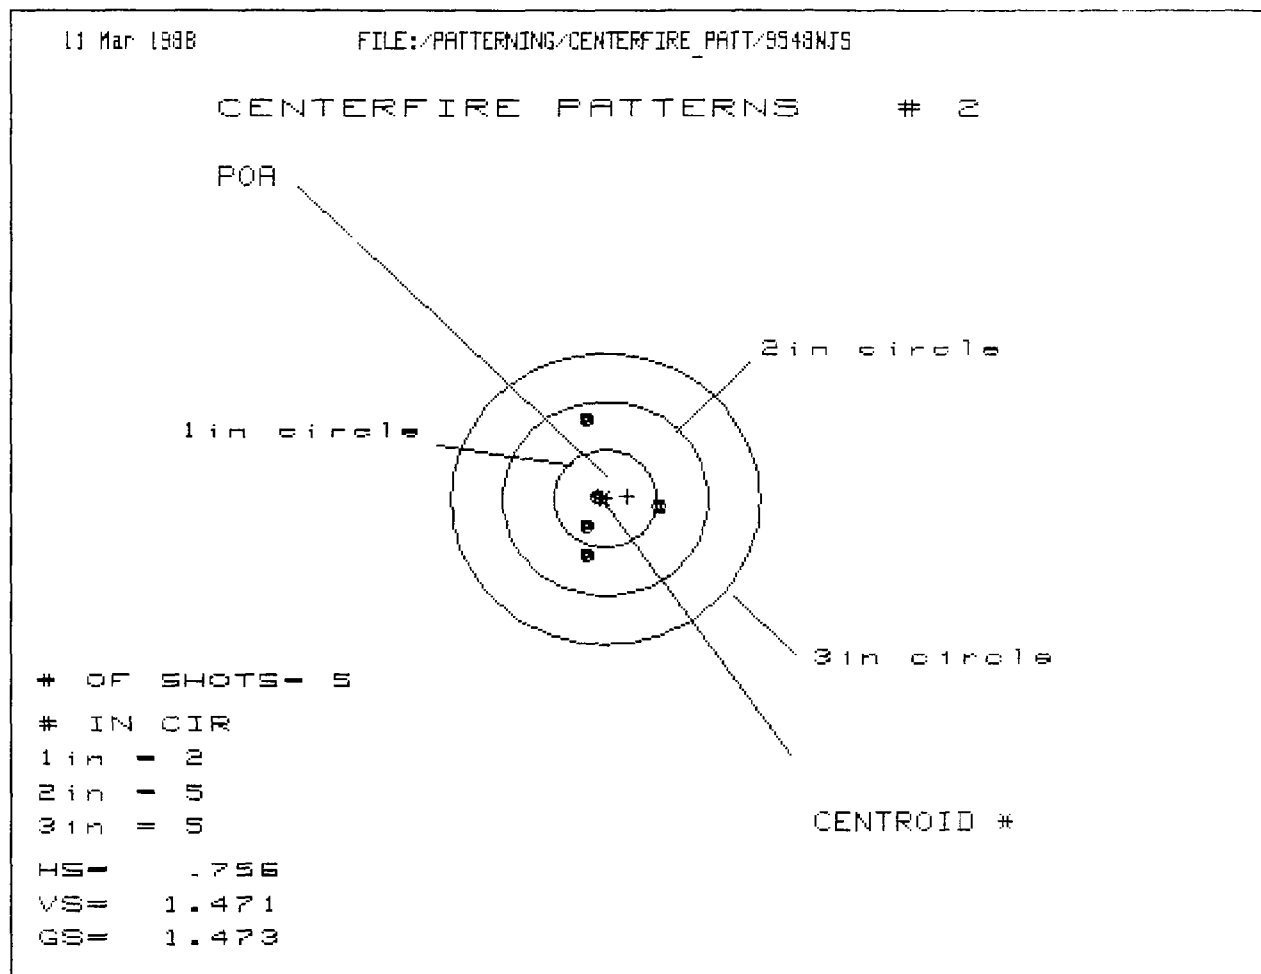


PATTERN #	:	2	4	3
SHOTS (BEST OF)	:	5	4	3
MAXIMUM X	:	.542	.489	.423
MINIMUM X	:	-.214	-.198	-.251
MAXIMUM Y	:	.857	.280	.146
MINIMUM Y	:	-.614	-.400	-.159
CENTROID X	:	-.218	-.165	-.099
CENTROID Y	:	-.026	-.240	-.106
POA TO CENTROID in.	:	.220	.291	.145
ANGLE POA CENTROID	:	186.685	235.464	227.045
MIN RADIUS	:	.084	.187	.226
MEAN RADIUS	:	.484	.361	.315
MAX RADIUS	:	.883	.510	.423
HORIZONTAL SPREAD	:	.756	.687	.674
VERTICAL SPREAD	:	1.471	.680	.305
EXTREME SPREAD	:	1.473	.878	.695
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	5		
NUMBER IN THREE INCH CIRCLE	=	5		

01 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9549MJS

## CENTERFIRE PATTERNS # 3

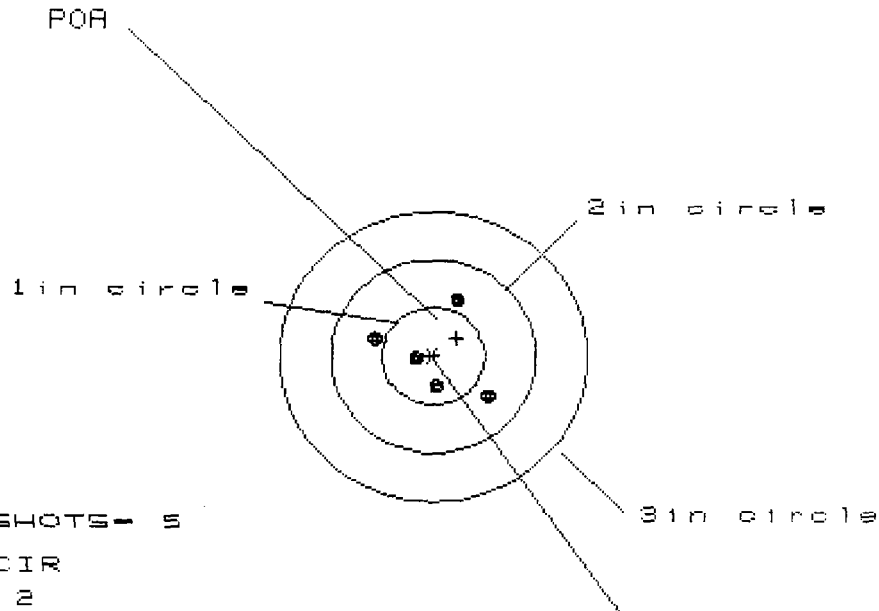

# OF SHOTS = 5

# IN CIR

1 in = 2

2 in = 3

3 in = 5

HS = 1.0000

VS = .944

GS = 1.215


PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.497	.336	.183
MINIMUM X	-.583	-.459	-.190
MAXIMUM Y	.560	.464	.489
MINIMUM Y	-.384	-.394	-.369
CENTROID X	-.231	-.355	-.202
CENTROID Y	-.186	-.089	-.115
POA TO CENTROID in.	.296	.366	.233
ANGLE POA CENTROID	218.781	194.141	209.541
MIN RADIUS	.168	.149	.224
MEAN RADIUS	.461	.403	.372
MAX RADIUS	.628	.573	.522
HORIZONTAL SPREAD	1.080	.795	.373
VERTICAL SPREAD	.944	.858	.858
EXTREME SPREAD	1.215	.885	.876
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9548RJS

## CENTERFIRE PATTERNS # 1

POA

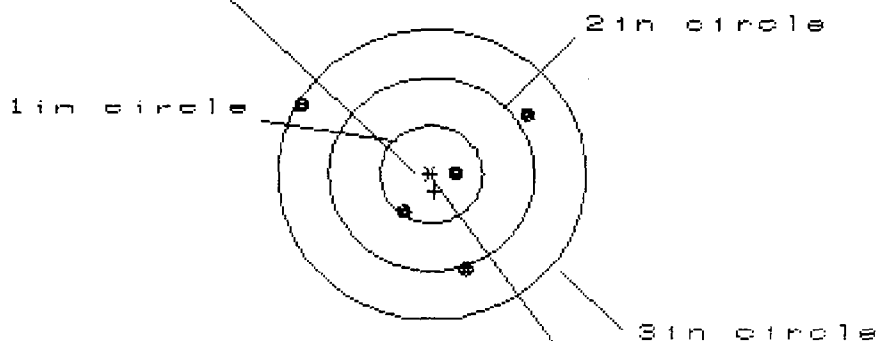

# OF SHOTS - 5

# IN CIR

1in = 2

2in = 2

3in = 5

HS= 2.177

VS= 1.675

GS= 2.265

2.165


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.951	.644	.206
MINIMUM X	-1.226	-.559	-.344
MAXIMUM Y	.702	.807	.435
MINIMUM Y	-.973	-.797	-.528
CENTROID X	-.034	.273	.058
CENTROID Y	.183	.007	-.262
POA TO CENTROID in.	.186	.273	.268
ANGLE POA CENTROID	169.513	1.470	347.518
MIN RADIUS	.230	.183	.356
MEAN RADIUS	.847	.650	.460
MAX RADIUS	1.413	1.033	.567
HORIZONTAL SPREAD	2.177	1.203	.550
VERTICAL SPREAD	1.675	1.604	.963
EXTREME SPREAD	2.265	1.732	.965
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	2		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9548RJS

## CENTERFIRE PATTERNS # 2

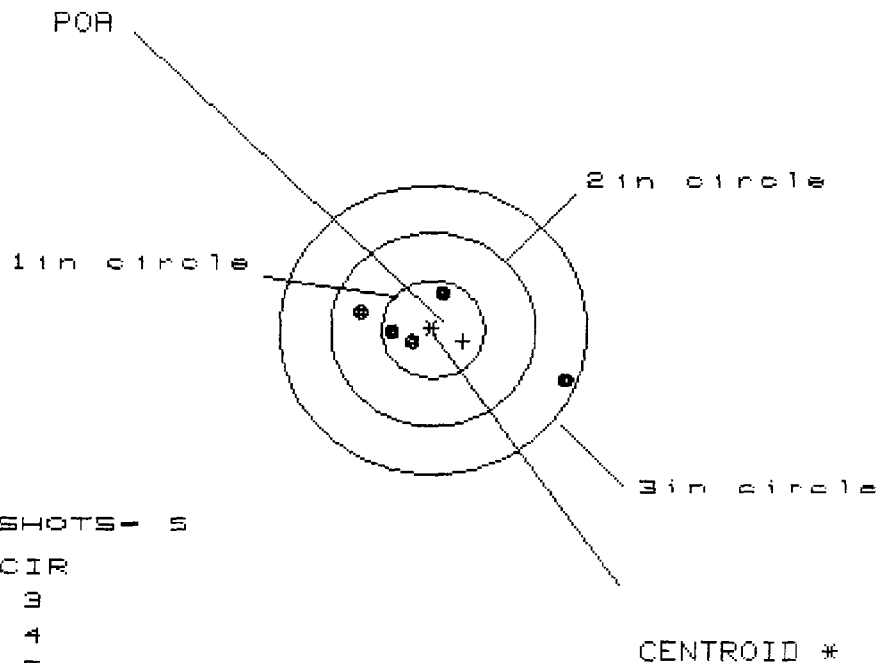

# OF SHOTS- 5

# IN CIR

1in = 3

2in = 4

3in = 5

HS= 2.000

VS= .897


GS= 2.121

PATTERN #	2		
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.257	.377	.234
MINIMUM X	-.743	-.429	-.228
MAXIMUM Y	.410	.288	.321
MINIMUM Y	-.487	-.199	-.166
CENTROID X	-.297	-.611	-.468
CENTROID Y	.119	.241	.208
POA TO CENTROID in.	.320	.656	.512
ANGLE POA CENTROID	111.861	111.514	114.012
MIN RADIUS	.192	.205	.166
MEAN RADIUS	.627	.340	.280
MAX RADIUS	1.348	.474	.397
HORIZONTAL SPREAD	2.000	.806	.462
VERTICAL SPREAD	.897	.487	.487
EXTREME SPREAD	2.121	.828	.663
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9548RJ5

## CENTERFIRE PATTERNS # 3

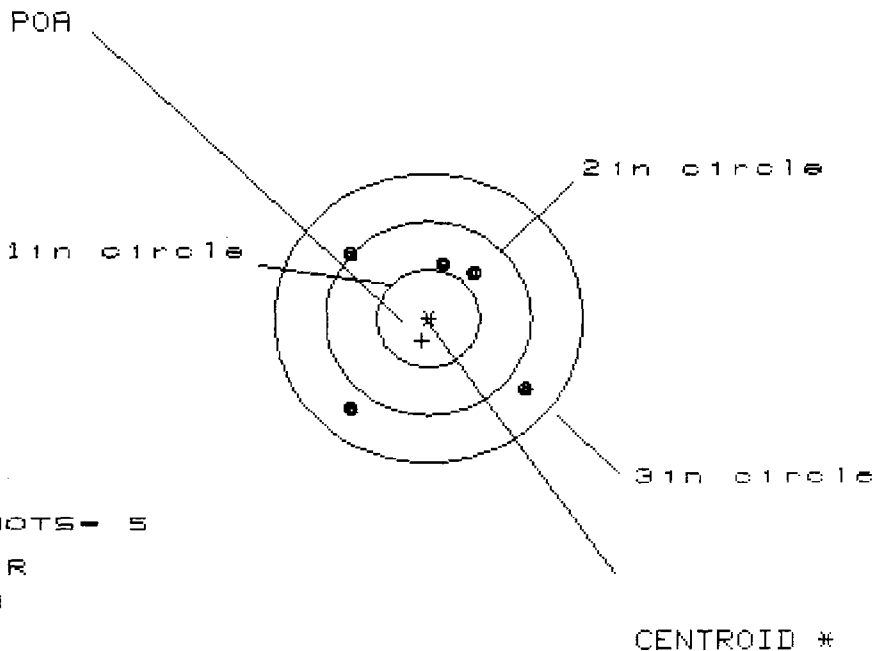

# OF SHOTS - 5

# IN CIR

1 in - 0

2 in - 3

3 in - 5

HS = 1.682

VS = 1.578

GS = 2.108


2.165

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.912	.719	.489
MINIMUM X	-.771	-.916	-.677
MAXIMUM Y	.647	.414	.109
MINIMUM Y	-.931	-.916	-.105
CENTROID X	.059	.252	.013
CENTROID Y	.230	.463	.768
POA TO CENTROID in.	.238	.527	.768
ANGLE POA CENTROID	75.531	61.418	89.056
MIN RADIUS	.553	.306	.187
MEAN RADIUS	.898	.699	.458
MAX RADIUS	1.209	1.164	.685
HORIZONTAL SPREAD	1.683	1.635	1.166
VERTICAL SPREAD	1.578	1.330	.214
EXTREME SPREAD	2.108	2.108	1.185
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9854NJS

## CENTERFIRE PATTERNS # 1

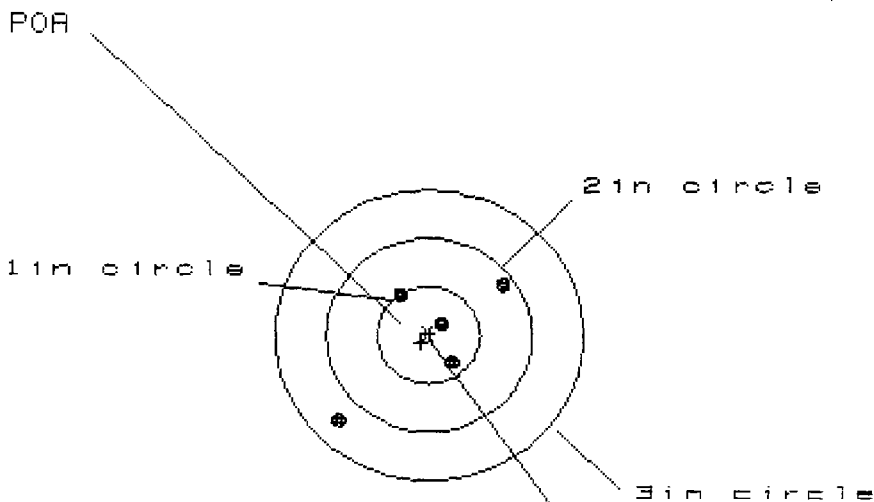

# OF SHOTS- 5

# IN CIR

1in = 3

2in = 4

3in = 5

HS= 1.588

VS= 1.427

GS= 2.135

CENTROID #


2.439

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.759	.551	.150
MINIMUM X	-.829	-.447	-.263
MAXIMUM Y	.550	.331	.314
MINIMUM Y	-.877	-.456	-.345
CENTROID X	.076	.283	.100
CENTROID Y	.077	.296	.185
POA TO CENTROID in.	.108	.410	.210
ANGLE POA CENTROID	45.150	46.212	61.730
MIN RADIUS	.195	.106	.117
MEAN RADIUS	.624	.424	.301
MAX RADIUS	1.207	.643	.409
HORIZONTAL SPREAD	1.588	.998	.413
VERTICAL SPREAD	1.427	.787	.659
EXTREME SPREAD	2.135	1.006	.778
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9854NJS

## CENTERFIRE PATTERNS # 2

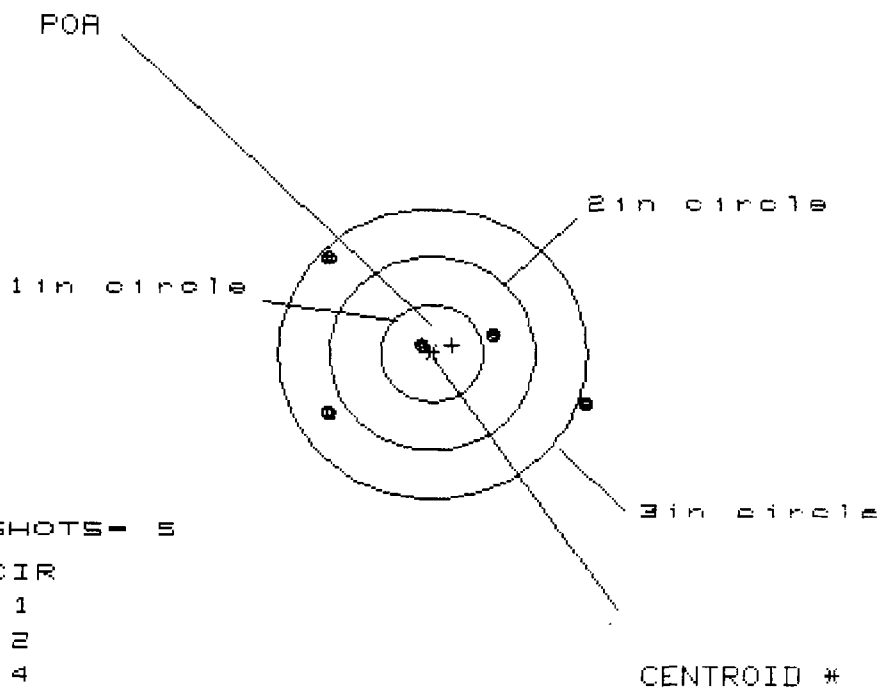

# OF SHOTS - 5

# IN CIR

1 in = 1

2 in = 2

3 in = 4

HS = 2.517

VS = 1.608


GS = 2.802

PATTERN #	2	2	2
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.509	1.002	.802
MINIMUM X	-1.008	-.631	-.831
MAXIMUM Y	.963	.829	.286
MINIMUM Y	-.645	-.779	-.503
CENTROID X	-.195	-.572	-.372
CENTROID Y	-.088	.046	-.238
POA TO CENTROID in.	.214	.574	.438
ANGLE POA CENTROID	204.191	94.621	211.705
MIN RADIUS	.167	.236	.219
MEAN RADIUS	.996	.816	.681
MAX RADIUS	1.601	1.023	.971
HORIZONTAL SPREAD	2.517	1.633	1.633
VERTICAL SPREAD	1.608	1.608	.789
EXTREME SPREAD	2.902	1.814	1.814
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	2		
NUMBER IN THREE INCH CIRCLE =	4		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9854NJS

## CENTERFIRE PATTERNS # 3

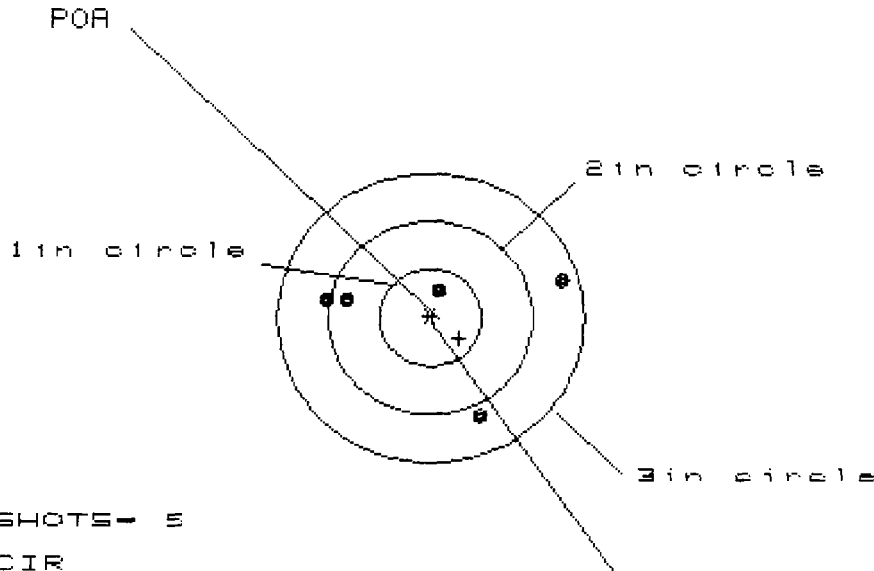

# OF SHOTS - 5

# IN CIR

1 in = 1

2 in = 2

3 in = 5

HS = 2.268

VS = 1.357


GS = 2.280

PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	1.270
MINIMUM X	-.998
MAXIMUM Y	.395
MINIMUM Y	-.962
CENTROID X	-.283
CENTROID Y	.211
POA TO CENTROID in.	.353
ANGLE POA CENTROID	126.675
MIN RADIUS	.256
MEAN RADIUS	.907
MAX RADIUS	1.330
HORIZONTAL SPREAD	2.268
VERTICAL SPREAD	1.357
EXTREME SPREAD	2.280
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	2
NUMBER IN THREE INCH CIRCLE =	5

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9854RTJ5

## CENTERFIRE PATTERNS # 1

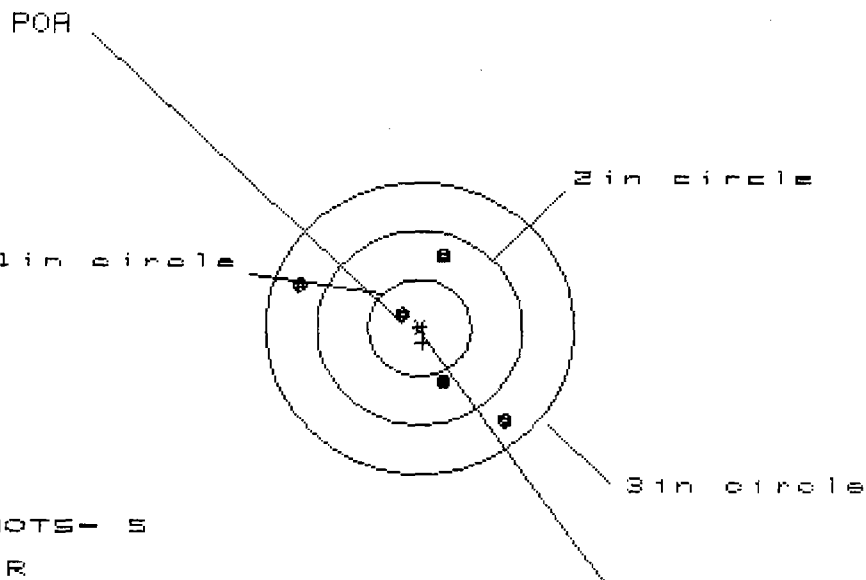

# OF SHOTS- 5

# IN CIR

1in = 1

2in = 3

3in = 5

HS= 1.986

VS= 1.636

GS= 2.434


1.824

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.855	.488	.182
MINIMUM X	-1.131	-.917	-.307
MAXIMUM Y	.725	.497	.587
MINIMUM Y	-.911	-.731	-.641
CENTROID X	-.030	-.244	.062
CENTROID Y	.153	.381	.291
POA TO CENTROID in.	.156	.452	.298
ANGLE POA CENTROID	168.834	147.347	78.049
MIN RADIUS	.289	.035	.312
MEAN RADIUS	.819	.634	.526
MAX RADIUS	1.250	.955	.653
HORIZONTAL SPREAD	1.986	1.405	.489
VERTICAL SPREAD	1.636	1.228	1.228
EXTREME SPREAD	2.434	1.677	1.229
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9854RJS

## CENTERFIRE PATTERNS # 2

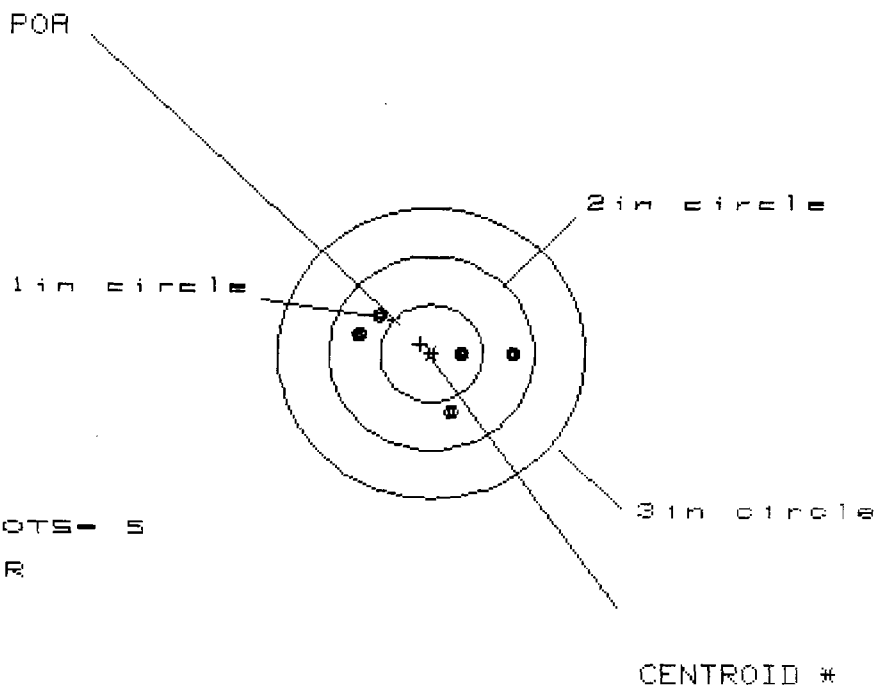

# OF SHOTS - 5

# IN CIR

1 in = 1

2 in = 5

3 in = 5

HS = 1.570

VS = 1.072

GS = 1.580

PATTERN #	2	2	2
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.833	.450	.273
MINIMUM X	-.737	-.528	-.484
MAXIMUM Y	.426	.435	.511
MINIMUM Y	-.646	-.636	-.561
CENTROID X	.109	-.100	.077
CENTROID Y	-.096	-.105	-.181
POA TO CENTROID in.	.145	.145	.197
ANGLE POA CENTROID	311.364	226.676	337.082
MIN RADIUS	.244	.450	.278
MEAN RADIUS	.637	.576	.527
MAX RADIUS	.834	.745	.704
HORIZONTAL SPREAD	1.570	.978	.757
VERTICAL SPREAD	1.072	1.072	1.072
EXTREME SPREAD	1.580	1.277	1.277
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

13 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9854RTJ5

## CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

# OF SHOTS- 5

# IN CIR

1 in = 2

2 in = 5

3 in = 5

HS= .908

VS= 1.251

GS= 1.458


CENTROID #

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.463	.352	.188
MINIMUM X	-.445	-.263	-.146
MAXIMUM Y	.488	.297	.360
MINIMUM Y	-.763	-.603	-.540
CENTROID X	-.063	.048	-.069
CENTROID Y	.075	.266	.203
POA TO CENTROID in.	.098	.270	.215
ANGLE POA CENTROID	139.805	79.752	161.143
MIN RADIUS	.358	.137	.261
MEAN RADIUS	.553	.389	.397
MAX RADIUS	.883	.623	.542
HORIZONTAL SPREAD	.908	.615	.334
VERTICAL SPREAD	1.251	.900	.900
EXTREME SPREAD	1.458	.941	.906
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9601NDT

## CENTERFIRE PATTERNS # 1

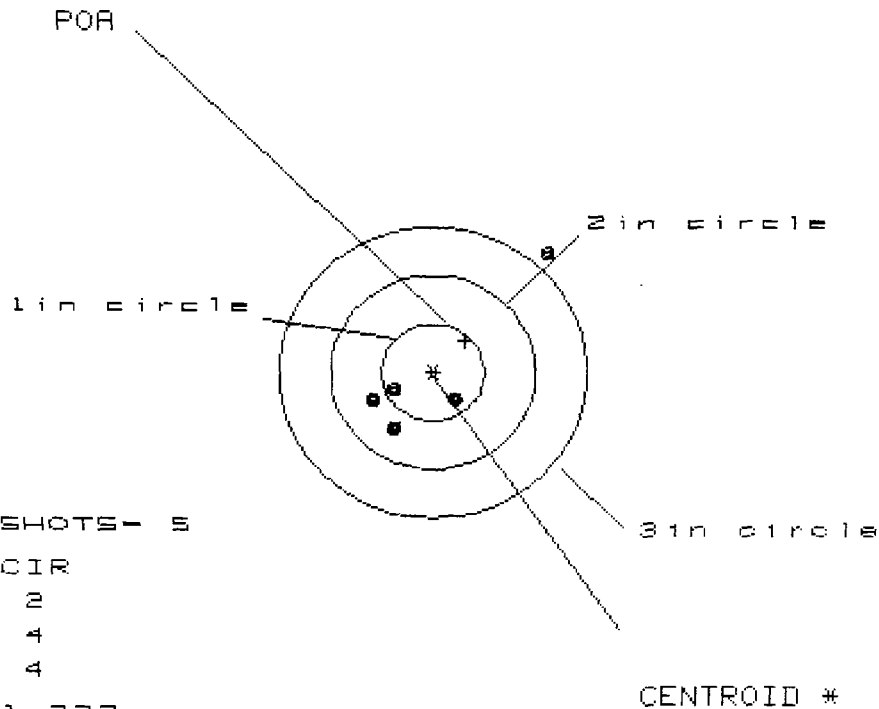

# OF SHOTS - 5

# IN CIR

1 in = 2

2 in = 4

3 in = 4

HS = 1.722

VS = 1.804

GS = 2.356


1.626

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	1.124	.527	.421
MINIMUM X	-.598	-.317	-.217
MAXIMUM Y	1.265	.148	.146
MINIMUM Y	-.539	-.223	-.225
CENTROID X	-.317	-.598	-.492
CENTROID Y	-.328	-.644	-.642
POA TO CENTROID in.	.456	.879	.909
ANGLE POA CENTROID	225.942	227.110	232.531
MIN RADIUS	.341	.178	.252
MEAN RADIUS	.759	.319	.331
MAX RADIUS	1.692	.533	.429
HORIZONTAL SPREAD	1.722	.844	.638
VERTICAL SPREAD	1.804	.371	.371
EXTREME SPREAD	2.356	.848	.706
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	4		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9601NDT

## CENTERFIRE PATTERNS # 2

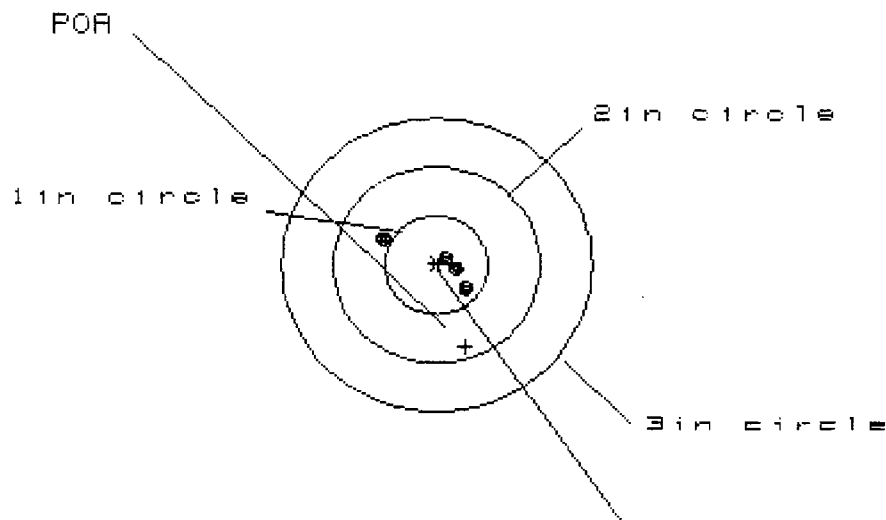

# OF SHOTS - 4

# IN CIR

1in = 3

2in = 4

3in = 4

HS = .750

VS = .478

GS = .898


CENTROID #

PATTERN #	2
SHOTS (BEST OF)	4
MAXIMUM X	.261
MINIMUM X	-.499
MAXIMUM Y	.220
MINIMUM Y	-.258
CENTROID X	-.284
CENTROID Y	.833
POA TO CENTROID in.	.890
ANGLE POA CENTROID	161.179
MIN RADIUS	.099
MEAN RADIUS	.302
MAX RADIUS	.545
HORIZONTAL SPREAD	.760
VERTICAL SPREAD	.478
EXTREME SPREAD	.898
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	4
NUMBER IN THREE INCH CIRCLE =	4

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9601NDT

## CENTERFIRE PATTERNS # 3

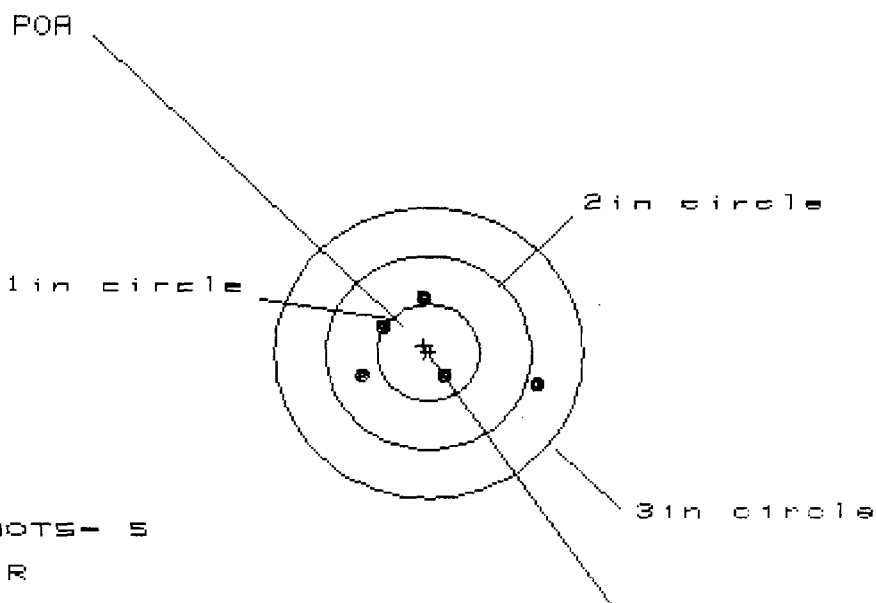

# OF SHOTS- 5

# IN CIR

1 in = 1

2 in = 4

3 in = 5

HS= 1.623

VS= .832


GS= 1.625

PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	1.013
MINIMUM X	-.610
MAXIMUM Y	.534
MINIMUM Y	-.298
CENTROID X	.047
CENTROID Y	-.072
POA TO CENTROID in.	.086
ANGLE POA CENTROID	327.010
MIN RADIUS	.285
MEAN RADIUS	.612
MAX RADIUS	1.056
HORIZONTAL SPREAD	1.623
VERTICAL SPREAD	.832
EXTREME SPREAD	1.625
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	4
NUMBER IN THREE INCH CIRCLE =	5

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9681RDT

## CENTERFIRE PATTERNS # 1

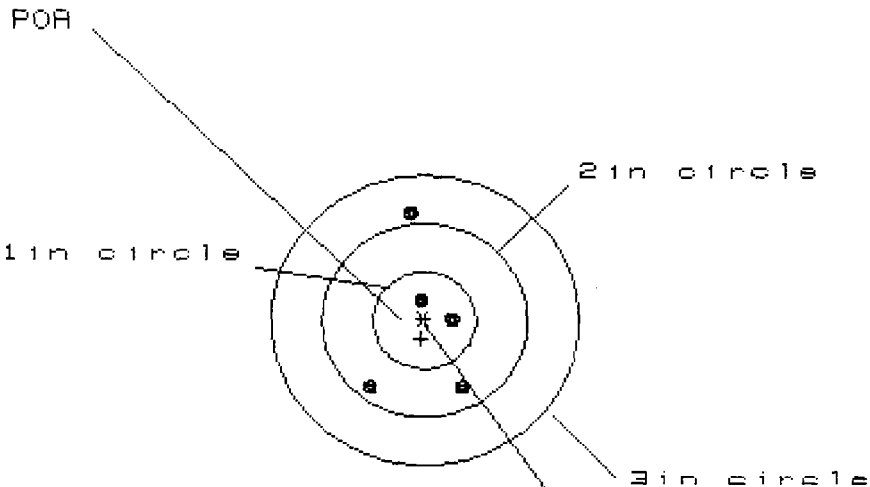

# OF SHOTS - 5

# IN CIR

1 in = 2

2 in = 4

3 in = 5

HS = .903

VS = 1.848

GS = 1.939


2.438

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.415	.372	.195
MINIMUM X	-.488	-.531	-.214
MAXIMUM Y	1.145	.517	.392
MINIMUM Y	-.703	-.416	-.541
CENTROID X	.033	.076	.253
CENTROID Y	.190	-.097	.028
POA TO CENTROID in.	.192	.123	.255
ANGLE POA CENTROID	80.185	321.849	6.241
MIN RADIUS	.230	.336	.150
MEAN RADIUS	.653	.515	.390
MAX RADIUS	1.158	.649	.575
HORIZONTAL SPREAD	.903	.903	.409
VERTICAL SPREAD	1.848	.933	.933
EXTREME SPREAD	1.939	1.019	1.019
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9601RDT

## CENTERFIRE PATTERNS # 2

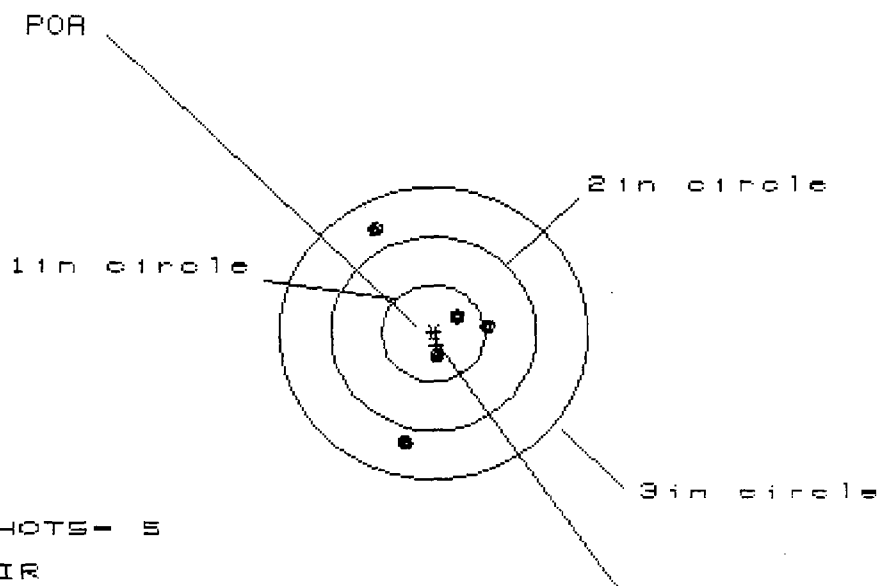

# OF SHOTS - 5

# IN CIR

1in = 2

2in = 3

3in = 5

HS = 1.0000

VS = 2.217

GS = 2.233


CENTROID #

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.514	.440	.227
MINIMUM X	-.566	-.640	-.211
MAXIMUM Y	1.056	.765	.180
MINIMUM Y	-1.161	-.484	-.229
CENTROID X	-.029	.045	.258
CENTROID Y	.125	.416	.161
POA TO CENTROID in.	.129	.418	.304
ANGLE POA CENTROID	166.805	83.857	31.912
MIN RADIUS	.208	.211	.181
MEAN RADIUS	.694	.545	.241
MAX RADIUS	1.199	.997	.311
HORIZONTAL SPREAD	1.080	1.080	.438
VERTICAL SPREAD	2.217	1.249	.409
EXTREME SPREAD	2.233	1.453	.518
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9681RDT

## CENTERFIRE PATTERNS # 3

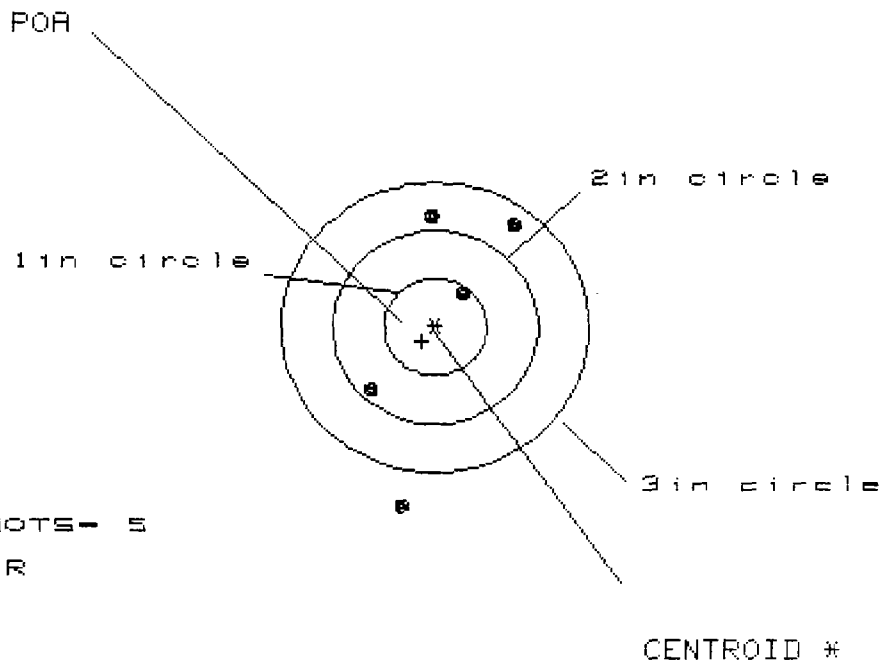

# OF SHOTS - 5

# IN CIR

1in = 1

2in = 2

3in = 4

HS = 1.424

VS = 2.985


GS = 3.141

PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	.794
MINIMUM X	-.630
MAXIMUM Y	1.116
MINIMUM Y	-1.869
CENTROID X	.129
CENTROID Y	.146
POA TO CENTROID in.	.195
ANGLE POA CENTROID	48.527
MIN RADIUS	.471
MEAN RADIUS	1.147
MAX RADIUS	1.906
HORIZONTAL SPREAD	1.424
VERTICAL SPREAD	2.985
EXTREME SPREAD	3.141
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	2
NUMBER IN THREE INCH CIRCLE =	4

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9568NJS

## CENTERFIRE PATTERNS # 1

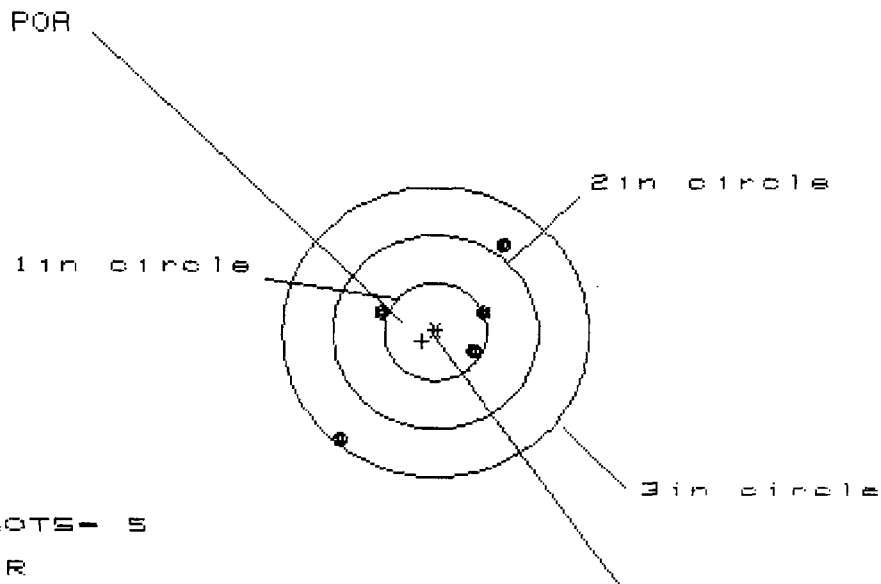

# OF SHOTS- 5

# IN CIR

1 in = 2

2 in = 3

3 in = 5

HS= 1.562

VS= 1.933

GS= 2.485

CENTROID \*


1,468

PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.626	.392	.336
MINIMUM X	-.936	-.744	-.613
MAXIMUM Y	.874	.609	.164
MINIMUM Y	-1.059	-.465	-.262
CENTROID X	.131	.365	.234
CENTROID Y	.096	.361	.158
POR TO CENTROID in.	.162	.513	.283
ANGLE POR CENTROID	36.390	44.724	34.084
MIN RADIUS	.430	.230	.350
MEAN RADIUS	.789	.547	.455
MAX RADIUS	1.414	.745	.634
HORIZONTAL SPREAD	1.562	1.136	.949
VERTICAL SPREAD	1.933	1.074	.426
EXTREME SPREAD	2.485	1.308	.987
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9568NJS

## CENTERFIRE PATTERNS # 2

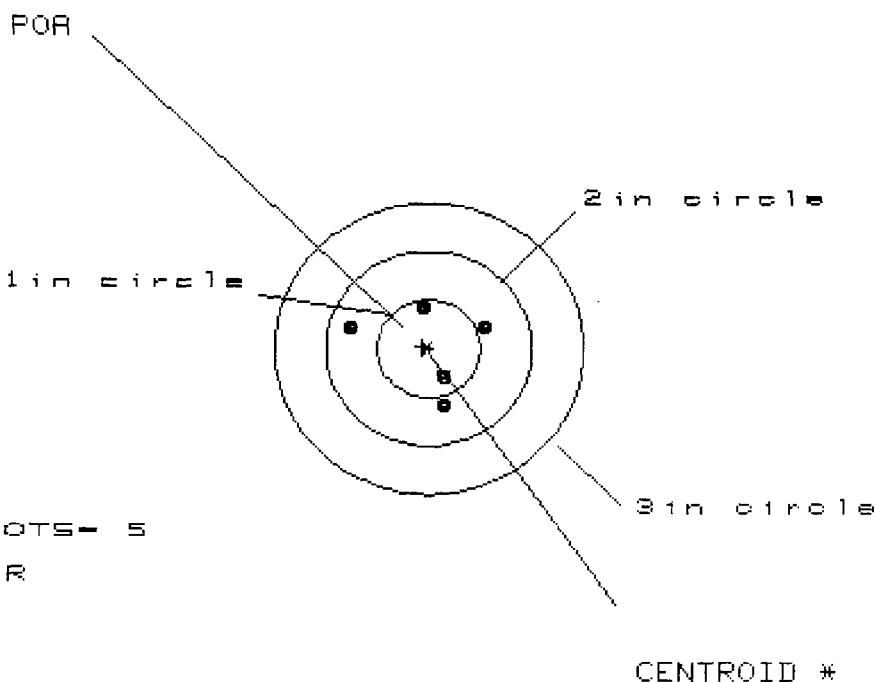

# OF SHOTS- 5

# IN CIR

1 in = 2

2 in = 5

3 in = 5

HS= 1.346

VS= 1.017


GS= 1.346

PATTERN #	2	2	2
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.567	.372	.087
MINIMUM X	-.779	-.234	-.110
MAXIMUM Y	.446	.496	.574
MINIMUM Y	-.571	-.521	-.443
CENTROID X	.057	.252	.128
CENTROID Y	-.026	-.076	-.154
POA TO CENTROID in.	.063	.263	.201
ANGLE POA TO CENTROID	294.278	286.835	320.329
MIN RADIUS	.277	.233	.134
MEAN RADIUS	.543	.436	.390
MAX RADIUS	.805	.549	.585
HORIZONTAL SPREAD	1.346	.606	.197
VERTICAL SPREAD	1.017	1.017	1.017
EXTREME SPREAD	1.346	1.036	1.036
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9568NJS

## CENTERFIRE PATTERNS # 3

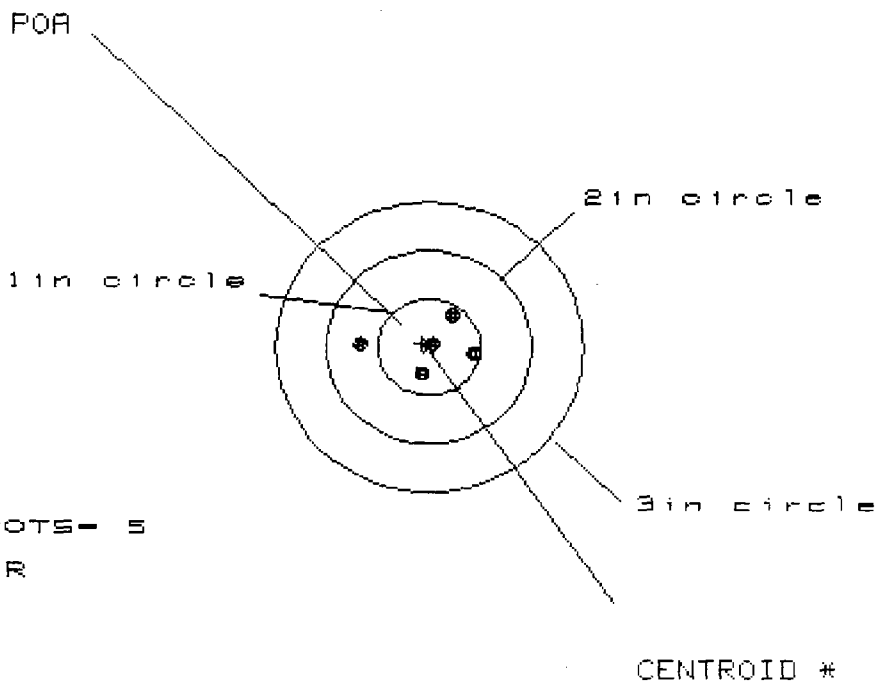

# OF SHOTS- 5

# IN CIR

1 in = 4

2 in = 5

3 in = 5

HS= 1.164

VS= .547


GS= 1.172

PATTERN #	3
SHOTS (BEST OF)	5
MAXIMUM X	.462
MINIMUM X	-.702
MAXIMUM Y	.299
MINIMUM Y	-.248
CENTROID X	.070
CENTROID Y	-.036
POA TO CENTROID in.	.079
ANGLE POA CENTROID	297.345
MIN RADIUS	.068
MEAN RADIUS	.372
MAX RADIUS	.703
HORIZONTAL SPREAD	1.164
VERTICAL SPREAD	.547
EXTREME SPREAD	1.172
NUMBER IN ONE INCH CIRCLE =	4
NUMBER IN TWO INCH CIRCLE =	5
NUMBER IN THREE INCH CIRCLE =	5

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9568RJS

## CENTERFIRE PATTERNS # 1

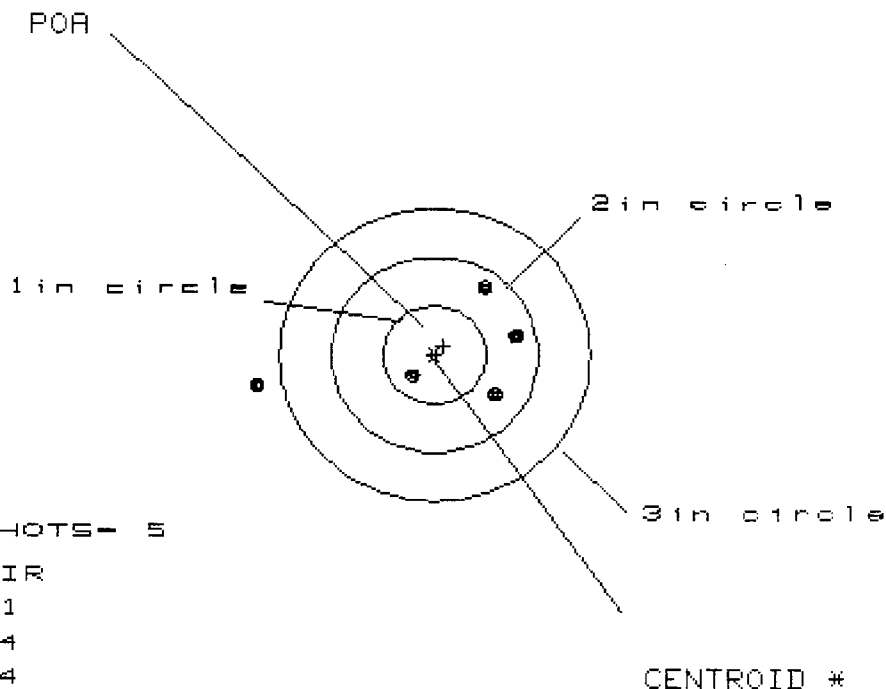

# OF SHOTS- 5

# IN CIR

1 in = 1

2 in = 4

3 in = 4

HS= 2.547

VS= 1.090

GS= 2.597

2.088


PATTERN #	1	2	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.826	.396	.417
MINIMUM X	-1.721	-.641	-.620
MAXIMUM Y	.722	.637	.291
MINIMUM Y	-.368	-.453	-.241
CENTROID X	-.087	.343	.322
CENTROID Y	-.094	-.009	-.221
POA TO CENTROID in.	.128	.344	.390
ANGLE POA CENTROID	227.402	271.501	304.531
MIN RADIUS	.276	.403	.314
MEAN RADIUS	.892	.556	.482
MAX RADIUS	1.755	.693	.622
HORIZONTAL SPREAD	2.547	1.037	1.037
VERTICAL SPREAD	1.090	1.090	.532
EXTREME SPREAD	2.597	1.144	1.092
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	4		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9568RJ5

## CENTERFIRE PATTERNS # 2

POA

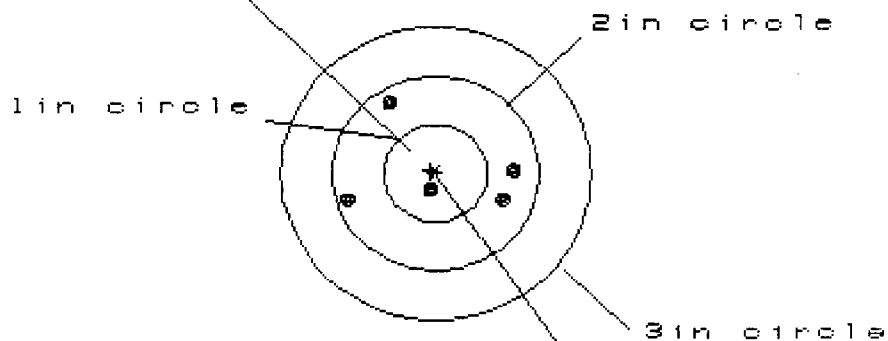

# OF SHOTS- 5

# IN CIR

1in - 1

2in - 5

3in = 5

HS- 1.638

VS= .973

GS= 1.664

CENTROID #

PATTERN #	2	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.758	.538	.324
MINIMUM X	-.880	-.644	-.498
MAXIMUM Y	.696	.627	.157
MINIMUM Y	-.277	-.344	-.135
CENTROID X	.048	.268	.482
CENTROID Y	-.033	.036	-.173
POA TO CENTROID in.	.058	.270	.512
ANGLE POA CENTROID	304.782	7.658	289.732
MIN RADIUS	.174	.366	.221
MEAN RADIUS	.668	.581	.360
MAX RADIUS	.922	.899	.499
HORIZONTAL SPREAD	1.638	1.182	.822
VERTICAL SPREAD	.973	.971	.292
EXTREME SPREAD	1.664	1.418	.841
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

11 Mar 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/9568RJS

## CENTERFIRE PATTERNS # 3

POA

1in circle

2in circle

3in circle

# OF SHOTS- 5

# IN CIR

1in = 1

2in = 4

3in = 5

HS= 1.268


VS= 1.855

GS= 2.003

CENTROID \*

PATTERN #	3	4	3
SHOTS (BEST OF)	5	4	3
MAXIMUM X	.444	.436	.159
MINIMUM X	-.824	-.832	-.133
MAXIMUM Y	1.351	.352	.302
MINIMUM Y	-.504	-.166	-.216
CENTROID X	-.024	-.016	.261
CENTROID Y	-.290	-.628	-.578
POA TO CENTROID in.	.291	.628	.635
ANGLE POA CENTROID	265.315	268.541	335.683
MIN RADIUS	.152	.302	.181
MEAN RADIUS	.722	.491	.243
MAX RADIUS	1.352	.845	.330
HORIZONTAL SPREAD	1.268	1.268	.292
VERTICAL SPREAD	1.855	.518	.518
EXTREME SPREAD	2.003	1.273	.529
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		5	

M700 ISCAR POLYMER METAL

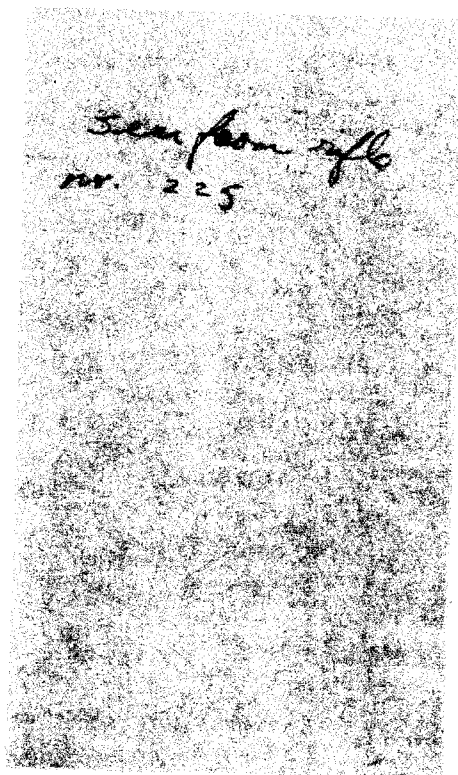

used in 721, 722, 700, 600

A 15436 Connector M 600, 660  
 A 19461 Connector M 721, 722, 700  
 B 19461 Connector M 721, 722, 700 Current print.

1B17945 Safety Cam (Blank) 721, 722, 700  
 2B17945 Safety Cam 721, 722, 40X  
 B15369 Safety Cam M 600, 700, 40XB

1B17946 Seal (Blank) M 721, 722, 725, 700  
 2B17946 Seal M 721, 722, 725, 700

1C 1794B Seal (Blank) M 721, 722, 725 - Before 61  
 1C 17946 Seal M 721, 722, 725

N 26590 <sup>Introduced in 1961</sup> Seal Safety Cam assembly (2pc.) M 600, 700

N 22045 Seal Safety Cam assembly (2pc.) M 721, 722

C 15666 <sup>Introduced 1966</sup> Seal Safety Cam assembly M 600, 700

CC: R.A. Williamson  
H.J. Hackman  
L.J. Boyle  
W.C. Schrader  
~~M.H. Walker~~ *Brooks*  
A.J. Seckner) In  
D.E. Geiss ) turn  
V.G. DeRus  
Estimate File #2502

April 13, 1966

A.D. KERR

MODEL 600-700 SEAR AND SAFETY CAM ASSEMBLY  
USING INVENTORIES OF OLD DESIGN PARTS VERSUS  
THEIR DISPOSAL AND SUBSTITUTING WITH THE  
NEW ONE-PIECE POWDER METAL ASSEMBLY

It is our understanding that approximately 40,000 Sears and Safety Cams are on the plant in the "as received" condition.

In view of the apparent attractive cost for the new one-piece powder metal design, a review has been made to determine an economic disposition of the parts on hand.

Discounting the purchase price, the estimated direct cost to complete these parts into Sear and Safety Cam Assemblies is \$11,500. The estimated cost to produce (per our present process) 40,000 of the one-piece powder metal assemblies is \$4,300. This indicates a gross savings of \$7,200 in plant operating costs with the powder metal component.

When sufficient quantities of new parts are available to meet production requirements, it would seem economically advisable to dispose of any old part inventories in the "as received" condition.

F. G. Carlson, Supervisor  
Methods & Standards Section

*R. F. Kerr*  
R. F. Kerr

RFK:am

cc: R.A. Williamson  
 S.M. Alvis  
 H.J. Hackman  
 V.G. DeReus  
 A.J. Seckner) In  
 D.E. Geiss )  
 Estimate File #2502

April 4, 1966

M. H. WALKER


**MODELS 700, 600, 100, 40XB - SEAR AND SAFETY CAM ASSEMBLY  
 COST COMPARISON - OLD TWO-PIECE DESIGN VERSUS  
NEW POWDER METAL SINGLE-PIECE CONSTRUCTION**

In response to your recent request, estimates have been developed to show a comparison of full factory costs. Costs for the proposed single-piece powder metal design are based on the common process just released by PE&C.

Sear and Safety Cam Assembly	Present Part No.	Estimated Cost per 100		Estimated Reduction per 100
		Present	Proposed	
Model 700, 600	26591	\$ 53.91	* 14.72	* 39.19
Model XP-100	26735	54.10	14.72	39.38
Model 40XB	26591	63.97	14.72	49.25

Our 1966-#2 Sales Forecast totaling 87,125 units, shows a full factory cost reduction of approximately \$34,300 with the new process.

F. G. Carlson, Supervisor  
 Methods & Standards Section

  
 R. F. Kerr

RFK:sm

cc: J.E. Leek  
 C.E. Morris  
 R.H. Walker  
 J.W. Brooks  
 R.H. Wetmore  
 R.P. Kelly

Ilion, New York  
 June 23, 1966

MEMORANDUM

TO: C. E. Wetmore *CPM*

FROM: A. A. Hugick

DROP TESTING OF MODEL 600 POWDER METAL SEARS

The enclosed drop test procedure was organized and conducted using the M/600 with one piece powder metal sears. Drop testing at ten inches corresponds to the test manual standard and waist high drop testing (45") was included for increasing drop test severity. A sample of chrome plate powder metal sears produced to date was included for drop test purposes. Sears numbered 1 thru 5 are old style sears with the large .003 inch radius at the connector surface edge. Sear numbered 6 thru 8 are new sears with .001 inch radius at the connector surface edge.

Fire control adjustments were made by production prior to drop testing.

Listed below are M/600 powder metal sear drop test observations:

1. The measured RC hardness of the new PM samples was 45 RC average versus 50 RC average for old samples.
2. No malfunctions were experienced at the normal drop height of 10".
3. Page 2 contains listed jar-off malfunctions encountered during the waist high M/600 drop testing. These high drop malfunctions are similar to prior test results of May 1964 special "Jar-off" testing.
4. Tight sear pin holes of the new sears were polished out prior to drop testing.
5. Minor chipping of the sear connector edge of the old sear was noticed when examined with a 20X glass.

RECOMMENDATION

Based on M/700 and M/600 chrome plated powder metal sear testing, the new chromed powder metal sears should be considered for use in the M/600.

AAH:ig  
 Enc.


M600 POWDER METAL SEAR  
 CHROME PLATED POWDER METAL SEAR  
 DATA FOR DROP TESTING COMPUTER AAH.

PROJ NO.

WORKS

DATE 6-9-66

SEAR NUMBER	TOTAL NUMBER OF DRY CYCLES	SEAR RADIUS AT CONNECTION EDGE	SEAR COMPONENT WEIGHT & HARDNESS	AVE. TRIB. PULL AT BEGINNING AND END OF TEST
1	0	.0034	9.3900 gr. 48 RC SCALE	5.77 - 5.60
2	0	.0039	9.3705 gr. 51 RC SCALE	6.25 - 5.30
3	0	.0042	9.3655 gr. 53 RC SCALE	5.45 - 5.70
4	0	.0039	9.4176 gr. 51.5 RC SCALE	5.00 - 4.85
5	0	.004	9.4423 gr. 53 RC SCALE	5.50 - 5.05
6	0	.0005 <sup>+</sup>	9.5337 gr. 44.5 RC SCALE	5.50 - 5.50
7	0	.000 <sup>+</sup>	9.5182 gr. 46.5 RC SCALE	5.90 - 5.70
8	0	.0012	9.4955 grams 45.0 RC SCALE	5.25 - 5.50

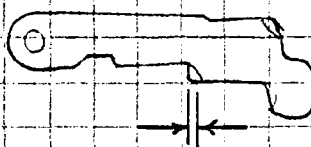

SEAR RADIUS AT CONNECTION EDGE MEASURED  
 ON THE OPTICAL COMPARATOR.

WAIST HIGH IS TAKEN AS 45 INCHES.

M 600 POWDER METAL SEAR  
 DROP TEST RESULT WITH M600  
 PM SEAR TESTING

PROJECT

WORKS

COMPUTED

AAH.

DATE 6-14-66

TYPE OF SEAR TESTED	NUMBER OF FAILURES	DROP TEST STEP NO.	NUMBER OF SEARS TESTED	TEST GUN SERIAL NO.	COMMENTS
STANDARD PROD.	1	VI-2	2	20344	
STANDARD PROD.	1	VI-4	2	20344	
FIRST PM.	0	—	1	—	
LARGE CON. RAD.	1	VI-4	4	1167	
LAST SHARP SEARS	1	VI-3	3	1167	
LAST SHARP SEARS	1	VI-2	3	20344	

VI JAR OFF TEST

A. DROP GUN "WAIST HIGH" ON SOLID WOOD SURFACE WITH SAFETY OFF.

1. BUTT DOWN

2. MUZZLE DOWN

3. TOP SIDE DOWN

4. BOTTOM SIDE DOWN

B. TRIGGER SHALL BE TRIED AFTER EACH DROP TO DETERMINE WHETHER THE SAFETY HAS RELEASED ANY MECHANISM WHICH MAY ALLOW FIRING.

C. THREE DROPS PER POSITION.

"WAIST HIGH" IS TAKEN AS 45 INCHES.

## CHRONOLOGICAL RECORD OF TESTING

MODEL & DESCRIPTION m/600 New P.M. seas.  
 CALIBER or GAUGE 308 ~~that that was~~ (LATEST - SHARP)  
 DATE 6-3-66 TEST P.M. Seal Drop Test (re-test) TESTER J. Hennings. PAGE NO.

barrels - " m/600 20344 were used placing different seals in these two barrels only. (3 seals)

✓ Test - I - Trigger pulls & firing pin indents (on sep. sheets.)

✓ Test - II - No malfunctions noticed.

✓ Test - III - (butt down) seal # 2 had a total of 3 drops in which the safety was jarred to the "ON" pos.

✓ Test - IV - No malfunctions noticed.

✓ Test - V - (muzzle down) seals # 1, 2, 3 had a total of 7 drops in which the safety was jarred to the "OFF" pos.

Test - VI - (butt down) - seal # 1 - on all three drops the safety was jarred to the "ON" pos.

(muzzle down) - seal # 3 on second drop gun fired.

top-side down - seal # 2 on first drop gun fired.

## CHRONOLOGICAL RECORD OF TESTING

MODEL & DESCRIPTION *M/600 New P.M. sears.*CALIBER or GAUGE *308 (LARGE RAP. SEAR*DATE *6-2-66* TEST *P.M. Sear Drop Test* TESTER *J. Hennings.* PAGE NO.

✓ Barrels # *1167 & 20344* were used placing different sears in these two barrels only.

✓ Test - I - Trigger pulls + firing pin indents (on sep. sheets)

✓ Test - II - No malfunctions noticed.

✓ Test - III - (~~butt~~ <sup>muzzle</sup> down) - sears # *1+2* had a total of *5* drops in which safety jarred to "ON" position.

✓ Test - IV - No malfunctions noticed.

✓ Test - V - (butt down) - sears # *3,3,4,5* had a total of *13* drops in which safety jarred to "OFF" position.

TEST - VI - (muzzle down) - sears # *2,3,4* had a total of *9* drops in which safety was jarred to "ON" position.  
(top side down) - sear # *2* - on third drop bolt jarred open.

(bottom side down) - sear # *4* on second drop the jar fired the firing pin.

NOTE! ON BOTH ACTIONS - PIN HOLE WAS TIGHT CAUSING SEAR TO BIND!

## CHRONOLOGICAL RECORD OF TESTING

MODEL & DESCRIPTION	DATE	TEST	TESTER	PAGE NO.
m/000 std. rear drop test.				
CALIBER or GAUGE	308			
PRESENT PRODUCTION (2 piece)				

6-13-66 661.s # 11674 20344 308 cal. m/000  
were dropped from various pos. with  
std. rears in fire-control

#1167 all tests ok except Test V. muzzle-down  
waist high the safe jared to "off" pos. on all 3 drops

" 20344 Tests I-IV OK

Test II - (butt down waist high) → safe jared to "off" pos. on all 3 drops

Test VI → (muzzle-down waist high) on 1<sup>st</sup> drop gun fired

Test VII → (bottom-side down waist high) - on 3<sup>rd</sup> drop gun fired

Test VIII → (butt down waist high) → safe jared to "on" pos. on 3<sup>rd</sup> drop

RD-69-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

DROP TEST PROCEDURE

MEASUREMENT and TEST LAB

- I. Trigger Pull and Firing Pin Indent
  - A. Take five samples.
  
- II. Safety Mechanism Shock Test
  - A. Drop gun ten inches on solid wood surface with safety "ON".
    - 1. Butt down
    - 2. Muzzle down
    - 3. Topside down
    - 4. Bottom down
  - B. The Trigger shall be tried after each drop to determine whether the safety has released any mechanism which may allow firing.
  - C. Three drops per position.
  
- III. Far-Off Test
  - A. Drop gun ten inches on solid wood surface with safety "OFF".
    - 1. Butt down
    - 2. Muzzle down
    - 3. Topside down
    - 4. Bottomside down
  - B. The Trigger shall be tried after each drop to determine whether the safety has released any mechanism which may allow firing.
  - C. Three drops per position.

AAH:T  
566

DROP TEST PROCEDURE - Measurement & Test Lab

IV. Safety Operations Test

- A. This test is for testing the safety mechanism.
  - 1. Cock gun
  - 2. Put Safety "ON"
  - 3. Try Trigger
  - 4. Release the Safety
  - 5. Pull Trigger
  - 6. Record if Trigger functions with Safety on
  - 7. Record if Firing Pin fell when Trigger was pulled
- B. Make 50 trials.

V. Safety Mechanism Shock Test

- A. Drop gun "waist height" on solid wood surface with safety "ON".
  - 1. Butt down
  - 2. Muzzle down
  - 3. Topside down
  - 4. Bottomside down
- B. The Trigger shall be tried after each drop to determine whether the Safety has released any mechanism which may allow firing.
- C. Three drops per position.

VI. Jar Off Test

- A. Drop gun "waist height" on solid wood surface with safety "OFF".
  - 1. Butt down
  - 2. Muzzle down
  - 3. Topside down
  - 4. Bottomside down
- B. Trigger shall be tried after each drop to determine whether the safety has released any mechanism which may allow firing.
- C. Three drops per position.

VII. Gun Function Check

- A. Trigger pull
- B. Firing pin indent
- C. Take sample of five.

AAH:T  
566

Elion, New York  
June 13, 1966

MEMORANDUM

To: C. R. Workman

From: A. A. Hugick

DROP TESTING OF MODEL 700 POWDER METAL SEARS

The enclosed drop test procedure was organized and conducted using M/700 powder metal sears. Two samples of M/700 sears were submitted for drop testing at this time.

Sample No. 1 consisted of M/700 chrome plated powder metal sears with approximately .003" radius when received from Production and had been cock-and-fire dry cycled for 30,000 cycles each. No malfunctions of the sear were encountered during drop testing of sample No. 1 sears.

Sample No. 2 consisted of M/700 chrome plated powder metal sear with approximately .0005-.001" radius at the connector edge, increased density, and zero dry cycles. No malfunctions of the sear were experienced during drop test of the M/700. This sample of sears had tight pin holes and had to be polished out for testing.

The fire control adjustment was made by Production prior to the dry cycle and drop testing. Hardness measurements on the RC scale varied from 38.5 RC to 54.5 RC. This variation of measured RC hardness should be clarified. *Kelly Chubbick said that the hardness was not uniform.*

Recommendations:

Based on test results of submitted test samples, the chrome plated powder metal sears should be considered for use in the M/700.

If the hardness difference is considered significant, some of the latest, softer sears should be dry cycled for wear on the sear connector edge.

Enc.  
AHC

REMINGTON ARMS COMPANY, INC.

ENGINEERING DEPARTMENT COMPUTATION SHEET

SHEET NO.

M700 PM SEAR TEST  
 DROP TEST SEAR DATA.  
 DRAWN BY AAH


PROJECT

WORKS

DATE

SAMPLE NUMBER ONE				
SEAR NUMBER	TOTAL NUMBER OF DRY CYCLES	SEAR RADIUS AT CONNECTOR EDGE	SEAR COMPONENT WEIGHT & HARDNESS	Avg. TRIG. Pull @ BEGINNING AND END OF TEST
153959	30,000	.0045	9.3685 GRAMS 38.5 RC SCALE	5.10 - 5.10
139298	30,000	.0035	9.4080 gr 52 RC SCALE	5.20 - 5.15
139413	30,000	.0050	9.4200 gr 51.5 RC SCALE	3.90 - 3.80
139555	30,000	.0068	9.3880 52 RC SCALE	4.90 - 4.55
139312	30,000	.0029	9.4140 gr 51 RC SCALE	NOT TESTED
139457	30,000	.0053	9.4310 gr 54.5 RC SCALE	4.60 - 4.75

SAMPLE NUMBER TWO				
TESTED IN 139298 Blue	00	.0005	9.5332 38.5 RC SCALE	5.55* - 4.95
TESTED IN 139413	00	.0011	9.5000 45.0 RC SCALE	4.85 - 4.75

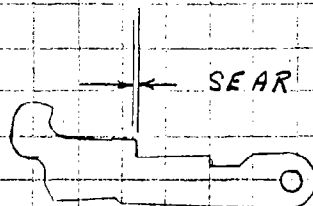

SEAR RADIUS AT CONNECTOR  
 MEASURED ON  
 OPTICAL COMPARATOR

WAIST HEIGHT WAS TAKEN AT 45 INCHES.

## CHRONOLOGICAL RECORD OF TESTING

MODEL & DESCRIPTION ~~700~~ <sup>POWDER METAL SEAR WITH ROSS</sup>  
 CALIBER or GAUGE .243

DATE 6-1-66 TEST m/700 sear drop test TESTER PAGE NO.  
 J. Hennings.

CARTRIDGES - 1 2 3 4 5  
 139298, 139559, 139555, 139457, 139413 - were used  
 with <sup>POWDER METAL</sup> ~~powder~~ sears.

TEST - I - Trigger pulls & Firing pin indents - (separate sheets)

TEST - II - (top side - down) # 139457 on second drop rear sight broke

TEST - III - (bottom side down) # 139457 on first & second drops bolt jarred open

TEST - IV - no malfunctions noticed

TEST - V - (top side down) # 139457 on second drop rear sight came off  
 (bottom side down) # 139298 on second drop stock started to crack  
 around trigger plate.

TEST - VI - (muzzle down) sears # 1, 2, 3, had a total of 7 drops  
 in which safety was jarred to "ON" position.

(top side down) sears # 1, 3, 4, 5 - had a total of 5 drops  
 in which bolt was jarred open. (\* 139298 on third  
 drop safety jarred to "ON" position.)

(bottom side down) sears - # 1, 2, 3, 4 - had a total of 5 drops  
 in which bolt jarred open. (\* 139555 on first  
 drop stock broke just behind trigger guard)

## CHRONOLOGICAL RECORD OF TESTING

MODEL &amp; DESCRIPTION 700 P.M sear (LATEST PROD W SHARP RND)

CALIBER or GAUGE .243

DATE 6-1-66 TEST P.M sear drop test TESTER PAGE NO.

J. Hennings

barrels # 139298 & 139413 were used with new  
P.M sears.

TEST - I - Trigger pulls &amp; firing pin indents (separate shoots)

Test - II - (butt down) - # 139298 - on first drop rear sight  
broke off.

TEST III - (MUZZLE DOWN) - # 139298 - on second drop bolt  
jarred open.

TEST - IV - No malfunctions noticed.

TEST - V - no malfunctions noticed.

TEST - VI - (butt down) both guns - a total of 4 drops in  
which safety was jarred open.  
# 139298 on third drop bolt jarred open.

NOTE! ON BOTH ACTIONS PIN HOLE WAS TIGHT;  
CAUSING SEAR TO BIND-

RD-69-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

DROP TEST PROCEDURE

MEASUREMENT and TEST LAB

- I. Trigger Pull and Firing Pin Indent
  - A. Take five samples.
  
- II. Safety Mechanism Shock Test
  - A. Drop gun ten inches on solid wood surface with safety "ON" *Safe*.
    1. Butt down
    2. Muzzle down
    3. Topside down
    4. Bottom down
  - B. The Trigger shall be tried after each drop to determine whether the safety has released any mechanism which may allow firing.
  - C. Three drops per position.
  
- III. Jar-Off Test
  - A. Drop gun ten inches on solid wood surface with safety "OFF" *Safe*.
    1. Butt down
    2. Muzzle down
    3. Topside down
    4. Bottomside down
  - B. The Trigger shall be tried after each drop to determine whether the safety has released any mechanism which may allow firing.
  - C. Three drops per position.

AAH:T  
566

DROP TEST PROCEDURE - Measurement & Test Lab

IV. Safety Operations Test

- A. This test is for testing the safety mechanism.
  - 1. Cock gun
  - 2. Put Safety "ON"
  - 3. Try Trigger
  - 4. Release the Safety
  - 5. Pull Trigger
  - 6. Record if Trigger functions with Safety on
  - 7. Record if Firing Pin fell when Trigger was pulled
- B. Make 50 trials.

V. Safety Mechanism Shock Test

- A. Drop gun "waist height" on solid wood surface with safety "ON" *safe*.
  - 1. Butt down
  - 2. Muzzle down
  - 3. Topside down
  - 4. Bottomside down
- B. The Trigger shall be tried after each drop to determine whether the Safety has released any mechanism which may allow firing.
- C. Three drops per position.

VI. Jar Off Test

- A. Drop gun "waist height" on solid wood surface with safety "OFF" *safe*.
  - 1. Butt down
  - 2. Muzzle down
  - 3. Topside down
  - 4. Bottomside down
- B. Trigger shall be tried after each drop to determine whether the safety has released any mechanism which may allow firing.
- C. Three drops per position.

VII. Gun Function Check

- A. Trigger pull
- B. Firing pin indent
- C. Take sample of five.

AAH:T  
566

Date Received 5-31-66

Model 700-8

## Description

Barrel Len.  
Caliber  
Type of Feed  
Other

# 139298

243

bolt

~~Lead~~ ~~500~~ #1  
Powder metal .0032

Date 5-1-66

Firing Pin Indent (Inches)

Before

1 .020  
2 .020  
3 .020  
4 .020  
5 .020

Avg. of 5 .020  
Max. .020  
Min. .020  
Ev. 0

Firing Pin Indent

After

1 .021  
2 .021  
3 .0205  
4 .021  
5 .021

Avg. of 5 .0209  
Max. .021  
Min. .0205  
Ev. .0005

Trigger Pull (lbs.)

Before

1 5.50  
2 5.25  
3 5.00  
4 5.25  
5 5.00

Avg. of 5 5.20  
Max. 5.50  
Min. 5.00  
Ev. .50

Trigger Pull (lbs.)

After

1 5.00  
2 5.00  
3 5.25  
4 5.25  
5 5.25

Avg. of 5 5.15  
Max. 5.25  
Min. 5.00  
Ev. .25

661. # 139 298

Test - I - OK

" II - OK

" III - OK

" IV - OK

" V - A.

4. on second drop stock started to crack around trigger plate.

" VI. A.

2. on first + second drops safety failed to "ON" position.

3. on second drop bolt opened.  
on third drop safety failed to "ON" position.

4. on second & third drops bolt failed open

Date Received 5-31-66

Model 700

## Description

Barrel Len.

# 153959

Caliber

.243

Type of Feed

bolt

Other

powder ~~metal~~ # 2  
POWDER METAL WORK.

Date 6-1-66

Firing Pin Indent (Inches)  
Before

1	.020
2	.0195
3	.0195
4	.020
5	.020

Avg. of 5	.0198
Max.	.020
Min.	.0195
Ev.	.0005

Firing Pin Indent  
After

1	.0215
2	.0215
3	.022
4	.022
5	.0215

Avg. of 5	.0217
Max.	.022
Min.	.0215
Ev.	.0005

Trigger Pull (lbs.)  
Before

1	4.75
2	5.25
3	4.75
4	5.25
5	5.50

Avg. of 5	5.10
Max.	5.50
Min.	4.75
Ev.	.50

Trigger Pull (lbs.)  
After

1	5.25
2	5.00
3	5.25
4	5.00
5	5.00

Avg. of 5	5.10
Max.	5.25
Min.	5.00
Ev.	.25

651 153.96-9

Test- I - OK

Test II - OK

" III - OK

" IV - OK

" V - OK

" VI - A.

On all three drops rafter was jarred to "ON" position.

4. on third drop bolt opened

Date Received 5-31-66

Model 700

## Description

Barrel Len.

# 139555

Caliber

.243

Type of Feed

601+

Other

Powder ~~same~~ #3  
MUTAL .0068R

Date 6-1-66

Firing Pin Indent (Inches)

Before

1	.021
2	.021
3	.020
4	.020
5	.020

Avg. of 5	.0204
Max.	.021
Min.	.020
Ev.	.001

Firing Pin Indent

After

1	.021
2	.022
3	.0215
4	.022
5	.0215

Avg. of 5	.0216
Max.	.022
Min.	.021
Ev.	.001

Trigger Pull (lbs.)

Before

1	4.75
2	4.75
3	4.75
4	4.75
5	5.50

Avg. of 5	4.90
Max.	5.50
Min.	4.75
Ev.	.75

Trigger Pull (lbs.)

After

1	4.50
2	4.75
3	4.50
4	4.50
5	4.50

Avg. of 5	4.55
Max.	4.75
Min.	4.50
Ev.	.25

661 # 139555

Test I- OK

" II - OK

" III - OK

" IV OK

" V OK

" VI A.

2.- on second and third drops safety was  
jacked to "ON" position.

3.- on first + third drops bolt opened on  
recoil of drop.

4. stock broke at rear of trigger guard  
on first drop.  
on second drop bolt opened on  
recoil of drop.

Date Received 5-31-66

Model 700

## Description

Barrel Len.  
Caliber  
Type of Feed  
Other

# 139457

.243

bolt

~~prod.~~ ~~2000~~ #4  
2000 ~~prod.~~ ~~2000~~ 0053 R.

Date 6-1-66

Strong Pin Indent (Inches)  
Before

1 .020  
2 .020  
3 .020  
4 .020  
5 .0195

Avg. of 5 .0199  
Max. .020  
Min. .0195  
Ev. .0005

Firing Pin Indent  
After

1 .019  
2 .019  
3 .019  
4 .020  
5 .019

Avg. of 5 .0192  
Max. .020  
Min. .019  
Ev. .001

Trigger Pull (lbs.)  
Before

1 4.75  
2 4.75  
3 4.50  
4 4.50  
5 4.50

Avg. of 5 4.60  
Max. 4.75  
Min. 4.50  
Ev. .25

Trigger Pull (lbs.)  
After

1 4.75  
2 4.75  
3 4.75  
4 4.75  
5 4.75

Avg. of 5 4.75  
Max. 4.75  
Min. 4.75  
Ev. 0

661. # 139 457

Test - I - OK

" II - A.

3. on second drop rear sight broke

" III - A.

4. - on first + second drop bolt jammed open.

" IV - OK

" V - A.

3. on second drop rear sight came off.

" VI A.

3 on third drop bolt jammed open

Received 5-31-66

Model 700

## Description

Barrel Len.  
Caliber  
Type of Feed  
Other

# 139413

.243

bolt

~~prod. steel~~ # 5  
Powder Metal 10050 R.

Date 6-1-66

Trigger Pull Indent (Inches)  
Before

1 .019  
2 .019  
3 .0195  
4 .019  
5 .019

Avg. of 5 .0191  
Max. .0195  
Min. .019  
Ev. .0005

Firing Pin Indent  
After

1 .019  
2 .020  
3 .0195  
4 .019  
5 .019

Avg. of 5 .0193  
Max. .020  
Min. .019  
Ev. .001

Trigger Pull (lbs.)  
Before

1 3.75  
2 3.75  
3 4.00  
4 4.00  
5 4.00

Avg. of 5 3.90  
Max. 4.00  
Min. 3.75  
Ev. .25

Trigger Pull (lbs.)  
After

1 4.00  
2 3.75  
3 3.75  
4 3.75  
5 3.75

Avg. of 5 3.80  
Max. 4.00  
Min. 3.75  
Ev. .25

661, 139413

Test - I - OK

Test - II - OK

" - III - OK

" - IV - OK

" - V - OK

" - VI - A. 1 - OK

2. - first drop bolt jammed open

3. bolt jammed open on third drop.

4 - OK

## PROCEDURE

## GUN DESIGN SPECIFICATIONS SHEET

Date Received 5-31-66Model 700 243 cal.

## Description:

Barrel Length #139298 new rear  
 Caliber 243  
 Type of Feed bolt.  
 Other \_\_\_\_\_

		Design Spec	Tester	Date
I	Headspace as Received			
II	Proof Test <input type="checkbox"/> Yes			
III	Headspace after Proof			
IV	Firing Pin Indent (Inches)			
	1 <u>.019</u> 6 <u>.019</u>			
	2 <u>.018</u> 7 <u>.019</u>			
	3 <u>.0185</u> 8 <u>.019</u>			
	4 <u>.0185</u> 9 <u>.019</u>			
	5 <u>.0185</u> 10 <u>.019</u>			
	Avg. of 10 <u>.0185</u>			
	Max. <u>.019</u>			
	Min. <u>.018</u>			
	E.V. <u>.001</u>			
V	Trigger Pull (Lbs.)			
	1 <u>5.50</u> 6 <u>6.00</u>			
	2 <u>6.25</u> 7 <u>4.75</u>			
	3 <u>5.50</u> 8 <u>4.25</u>			
	4 <u>5.25</u> 9 <u>4.50</u>			
	5 <u>5.25</u> 10 <u>5.25</u>			
	Avg. of 10 <u>5.55</u>			
	Max. <u>6.25</u>			
	Min. <u>5.25</u>			
	E.V. <u>1.00</u>			
VI	Firing Pin Protrusion (in.)			
	(a) Positive			
	(b) Extreme			

Date Received 5-31-66

Model 700

## Description

Barrel Len.  
Caliber  
Type of Feed  
Other

# 139298  
.243  
bolt  
new PM. sear #1

Date 6-2-66

Firing Pin Indent (Inches)  
Before

1 .019  
2 .018  
3 .0185  
4 .0185  
5 .0185

Avg. of 5 .0185  
Max. .019  
Min. .018  
Ev. .001

Firing Pin Indent  
After

1 .019  
2 .019  
3 .019  
4 .019  
5 .019

Avg. of 5 .019  
Max. .019  
Min. .019  
Ev. 0

Trigger Pull (lbs.)  
Before

1 5.50  
2 6.25  
3 5.50  
4 5.25  
5 5.25

Avg. of 5 5.55  
Max. 6.25  
Min. 5.25  
Ev. 1.00

Trigger Pull (lbs.)  
After

1 6.00  
2 4.75  
3 4.25  
4 4.50  
5 5.25

Avg. of 5 4.95  
Max. 6.00  
Min. 4.25  
Ev. 1.75

661 # 139298 new rear

Test - I - OK

" II - A.

1. - on first drop rear sight broke off.
2. - OK
3. - OK
4. - OK.

" III - A. 2. on second drop bolt jarred open

" IV - OK

" V - OK

" VI - A.

1. on second & third drops safety was jarred to "ON" position
4. on third drop bolt jarred open

Date Received 5-31-66

Model 700

## Description

Barrel Len.

# 139413

Caliber

.243

Type of Feed

6014

Other

New P.M. Ser. # 2

Date 6-2-66

Firing Pin Indent (Inches)

Before

1	.018
2	.018
3	.018
4	.018
5	.018

Avg. of 5	.018
Max.	.018
Min.	.018
Ev.	0

Firing Pin Indent

After

1	.019
2	.019
3	.0185
4	.0185
5	.019

Avg. of 5	.0188
Max.	.019
Min.	.0185
Ev.	.0005

Trigger Pull (lbs.)

Before

1	5.00
2	4.75
3	5.00
4	4.75
5	4.75

Avg. of 5	4.85
Max.	5.00
Min.	4.75
Ev.	.25

Trigger Pull (lbs.)

After

1	4.75
2	4.75
3	4.50
4	4.50
5	5.25

Avg. of 5	4.75
Max.	5.25
Min.	4.50
Ev.	.75

661. - # 139413 new year.

this year is very 1953

Test- I- OK

" - II- OK

" - III- OK

" - IV- OK

" - V- OK


" - VI- A.

1. - on first & third drops safety geared  
to "ON" position.


852-111-3

40X10	SEAR	PL
40X13	SEAR	PL
40X20	BLANK	PL
40X25	SEAR	PL
40X30	SEAR	PL
40X35	SEAR	PL
40X40	SEAR	PL
40X45	SEAR	PL
40X50	SEAR	PL
40X55	SEAR	PL
40X60	SEAR	PL
40X65	SEAR	PL
40X70	SEAR	PL
40X75	SEAR	PL
40X80	SEAR	PL
40X85	SEAR	PL
40X90	SEAR	PL
40X95	SEAR	PL
40X100	SEAR	PL
40X105	SEAR	PL
40X110	SEAR	PL
40X115	SEAR	PL
40X120	SEAR	PL
40X125	SEAR	PL
40X130	SEAR	PL
40X135	SEAR	PL
40X140	SEAR	PL
40X145	SEAR	PL
40X150	SEAR	PL
40X155	SEAR	PL
40X160	SEAR	PL
40X165	SEAR	PL
40X170	SEAR	PL
40X175	SEAR	PL
40X180	SEAR	PL
40X185	SEAR	PL
40X190	SEAR	PL
40X195	SEAR	PL
40X200	SEAR	PL
40X205	SEAR	PL
40X210	SEAR	PL
40X215	SEAR	PL
40X220	SEAR	PL
40X225	SEAR	PL
40X230	SEAR	PL
40X235	SEAR	PL
40X240	SEAR	PL
40X245	SEAR	PL
40X250	SEAR	PL
40X255	SEAR	PL
40X260	SEAR	PL
40X265	SEAR	PL
40X270	SEAR	PL
40X275	SEAR	PL
40X280	SEAR	PL
40X285	SEAR	PL
40X290	SEAR	PL
40X295	SEAR	PL
40X300	SEAR	PL
40X305	SEAR	PL
40X310	SEAR	PL
40X315	SEAR	PL
40X320	SEAR	PL
40X325	SEAR	PL
40X330	SEAR	PL
40X335	SEAR	PL
40X340	SEAR	PL
40X345	SEAR	PL
40X350	SEAR	PL
40X355	SEAR	PL
40X360	SEAR	PL
40X365	SEAR	PL
40X370	SEAR	PL
40X375	SEAR	PL
40X380	SEAR	PL
40X385	SEAR	PL
40X390	SEAR	PL
40X395	SEAR	PL
40X400	SEAR	PL
40X405	SEAR	PL
40X410	SEAR	PL
40X415	SEAR	PL
40X420	SEAR	PL
40X425	SEAR	PL
40X430	SEAR	PL
40X435	SEAR	PL
40X440	SEAR	PL
40X445	SEAR	PL
40X450	SEAR	PL
40X455	SEAR	PL
40X460	SEAR	PL
40X465	SEAR	PL
40X470	SEAR	PL
40X475	SEAR	PL
40X480	SEAR	PL
40X485	SEAR	PL
40X490	SEAR	PL
40X495	SEAR	PL
40X500	SEAR	PL
40X505	SEAR	PL
40X510	SEAR	PL
40X515	SEAR	PL
40X520	SEAR	PL
40X525	SEAR	PL
40X530	SEAR	PL
40X535	SEAR	PL
40X540	SEAR	PL
40X545	SEAR	PL
40X550	SEAR	PL
40X555	SEAR	PL
40X560	SEAR	PL
40X565	SEAR	PL
40X570	SEAR	PL
40X575	SEAR	PL
40X580	SEAR	PL
40X585	SEAR	PL
40X590	SEAR	PL
40X595	SEAR	PL
40X600	SEAR	PL
40X605	SEAR	PL
40X610	SEAR	PL
40X615	SEAR	PL
40X620	SEAR	PL
40X625	SEAR	PL
40X630	SEAR	PL
40X635	SEAR	PL
40X640	SEAR	PL
40X645	SEAR	PL
40X650	SEAR	PL
40X655	SEAR	PL
40X660	SEAR	PL
40X665	SEAR	PL
40X670	SEAR	PL
40X675	SEAR	PL
40X680	SEAR	PL
40X685	SEAR	PL
40X690	SEAR	PL
40X695	SEAR	PL
40X700	SEAR	PL
40X705	SEAR	PL
40X710	SEAR	PL
40X715	SEAR	PL

MODEL	PART USE	AMUN.	SEE
DEAD WEIGHT	SHAWED BY DATE	CHECK BY NAME	APPR. BY DATE
"	2-23-62	W. B. S. G.	W. B. S. G.
TITLE		SCALE	
30AR		4:1	
NUMBER		SUPERVISOR - TECHNICIAN	
2C-17946		2B-7346	
		REMINGTON ARMS CO. INC.	
		RESEARCH & DEV. DIV.	

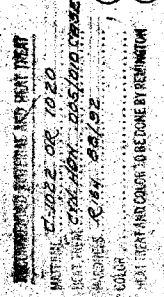


00051-2



DO NOT SCALE THIS DRAWING. WORK TO FIGURES  
UNLESS OTHERWISE NOTED. TOLERANCES  
ON DECIMAL DIMENSIONS ARE  $\pm .005$   
& ON FRACTIONAL DIMENSIONS  $\pm .005$   
& ON ANGULAR DIMENSIONS  $\pm .005$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S.) MICROINCH ROUGHNESS  
VALUES AND ARE THE MAXIMUM ROUGH-  
NESS ACCEPTABLE. UNLESS OTHERWISE  
SPECIFIED, FINISH ROUGHNESS TO BE  
125 OR BETTER.

ALTERATIONS				
LET.	NO.	REFERENCE	BY	DATE
1	ADD 400 660	6666	F. 11/15	
2	ADD 400 660	6736	DD. 11/15	
3	0008 / 1000	6736	DD. 11/15	

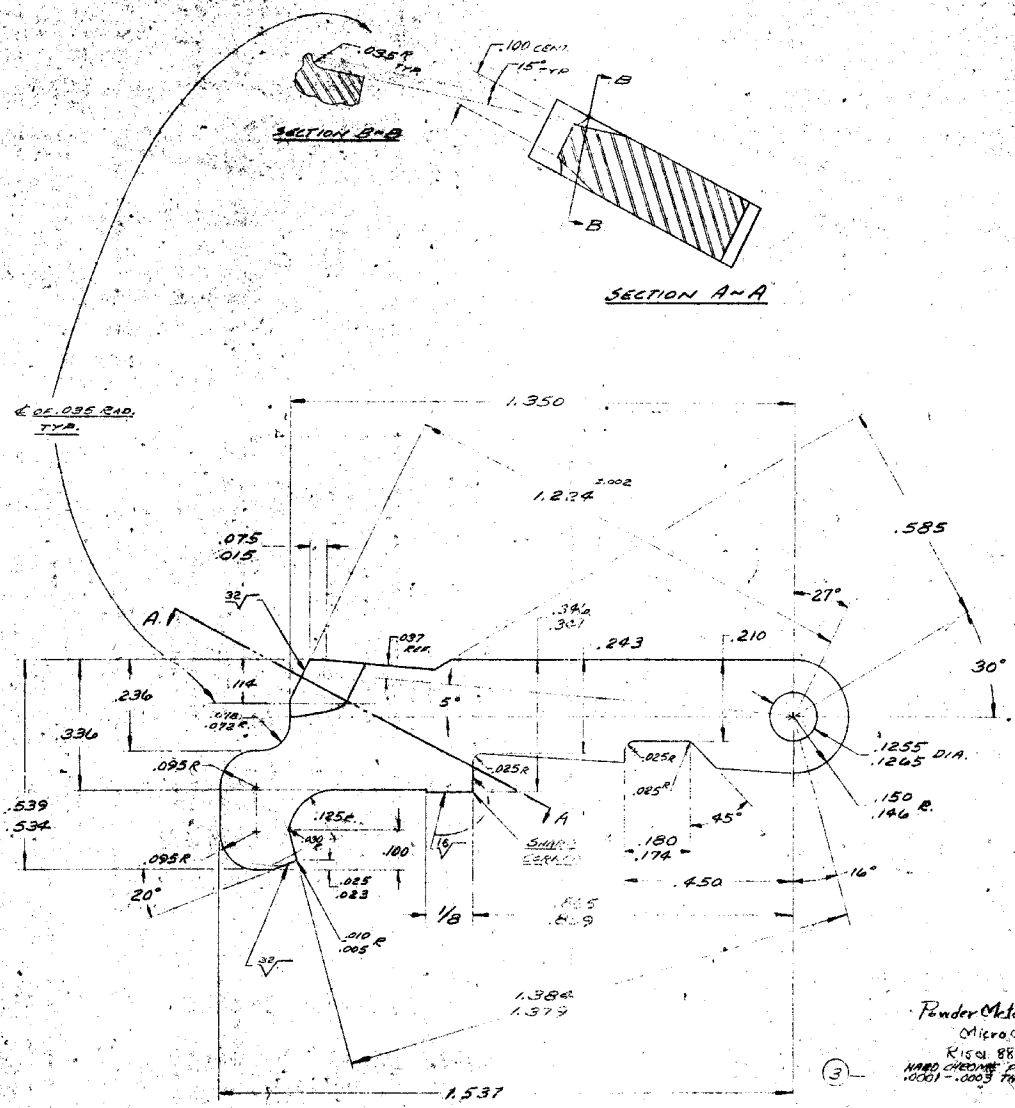

1.210  
1.153  
1.060

FEB 8 1966

①	660 SEAR SAFETY CAM	1 P.L.		
	700 VPR SEAR SAFETY CAM	1 P.L.		
②	40-XB SEAR SAFETY CAM BLANK	1 P.L.		
	600 SEAR SAFETY CAM	1 P.L.		
	700 " " " "	1 P.L.		
	700 " " " "	1 P.L.		
MODEL		PART USE	QUAN	DATE
DES'D BY DATE		DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE
10-22-62		10-22-62	10-22-62	10-22-62
TITLE		SEAR SAFETY CAM		
NUMBER		SCALE	SUPERSEDES-REFERENCE	
C-150-66		A-X	M26390	
REMINGTON ARMS CO. INC.				
RESEARCH & DEV. DEPT.				

Powder Metal 1567  
Micro Cam  
Rise 88-92  
HARD CHROME PLATE  
10001-10003 TYP.


NUMBER <b>A-16719</b>		REMINGTON ARMS CO. INC. RESEARCH & DEV. DEPT.	
SCALE <b>4:1</b>	SUBMITTANCE REFERENCE <b>- A-19461</b>		
TITLE <b>CONNECTOR</b>			
DES. BY DATE <b>PY 7-30-57</b>	DRN. BY DATE <b>R.S.J. 8/10/57</b>	CHK. BY DATE <b>8-13-57</b>	APP. BY DATE
FOR DETAILS, SEE PROCESS RECORD			
MODEL	PART USE	QUAN.	SEE
<b>40X</b>	<b>TRIGGER CONNECTOR</b>		
<b>40XCF</b>	<b>TRIGGER CONNECTOR</b>	<b>1</b>	<b>P.L.</b>
<b>40X-B</b>	"	<b>1</b>	<b>P.L.</b>

DO NOT SCALE THIS DRAWING. WORK TO FIGURES  
UNLESS OTHERWISE NOTED. TOLERANCES  
ON DECIMAL DIMENSIONS ARE  $\pm .005$   
& ON FRACTIONAL DIMENSIONS  $\pm \frac{1}{64}$   
& ON ANGULAR DIMENSIONS  $\pm 00^{\circ}30'$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS  
VALUES AND ARE THE MAXIMUM ROUGH-  
NESS ACCEPTABLE UNLESS OTHERWISE  
SPECIFIED. FINISH ROUGHNESS TO BE  
**125 OR BETTER.**

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL **C-1022 OR EQUIV.**  
HEAT TREAT **CYANIDE 805 CASE**  
HARDEN **R15N 88-92**  
TEMPER **NONE**

PLATING AND GRINDING TO BE DONE BY REMINGTON

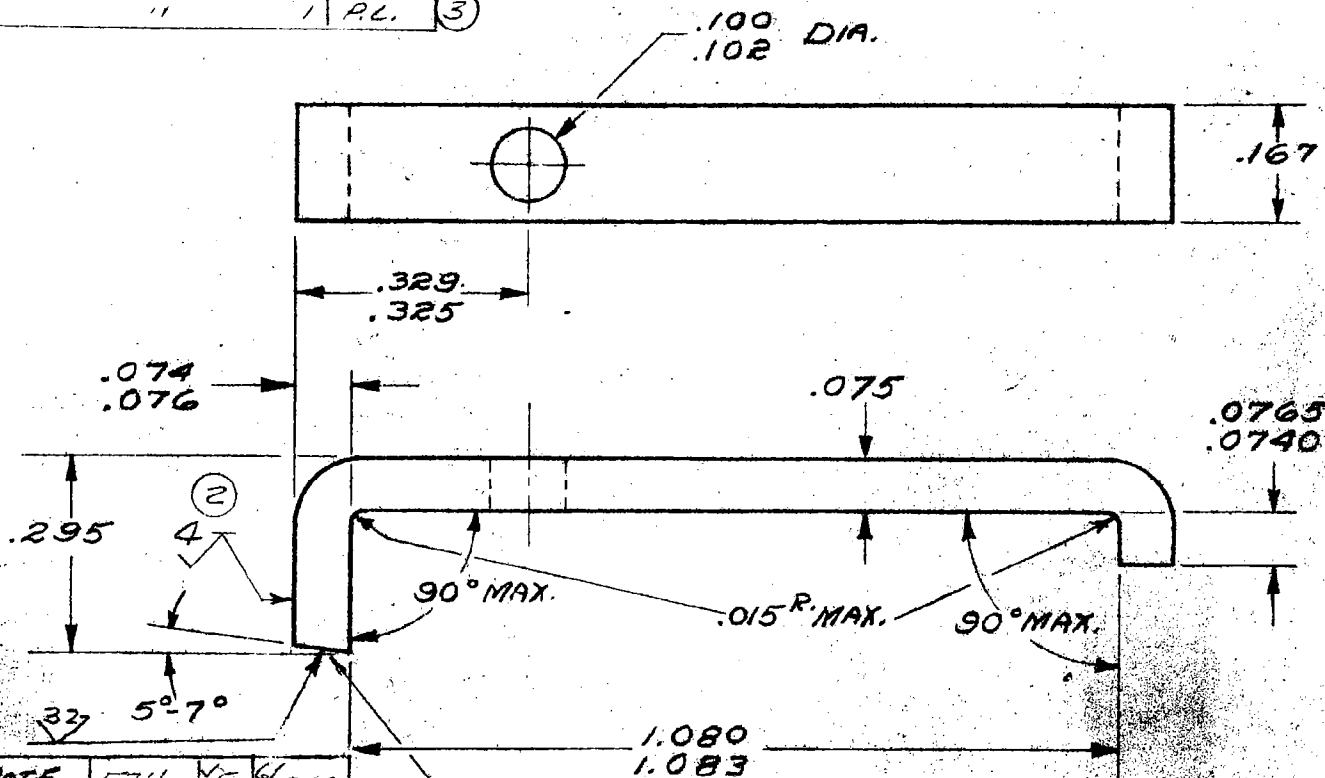

5	ADDED NOTE	5716	VF	4/23/64
4	ADDED H.T. SPEC.	5149	058	5-20-63
3	ADD USE 40X-B	5120	058	1-24-63
2	327	"	"	"
1	ADDED 40X C.F.	3941	058	7-15-60
ALT.	WAS	REFERENCE	BY	DATE

ALTERATIONS

(5) NOTE: HEAT TREAT BEFORE GRINDING

NOTE: THIS PART TO BE CHROME-PLATED.  
NOTE: CHECK MATERIAL THICKNESS AFTER BENDING  
BY LOCATING ON BODY WITH LONG LEG RESTING ON  
SURFACE AT 90°. CHECK FROM 90° SURFACE TO  
TOP SURFACE OF LONG LEG.



**A-16719**

B-19461

DO NOT SCALE THIS DRAWING. WORK TO FIGURES  
UNLESS OTHERWISE NOTED, TOLERANCES  
ON DECIMAL DIMENSIONS ARE  $\pm .005$   
& ON FRACTIONAL DIMENSIONS  $\pm \frac{1}{64}$   
& ON ANGULAR DIMENSIONS  $\pm 00^{\circ}30'$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS  
VALUES AND ARE THE MAXIMUM ROUGH-  
NESS ACCEPTABLE UNLESS OTHERWISE  
SPECIFIED. FINISH ROUGHNESS TO BE  
125  
V OR BETTER.

ALTERATIONS

LET.	WAS	REFERENCE	BY	DATE
7	REDRAWN	4652	4.2	3-5-62
8	7-19461			
9	19461	5149	4.2	4-24-62
10	4000 NOTE	5716	4	4-24-64
11	4000 NOTE	6473	DD	5-14-66

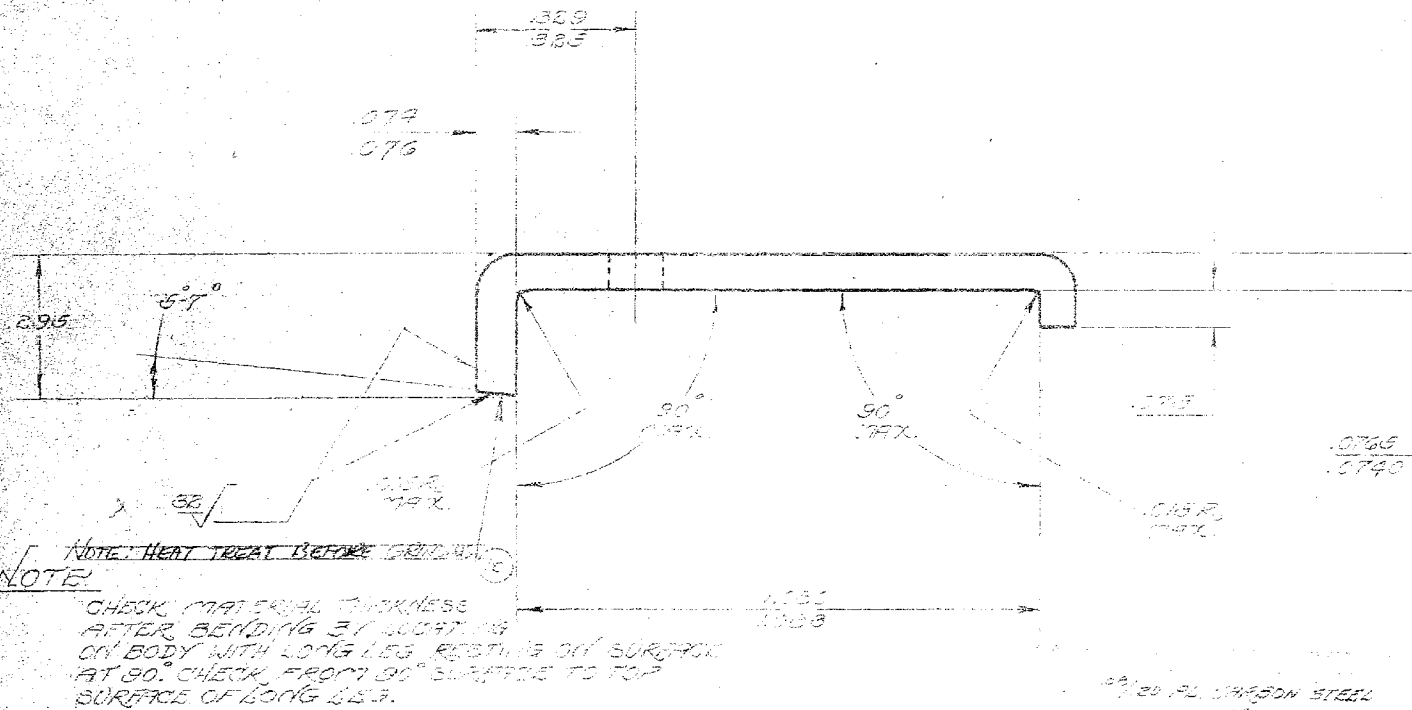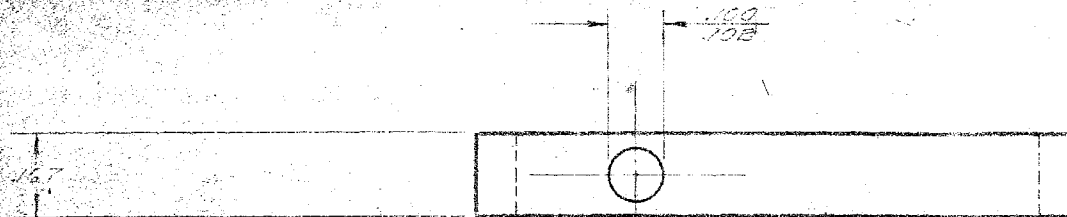

11	NAME	TRIGGER CONNECTOR	F.L.
12	TRIGGER CONNECTOR		
13	TRIGGER CONNECTOR		
14	TRIGGER CONNECTOR		
15	TRIGGER CONNECTOR		
16	TRIGGER CONNECTOR		
17	TRIGGER CONNECTOR		
18	TRIGGER CONNECTOR		
19	TRIGGER CONNECTOR		
20	TRIGGER CONNECTOR		
21	TRIGGER CONNECTOR		
22	TRIGGER CONNECTOR		
23	TRIGGER CONNECTOR		
24	TRIGGER CONNECTOR		
25	TRIGGER CONNECTOR		
26	TRIGGER CONNECTOR		
27	TRIGGER CONNECTOR		
28	TRIGGER CONNECTOR		
29	TRIGGER CONNECTOR		
30	TRIGGER CONNECTOR		
31	TRIGGER CONNECTOR		
32	TRIGGER CONNECTOR		
33	TRIGGER CONNECTOR		
34	TRIGGER CONNECTOR		
35	TRIGGER CONNECTOR		
36	TRIGGER CONNECTOR		
37	TRIGGER CONNECTOR		
38	TRIGGER CONNECTOR		
39	TRIGGER CONNECTOR		
40	TRIGGER CONNECTOR		
41	TRIGGER CONNECTOR		
42	TRIGGER CONNECTOR		
43	TRIGGER CONNECTOR		
44	TRIGGER CONNECTOR		
45	TRIGGER CONNECTOR		
46	TRIGGER CONNECTOR		
47	TRIGGER CONNECTOR		
48	TRIGGER CONNECTOR		
49	TRIGGER CONNECTOR		
50	TRIGGER CONNECTOR		
51	TRIGGER CONNECTOR		
52	TRIGGER CONNECTOR		
53	TRIGGER CONNECTOR		
54	TRIGGER CONNECTOR		
55	TRIGGER CONNECTOR		
56	TRIGGER CONNECTOR		
57	TRIGGER CONNECTOR		
58	TRIGGER CONNECTOR		
59	TRIGGER CONNECTOR		
60	TRIGGER CONNECTOR		
61	TRIGGER CONNECTOR		
62	TRIGGER CONNECTOR		
63	TRIGGER CONNECTOR		
64	TRIGGER CONNECTOR		
65	TRIGGER CONNECTOR		
66	TRIGGER CONNECTOR		
67	TRIGGER CONNECTOR		
68	TRIGGER CONNECTOR		
69	TRIGGER CONNECTOR		
70	TRIGGER CONNECTOR		
71	TRIGGER CONNECTOR		
72	TRIGGER CONNECTOR		
73	TRIGGER CONNECTOR		
74	TRIGGER CONNECTOR		
75	TRIGGER CONNECTOR		
76	TRIGGER CONNECTOR		
77	TRIGGER CONNECTOR		
78	TRIGGER CONNECTOR		
79	TRIGGER CONNECTOR		
80	TRIGGER CONNECTOR		
81	TRIGGER CONNECTOR		
82	TRIGGER CONNECTOR		
83	TRIGGER CONNECTOR		
84	TRIGGER CONNECTOR		
85	TRIGGER CONNECTOR		
86	TRIGGER CONNECTOR		
87	TRIGGER CONNECTOR		
88	TRIGGER CONNECTOR		
89	TRIGGER CONNECTOR		
90	TRIGGER CONNECTOR		
91	TRIGGER CONNECTOR		
92	TRIGGER CONNECTOR		
93	TRIGGER CONNECTOR		
94	TRIGGER CONNECTOR		
95	TRIGGER CONNECTOR		
96	TRIGGER CONNECTOR		
97	TRIGGER CONNECTOR		
98	TRIGGER CONNECTOR		
99	TRIGGER CONNECTOR		
100	TRIGGER CONNECTOR		

cc: J.W. Brooks

Ilion, New York  
July 11, 1966

MEMORANDUM

TO: C. B. Workman

FROM: A. A. Hugick

POWDER METAL ENDURANCE TESTING

A 100,000 cock-and-fire dry cycle test was run on the H/700 PM sear in the Measurement Lab dry cycle machine. The hardness of this sear was measured as 88.5 - R15N. Initial radius at the connector edge was measured as .0013" on the optical comparator. The radius was measured as .0033" at the dry cycle test completion. All dry cycle testing was conducted with the sear lubricated with lubriplate.

Initial test trigger pull as adjusted by production was 4.55 lbs. During the dry cycle testing two firing pin tips broke. (@ 20,000 and 80,000).

AAH:ic

TITLE OF PROJ PM SEAR ENDURANCE TEST

PROJ NO

SUBJECT

WORKS

COMPUTER

COMC

DATE

6/15

1966

1) GUN TESTED - M700 with new PM sear  
A) Trigger pull at start of test

1 -	4.50	
2 -	4.50	
3 -	4.50	ave.
4 -	4.75	
5 -	4.75	

20000 - Firing pin broke during the 20000 cycles. Sear showed negligible rounding after inspection on optical comparator.  
New firing pin assembly  
40000 - Sear OK

61000 - Sear condition of - little change over 60000 cycles - firing pin OK  
40,000

Trigger pull (ave. of 5)

1 -	3.75
2 -	3.75
3 -	3.75
4 -	3.50
5 -	3.75

82000 - Broken firing pin tip over a period of 40000 cycles from 60000 to 82000  
20,000

100000 - Sear OK

M100. PM SEAK  
100,000 COCK-AND-PISTON  
DRY CYCLES - WELL  
LUB.  
88.5 - R15N  
48.5 MEAS. RC.

---

10013 RAD. AT  
CONNECTOR - INITIAL

---

10033 RAD. AT  
CONNECTOR - TERMINAL

---

6-27-66 AAK.

cc: W.A. Lock  
C.H. Morse  
~~H.H. Walker~~  
J.W. Brooks  
~~H.J. Waters~~  
H.N. Kelly

Ilion, New York  
June 21, 1966

MEMORANDUM

TO: C. B. Workman



FROM: A. A. Higick - W. N. Curry

Model 700 COCKED POWDER METAL SEARS

Six M/700 rifles with powder metal sears were cock-and-fire dry cycled 30,000 cycles each in the Measurement Lab dry cycle machine for the purpose of establishing M/700 firing pin dry cycle life. The included test sears had a radius of approximately .003" on the connector surface edge when received from production. The average sear component weight was measured as 9.6021 grams. The average measured RC hardness was approximately 50 RC. All dry cycle testing was conducted with the sear well lubricated.

Enclosed is a photograph which best illustrates the lack of sear wear at the connector and cocking cam surfaces of the M/700 sears.

AAH:KCR  
Enc.

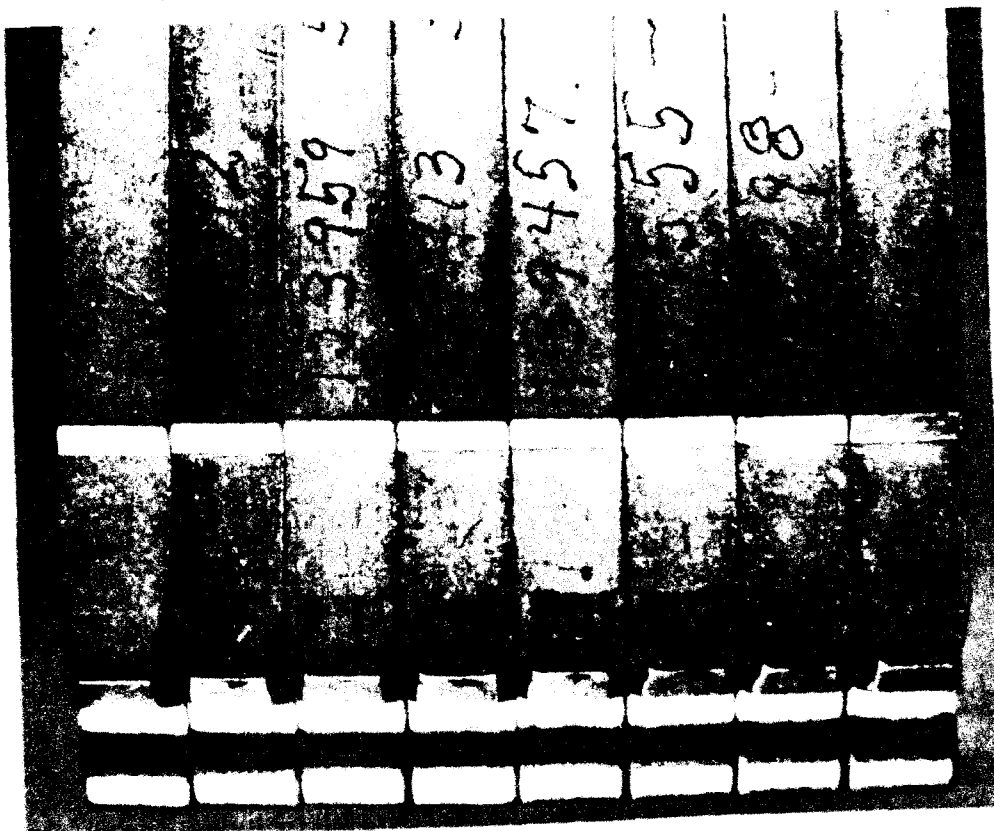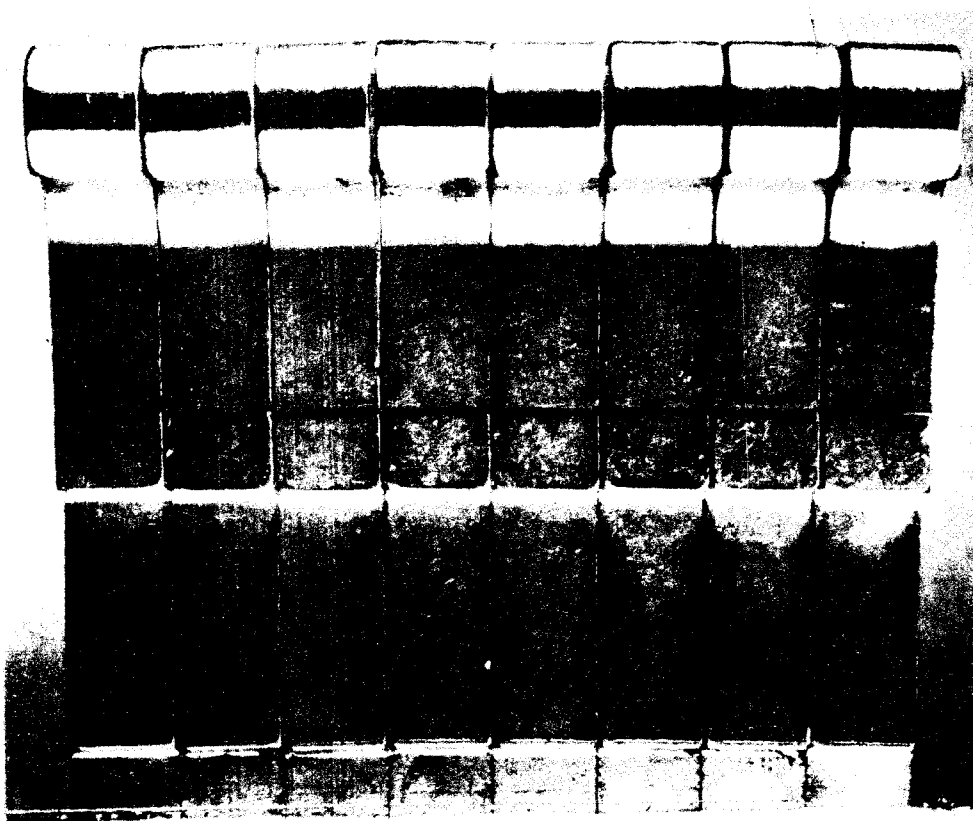

MODEL 700 SEAR TEST

CHROME PLATED POWDER METAL SEAR  
30,000 Cock and Fire Dry Cycle

AAH:WVIC

6-7-66



TITLE OF PROJ

M700

PROJ NO

SUBJECT

FLASH CHROME PLATED PM

WORKS

SEAR TESTING

COMPUTER AAH

DATE 6-8-66

19

SEAR NUMBER	TOTAL NUMBER OF CYCLES	SEAR RAD. AT CONNECTOR	SEAR COMPONENT WT	AVER. TRIGGER PULL AT END OF DRY CYCLING
153959	30,000	.0045	9.3685 gr	5.60 LBS
139298	30,000	.0035	9.4080 gr	7.70 LBS.
139413	30,000	.0050	9.4200 gr	4.60 LBS.
139555	30,000	.0068	9.3880 gr	5.70 LBS.
139312	30,000	.0029	9.4140 gr	5.35 LBS.
139457	30,000	.0053	9.431 gr	5.50 LBS.
NONE	000	.0035	9.385 GRAMS	
Ave		.0045	9.4021 grams	

AAH-6-8-66

Ilion, New York  
June 13, 1966

MEMORANDUM

To: C. B. Workman

From: A. A. Hagish - W. H. Curry

MODEL 700 COCK-AND-FIRE DRY CYCLE FIRING PIN LIFE

Each of  
M/700 cock-and-fire dry cycle life testing was run in the Measurement Lab dry cycle machine. Six M/700 actions were subject to a 30,000 dry cycle test. One firing pin tip failed at 20,000 dry cycles. The M/700 dry cycle test guns have been returned to the tester for further examination of parts.

Enclosed are the dry cycle testing observations and comments.

End/AMC:ic  
6/8/66

Latest test of one rifle with latest scan (PA)  
the firing pin broke some place between 0-20,000.  
New Firing pin put in + broke between 55,000  
+ 60,000. New Firing pin put in + still ok  
at 100,000.

WORK REQUESTDATE REQUESTED 3-9-66WORK ORDER E0262DESIGNER OR ENGINEER J W 13 rocksMODEL 14700CAL. OR GAUGE —BARREL TYPE —TYPE OF TESTNEW DESIGN ✓ DESIGN CHANGE —DRY CYCLE ✓ ACCURACY — HANDLOADING — STRESS —PRESSURE — MUZZLE VELOCITY — FUNCTION — PHOTOS —EVALUATION — BOLT VELOCITIES — OTHER —REPORT REQUIREDFORMAL —INFORMAL —TEST RESULTS ONLY ✓TEST OBJECTIVEFiring Pin evaluation, 5 ear (chrome) + comments (chrome)  
stand

1. check trigger pull.

5000 rd

1. check Firing Pin joint for cracking or breaking.

10000 2. visual check of S&amp;H.

1. Repeat 5000 cycle check

15000

1. Repeat above check

20,000

1. Repeat above check

25,000

1. Repeat above check

\* Repeat test after completion  
of dry cycleGUNS REQUIRED

1 rifle 39413 new Fire control &amp; Firing Pin area

Rifle from previous dry cycle &amp; M rear test.

TEST COMPLETION DATE —SIGNED —

REMINGTON ARMS COMPANY, INC.

ENGINEERING DEPARTMENT

COMPUTATION SHEET

SHEET 1

M 700 Firing Pin Evaluation  
 Test of M 700 firing pin assembly +  
 chrome seal by dry cycling WMC

PAGE NO.

WORK

DATE 3/21 66

This test was made on #139413 M700 to determine damage to the firing pin (breakage) and durability of the PM chrome seal. The gun was cocked and fired at a rate of one cycle every two seconds with inspection of the firing pin + seal every 5000 cycles.

### BEGINNING OF TEST

1- Fire trigger pull taken at start of test.

6.25

The fire control was cleaned  
 + lubricated before test. Ave-6.30

6.25

6.25

6.50

6.25

2- The seal stuck down at 4,750 cycles (cleaned + oiled fire control).

3- 5000 cycles: seal shows light wear but no deformation.

On examination of the firing pin the shoulder shows an uneven seat in the front of the bolt body. The firing pin tip shows heavy chipping against the firing pin hole.

4- 5,370 cycles: cocking cam had to be lubricated because of excessive force required to cock the action. (dry cycle machine jammed)

5- Shoulder of bolt has picked up small pieces of metal and seats unevenly in bolt body. Firing pin tip shows increased rubbing around the tip.

REMINGTON ARMS COMPANY, INC.

ENGINEERING DEPARTMENT COMPUTATION SHEET

2

## M700 Firing Pin Evaluation Test

20 MC

3/21

66

11,680 cycles

6 - Action failed to rock due to excessive wear on locking cam; replaced bolt body and took trigger pull. 5.25

5.25

5.00 ave. - 5.25 lbs

5.50

6.25

7) 15,000: The firing pin assembly seats more evenly in the recessed bolt body. The area around the tip shows little additional wear. No change in condition of the rear.

8-20,000: The magnolux process shows no cracks; visual inspection the same. The rear shows little change over 15,000 cycles.

9 - 25,000: A second magnolux inspection shows no cracks. A visual inspection indicates a very small phase in the tip of the firing pin which looks ready to chip.

Trigger pull at 25,000 cycles

4.25

4.50

4.75 Ave - 4.60 lbs.

4.75

4.75

## M 700 Firing Pin evaluation Test

PART NO.

W. H.

DATE 3/21 1966

## Summary:

The M 700 firing pin assembly under test showed no other faults than already mentioned and no cracks or breakage could be located by the magnifying process or by visual inspection under the low power microscope. The impact area of wear seemed to be on the last 150 of the firing pin tip. One other change seemed when the recip bolt made a different seat on the firing pin shoulder. The recip bolt was a more even seat.

Other than light pitting the sear seems in good condition, however the trigger pull decreased 1.70 lbs in the 25,000 cycles.

TITLE OF PROJ

*Firing Pin Evaluation test*

PROJ NO

SUBJECT

WORKS



COMPUTER

*WMC*

DATE

*5/1/66*

19

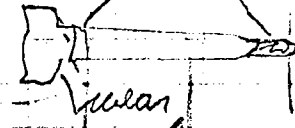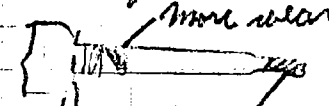*Continuation of firing pin dry cycle**Guns 139555**Start of test (trigger pull)**5.0**5.0**5.0**5.5**5.25**Ave. 5.15**5000 - Wear spots in the usual three places have shown up just as the gun assembly rubbed.**bright spot on shoulder**Seal ok**10,000 Wear spots have increased slightly on firing pin assembly**Seal ok**15,000 Rubbed spots don't show much increase seen 10,000 cycles. Rubbed area in front of shoulder shows slight enlargement.**Seal shows normal wear**shoulder has same worn bright**20,000 increased wear on parts of pin originally showing wear**increased wear*

REMINGTON ARMS COMPANY, INC.

ENGINEERING DEPARTMENT  COMPUTATION SHEET

TITLE OR PROJ

M700 Firing Pin Evaluation

PROJ NO

SUBJECT

WORKS


COMPUTER

Wm C

DATE

5/4/66

25,000 No additional wear visible around the tip of pin. Ruptured section ahead of plunger has increased wear. No back of shoulder has light red mark.   
 increase no visible increase



30,000 No failures; magnum process fine.   
 no contact

No excessive wear on rear

Average of 5 trigger pulls 5.70 lbs

\*Note increase of trigger pull on this gun in contrast to the usual decrease over the 30,000 cycle test.

REMINGTON ARMS COMPANY, INC.

ENGINEERING DEPARTMENT ( ) COMPUTATION SHEET

Sheet No. 1

M700 Firing Pin Evaluation Test

PROJ. No.

WORKS

COMPUTED

WMC

DATE

4/20

IN 60

Continuation of firing pin/sear evaluation test  
 Trigger pull (start of test) Gun # 139312

5.5

5.0

ave. 5.45 lbs


5.5

5.75


5.5

Cocking cam + out side bolt surface lubricated

5000 - light wear around firing pin tip  
 Sear OK




10,000 Metal rubbing, increasing around firing pin tip. Rubbed spot shows about .075 forward of shoulder.  
 .035 rub mark increased wear



Sear OK

15000 - No noticeable change in wear condition

20000 - Tip of the pin broke ground the rubbing portion caused by firing pin hole rub mark break



Sear has no excessive wear  
 20,000 - end of test (Trigger pull sec. of 5)

5.35 lbs

TITLE OF PROJ

M700 Firing pin Activation test

PROJ NO

SUBJECT

COMPUTER

WMC

DATE

5/24/66

19

Gun # 139298

Start of test (trigger pull)

6.00

5.75


5.50

6.00

6.00


ave 5.85

5000 - beginning red spot on tip shoulder +  
 .100 in front of shoulder

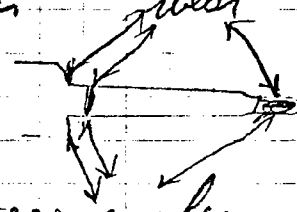

10000 - slight increase over 5000 cycles

15000 Wear increased forward of shoulder slightly increase



20000 Wear increased forward of shoulder; tip +  
 shoulder show a very slight increase in wear



25000 considerable increase in wear .100 forward of  
 shoulder

inward wear area  
 mostly on one side

REMINGTON ARMS COMPANY, INC.

ENGINEERING DEPARTMENT

COMPUTATION SHEET

SHEET

TITLE: M700

M700 Firing pin Erosion Test

PROJ. NO.

REVISED

WORKS

COMPUTER

DATE

10

30000 - No breakage - magna flux indicator no  
cracks.

Trigger pull (ave of 5) - 6.25  
7.50 ave 7.7 lb  
8.00  
8.75  
8.00

TITLE OF PROJ.

M700 Firing pin Evaluation test

PROJ. NO.

SUBJECT

WORK

COMPUTER

DATE 4/18/66 19


Continuation of firing pin & wear dry cycle  
test (gun # 153545)

Triggers pulled before start of test.

6.75	
6.00	ave. 6.15 lbs
6.25	
5.75	
6.00	

5000 - all normal wear spots reflected bright

Seal ok

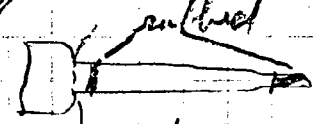

pin seat wear bright

10,000 - all wear spots increasing

Seal light ref. wear no deformation

15000 Little visibly increase over 10000 cycles  
wear has occurred in the same places  
as in the other tests

Seal ok



visible wear spots  
(no increase over 10000)

REMINGTON ARMS COMPANY, INC.

ENGINEERING DEPARTMENT

COMPUTATION SHEET

SHEET

TITLE OF PROJ

SUBJECT

M700 Firing penetration test  
continued GUN # 153959

PROJ NO

WORKS


COMPLETED

DATE

19

20000 - Wear angle ground pin tip + in front  
of shoulder have increased wear increase

Seam brightened but  
shows no deformation.



25000 - No cracks no weight change in  
the last 5000 cycles  
Seam shows no deformation

30,000 - End of test with no failure of  
firing pin or seam

Trigger pull over at  
end of test - 5.60 lbs.

REMINGTON ARMS COMPANY, INC.  
ENGINEERING DEPARTMENT COMPUTATION SHEET

## Firing Pin Evaluation Test

DATE

COMPUTER

CVMC

PROJECT

VIEWS

4/1/66

This is a dry cycle test to determine the strength of the firing pin assembly against breakage for 3000 dry cycle firing. The guns used in this test will be rocked and fired by a machine once every 2 seconds. The rear assembly will also be checked for undue wear.

GUN # 139457

Trigger pull before test:

5.75

6.00

Ave. - 5.75


5.50

6.25

6.25


5000 cycles - no cracking of firing pin, light wear around the tip of firing pin, the only sign of wear. Seat shows bright spots but no wear.

10,800 - Tip shows scrub marks & area of firing pin seat shows wear but noticeable bright marks

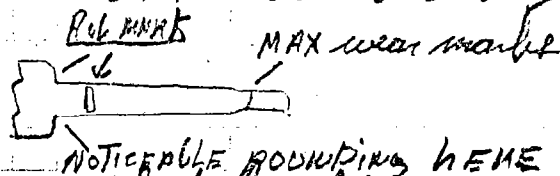

The seat is only rubbed bright in area of contact with no excessive wear.

15,200 - Tip shows heavy metal scrubbing; other area of wear show no increase over 10800 even wear



- No excessive wear to seat

REMINGTON ARMS COMPANY, INC.

ENGINEERING DEPARTMENT (710) COMPUTATION SHEET

DATE OF PROJ

M 700 Firing Pin Evaluation

PROJECT

G# 139457

COMPUTER

RMC

WORKS

DATE 4/7/66

20300 cycles increasing wear around the firing pin tip shoulder area note little change

NO CHANGE

MAX. WEAR



No change

No excessive wear to rear

25,000 cycles wear around firing pin tip, looks about the same as 20300 cycles. Shoulder has formed a light circle around the seating area

no visible increase of wear area.

Ringed portion


Spear shows more galling on the left top than on other exposed parts.

rubbed spot



30000 - Magnaflex probe shows no cracks; visual inspection - no cracks

galling rubbing



Little change in looks over 25000 cycles  
No visible change in wear  
Trigger Pull (end of test)

ave. of 5 - 5.5 lbs

REMINGTON ARMS COMPANY, INC.  
 ENGINEERING DEPARTMENT - [ ] COMPUTATION SHEET

## Firing Pin Evaluation Test

COMPUTED BY CVMC

DATE 4/1/66


This is a dry cycle test to determine the strength of the firing pin assembly against breakage for 30,000 dry cycle firings. The gauge used in this test will be rocked and fired by a machine once every 2 seconds. The rear assembly will also be checked for undue wear thru rated pressure test.

GUN # 139457

Trigger pull before test: 5.75  
 6.00 Ave. - 5.75  
 5.50  
 6.25  
 6.25

5000 cycles - no cracking of firing pin  
 light wear around the tip of firing pin  
 the only sign of wear  
 seal shows bright spots but no wear.

10,800 - Tip shows scrub marks & area of firing  
 pin seat shows even but noticeable bright  
 marks

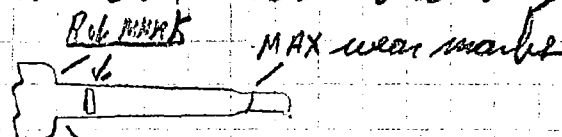

The seal is only rubbed bright in area of contact with no excessive wear.

15,200 - Tip shows heavy metal scrubbing;  
 other area of wear show no increase in  
 10800 uneven wear



No excessive wear to seal

M 700 Firing Pin Evaluation


G# 139457

COMPUTED BY RCMC

DATE 4/7/66

20,300 cycles increasing wear around the firing pin tip shoulder area notes little change

NO CHANGE MAX. WEAR




No excessive wear to rear

25,000 cycles wear around firing pin tip foggy about the same as 20,300 cycles. Shoulder has formed a light circle around the seating area


no visible increase of wear area

Ringed portion

Seam shows more galling on the left top than on other exposed parts, rubbed spot



30,000 - Magnaflex project shows no cracks; visual inspection - no cracks

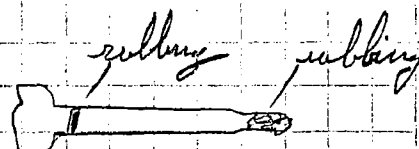

Little change as looks over 25,000 cycles  
No visible change in seam  
Trigger Pull (end of test)

ave. of 5 - 5.5 lbs

WORK REQUESTDATE REQUESTED 3-9-66WORK ORDER E0262DESIGNER OR ENGINEER J W BrooksMODEL 14700CAL. OR GAUGE —BARREL TYPE —TYPE OF TESTNEW DESIGN ✓DESIGN CHANGE —DRY CYCLE ✓ACCURACY —HANDLOADING —STRESS —PRESSURE —MUZZLE VELOCITY —FUNCTION —PHOTOS —EVALUATION —BOLT VELOCITIES —OTHER —REPORT REQUIREDFORMAL —INFORMAL —TEST RESULTS ONLY ✓TEST OBJECTIVE

Firing Pin evaluation, 5 sec (chrome) + commuted (chrome)  
start

1. check trigger pull

5000 rd

1. check Firing Pin joint for cracking or breaking.

10000 2. visual check of 5 sec

1. Repeat 5000 cycle check

15000

1. Repeat above check

20,000

1. Repeat above check

25000

1. Repeat above check

GUNS REQUIRED

1 rifle 39413. new Firing Pin control & Firing Pin assembly.

rifle from previous dry cycle for 5 sec test.

TEST COMPLETION DATE —SIGNED —

TITLE OF PROJECT M 700 Firing Pin Evaluation  
 SUBJECT Test of M 700 firing pin assembly +  
 chrome seal by dry cycling COMPUTER WMC

Proj. No.

Work No.

DATE 3/21 66

This test was made on #139413 M700 to determine damages to the firing pin (bushings) and durability of the P.M. chromed gear. The gear was cocked and fired at a rate of one cycle every two seconds with inspection of the firing pin + gear every 5000 cycles.

### BEGINNING OF TEST

1- Fire trigger pull taken at start of test.

6.25

The fire control was cleaned  
 + deburred before test.

6.25

ave - 6.30

6.25

6.50

6.25

2- The gear stuck down at 4,750 cycles (cleaned + oiled fire control).

3- 5000 cycles: gear shows light wear but no deformation.

On examination of the firing pin the shoulder shows an uneven seat in the front of the bolt body. The firing pin tip shows heavy chipping against the firing pin hole.

4- 5,370 cycles: cocking cam had to be lubricated because of excessive force required to cock the action. (dry cycle machine jammed)

5- Shoulder of bolt has picked up small pieces of metal and seats unevenly in bolt body. Firing pin tip shows increased rubbing around the tip.

TITLE OF PROJ

M700 Firing Pin Evaluation Test

PROJ NO

SUBJECT

WORK

COMPUTER

WMC

DATE

3/21

1966

11,680 CYCLES

6 - Action failed to cock due to excessive wear on cocking cam; replaced bolt body (no. 101117) and took trigger pull.

5.25

5.25

5.00 ave. - 5.25 lbs

5.50

6.25

7) 15,000: The firing pin assembly seats more evenly in the sleep bolt body. The area around the tip shows little additional wear. No change in condition of the sear.

8-20,000: The magnifying process shows no cracks, visual inspection the same. The sear shows little change over 15,000 cycles.

9 - 25,000: A second magnifying inspection shows no cracks. A visual inspection indicates a very small piece in the tip of the firing pin which looks ready to chip.

Trigger pull at 25,000 cycles

4.25

4.50

4.75

4.75

4.75

ave. - 4.60 lbs.

TITLE OF PROJ.

M 700 Firing Pin evaluation Test

PROJ. NO.

SUBJECT

COMPUTER

WMC

DATE

WORK

3/21

66

## Summary:

The M 700 firing pin assembly under test showed no other faults than already mentioned and no cracks or breakage could be located by the magnifying process or by visual inspection under the 100 power microscope. The report area of wear seemed to be on the last 150 of the firing pin tip. One other change seemed when the recip bolt made a different seat on the firing pin shoulder. The second bolt was a more even seat.

Other than light pitting the sear seems in good condition, however the trigger pull decreased 1.70 lbs in the 25,000 cycles.

3-2-66

Per K. Chadwick

The firing pin that broke at shoulder was checked for hardness it was ok running as follows

20 22 24 26 28 30 32 34 36 38 40  
RC 40 RC 40 RC 40 RC 40 RC 40

It ran approx RC 40 from tip back almost to the shoulder & then it dropped to RC 20.

These parts are heat treated only on the points.

Use two other Firing Pins that looked cracked from mag. neglect & under the glass. one broke & one cracked further when bat, material is ok. Kelly will run micro if necessary but at this time it does not seem necessary.

M700 SEAR TEST  
FIRING PIN BREAKAGE AND  
DRY CYCLE NUMBER

*Broken  
Firing Pin*

PM  
139555 -

- 25,000  
- 33,000

FIRING PIN BREAKAGE  
TOTAL CYCLES ON GUN

*work*  
139298 *OK* - 21,000  
- 21,000

FIRING PIN LAST CHECKED OKAY  
TOTAL CYCLES ON GUN

*work*  
139609 *OK* - 21,000  
- 21,000

FIRING PIN LAST CHECKED OKAY  
TOTAL CYCLES ON GUN

154225 - 10,000  
- 10,000

FIRING PIN LAST CHECKED OKAY  
TOTAL CYCLES ON GUN

*PM*  
X 139413 - 26,000  
- 29,000

FIRING PIN LAST TESTED OKAY  
TOTAL CYCLES ON GUN

*PM ch*  
X 139457 - 30,000  
*Broken at Shoulder* 70,000

FIRING PIN LAST CHECKED OKAY  
TOTAL CYCLES ON GUN

*PM ch*  
139312 *OK* - 30,000  
- 70,000

FIRING PIN LAST CHECKED OKAY  
TOTAL CYCLES ON GUN

*std Prod*  
X 153959 - 10,000  
- 50,000

FIRING PIN LAST CHECKED OKAY  
TOTAL CYCLES ON GUN

AAH  
2/24/66

# M700 SEAR TEST FIRING PIN BREAKAGE AND DRY CYCLE NUMBER

139555	- 25,000 - 33,000	FIRING PIN BREAKAGE TOTAL CYCLES ON GUN	X
139298 OK	- 21,000 - 21,000	FIRING PIN LAST CHECKED OKAY TOTAL CYCLES ON GUN	
139609 OK	- 21,000 - 21,000	FIRING PIN LAST CHECKED OKAY TOTAL CYCLES ON GUN	
154225-	- 10,000 - 10,000	FIRING PIN LAST CHECKED OKAY TOTAL CYCLES ON GUN	
139413	- 26,000 - 29,000	FIRING PIN LAST TESTED OKAY TOTAL CYCLES ON GUN	
139457	- 30,000 70,000	FIRING PIN LAST CHECKED OKAY TOTAL CYCLES ON GUN	
139312 OK	- 30,000 - 70,000	FIRING PIN LAST CHECKED OKAY TOTAL CYCLES ON GUN	
153959	- 10,000 - 50,000	FIRING PIN LAST CHECKED OKAY TOTAL CYCLES ON GUN	

John  
 we should give workman  
 a test rifle or two with known  
 firing pins when he tests the  
 production PPT sears  
 JWH

AAH  
 2/24/66

11-22-65

Mike  
 Paul Aoy  
 Kelly Chalk  
 Clarke  
 Adam  
 Nic DeBres

9 AM Monday  
 Nov. 22

1. Release Chromed P.M. Seals to production if there are no more tests to run. For M700+60
2. A. When new parts are run with corrected dies test will be run to see if 40 X B can be included.  
 B also test parts impregnated with oil as one of tests to determine if seals can be used without chrome plate.  
 C. section parts with discolored surface to see what discolored surface is.

Kelby to get new P.M. Seals made up & tumbled & plated. Decision as to what is to be done will be made at that time. Opinion seems to be that seal is ok & can be released to production however it should be kept track of once it is released to make sure there are no complaints because of this fact etc because of P.M. chroming

RD 6565

EST, #2502ESTIMATED SAVINGS & RETURN ON INVESTMENTPROPOSED ONE PIECE POWDER METAL BLANK  
M/XP-100, 600 & 700 SEAR SAFETY CAM ASSY


	<u>1965 Year of Operation</u>		
	<u>PRESENT</u> <u>(2) PIECE</u> <u>CONSTR.</u>	<u>PROPOSED</u> <u>(1) PIECE</u> <u>STAMPING</u>	<u>PROPOSED</u> <u>(1) PIECE</u> <u>POWDER</u> <u>METAL BLANK</u> <u>PROPOSED</u> <u>"B"</u>
<u>Quantity Forecast</u>	XP-100 1,200 M/600 15,000 M/700 32,000	49,200	
<u>OPERATING COSTS</u>			
Purchased parts	\$ 2,750	\$ 1,620	\$
Raw material			400
Direct Labor	6,840	4,470	1,190
Industrial Relations @ 33%	2,260	1,480	390
Supplies			
Tool Replacement			
Cutter Grind	680	1,110	1,080
Tool Maintenance			
Maintenance			
Electricity		230	360
Equipment Depreciation @ 10 1/2%		710	
Franchise Tax @ 4 1/2%		130	380
	<u>\$12,530</u>	<u>\$9,520</u>	<u>\$3,440</u>
<u>SAVINGS IN OPERATING COST</u>		\$3,010	\$2,090
Less: All other expense:			
All Other 6.5%; Federal Tax 48%		1,550	4,670
<u>NET SAVINGS</u>		<u>\$1,460</u>	<u>\$4,420</u>
<u>INVESTMENT</u>			
Project expenditures	\$ 7,100	\$	\$
Manufacturing and working facilities			
Net Change in working capital	(2,000)		(5,450)
Total capital required for this project	<u>\$5,100</u>		<u>\$5,450</u>
<u>RETURN ON INVESTMENT - THIS PROJECT</u>	28.6%		NO CAPITAL INVESTMENT
*****			
Return on total capital required including	VENDOR TOOLING \$2,400 P/M TOOLING \$1,600		
research and development and other	OPER. CHGES \$3,900		400
operation charges	\$11,400		(8,345)
	12.8%		NET DECREASE
Return on total additional investment after			IN TOTAL CAPITAL
completion of this project			

(Subdivision 5)

FG CARLSON  
10/15/64

DO NOT SCALE THIS DRAWING. WORK TO FIGURES  
UNLESS OTHERWISE NOTED. TOLERANCES  
ON DECIMAL DIMENSIONS ARE  $\pm .005$   
& ON FRACTIONAL DIMENSIONS  $\pm \frac{.01}{64}$   
& ON ANGULAR DIMENSIONS  $\pm 00^{\circ}30'$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS  
VALUES AND THE MAXIMUM ALLOWABLE  
SURFACE TEXTURE IS ACCEPTABLE. UNLESS OTHERWISE  
SPECIFIED, FINISH ROUGHNESS TO BE  
125 OR BETTER.

LET.	WAS	REFERENCE	BY	DATE
14	REDREW N	4862	GR	8-13-64
15	B17946	"	GR	"
16	ADD 56 40X 8	3129	1/28	1-29-64
17	347	5779	1/28	7-29-64

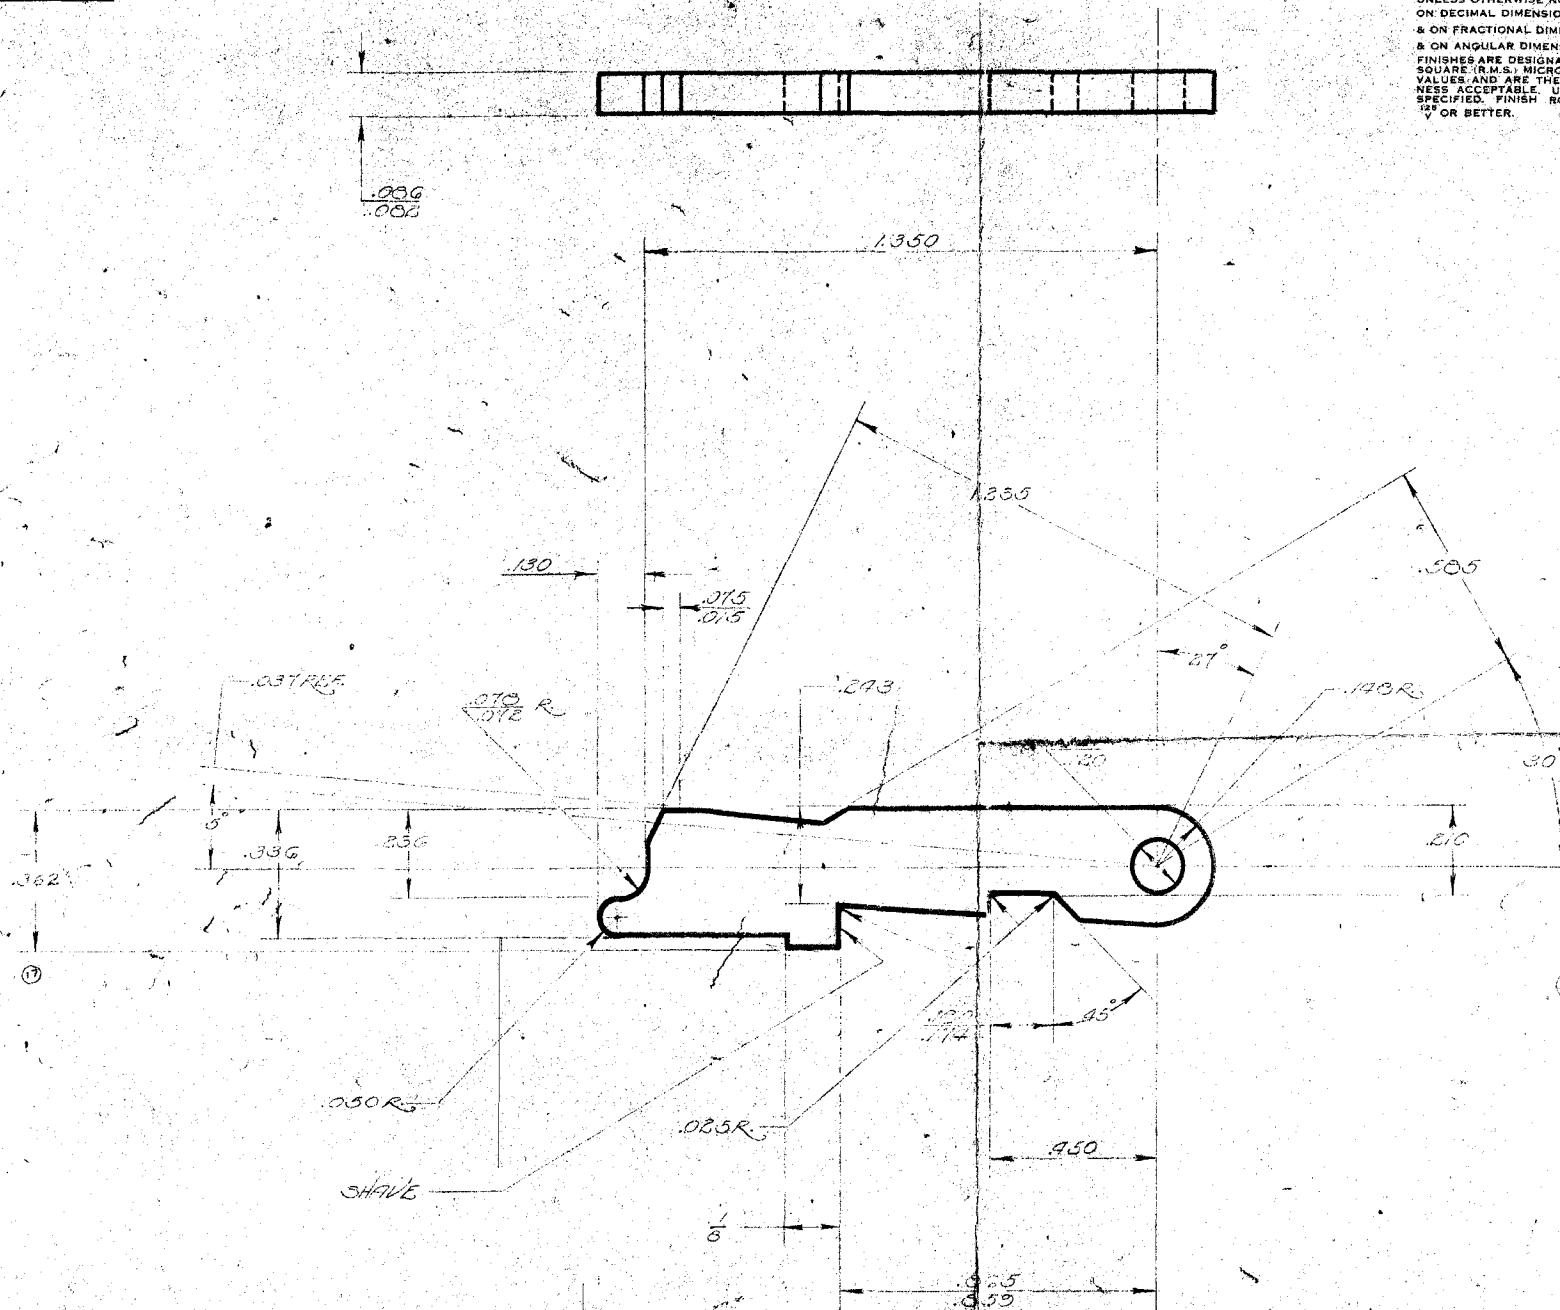

REF ID: A66744

C-1022 OR 1020

...and the other is the fact that the system is not yet fully operational. The system is still in the process of being developed and is not yet ready for use. The system is still in the process of being developed and is not yet ready for use.

*Journal of Management Education* 30(6)p.789-804

10-10-1964

THE UNIVERSITY OF CHICAGO PRESS

...the ... ..

40X-5	SEAR	BLANK	03/10/94
40X-6	SEAR	BLANK	03/10/94
40X-7	SEAR	BLANK	03/10/94
40X-8	SEAR	BLANK	03/10/94
41A	SEAR	BLANK	03/10/94
41B	SEAR	BLANK	03/10/94
41C	SEAR	BLANK	03/10/94
41D	SEAR	BLANK	03/10/94
41E	SEAR	BLANK	03/10/94
41F	SEAR	BLANK	03/10/94
41G	SEAR	BLANK	03/10/94
41H	SEAR	BLANK	03/10/94
41I	SEAR	BLANK	03/10/94
41J	SEAR	BLANK	03/10/94
41K	SEAR	BLANK	03/10/94
41L	SEAR	BLANK	03/10/94
41M	SEAR	BLANK	03/10/94
41N	SEAR	BLANK	03/10/94
41O	SEAR	BLANK	03/10/94
41P	SEAR	BLANK	03/10/94
41Q	SEAR	BLANK	03/10/94
41R	SEAR	BLANK	03/10/94
41S	SEAR	BLANK	03/10/94
41T	SEAR	BLANK	03/10/94
41U	SEAR	BLANK	03/10/94
41V	SEAR	BLANK	03/10/94
41W	SEAR	BLANK	03/10/94
41X	SEAR	BLANK	03/10/94
41Y	SEAR	BLANK	03/10/94
41Z	SEAR	BLANK	03/10/94

MODEL	PART USE	QUAN.	SEE
-------	----------	-------	-----

DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE
---------------	---------------	---------------	---------------

2-13-62

TITLE	...
-------	-----

SLACK BLANK

NUMBER	SCALE	SUPERSEDES--REFERENCE
1	1:50,000	1:50,000

IC 17945 4:1 1D-1 344

100-71546 REMINGTON ARMS CO. INC.

RESEARCH & DEV DEPT




ALT	DATE	BY	REVISION
10	12/10/43	1953	10

DO NOT SCALE THIS DRAWING. WHERE TOLERANCES  
UNLESS OTHERWISE NOTED, TOLERANCES  
ON DECIMAL DIMENSIONS ARE  $\pm .005$   
& ON FRACTIONAL DIMENSIONS  $\pm .01$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS  
VALUES AND ARE THE MAXIMUM ROUGHNESS  
VALUES ALLOWED. FINISHES SPECIFIED  
125 OR BETTER.

**SUPERSEDED**

SEE D.E. 6500 DATED 4-31-64

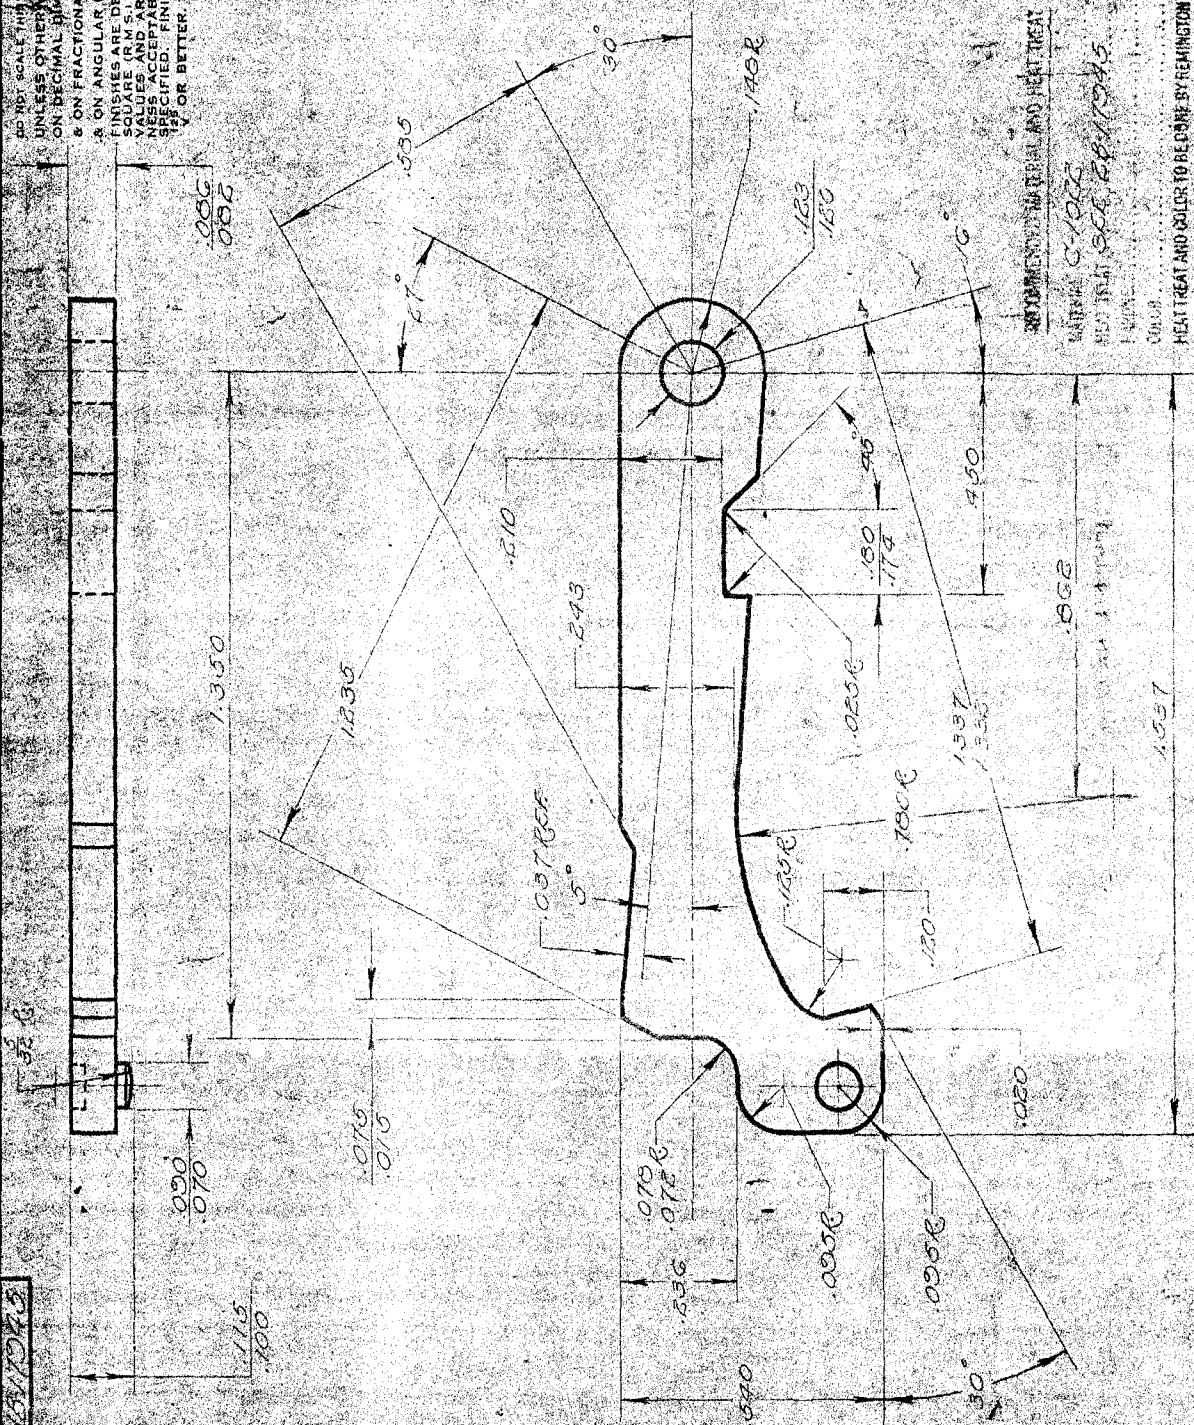


MODEL		PART USE	DATE	BY	REVISION
1013	SAFETY CATCH BLANK				
1014	SAFETY CATCH BLANK				
1015	SAFETY CATCH BLANK				
1016	SAFETY CATCH BLANK				
1017	SAFETY CATCH BLANK				
1018	SAFETY CATCH BLANK				
1019	SAFETY CATCH BLANK				
1020	SAFETY CATCH BLANK				
1021	SAFETY CATCH BLANK				
1022	SAFETY CATCH BLANK				
1023	SAFETY CATCH BLANK				
1024	SAFETY CATCH BLANK				
1025	SAFETY CATCH BLANK				
1026	SAFETY CATCH BLANK				
1027	SAFETY CATCH BLANK				
1028	SAFETY CATCH BLANK				
1029	SAFETY CATCH BLANK				
1030	SAFETY CATCH BLANK				
1031	SAFETY CATCH BLANK				
1032	SAFETY CATCH BLANK				
1033	SAFETY CATCH BLANK				
1034	SAFETY CATCH BLANK				
1035	SAFETY CATCH BLANK				
1036	SAFETY CATCH BLANK				
1037	SAFETY CATCH BLANK				
1038	SAFETY CATCH BLANK				
1039	SAFETY CATCH BLANK				
1040	SAFETY CATCH BLANK				
1041	SAFETY CATCH BLANK				
1042	SAFETY CATCH BLANK				
1043	SAFETY CATCH BLANK				
1044	SAFETY CATCH BLANK				
1045	SAFETY CATCH BLANK				
1046	SAFETY CATCH BLANK				
1047	SAFETY CATCH BLANK				
1048	SAFETY CATCH BLANK				
1049	SAFETY CATCH BLANK				
1050	SAFETY CATCH BLANK				
1051	SAFETY CATCH BLANK				
1052	SAFETY CATCH BLANK				
1053	SAFETY CATCH BLANK				
1054	SAFETY CATCH BLANK				
1055	SAFETY CATCH BLANK				
1056	SAFETY CATCH BLANK				
1057	SAFETY CATCH BLANK				
1058	SAFETY CATCH BLANK				
1059	SAFETY CATCH BLANK				
1060	SAFETY CATCH BLANK				
1061	SAFETY CATCH BLANK				
1062	SAFETY CATCH BLANK				
1063	SAFETY CATCH BLANK				
1064	SAFETY CATCH BLANK				
1065	SAFETY CATCH BLANK				
1066	SAFETY CATCH BLANK				
1067	SAFETY CATCH BLANK				
1068	SAFETY CATCH BLANK				
1069	SAFETY CATCH BLANK				
1070	SAFETY CATCH BLANK				
1071	SAFETY CATCH BLANK				
1072	SAFETY CATCH BLANK				
1073	SAFETY CATCH BLANK				
1074	SAFETY CATCH BLANK				
1075	SAFETY CATCH BLANK				
1076	SAFETY CATCH BLANK				
1077	SAFETY CATCH BLANK				
1078	SAFETY CATCH BLANK				
1079	SAFETY CATCH BLANK				
1080	SAFETY CATCH BLANK				
1081	SAFETY CATCH BLANK				
1082	SAFETY CATCH BLANK				
1083	SAFETY CATCH BLANK				
1084	SAFETY CATCH BLANK				
1085	SAFETY CATCH BLANK				
1086	SAFETY CATCH BLANK				
1087	SAFETY CATCH BLANK				
1088	SAFETY CATCH BLANK				
1089	SAFETY CATCH BLANK				
1090	SAFETY CATCH BLANK				
1091	SAFETY CATCH BLANK				
1092	SAFETY CATCH BLANK				
1093	SAFETY CATCH BLANK				
1094	SAFETY CATCH BLANK				
1095	SAFETY CATCH BLANK				
1096	SAFETY CATCH BLANK				
1097	SAFETY CATCH BLANK				
1098	SAFETY CATCH BLANK				
1099	SAFETY CATCH BLANK				
1100	SAFETY CATCH BLANK				
1101	SAFETY CATCH BLANK				
1102	SAFETY CATCH BLANK				
1103	SAFETY CATCH BLANK				
1104	SAFETY CATCH BLANK				
1105	SAFETY CATCH BLANK				
1106	SAFETY CATCH BLANK				
1107	SAFETY CATCH BLANK				
1108	SAFETY CATCH BLANK				
1109	SAFETY CATCH BLANK				
1110	SAFETY CATCH BLANK				
1111	SAFETY CATCH BLANK				
1112	SAFETY CATCH BLANK				
1113	SAFETY CATCH BLANK				
1114	SAFETY CATCH BLANK				
1115	SAFETY CATCH BLANK				
1116	SAFETY CATCH BLANK				
1117	SAFETY CATCH BLANK				
1118	SAFETY CATCH BLANK				
1119	SAFETY CATCH BLANK				
1120	SAFETY CATCH BLANK				
1121	SAFETY CATCH BLANK				
1122	SAFETY CATCH BLANK				
1123	SAFETY CATCH BLANK				
1124	SAFETY CATCH BLANK				
1125	SAFETY CATCH BLANK				
1126	SAFETY CATCH BLANK				
1127	SAFETY CATCH BLANK				
1128	SAFETY CATCH BLANK				
1129	SAFETY CATCH BLANK				
1130	SAFETY CATCH BLANK				
1131	SAFETY CATCH BLANK				
1132	SAFETY CATCH BLANK				
1133	SAFETY CATCH BLANK				
1134	SAFETY CATCH BLANK				
1135	SAFETY CATCH BLANK				
1136	SAFETY CATCH BLANK				
1137	SAFETY CATCH BLANK				
1138	SAFETY CATCH BLANK				
1139	SAFETY CATCH BLANK				
1140	SAFETY CATCH BLANK				
1141	SAFETY CATCH BLANK				
1142	SAFETY CATCH BLANK				
1143	SAFETY CATCH BLANK				
1144	SAFETY CATCH BLANK				
1145	SAFETY CATCH BLANK				
1146	SAFETY CATCH BLANK				
1147	SAFETY CATCH BLANK				
1148	SAFETY CATCH BLANK				
1149	SAFETY CATCH BLANK				
1150	SAFETY CATCH BLANK				
1151	SAFETY CATCH BLANK				
1152	SAFETY CATCH BLANK				
1153	SAFETY CATCH BLANK				
1154	SAFETY CATCH BLANK				
1155	SAFETY CATCH BLANK				
1156	SAFETY CATCH BLANK				
1157	SAFETY CATCH BLANK				
1158	SAFETY CATCH BLANK				
1159	SAFETY CATCH BLANK				
1160	SAFETY CATCH BLANK				
1161	SAFETY CATCH BLANK				
1162	SAFETY CATCH BLANK				
1163	SAFETY CATCH BLANK				
1164	SAFETY CATCH BLANK				
1165	SAFETY CATCH BLANK				
1166	SAFETY CATCH BLANK				
1167	SAFETY CATCH BLANK				
1168	SAFETY CATCH BLANK				
1169	SAFETY CATCH BLANK				
1170	SAFETY CATCH BLANK				
1171	SAFETY CATCH BLANK				
1172	SAFETY CATCH BLANK				
1173	SAFETY CATCH BLANK				
1174	SAFETY CATCH BLANK				
1175	SAFETY CATCH BLANK				
1176	SAFETY CATCH BLANK				
1177	SAFETY CATCH BLANK				
1178	SAFETY CATCH BLANK				
1179	SAFETY CATCH BLANK				
1180	SAFETY CATCH BLANK				
1181	SAFETY CATCH BLANK				
1182	SAFETY CATCH BLANK				
1183	SAFETY CATCH BLANK				
1184	SAFETY CATCH BLANK				
1185	SAFETY CATCH BLANK				
1186	SAFETY CATCH BLANK				
1187	SAFETY CATCH BLANK				
1188	SAFETY CATCH BLANK				
1189	SAFETY CATCH BLANK				
1190	SAFETY CATCH BLANK				
1191	SAFETY CATCH BLANK				
1192	SAFETY CATCH BLANK				
1193	SAFETY CATCH BLANK				
1194	SAFETY CATCH BLANK				
1195	SAFETY CATCH BLANK				
1196	SAFETY CATCH BLANK				
1197	SAFETY CATCH BLANK				
1198	SAFETY CATCH BLANK				
1199	SAFETY CATCH BLANK				
1200	SAFETY CATCH BLANK				
1201	SAFETY CATCH BLANK				
1202	SAFETY CATCH BLANK				
1203	SAFETY CATCH BLANK				
1204	SAFETY CATCH BLANK				
1205	SAFETY CATCH BLANK				
1206	SAFETY CATCH BLANK				
1207	SAFETY CATCH BLANK				
1208	SAFETY CATCH BLANK				
1209	SAFETY CATCH BLANK				
1210	SAFETY CATCH BLANK				
1211	SAFETY CATCH BLANK				
1212	SAFETY CATCH BLANK				
1213	SAFETY CATCH BLANK				
1214	SAFETY CATCH BLANK				
1215	SAFETY CATCH BLANK				
1216	SAFETY CATCH BLANK				
1217	SAFETY CATCH BLANK				
1218	SAFETY CATCH BLANK				
1219	SAFETY CATCH BLANK				
1220	SAFETY CATCH BLANK				
1221	SAFETY CATCH BLANK				
1222	SAFETY CATCH BLANK				
1223	SAFETY CATCH BLANK				
1224	SAFETY CATCH BLANK				
1225	SAFETY CATCH BLANK				
1226	SAFETY CATCH BLANK				
1227	SAFETY CATCH BLANK				
1228	SAFETY CATCH BLANK				
1229	SAFETY CATCH BLANK				
1230	SAFETY CATCH BLANK				
1231	SAFETY CATCH BLANK				
1232	SAFETY CATCH BLANK				
1233	SAFETY CATCH BLANK				
1234	SAFETY CATCH BLANK				
1235	SAFETY CATCH BLANK				
1236	SAFETY CATCH BLANK				
1237	SAFETY CATCH BLANK				
1238	SAFETY CATCH BLANK				
1239	SAFETY CATCH BLANK				
1240	SAFETY CATCH BLANK				
1241	SAFETY CATCH BLANK				
1242	SAFETY CATCH BLANK				
1243	SAFETY CATCH BLANK				
1244	SAFETY CATCH BLANK				
1245	SAFETY CATCH BLANK				
1246	SAFETY CATCH BLANK				
1247	SAFETY CATCH BLANK				
1248	SAFETY CATCH BLANK				
1249	SAFETY CATCH BLANK				
1250	SAFETY CATCH BLANK				
1251	SAFETY CATCH BLANK				
1252	SAFETY CATCH BLANK				
1253	SAFETY CATCH BLANK				
1254	SAFETY CATCH BLANK				
1255	SAFETY CATCH BLANK				
1256	SAFETY CATCH BLANK				
1257	SAFETY CATCH BLANK				
1258	SAFETY CATCH BLANK				
1259	SAFETY CATCH BLANK				
1260	SAFETY CATCH BLANK				
1261	SAFETY CATCH BLANK				
1262	SAFETY CATCH BLANK				
1263	SAFETY CATCH BLANK				
1264	SAFETY CATCH BLANK				
1265	SAFETY CATCH BLANK				
1266	SAFETY CATCH BLANK				
1267	SAFETY CATCH BLANK				
1268	SAFETY CATCH BLANK				
1269	SAFETY CATCH BLANK				
1270	SAFETY CATCH BLANK				
1271	SAFETY CATCH BLANK				
1272	SAFETY CATCH BLANK				
1273	SAFETY CATCH BLANK				
1274	SAFETY CATCH BLANK				
1275	SAFETY CATCH BLANK				
1276	SAFETY CATCH BLANK				
1277	SAFETY CATCH BLANK				
1278	SAFETY CATCH BLANK				
1279	SAFETY CATCH BLANK				
1280	SAFETY CATCH BLANK				
1281	SAFETY CATCH BLANK				
1282	SAFETY CATCH BLANK				
1283	SAFETY CATCH BLANK				
1284	SAFETY CATCH BLANK				
1285	SAFETY CATCH BLANK				
1286	SAFETY CATCH BLANK				
1287	SAFETY CATCH BLANK				
1288	SAFETY CATCH BLANK				
1289	SAFETY CATCH BLANK				
1290	SAFETY CATCH BLANK				
1291	SAFETY CATCH BLANK				
1292	SAFETY CATCH BLANK				
1293	SAFETY CATCH BLANK				
1294	SAFETY CATCH BLANK				
1295	SAFETY CATCH BLANK				
1296	SAFETY CATCH BLANK				
1297	SAFETY CATCH BLANK				
1298	SAFETY CATCH BLANK				
1299	SAFETY CATCH BLANK				
1300	SAFETY CATCH BLANK				
1301	SAFETY CATCH BLANK				
1302	SAFETY CATCH BLANK				
1303	SAFETY CATCH BLANK				
1304	SAFETY CATCH BLANK				
1305	SAFETY CATCH BLANK				
1306	SAFETY CATCH BLANK				
1307	SAFETY CATCH BLANK				
1308	SAFETY CATCH BLANK				
1309	SAFETY CATCH BLANK				
1310	SAFETY CATCH BLANK				
1311	SAFETY CATCH BLANK				
1312	SAFETY CATCH BLANK				
1313	SAFETY CATCH BLANK				

2B-17945

DIMENSION	BEFORE HEAT TREAT	AFTER HEAT TREAT
A	1.2255 1.2235	1.225 1.223



WHEN SET TO .3815  
BASIC  $\phi$  TO BOTTOM

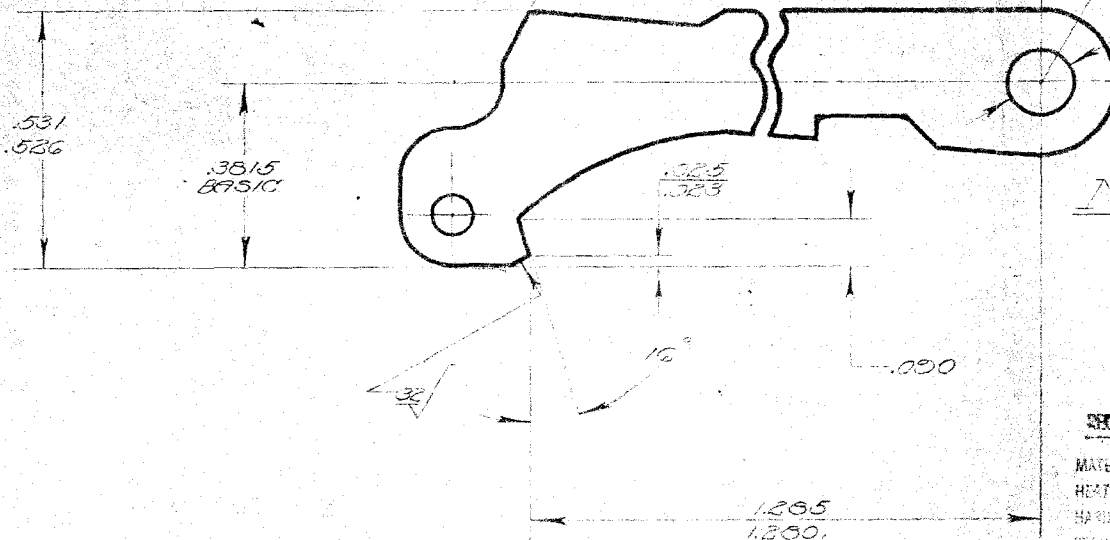

**RECOMMENDED MATERIAL AND HEAT TREAT**

MATERIAL C-1022  
HEAT TREAT CYANIDE  
HARDNESS R15N 30-30  
COLOR NOTE  
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

2B-17945

DO NOT SCALE THIS DRAWING. WORK TO FIGURES  
UNLESS OTHERWISE NOTED. TOLERANCES  
ON DECIMAL DIMENSIONS ARE  $\pm .005$   
& ON FRACTIONAL DIMENSIONS  $\pm \frac{1}{64}$   
& ON ANGULAR DIMENSIONS  $\pm 00^{\circ}30'$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS  
VALUES AND ARE THE MAXIMUM ROUGH-  
NESS ACCEPTABLE UNLESS OTHERWISE  
SPECIFIED. FINISH ROUGHNESS TO BE  
125  
V OR BETTER.

**ALTERATIONS**

LET.	WAS.	REFERENCE	BY	DATE
1B	REDRAWN	9253	40	9-6-62

**SUPERSEDED**  
SEE 5149 DATED 3-20-63

**NOTE**

FOR DIMENSIONS  
NOT SHOWN, SEE  
SAFETY CAM BLANK  
DWG. 1B-17945.

4070	SAFETY CAM	PL	
4071	SAFETY CAM	PL	
722	SAFETY CAM	PL	
731	SAFETY CAM	PL	
MODEL	PART USE	QUAN.	SEE
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE
	2-6-62	10-1-62	10-1-62
TITLE			
SAFETY CAM			
NUMBER	SCALE	SUPERSEDES—REFERENCE	
2B-17945	4:1		
REMINGTON ARMS CO. INC.			
RESEARCH & DEV. DEPT.			

REMINGTON ARMS CO. INC.  
RESEARCH & DEV. DEPT.

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINER V. REMINGTON

BARBER - PRESALE R 0137609  
72538597


2-B-17945

RECOMMENDATION FOR HEAT TREAT  
MATERIAL SEE 15-17945  
HEAT TREAT CHANICE  
HARDNESS R15N 80-90  
COLOR NONE  
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

DO NOT SCALE THIS DRAWING. WORK TO FIGURES  
UNLESS OTHERWISE NOTED. TOLERANCES  
ON DECIMAL DIMENSIONS ARE  $\pm .005$   
ON FRACTIONAL DIMENSIONS  $\pm \frac{1}{64}$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S) MICRO-INCH ROUGHNESS  
VALUES AND ARE THE MAXIMUM ROUGH-  
NESS ACCEPTABLE. UNLESS OTHERWISE  
SPECIFIED. FINISH ROUGHNESS TO BE  
125 OR BETTER.

ALTERATIONS				
LET.	WAS	REFERENCE	BY	DATE
1	ADDED	300103	L.R.	2-12-47
2	.049 - .043	" "	L.R.	2-12-47
3	.025	" 100	" "	2-21-47
4	B-17945	" "	" "	2-21-47
5	.070 - .080	" "	" "	2-24-47
6	AISI-C1118	" "	" "	" "
7	D-17036Y	" "	" "	7-16-47
8	ADDED NOTE	" "	" "	7-21-47
9	ADDED .0015	" "	" "	" "
10	.125	" "	" "	" "
11	.020	222060	" "	4-8-48
12	Added	02R141	" "	11-29-51
13	ADDED	255	" "	5-8-53
14	ADDED	3941	" "	7-15-60
15	"	222060	" "	6-1-61
16	"	"	" "	" "
17	Revised N. 700	4295	" "	7-1-61

DIMEN- SION	BEFORE	AFTER
	HEAT TREAT	HEAT TREAT
A	1.2235	1.223
	1.2255	1.225

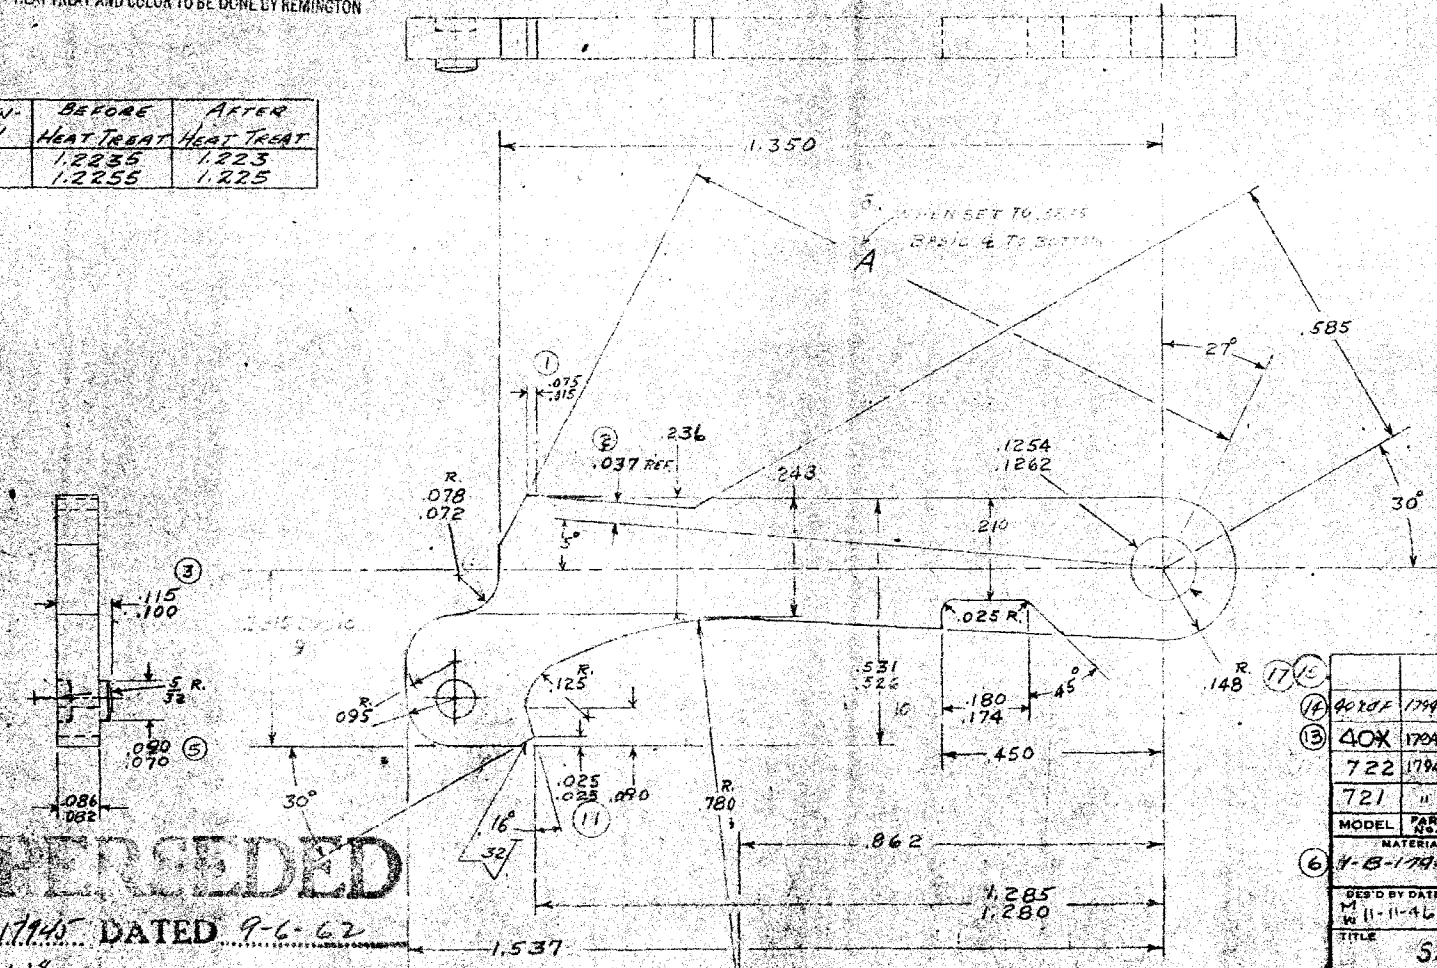

**SUPERSEDED**  
SEE 2-B-17945 DATED 9-6-62  
REV. 18  
#4953

17 15					
14	40X 17945	SAFETY CAM	1	1/16	P.L.
13	40X 17945	SAFETY CAM	"	"	P.L.
	722 17945	SAFETY CAM	L.R.	11-29-51	
	721 "	SAFETY CAM	L.R.	"	
	MODEL	PART NO.	PART USE	QUAN.	DATE
6	MATERIAL		HEAT TREATMENT	SURFACE TREATMENT	
	2-B-17945		205-010	NONE	
	FOR DETAILS, SEE PROCESS RECORD				
	DES'D BY DATE	DRAWN BY DATE	INDEX BY DATE	CHECK BY DATE	
	M 11-11-46	L.R. 1-17-47	"	M 11-29-51	
	TITLE				APPR. BY DATE
	SAFETY CAM				W. L. BAKER
	NUMBER	SCALE	REFERENCE		
1	2-B-17945	4 X SIZE	0		
	THE REMINGTON ARMS CO.				
	TECHNICAL DRAWING				

10/26/65

Chromed P. M. Sears - Tests to be completed after  
 #1. Drop test: dry cycle tests are completed?

2. Dust test. (Wet) ? (#15)

Run with control  
sample.

3. Creep.

#4. Safety mechanism <sup>stroke</sup> test. (#9)

5. No Lubrication test (#16). Done in house

6. Field test (#18)

7. Defective Imms. (Punctured primer etc.) (#20)

8. Safety Mechanism Function Test (#22)

not necessary!

Get 40X B with <sup>new</sup> Chrom. PM Sears & Connectors  
 checks to see that load stays constant  
 thru dry cycle.

## P.M. 5 ear test

1. Wash P.M. sear in hi clean.
2. " connector in hi clean
3. assemble into Fire control without touching mating surfaces or cam surface.
4. wash Firing Pin head sear cam surface.
5. adjust trigger pull within specs. if possible.
6. Take 5 readings of spring force at trigger pull.
7. " " " " trigger pull.
8. Dry cycle rifle (slow interval approx 5 sec.)
9. Check 5 reading of trigger pull.
10. check surfaces for visual.
11. If rust appearing & heavy enough have part returned to check to see if it is rust.
12. If not heavy enough run more dry cycle to bedding more surface for checking.

35722  
35915

Keily

1. Present scars are lapped before & after chum.
2. D. 1. Ions have very small volume on contact surface.
3. What consistent weight should be checked for?
  1. 3# to start with.
  2. 1# to start with.
  3. 3# for testing.
  4. 1# after testing.

P 14. ~~Seams~~

Impregnated with oil instead of chrome plated.

1. dirt & dust pickup be too great?
2. wear of surface?
3. cost of dipping over chrome?
- 4.


1. Have new 5 ears made up with converted dies.
2. Chrome parts for test.
3. Cost to chrome.
4. oil impregnated parts for test.
5. cost to impregnate with oil.
- 6.

zinc phosphate

many hours



BARBER - PRESALE R 0137616  
R2538604

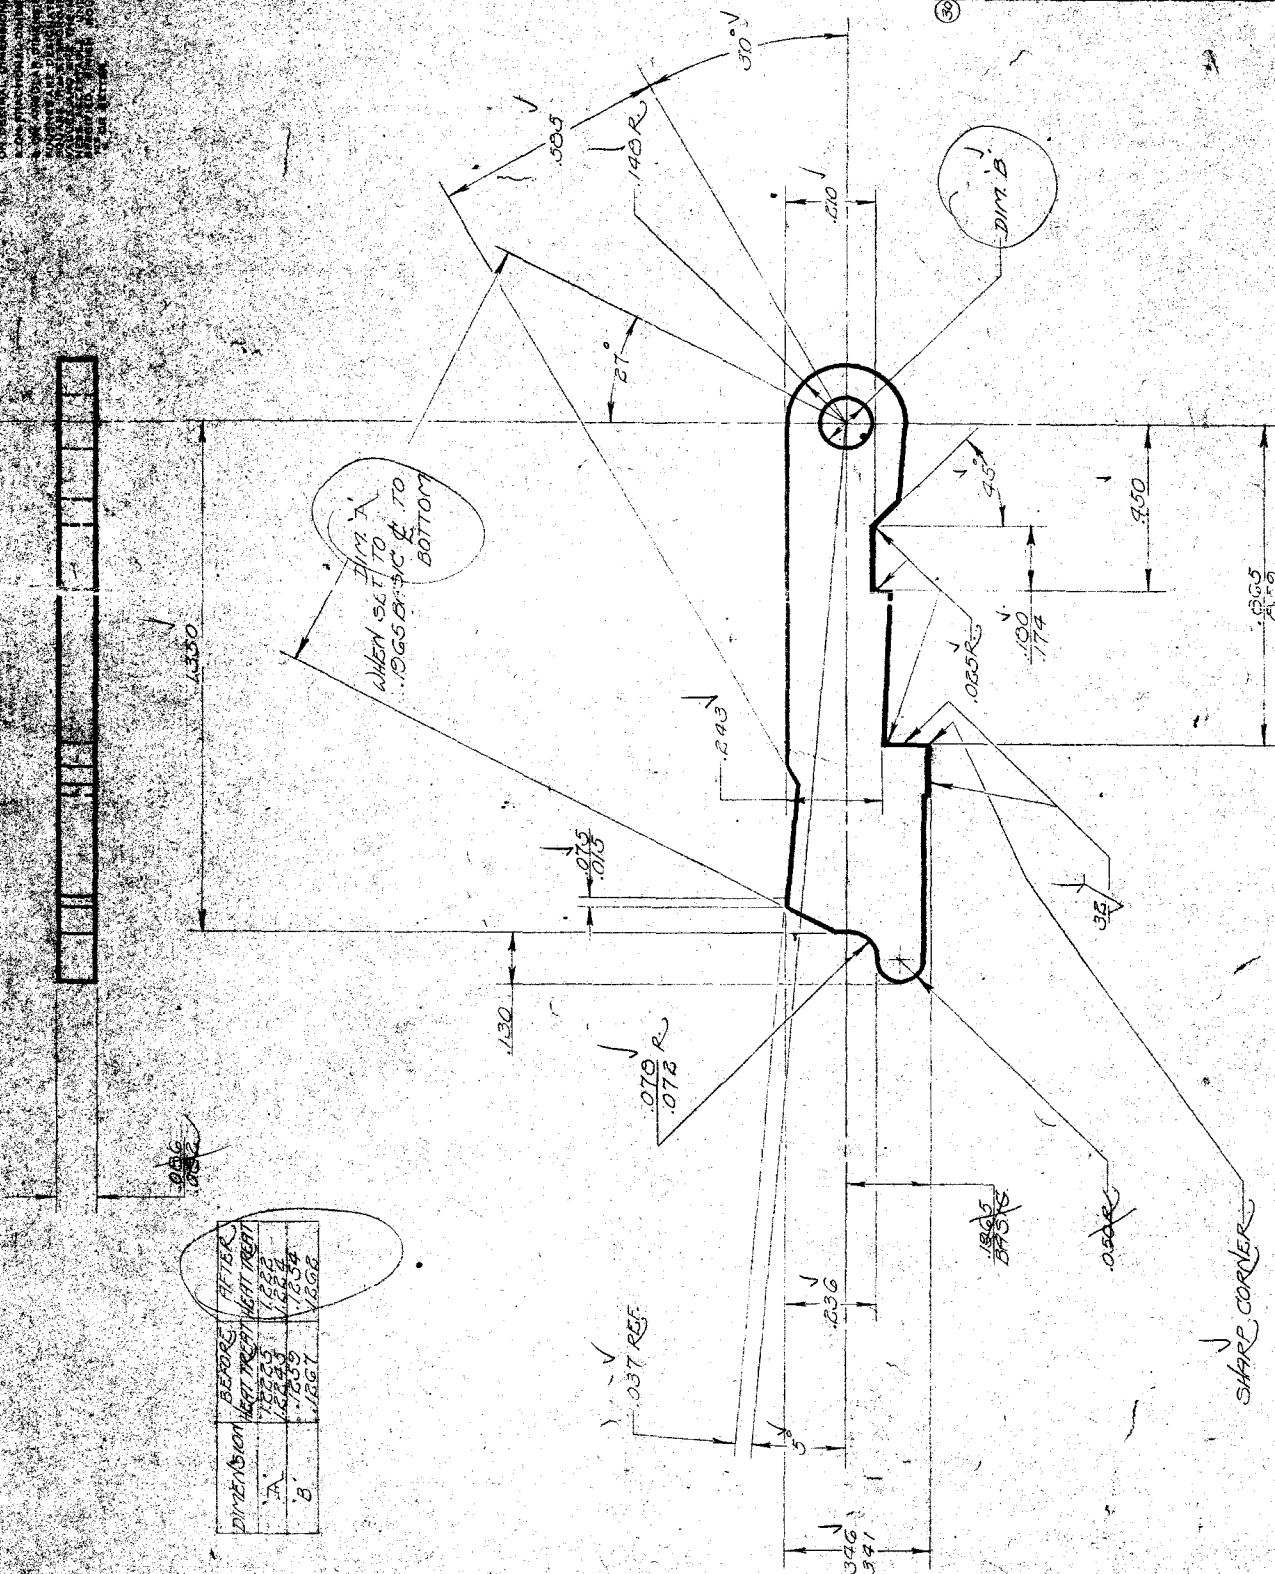[illegible]

# STANDARD SYSTEMS AND BEST PRACTICES

[illegible]

SECRET

HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

100

12/18/78

John Brooks

Per M/D Change # <sup>DCR</sup> 10586 - we  
are grinding flat - not at 60

---

Any questions please J. Hall  
call or contact —  
J. Hall

1. What type of fixture?
  2. Could it be attached to ground at 50
- Gerry will let us know 1/9/79  
yes it can be

D-6738

DESIGN CHANGE REQUEST (DCR)

~~PARTS LIST CHANGE NOTICE (PLCN)~~~~PARTS LIST TRANSMITTAL~~~~TRANSMITTAL OF DRAWINGS / PARTS LIST~~

DCR # 10586

Sheet 1 of 1

Requested By	Changed By	Date
RESEARCH	F. MARTIN	9 Jan 78
Originating Date	Transmittal Date	
	F-10-78	

Model	Part Name	Drawing No.	Part No.
M-700	SEAR SAFETY CAM	C-15666	
M-600	SEAR SAFETY CAM	C-91490	

Dwg. No.	Rev. No.	Design Change
C-15666	12	CHGD. "AFTER GRIND" TO "BLACK FIN"
"	13	ADD .866-.870 AFTER GRIND
C-91490	9	CHGD. "AFTER GRIND" TO "BLACK FIN"
"	10	ADD .866-.870 AFTER GRIND

Reason for Change: FOR BETTER DIMENSIONAL CONTROL OF PARTS AND IMPROVE CHARACTERISTICS OF TRIGGER ASSEMBLY BY INSURING SHARP CORNER AFTER GRIND.

Disposition of Parts on Hand (check below)

( ) Scrap ( ) Alter ( ) Use Inventory

(PLCN) Use form below if part number is changed / add - used, or superseded.

	Drawing No.	Part No.	Part Name
Current Listing			
New Listing			
Current Listing			
New Listing			

NOTE: Please mark your Parts List to agree ( )

( ) Superseded Part is Obsolete (check disposition below)

( ) Use Up ( ) Scrap ( ) Service Repair ( ) Other Model Bk

( ) New Part is: ( ) Steel ( ) Powder Metal ( ) Assembly ( ) Wood ( ) Purchased ( ) Other

APPROVED: *John M. Brooks*

RD-6738

DESIGN CHANGE REQUEST (DCR)

DCR # 10566

Sheet 1 of 1

~~PARTS LIST CHANGE NOTICE (PLCN)~~

OR

~~PARTS LIST TRANSMITTAL~~~~TRANSMITTAL OF DRAWINGS / PARTS LIST~~

Requested By	Changed By	Date
RESEARCH	F. MARTIN	9 JAN 78
Originating Date	Transmittal Date	
	1-10-78	

Model	Part Name / ALN	Drawing No.	Part No.
M-700	SEAR SAFETY CAM	C-15666	
M-600	SEAR SAFETY CAM	C-91970	

Dwg. No.	Rev. No.	Design Change
C-15666	12	CHG'D. "AFTER GRIND" TO "BLANK DIM."
"	13	ADD .866-.870 AFTER GRIND
C-91970	9	CHG'D. "AFTER GRIND" TO "BLANK DIM."
"	10	ADD .866-.870 AFTER GRIND

Reason for Change: FOR BETTER DIMENSIONAL CONTROL OF PARTS AND IMPROVE CHARACTERISTICS OF TRIGGER MECHANISM BY INSURING SHARP CORNER AFTER GRIND.

6-29-78 NEW FIXTURE READY FOR TRYOUT

Disposition of Parts on Hand (check below)

( ) Scrap ( ) Alter ( ) Use Inventory

(PLCN) Use form below if part number is changed / add-used, or superseded.

	Drawing No.	Part No.	Part Name
Current Listing			
New Listing			
Current Listing			
New Listing			

NOTE: Please mark your Parts List to agree ( )

( ) Superseded Part is Obsolete (check disposition below)

( ) Use Up ( ) Scrap ( ) Service Repair ( ) Other Model Use

( ) New Part is: ( ) Steel ( ) Powder Metal ( ) Assembly ( ) Wood ( ) Purchased ( ) Other

APPROVED: [Signature]

97951-2



DO NOT SCALE THIS DRAWING. WORK TO FIGURES  
UNLESS OTHERWISE NOTED. TOLERANCES  
ON DECIMAL DIMENSIONS ARE  $\pm .005$   
ON FRACTIONAL DIMENSIONS  $\pm \frac{1}{64}$   
ON ANGULAR DIMENSIONS  $\pm 00'30''$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS  
VALUES AND ARE THE MAXIMUM ROUGH-  
NESS ACCEPTABLE, UNLESS OTHERWISE  
SPECIFIED. FINISH ROUGHNESS TO BE  
125 OR BETTER.

ALTERATIONS				
LET.	WAR	REFERENCE	BY	DATE
1	ADD 660	1444	5	1944
2	ADD BLANK	6736	DD	1947
3	.0002 / .0005	6736	DD	1947
4	ADD HAPPAW	8445	2	11-20
5	ADD 600	10801	10	11-20
6	ADD 100 8.136	10308	10	11-20
7	ADD 100 8.136	10308	10	11-20
8	ADD 100 8.136	10308	10	11-20
9	ADD 100 8.136	10308	10	11-20
10	ADD 100 8.136	10308	10	11-20
11	ADD 100 8.136	10308	10	11-20
12	ADD 100 8.136	10308	10	11-20
13	ADD 100 8.136	10308	10	11-20


# NOTE

NO BURRS WIDER THAN PART  
THICKNESS PERMITTED - PART  
TO WORK FREELY IN .1725 SLOT


⑧

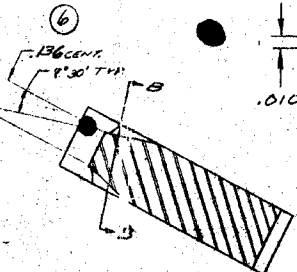

SECTION CC ⑤  
SCALE 10/1

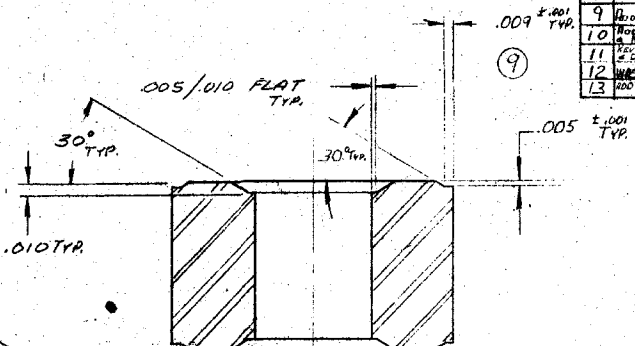

⑥  
NO CROSS  
LINES PERMITTED  
ON THIS  
SURFACE

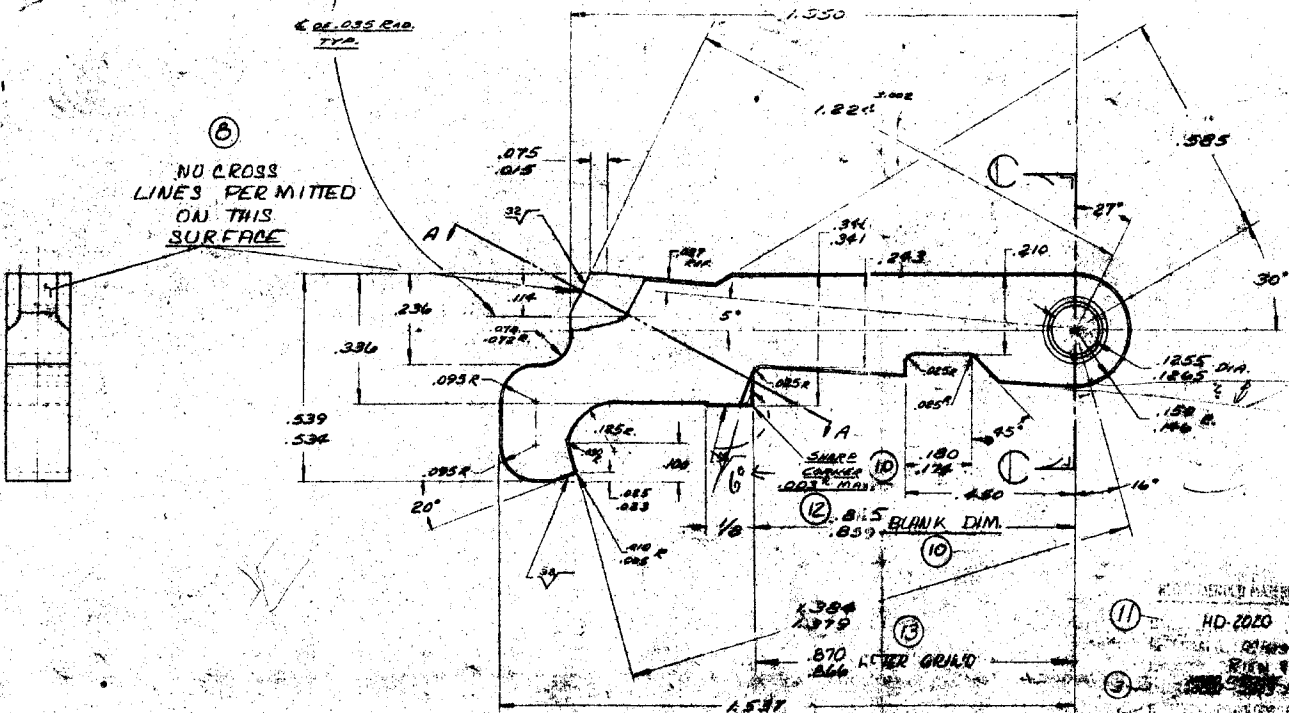

1/11/49 grinding as shown  
can grind @ 6° if desired

⑦	④	①	②	③	⑤	⑥	⑧	⑨
ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD
ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD
ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD
ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD
ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD
ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD
ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD
ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD
ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD	SEAL SAFETY CAM	ADD

xc: R.L. Hall  
 H.K. Boyle  
J.P. Linde  
 G.D. Campbell  
 R.W. Farrington, Jr  
 Est. #4293

May 27, 1981

C.B. Workman

Proposed Revisions to Model 700 ADL Product Specifications

A "high-spot" analysis of current M/700 ADL costs and the effects of proposed revisions to the product specifications has been completed based on a list of proposed features provided by Marketing and Research. All costs are stated in current dollars and are based on current labor, material, and burden rates.

Three sets of specifications and a total of 25 revised features were proposed. Detailed processes and project expenditure estimates were not provided. The net cost effect of each feature was estimated relative to current M/700 ADL specifications and volume. The estimated factory cost for each proposed set of specifications are summarized in the following table:

Feature Present M/700 ADL	Net Cost Effect		Proposals		
	Full Allocation	Incremental	Marketing	Ilion I	Ilion II
	--	--	\$ 138.62	\$ 138.62	\$ 138.62
1. Cut Checkering -	\$ 6.21	\$ 3.62	Yes	Yes	Yes
2. Open Sights	--	--	No	No	No
3. Delete Open Sights	(5.29)	(3.63)	Yes	Yes	Yes
4. Scope Rings	15.63	12.63	Yes	No	No
5. Cast Follower	--	--	Yes	No	No
6. Formed Follower	(3.20)	(2.51)	No	Yes	Yes
7. Soft Rubber Butt Pad	Not Evaluated <sup>1</sup>		No	No	No
8. Simplified Butt Plate	(.25)	(.17)	Yes	Yes	Yes
9. Delete Jeweled Bolt	(.38)	(.28)	No	Yes	Yes
10. Plain Bolt Handle	Not Evaluated <sup>2</sup>		No	Yes	Yes
11. Present Bolt Handle	--	--	Yes	No	No
12. BDL Floor Plate	3.90	2.95	Yes	No	Yes
13. RKW-Finish	--	--	Yes	No	No
14. Lacquer Finish - Gloss	(5.29)	(4.26)	No	Yes	Yes
15. Monte Carlo	--	--	Yes	No	No
16. Cheekpiece	--	--	Yes	No	No
17. Grip Cap - 700 BDL	.28	.19	Yes	No	No
18. "Classic" Style Stock	(.96)	(.70)	No	Yes	Yes
19. Swivel Studs	1.02	.76	Yes	No	Yes
20. Sling	Not Evaluated <sup>1</sup>		No	No	No
21. Walnut Stock	--	--	Yes	Yes	Yes
22. Alternate Wood	Not Evaluated <sup>1</sup>		No	No	No
23. High Gloss Finish	--	--	Yes	Yes <sup>3</sup>	No
24. Satin Finish	--	--	No	Yes	Yes
25. Delete Bolt Lock	(.04)	(.03)	No	No	No

Estimated Full Allocation Factory Cost


\$ 160.09    \$ 129.42    \$ 134.34

Proposed Revisions to Model 700 ADL Product Specifications - (cont'd.)Footnotes to Table

1. Although listed, these features were not estimated because they were deleted in the Marketing and Ilion proposed specifications.
2. A plain bolt handle was not evaluated because neither detailed process estimates nor purchased cost data were currently available.
3. Proposal Ilion I called for high gloss lacquer finish. This feature was estimated based on process costs for the low-lustre M/788 lacquer finish.

As a further basis for comparison, the following table shows estimated pre-tax earnings and percentage margin at current M/700 ADL pricing for each proposal, plus calculated net and retail selling prices to yield stated percentage margin levels.

	<u>Present</u> <u>M/700 ADL</u>	<u>Marketing</u>	<u>Ilion I</u>	<u>Ilion II</u>
Current Retail Selling Price	\$ 334.95	\$ 334.95	\$ 334.95	\$ 334.95
Current Net Selling Price	\$ 177.44	\$ 177.44	\$ 177.44	\$ 177.44
Pretax Earnings	\$ 18.59	(\$ 1.54)	\$ 27.40	\$ 22.79
% of Net Selling Price	10.5%	(0.9%)	15.4%	12.5%
<u>Calculated Prices</u>				
<u>for 10% Margin</u>				
Retail Selling Price	\$ 332.58	\$ 384.10	\$ 310.51	\$ 322.21
Net Selling Price	\$ 176.19	\$ 203.47	\$ 164.49	\$ 170.75
<u>for 15% Margin</u>				
Retail Selling Price	\$ 356.40	\$ 411.60	\$ 332.74	\$ 345.39
Net Selling Price	\$ 188.80	\$ 218.04	\$ 176.27	\$ 182.97
<u>for 20% Margin</u>				
Retail Selling Price	\$ 383.61	\$ 443.02	\$ 358.15	\$ 371.76
Net Selling Price	\$ 203.22	\$ 234.69	\$ 189.73	\$ 196.94
<u>for 25% Margin</u>				
Retail Selling Price	\$ 415.51	\$ 479.89	\$ 387.95	\$ 402.70
Net Selling Price	\$ 220.13	\$ 254.22	\$ 205.52	\$ 213.33

  
J.C. Hutton, Superintendent  
Industrial Engineering Section

By: T.R. Andrews

TRA/kc

700 up

ADL

7-1-81

+

	Full obs.	Inc.	Full obs.	Inc.
1. Floor plates	3.90	2.85		
2. Sights -	-	-	5.29	3.63
3. Cast follower				
4. Formed follower -				
5. no ball bolts	-	-	.04	.03
6. Cut checking	6.21	3.62		
7. Tongue female			<u>5.29</u>	<u>4.26</u>
8. Slain revised studs	1.02	.76		
9. M Free Butt Pist	-	-		
10. BDL Grip Cap.	<u>.28</u>	<u>.19</u>		
11. Dry round heated frame	10.41	7.52	10.52	7.92
12.				

Marketing Facilities.

160.09

10.41

170.50

10.52159.98cost after July 14 & Sept 4 to the  
month of Septemberno more money to be included

xc: R.L. Hall  
 H.K. Boyle  
J.P. Linde  
 G.D. Campbell  
 R.W. Farrington, Jr.  
 Est. #4293

May 27, 1981

C.B. Workman

Proposed Revisions to Model 700 ADL Product Specifications

A "high-spot" analysis of current M/700 ADL costs and the effects of proposed revisions to the product specifications has been completed based on a list of proposed features provided by Marketing and Research. All costs are stated in current dollars and are based on current labor, material, and burden rates.

Three sets of specifications and a total of 25 revised features were proposed. Detailed processes and project expenditure estimates were not provided. The net cost effect of each feature was estimated relative to current M/700 ADL specifications and volume. The estimated factory cost for each proposed set of specifications are summarized in the following table:


Feature	Net Cost Effect		Proposals		
	Full Allocation	Incremental	Marketing	Ilion I	Ilion II
Present M/700 ADL	--	--	\$ 138.62	\$ 138.62	\$ 138.62
1. Cut Checkering -	\$ 6.21	\$ 3.62	Yes	Yes	Yes
2. Open Sights	--	--	No	No	No
3. Delete Open Sights	(5.29)	(3.63)	Yes	Yes	Yes
4. Scope Rings	15.63	12.63	Yes	No	No
5. Cast Follower	--	--	Yes	No	No
6. Formed Follower	(3.20)	(2.51)	No	Yes	Yes
7. Soft Rubber Butt Pad	Not Evaluated <sup>1</sup>		No	No	No
8. Simplified Butt Plate	(.25)	(.17)	Yes	Yes	Yes
9. Delete Jeweled Bolt	(.38)	(.28)	No	Yes	Yes
10. Plain Bolt Handle	Not Evaluated <sup>2</sup>		No	Yes	Yes
11. Present Bolt Handle	--	--	Yes	No	No
12. BDL Floor Plate	3.90	2.95	Yes	No	Yes
13. RKW-Finish	--	--	Yes	No	No
14. Lacquer Finish - Gloss	(5.29)	(4.26)	No	Yes	Yes
15. Monte Carlo	--	--	Yes	No	No
16. Cheekpiece	--	--	Yes	No	No
17. Grip Cap - 700 BDL	.28	.19	Yes	No	No
18. "Classic" Style Stock	(.96)	(.70)	No	Yes	Yes
19. Swivel Studs	1.02	.76	Yes	No	Yes
20. Sling	Not Evaluated <sup>1</sup>		No	No	No
21. Walnut Stock	--	--	Yes	Yes	Yes
22. Alternate Wood	Not Evaluated <sup>1</sup>		No	No	No
23. High Gloss Finish	--	--	Yes	Yes <sup>3</sup>	No
24. Satin Finish	--	--	No	Yes	Yes
25. Delete Bolt Lock	(.04)	(.03)	No	No	No
Estimated Full Allocation Factory Cost			\$ 160.09	\$ 129.42	\$ 134.34

Proposed Revisions to Model 700 ADL Product Specifications - (cont'd.)Footnotes to Table

1. Although listed, these features were not estimated because they were deleted in the Marketing and Ilion proposed specifications.
2. A plain bolt handle was not evaluated because neither detailed process estimates nor purchased cost data were currently available.
3. Proposal Ilion I called for high gloss lacquer finish. This feature was estimated based on process costs for the low-lustre M/788 lacquer finish.

As a further basis for comparison, the following table shows estimated pre-tax earnings and percentage margin at current M/700 ADL pricing for each proposal, plus calculated net and retail selling prices to yield stated percentage margin levels.

	Present M/700 ADL	Marketing	Ilion I	Ilion II
Current Retail Selling Price	\$ 334.95	\$ 334.95	\$ 334.95	\$ 334.95
Current Net Selling Price	\$ 177.44	\$ 177.44	\$ 177.44	\$ 177.44
Pretax Earnings	\$ 18.59	(\$ 1.54)	\$ 27.40	\$ 22.79
% of Net Selling Price	10.5%	(0.9%)	15.4%	12.5%
<u>Calculated Prices</u>				
<u>for 10% Margin</u>				
Retail Selling Price	\$ 332.58	\$ 384.10	\$ 310.51	\$ 322.21
Net Selling Price	\$ 176.19	\$ 203.47	\$ 164.49	\$ 170.75
<u>for 15% Margin</u>				
Retail Selling Price	\$ 356.40	\$ 411.60	\$ 332.74	\$ 345.39
Net Selling Price	\$ 188.80	\$ 218.04	\$ 176.27	\$ 182.97
<u>for 20% Margin</u>				
Retail Selling Price	\$ 383.61	\$ 443.02	\$ 358.15	\$ 371.76
Net Selling Price	\$ 203.22	\$ 234.69	\$ 189.73	\$ 196.94
<u>for 25% Margin</u>				
Retail Selling Price	\$ 415.51	\$ 479.89	\$ 387.95	\$ 402.70
Net Selling Price	\$ 220.13	\$ 254.22	\$ 205.52	\$ 213.33

  
J.C. Hutton, Superintendent  
Industrial Engineering Section

By: T.R. Andrews

TRA/kc

M/7 DESIGN SPECIFICATION

This is a composite listing of features provided on the M/7 proto-type and those desired by Research:

- Octagonal Receiver
  - Investigate the use of octagonal stock
  - Heavier barrel lug
- Walnut Stock
  - True Classic
  - No Monte Carlo
  - Cheekpiece
  - Cut - functional checkering
  - Sling swivel studs
- Hammer Forged Barrel
  - No turn or polish
  - Program to determine possible benefits i.e., accuracy vs. finish
  - Lightweight - slimmer contour
  - Clean no sights
- Fire Control
  - Blocked trigger and sear
  - Bolt lock
  - New safety configuration or location
  - With safe adjustments
- Improved (Reduced) Locktime
  - Lightweight firing pin
  - Investigate pierced primer gas flow around firing pin and head
- Additional Desired Features
  - Scope mounts
  - New bolt handle
  - Jeweled
    - follower
    - bolt body
- New Extractor
- New Feeding System
  - To be smoother
  - To be functionally superior
  - To be detachable with integral magazine box

- Classic Calibers
- Limited Production 3,000 - 4,000 per year

F. E. Martin:ws  
September 11, 1981

RD-69 REV. 6-58

**REMINGTON ARMS COMPANY, INC.**

INTER-DEPARTMENTAL CORRESPONDENCE



c: J. G. Williams  
J. E. Preiser  
P. H. Holmberg  
J. P. Linde  
G. D. Campbell  
J. W. Brooks

Bridgeport, Connecticut  
July 14, 1981

C. B. WORKMAN

MODEL REQUIREMENTS - M/700 ADL RESTYLE

Following is a list of model requirements for the M/700 ADL restyle.

ACTION:

- Standard M/700 with detachable floor plate
- No iron sights
- Redesigned cast magazine follower
- No bolt lock
- Jeweled bolt

STOCK:

- M/700 ADL style
- Cut-checkering (reduced pattern from BDL or Classic)
- New lacquer finish (medium gloss)
- Sling swivel studs
- M/Four butt plate
- BDL grip cap

ACCESSORIES:

- Scope mount rings - design to be determined

W. H. FORSON

WHF:b

REMINGTON ARMS CO.  
RECEIVED

JUL 17 1981

ILION RESEARCH DIVISION

RD-49-B

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

Ilion, New York  
November 28, 1978

TO: C. B. WORKMAN

FROM: J. A. STEKL *JAS*

SUBJECT: CENTER FIRE RIFLE CALIBERS INTRODUCED BY REMINGTON

-----

The following table summarizes center fire rifle calibers introduced by Remington Arms Company, Inc. from 1963 to date:

CALIBER	YEAR INTRODUCED	INTRODUCED IN MODEL 700
6mm Rem.	1963	X
223 Rem.	1964	
22/250 Rem.	1965	X
350 Rem. Mag.	1965	
6.5mm Rem. Mag.	1966	
25-06 Rem.	1970	X
17 Rem.	1971	X
8mm Rem. Mag.	1977	X

JAS:sse

RIFLE BOLT MALFUNCTIONS

- Springs are right hand.
- When bolt is opened, spring is depressed and expands by coils turning.
- If spring ends cannot move, assembly will have no torque moment but spring tries to unwind. Probably tend to buckle.
- If both ends of spring cannot move, it will not turn assembly to uncock.
- If front end can turn only or slide, and the rear of spring cannot turn the spring will not have torque moment as spring will unwind.
- If rear end can turn only or slide, and the front end cannot turn, the spring will not have torque moment as spring will unwind.
- If firing pin cannot turn and front of spring cannot turn, there will be no torque as spring will unwind.
- Same with rear of spring held and firing pin held, spring will unwind.
- If bolt opened slow or fast - front of spring held to firing pin - O.D. of spring held to I.D. of bolt then firing pin would tend to rotate and cause uncocking.
- Dirt, grease, etc., in detent notch and frozen could allow firing pin head and bolt plug to rotate up, sliding off crud.
- Worn detent notch could cause problem along with frozen dirt or crud in detent notch.

JWBrooks:eb  
8-27-82

RD-49-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



xc: C.B. Workman  
C.E. Ritchie  
J.W. Brooks  
D.E. Bullis

"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

Ilion, New York  
December 28, 1981

TO: J.H. Hennings

FROM: A.J. Long/F.L. Supry *FLS*

M/700 NEW DESIGN SAFETY, NO BOLT LOCK ARM

Date Started: 9/4/81  
Date Completed: 10/6/81  
Work Order No.: C-1803

INTRODUCTION

Six M/700 new design safety switches were received from design for evaluation. The evaluation will include dry cycle function, drop test function and live fire function.

TEST OBJECTIVE

To determine if the new safety will function satisfactorily without the bolt lock arm.

TEST OBSERVATION

Five samples were dry cycled 10,000 cycles each, four of the five samples experienced no malfunctions. At 4,000 cycles, sample no. 4 was found to be difficult to operate. It was then disassembled, cleaned, lubricated and reassembled. There were no malfunctions during the remainder of the test.

There were no malfunctions during the live fire tests on the same five samples.

There were no failures during the drop testing, which was conducted on two of the five samples and on the sample that had no dry cycles or live fire rounds. One standard production M/700 was included as a control rifle.

A photograph comparing the current design to the new design is included in this report.

DRY CYCLE

Five of the six samples were assembled into Model 700 actions, after the sear lift and engagement was determined by assembly. Ten Thousand (10,000) cycles were conducted on each sample on a safe on - off dry cycle machine.

The trigger pull and safe on-off forces were measured at the start of the dry cycle and at 1,000 round intervals during the test. The sear engagement and sear lift was also measured at the completion of the dry cycle testing.

TEST RESULTS (for individual test results refer to Data Sheet No. 1)

After 10,000 Dry Cycles:

- Sear engagement showed no change.
- Sear lift showed an overall increase of .0017".
- Trigger pull showed an overall increase of .025 lbs.
- Safe "on" forces showed an overall decrease of 2.0 lbs.
- Safe "off" forces showed an overall decrease of 2.25 lbs.
- There were no failures or breakages.

LIVE FIRE

The five samples with 10,000 dry cycles were assembled in M/700 30.06 caliber actions; and 500 rounds of R30065 (180 gr. pointed soft point core-lokt) were fired thru each action.

TEST RESULTS

There were no breakages or failures.

DROP TEST

Three of the M/700 design change fire controls (2 with 10,000 dry cycles and 500 live rounds, one as received from design) and one current production M/700 fire control were assembled in M/700 30,06 cal. actions; and a drop test was conducted.

Each of the rifles were dropped from 4 feet onto a solid neoprene rubber mat, and from 2 feet onto a solid maple plank.


- At each distance the rifles were dropped in four different positions:
  - a) muzzle first
  - b) butt first
  - c) top first
  - d) bottom first
- The actions were closed on a copper crusher placed in a holder in the chamber.
- The safety was in the "on" position in the 4 foot drops, and in the "off" position in the two foot drops.

TEST RESULTS

- The position of the safety was not affected by the drops.
- The rifle did not fire during the test.
- The copper crusher was not indented during the test.
- There was no difference noticed in the results of this test between the new design and the current design fire controls.

Firearms Research Division  
AL/FS:m  
Attachments

MODEL 700 SAFETY NEW DESIGN TEST

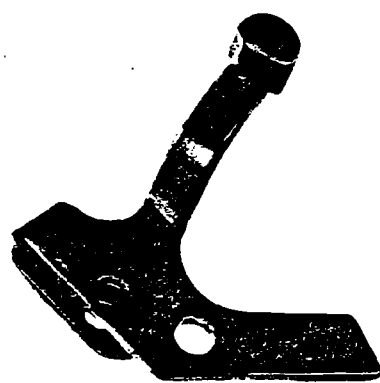

CURRENT



NEW DESIGN

10/15/81



RD-44-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



Distribution: C.B. Workman  
C.E. Ritchie  
J.W. Brooks  
D.E. Bullis

"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

RESEARCH TEST and MEASUREMENT REPORT - Report No. 812391


M700 NEW DESIGN SAFETY, NO BOLT LOCK ARM

Prepared by: A. Long / F. Supry

Date Prepared: 12-28-81

Proofread and Cleared By:

J.H. Hennings, / R.E. Nightingale,  
Foreman-Test Lab / Foreman-Measurement Lab

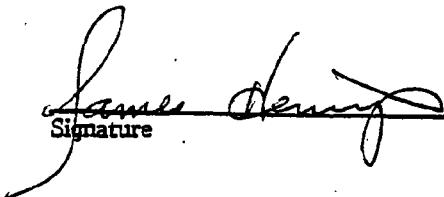 1-20-82  
Signature Date

C.E. Ritchie,  
Sr. Supervisor - Testing,  
Meas. & Mech. Analysis Lab

 1/20/82  
Signature Date

RD-40-B

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



xc: C.B. Workman  
C.E. Ritchie  
J.W. Brooks  
D.E. Bullis

"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

Ilion, New York  
December 28, 1981

TO: J.H. Hennings

FROM: A.J. Long/F.L. Supry *FLS*

M/700 NEW DESIGN SAFETY, NO BOLT LOCK ARM

Date Started: 9/4/81  
Date Completed: 10/6/81  
Work Order No.: C-1803

INTRODUCTION

Six M/700 new design safety switches were received from design for evaluation. The evaluation will include dry cycle function, drop test function and live fire function.

TEST OBJECTIVE

To determine if the new safety will function satisfactorily without the bolt lock arm.

TEST OBSERVATION

Five samples were dry cycled 10,000 cycles each, four of the five samples experienced no malfunctions. At 4,000 cycles, sample no. 4 was found to be difficult to operate. It was then disassembled, cleaned, lubricated and reassembled. There were no malfunctions during the remainder of the test.

There were no malfunctions during the live fire tests on the same five samples.

There were no failures during the drop testing, which was conducted on two of the five samples and on the sample that had no dry cycles or live fire rounds. One standard production M/700 was included as a control rifle.

A photograph comparing the current design to the new design is included in this report.

DRY CYCLE

Five of the six samples were assembled into Model 700 actions, after the sear lift and engagement were determined to be satisfactory by assembly. Ten thousand (10,000) cycles were conducted on each sample on a safe on-off dry cycle machine.

The trigger pull and safe on-off forces were measured at the start of the dry cycle and at 1,000 round intervals during the test. The sear engagement and sear lift were also measured at the completion of the dry cycle testing.

TEST RESULTS (For individual test results refer to Data Sheet No. 1).

After 10,000 Dry Cycles:

- Sear engagement showed no change.
- Sear lift showed an average decrease of .0004" FULL, and an average INCREASE of .001" NULL.
- Trigger pull showed an overall increase of 0.25 lbs.
- Safe "on" forces showed an overall decrease of 2.0 lbs.
- Safe "off" forces showed an overall decrease of 2.25 lbs.
- There were no failures or breakages.

LIVE FIRE

The five samples with 10,000 dry cycles were assembled in M/700 30.06 caliber actions; and 500 rounds of R30065 (180 gr. pointed soft point core-lokt) were fired thru each action.

TEST RESULTS

There were no breakage or failures.

DROP TEST

Three of the M/700 design change fire controls (2 with 10,000 dry cycles and 500 live rounds, one as received from design) and one current production M/700 fire control were assembled in M/700 30,06 cal. actions; and a drop test was conducted.

Each of the rifles were dropped from 4 feet onto a solid neoprene rubber mat, and from 2 feet onto a solid maple plank.


- At each distance the rifles were dropped in four different positions:
  - a) muzzle first
  - b) butt first
  - c) top first
  - d) bottom first
- The actions were closed on a copper crusher placed in a holder in the chamber.
- The safety was in the "on" position in the 4 foot drops, and in the "off" position in the two foot drops.

TEST RESULTS

- The position of the safety was not affected by the drops.
- The rifle did not fire during the test.
- The copper crusher was not indented during the test.
- There was no difference noticed in the results of this test between the new design and the current design fire controls.

Firearms Research Division  
AL/FS:m  
Attachments

MODEL 700 SAFETY NEW DESIGN TEST

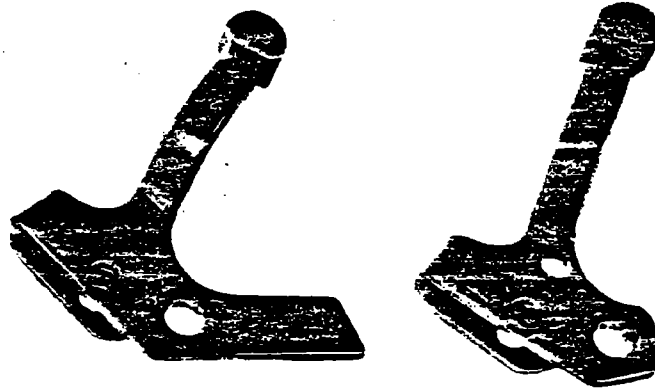

CURRENT

10/15/81

NEW DESIGN

MODEL 700 NEW DESIGN SAFETY  
NO BOLT LOCK ARM

DATA SHEET #1

10-9-81

SEAR MOVEMENT ↓	SEAR FULL ↓	LIFT MUEL ↑		DRY CYCLES										AFTER 500 RDS INVERT
				0	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000
1 → .010	.011	.0057	SAFE ON	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
2 → .010	.0095	.0035	SAFE ON	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
3 → .010	.011	.006	SAFE ON	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
4 → .010	.0105	.0045	SAFE ON	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
5 → .010	.0105	.0045	SAFE ON	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
AFTER 10,000 CYCLES AND DRY TEST				6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
1 → .010	.010	.0065		6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
2 → .010	.010	.005		6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
3 → .010	.010	.0065		6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
4 → .010	.0105	.006		6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3
5 → .010	.010	.0075		6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3	6.1 6.2 6.3

RD-68-6

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



Distribution: C.B. Workman  
C.E. Ritchie  
J.W. Brooks  
D.E. Bullis

"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

RESEARCH TEST and MEASUREMENT REPORT - Report No. 812391

M700 NEW DESIGN SAFETY, NO BOLT LOCK ARM

Prepared by: A. Long / F. Supry

Date Prepared: 12-28-81

Proofread and Cleared By:

J.H. Hennings , / R.E. Nightingale,  
Foreman-Test Lab / Foreman-Measurement Lab

\_\_\_\_\_  
Signature Date

C.E. Ritchie,  
Sr. Supervisor - Testing,  
Meas. & Mech. Analysis Lab

\_\_\_\_\_  
Signature Date

RD-49-B

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



xc: C.B. Workman  
C.E. Ritchie  
J.W. Brooks  
D.E. Bullis

"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

Ilion, New York  
December 28, 1981

TO: J.H. Hennings

FROM: A.J. Long/F.L. Supry *FLS*

M/700 NEW DESIGN SAFETY, NO BOLT LOCK ARM

Date Started: 9/4/81  
Date Completed: 10/6/81  
Work Order No.: C-1803

INTRODUCTION

Six M/700 new design safety switches were received from design for evaluation. The evaluation will include dry cycle function, drop test function and live fire function.

TEST OBJECTIVE

To determine if the new safety will function satisfactorily without the bolt lock arm.

TEST OBSERVATION

Five samples were dry cycled 10,000 cycles each, four of the five samples experienced no malfunctions. At 4,000 cycles, sample no. 4 was found to be difficult to operate. It was then disassembled, cleaned, lubricated and reassembled. There were no malfunctions during the remainder of the test.

There were no malfunctions during the live fire tests on the same five samples.

There were no failures during the drop testing, which was conducted on two of the five samples and on the sample that had no dry cycles or live fire rounds. One standard production M/700 was included as a control rifle.

A photograph comparing the current design to the new design is included in this report.

*Trigger pull sat  
3-5 lbs.  
See Engineering drawing?  
D.E. Bullis  
1005 Action cam...*

DRY CYCLE

Five of the six samples were assembled into Model 700 actions, after the sear lift and engagement was determined by assembly. Ten Thousand (10,000) cycles were conducted on each sample on a safe on - off dry cycle machine.

The trigger pull and safe on-off forces were measured at the start of the dry cycle and at 1,000 round intervals during the test. The sear engagement and sear lift was also measured at the completion of the dry cycle testing.

TEST RESULTS (for individual test results refer to Data Sheet No. 1)

After 10,000 Dry Cycles:

- Sear engagement showed no change.
- Sear lift showed an overall increase of .0017".
- Trigger pull showed an overall increase of .025 lbs.
- Safe "on" forces showed an overall decrease of 2.0 lbs.
- Safe "off" forces showed an overall decrease of 2.25 lbs.
- There were no failures or breakages.

LIVE FIRE

The five samples with 10,000 dry cycles were assembled in M/700 30.06 caliber actions; and 500 rounds of R30065 (180 gr. pointed soft point core-lokt) were fired thru each action.

TEST RESULTS

There were no breakages or failures.

DROP TEST

Three of the M/700 design change fire controls (2 with 10,000 dry cycles and 500 live rounds, one as received from design) and one current production M/700 fire control were assembled in M/700 30,06 cal. actions; and a drop test was conducted.

Each of the rifles were dropped from 4 feet onto a solid neoprene rubber mat, and from 2 feet onto a solid maple plank.


- At each distance the rifles were dropped in four different positions:
  - a) muzzle first
  - b) butt first
  - c) top first
  - d) bottom first
- The actions were closed on a copper crusher placed in a holder in the chamber.
- The safety was in the "on" position in the 4 foot drops, and in the "off" position in the two foot drops.

TEST RESULTS

- The position of the safety was not affected by the drops.
- The rifle did not fire during the test.
- The copper crusher was not indented during the test.
- There was no difference noticed in the results of this test between the new design and the current design fire controls.

Firearms Research Division  
AL/FS:m  
Attachments

MODEL 700 SAFETY NEW DESIGN TEST

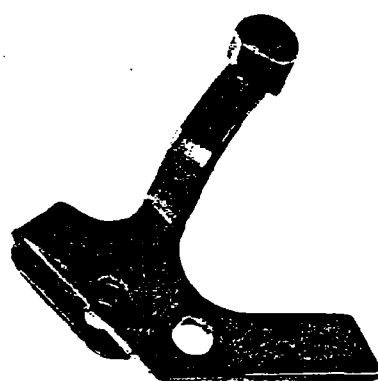

CURRENT



NEW DESIGN

10/15/81

MODEL 700 NEW DESIGN SAFETY  
NO BOLT LOCK ARM

DATA SHEET #1

10-A-81

A.I.L.

DRY CYCLES

	0	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	AFTER 500 RAS LIVE FIRE
1	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
2	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
3	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
4	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
5	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
6	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
7	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
8	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
9	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
10	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
11	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
12	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
13	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
14	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
15	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
16	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
17	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
18	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
19	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
20	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
21	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
22	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
23	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
24	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
25	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
26	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
27	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
28	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
29	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
30	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
31	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
32	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
33	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
34	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
35	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
36	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
37	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
38	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
39	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0
40	6.1	6.3	6.5	6.8	6.1	6.4	5.9	6.4	6.3	6.3	6.2	6.0

AFTER 10000 CYCLES AND DROP TEST

	1	2	3	4	5
SEAR ENGAGEMENT	0.010	0.010	0.010	0.010	0.010
SEAR FULL	0.011	0.011	0.011	0.011	0.011
LIFT FULL	0.0057	0.0057	0.0057	0.0057	0.0057
SAFE ON	0.0057	0.0057	0.0057	0.0057	0.0057
SAFE OFF	0.0057	0.0057	0.0057	0.0057	0.0057

RD-69 REV. 6-58

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

Remington



cc: E. Hooton, Jr.  
J. G. Williams  
J. P. Glas  
C. A. Riley  
P. H. Holmberg  
W. H. Forson  
✓ C. B. Workman  
K. D. Green  
J. H. Chisnall  
J. A. Stekl  
R. L. St. John  
J. H. Carter  
J. P. Linde  
R. B. Sperling

Bridgeport, Connecticut

February 3, 1982

REMINGTON ARMS CO.  
RECEIVED

H. K. BOYLE

SERVICE REQUIREMENT FOR MODEL 700  
RELATIVE TO REMOVAL OF BOLT LOCK

FEB 5 1982

FIREARMS RESEARCH DIVISION

With removal of the bolt lock feature from the Model 700, several questions have arisen with regard to repairs. This note sets forth Marketing's desires for handling repairs and/or replacements of Model 700's.

The various Arms Service repairs should be handled following these guidelines:

- Receiver and trigger assembly not involved in repair.

No change is to be made to the bolt lock. From a bolt lock standpoint, the gun is to be returned in the same condition it was received.

- Receiver or trigger assembly involved in repair but bolt lock is not affected.

If the repairs can be made without impacting the bolt lock, they should be done that way.

- Receiver or trigger assembly must be replaced as part of the repair.

The same guidelines as above should be followed. The features of the firearm should not be changed during a repair. If parts are not available to make such repairs, then the customer should be given the choice of either having the repair made (and accepting the feature change) or having the gun returned without being repaired.

H. K. BOYLE

-2-

February 3, 1982

Replacement of Model 40X, Model 600, and 660 parts should be handled the same way. If the bolt lock feature will change as a result of a repair, we must have the customer's permission in advance.

Repairs made by our Recommended Gunsmiths should follow this same philosophy. This situation would arise only when the trigger assembly is replaced, since the receiver is a restricted part.

  
F. T. Millener

FTM:fms

MODEL	TRIGGER PULL	FIRING PIN INDENT
Mohawk 10C	3.5 - 6.5 lbs.	.014" - .016"
40XB Sporter	3.0 - 5.0 lbs.	.019"
40XR Sporter	2.0 - 4.0 lbs.	.019"
Nylon 66	3.5 - 6.5 lbs.	.014" - .016"
540XR & Junior	1.0 - 5.0 lbs.	-----
541-S Custom Spt.	3.0 - 5.0 lbs.	.017" - .025"
552	3.5 - 6.5 lbs.	.014" - .016"
572	3.5 - 6.5 lbs.	.016" - .018"
580-581-582	3.5 - 6.5 lbs.	.017" - .025"
40X C.F.	1.5 - 3.5 lbs.	.018" - .026"
40XC	2.0 - 4.0 lbs.	.018" - .026"
XP-100	1.5 - 2.750 lbs.	.018" - .026"
Mohawk 600	4.0 - 6.0 lbs.	.018" - .026"
700	3.0 - 5.0 lbs.	.018" - .026"
700 Custom	3.0 - 5.0 lbs.	.018" - .026"
700 Classic	3.0 - 5.0 lbs.	.018" - .026"
700 Sniper	3.0 - 3.5 lbs.	.018" - .026"
700 Varmint	2.0 - 4.0 lbs.	.018" - .026"
742,7400,Four		
760,7600,Six	3.5 - 6.5 lbs.	.019" - .025"
788	3.5 - 6.5 lbs.	.018" - .018"
870-Field, Mag., Deer, & Police	3.5 - 6.5 lbs.	.013" - .018"
870 Trap Skeet	3.5 - 5.0 lbs.	.013" - .018"
1100 Field, Mag., and Deer	3.5 - 6.5 lbs.	.013" - .018"
1100 Trap-Skeet	3.5 - 5.5 lbs.	.013" - .018"
3200	3.0 - 5.5 lbs.	.013" - .018"

C.J.S.  
June 14, 1982

M. 700 Modified Converter  
2-12-83 + 2-23-83  
830423

RD-40-6

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



Distribution: C. B. Workman  
C. E. Ritchie  
J. W. Brooks  
J. P. Linde

"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

RESEARCH TEST and MEASUREMENT REPORT - Report No. 830423

M/700 MODIFIED TRIGGER CONNECTOR EVALUATION

Prepared by: C. E. Ritchie

Date Prepared: 2 - 12 - 83

Proofread and Cleared By:

J.H. Hennings , / R.E. Nightingale,  
Foreman-Test Lab / Foreman-Measurement Lab

Signature \_\_\_\_\_ Date \_\_\_\_\_

C.E. Ritchie,  
Sr. Supervisor - Testing,  
Meas. & Mech. Analysis Lab

C. E. Ritchie 2/27/83  
Signature \_\_\_\_\_ Date \_\_\_\_\_

TEST & MEASUREMENT LAB REPORT

REPORT NUMBER: 830423  
REPORT TITLE: M/700 MODIFIED TRIGGER CONNECTOR EVALUATION  
MODEL(S): 700  
GAUGE OR CALIBER: All (.308 Cal. Tested)  
DATE: 2 - 11 - 83  
WORK ORDER NO.: G0460 - 000 X  
PART NAME: Trigger Connector  
DESIGNER/ENGINEER: J. W. Brooks

TEST TYPE:

1. PHOTO LAB
2. STRENGTH TEST - NO. OF GUNS TESTED \_\_\_\_\_
3. FUNCTION TEST - NO. OF GUNS TESTED 4
4. ACCURACY TEST - NO. OF GUNS TESTED \_\_\_\_\_  
Trigger Pull
5. MEASUREMENTS - TYPE: Safe On-Off Forces  
~~Sear Lift (Finish Test)~~
6. ENVIRONMENTAL TEST
7. AMMUNITION TESTING & EVALUATION - TYPE: \_\_\_\_\_
8. VISUAL EVALUATION - \_\_\_\_\_ OUT OF \_\_\_\_\_ GUN SAMPLE
9. ENDURANCE - NO. OF GUNS TESTED: 4  
Dry Cycle Rounds = 25,000  
NO. OF ROUNDS PER GUN: Live 100  
Dry Cycle Total = 100,000  
TOTAL ROUNDS FIRED IN TEST: 400

AMMO TYPE: MAGS. \_\_\_\_\_; TARGET: X

RIM FIRE \_\_\_\_\_ CENTER FIRE \_\_\_\_\_

REMINGTON ARMS CO., INC.  
Firearms Research Division

Report No. 830423  
Page 1

February 12, 1983

TO: C. B. WORKMAN  
FROM: C. E. RITCHIE  
REPORT TITLE: M/700 MODIFIED TRIGGER CONNECTOR EVALUATION

ABSTRACT

Recently, Production received M/700 Trigger Connectors from the vendor which were slightly (0.001" to 0.003") out of specification. Process Engineering, through J. W. Brooks, Supervisor Current Products Design, requested the Test Lab to determine whether this dimensional difference would adversely affect the safe operation of the Trigger Assembly and ultimately the M/700 rifle itself.

SCOPE OF TEST

To evaluate the out of specification M/700 Trigger Connector by testing 4 specially prepared M/700 rifles, 2 rifles with a minimum stack-up of dimensional tolerances and 2 with a maximum stack-up of dimensional tolerances.

(Refer to sketches in Appendix "A" Page 3 and 4.)

TEST RESULTS

All four (4) test rifles went through the dry cycle, live fire and drop test with no trigger related malfunctions.

(Refer to Appendix "A" Page 1 and 2 for individual results.)

---

**REPORT TEXT**

---

1. All four (4) test rifles reached 25,000 dry cycles with no trigger related malfunctions.
2. All four (4) test rifles were Jack Fired 100 live rounds using Remington 180 grain P.S.P. Cal. .308 ammo. with no trigger related malfunctions.
3. All four (4) rifles were pendulum drop tested, against both a neoprene and a hardwood backstop, at the three foot level in the following modes:

Muzzle First - with Safe "On" and with Safe "Off"

Butt First - " " " " " " "

Left Side - " " " " " " "

Right Side - " " " " " " "

There were no trigger related malfunctions (firing pin did not fall) in any of the test rifles during the drop test.

4. At finish of test the following measurements were taken: Trigger Pull, Safe "On-Off" and Sear Lift. Present Remington Specs. are:

Trigger Pull	-	3.0 to 5.0 lbs.
Safe "On - Off"	-	None Established
Sear Lift	-	.005" to .018"

**NOTE:** It was noted that the two min. condition test rifles had a higher reading on Trigger Pull, Safe "On - Off" and Sear Lift tests than the two max. condition rifles.

Refer to Appendix "A" for individual results.

## TEST PROCEDURE

### A. Measurements

Sear Lift was measured at the conclusion of dry cycle, live fire and drop tests.

### B. Test Concitions

1. All four (4) test rifles were dry cycle tested on the 4 cock and fire dry cycle machines in the R & D Test Lab Dry Cycle Room.

All rifles were lubricated liberally with DuPont Teflon Wet Lubricant, in and around the Bolt Cocking Cam surface, Sear Safety Cam (top), and the Trigger Housing inspection hole every 5,000 cycles starting at 0 cycles.

2. After dry cycle testing, all 4 rifles were live round fired 100 rounds each with Remington 180 grain P.S.P. ammunition. All rifles were shot 20 rounds each, then allowed to cool/able to touch with the hand until all 100 rounds had been shot.
3. A drop test was then conducted on all four rifles at the 3 foot test height, on both hardwood and neoprene backstops from the muzzle, butt and both sides.
4. Sear Lift was then measured using the optical comparator in the R & D Model Shop.

### C. Ammunition

Remington 180 grain P.S.P. Code R308W3.

### D. Rifles used in the test:

Remington M/700, 1983 Restyle, Cal. .308

Rifle No. 8	Serial No. B6440493	(Min. Condition)
Rifle No. 5	Serial No. B6438179	" "
Rifle No. 7	Serial No. B6438908	(Max Condition)
Rifle No.	Serial No. B6438658	" "

" A P P E N D I X " A "

M-700 Modified Trigger Connector

2-12-83

J. Baggetta

Date Sheet No 1

	GUN No.	1	2	3	4	5	6
		B6440493	B6438179	B6438908	B6438658		
		MIN.	MIN	MAX	MAX	Test Results	
		Condition	Condition	Condition	Condition		
1	Dry Cycles	25000	25000	25000	25000	OK	
2							
3	Rounds Fired	100	100	100	100	OK	
4	Rem 180gr PSP						
5							
6	Drop Test						
7	Neoprene Pad						
8	MUZZLE First						
9	Safe ON	OK	OK	OK	OK		
10	Safe OFF	OK	OK	OK	OK		
11	BUTT First						
12	Safe ON	OK	OK	OK	OK		
13	Safe OFF	OK	OK	OK	OK		
14	Right Side						
15	Safe ON	OK	OK	OK	OK		
16	Safe OFF	OK	OK	OK	OK		
17	Left Side						
18	Safe ON	OK	OK	OK	OK		
19	Safe OFF	OK	OK	OK	OK		
20							
21	Drop Test						
22	Hardwood Pad						
23	MUZZLE First						
24	Safe ON	OK	OK	OK	OK		
25	Safe OFF	OK	OK	OK	OK		
26	BUTT First						
27	Safe ON	OK	OK	OK	OK		
28	Safe OFF	OK	OK	OK	OK		
29	Right Side						
30	Safe ON	OK	OK	OK	OK		
31	Safe OFF	OK	OK	OK	OK		
32	Left Side						
33	Safe ON	OK	OK	OK	OK		
34	Safe OFF	OK	OK	OK	OK		
35							
36	Seam Lift	.0205"	.0265"	.0070"	.0060"		
37							
38	Remington						
39	Spec. Seam	LEFT .005 to .018"					
40							

M/700 MODIFIED TRIGGER CONNECTOR

2-12-83

R. HOWE

DATA SHEET No. 2

GUN No.		1	2	3	4	5	6
		36440493	36438179	36438908	36438658	REMINGTON SPR.	
		MIN	MIN	MAX	MAX		
		CONDITION	CONDITION	CONDITION	CONDITION		
1							
2	TRIGGER PULL						
3	POUND FORCES	5.9 LBS.	5.5 LBS.	4.9 LBS.	3.2 LBS.	3.0 to 5.0 LBS.	
4	(RESULT OF THREE)						
5	(MEASUREMENTS)						
6							
7	SAFE "ON"						
8	POUND FORCES	11.1 LBS.	16.5 LBS.	6.0 LBS.	6.2 LBS.	NONE ESTABLISHED	
9	(RESULT OF THREE)						
10	(MEASUREMENTS)						
11							
12	SAFE "OFF"						
13	POUND FORCES	9.3 LBS.	8.8 LBS.	5.0 LBS.	8.0 LBS.	NONE ESTABLISHED	
14	(RESULT OF THREE)						
15	(MEASUREMENTS)						
16							
17							
18							
19							
20							
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							
35							
36							
37							
38							
39							
40							

BARBER - PRESALE R 0137660

CONDITION NO.		1	1	1	2	2	2	1	2	2	1	1	2
1 TRIGGER HOUSING ASSEMBLY NO.		1	2	3	4	5	6	7	8	9	10	11	12
	Dim.												
HOUSING	A	1.2395	1.2385	1.2395	1.241	1.2405	1.240	1.2385	1.2385	1.2405	1.240	1.238	1.2395
	B	.8395	.839	.8395	.841	.8415	.841	.840	.8405	.8405	.8385	.839	.842
SEAR	C	.1975- .198	.1975- .198	.1975- .198	.186	.1865	.1865	.1975	.1855	.1855	.1975	.1975- .198	.1865
	D	.8705- .871	.870- .8695	.8705- .871	.8655	.8655	.8645	.870- .8695	.863	.865	.871	.869- .8695	.8645
CONNECTOR	E	.215	.215	.215	.225	.225	.225	.215	.225	.225	.215	.215	.225
	F	.074	.072- .0715	.071- .0705	.071	.071	.071	.074	.071	.071	.074	.072- .0715	.071
TRIGGER	G	.972	.975	.975	.967	.967	.967	.9725	.967	.967	.9725	.975	.967
	H	.190	.190	.190	.186	.186	.186	.190	.186	.186	.190	.190	.186

B6438179

B6438908 B6440493

B6438658


JWB:js  
2/18/83

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON


BARBER - PRESALE R 0137660  
R2538648

Report No. 830423  
C. E. Ritchie  
2-21-83  
Page 4

Condition No. 2

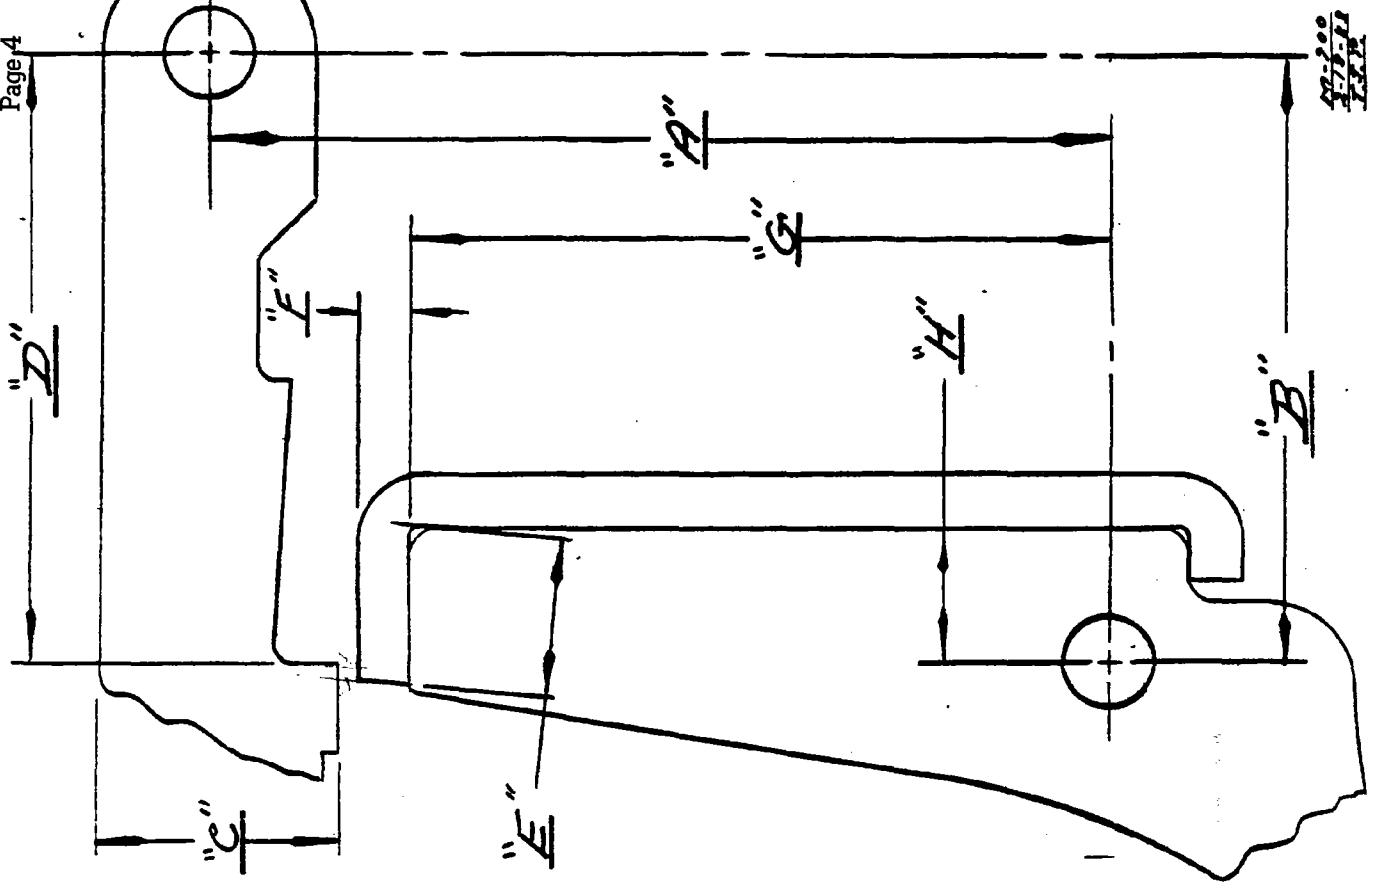

Condition No. 1

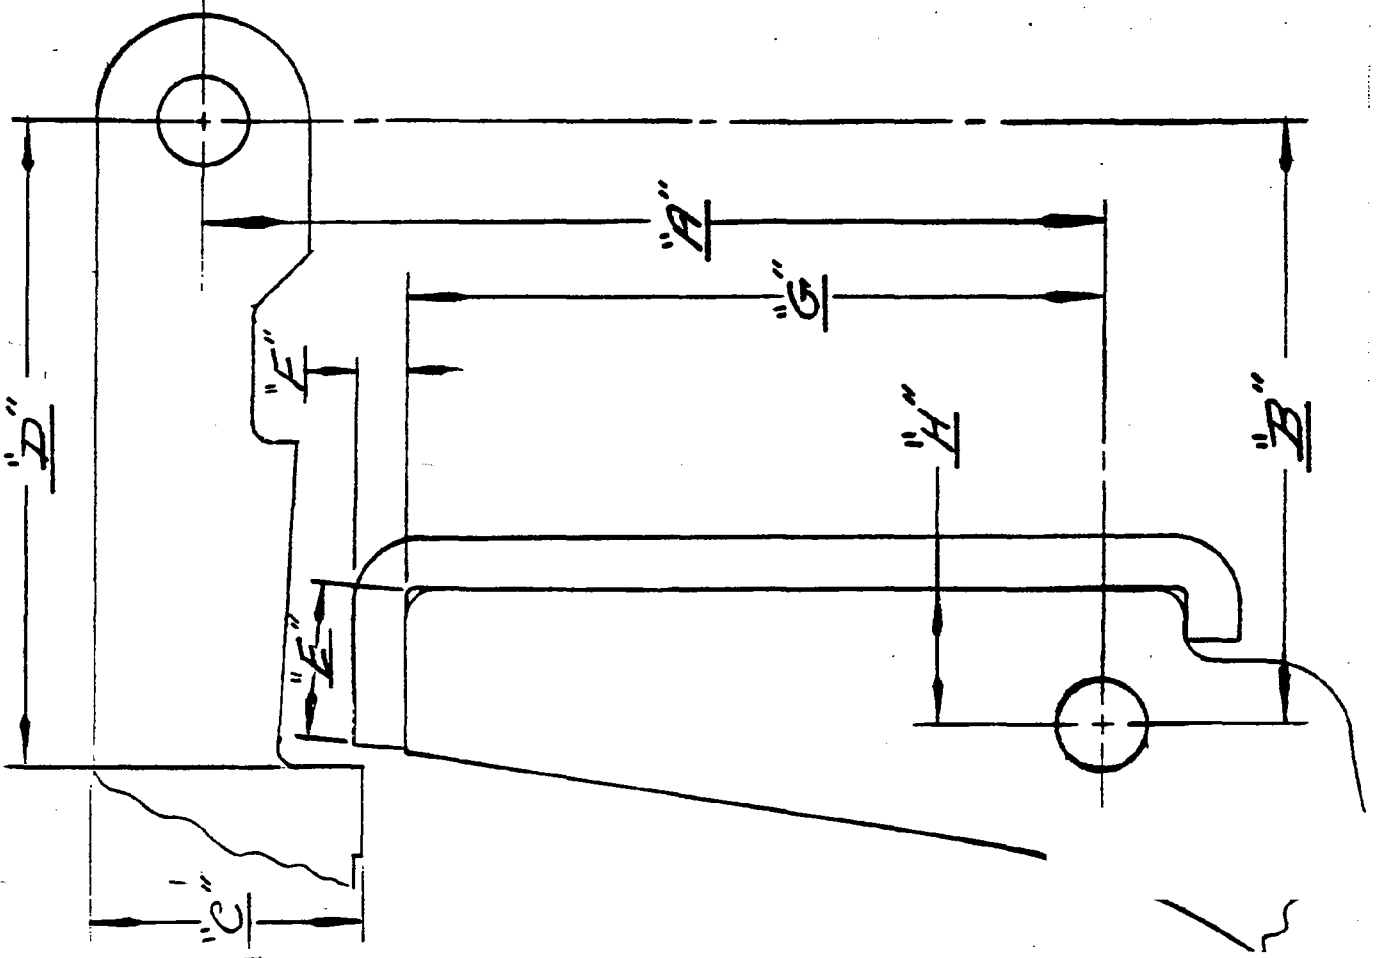

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<input type="checkbox"/> Developmental <input type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance	AREA OF TESTING <input type="checkbox"/> Safety Related <input type="checkbox"/> Litigation <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> Warehouse Audit <input type="checkbox"/> New Design <input type="checkbox"/> Cost Reduction <input type="checkbox"/> Design Change <input type="checkbox"/> Stake- <input checked="" type="checkbox"/> Plant Assistance <input type="checkbox"/> Other	
FIREARM STAT'S MODEL: <u>700</u> CAL or GAGE: <u>AWY</u> BARREL TYPE: <u>—</u> PROOFED: YES <u>—</u> NO <u>—</u>	REPORT REQ'D. FORMAL <u>✓</u> TEST RESULTS ONLY <u>—</u>	DATE REQUESTED: <u>2-11-83</u> DATE NEEDED BY: <u>2-14-83</u> REQUESTED BY: <u>J. LINDE</u> WORK ORDER NO: <u>G0460-000X</u>

TEST TYPE			
<input type="checkbox"/> Strength Test <input checked="" type="checkbox"/> Function Test <input type="checkbox"/> Accuracy Test	<input type="checkbox"/> Ammunition Test <input type="checkbox"/> Environmental Test <input type="checkbox"/> Customer Complaint	<input checked="" type="checkbox"/> Dry Cycle Test <input type="checkbox"/> Measurements <input checked="" type="checkbox"/> Endurance Test	<input type="checkbox"/> Photo/Video <input type="checkbox"/> Other

## EXPLAIN IN DETAIL THE REASON FOR THIS TEST:

- Dry cycle rifles with sample Trigger assemblies (7), (10) and (4), (5) to 25,000 cycles
- Shoot 100 rounds in each shooting + check for any trigger related malfunctions
- Drop test from 3' on the muzzle, Butt, + sides. check for rifle firing.

UNS REQUIRED: 4

New trigger connector (mm./max) conditions.

(Test Results to go to CB Workman immediately)

JTE: NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: \_\_\_\_\_  
 TEST COMPLETED BY: \_\_\_\_\_  
 REPORT DATE: \_\_\_\_\_

70-40-6

REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington*  
SUPERIOR

*PETERS*  
SUPERIOR

Distribution: C. B. Workman  
C. E. Ritchie  
J. W. Brooks  
J. P. Linde

"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

RESEARCH TEST and MEASUREMENT REPORT - Report No. 830423  
M/700 MODIFIED TRIGGER CONNECTOR EVALUATION Supplement No. 1

Prepared by: R. Howe

Date Prepared: February 23, 1983

Proofread and Cleared By:

J.H. Hennings, / R.E. Nightingale,  
Foreman-Test Lab / Foreman-Measurement Lab

*R. E. Nightingale* 2-28-83  
Signature Date

C.E. Ritchie,  
Sr. Supervisor - Testing,  
Meas. & Mech. Analysis Lab

*C. E. Ritchie* 2/25/83  
Signature Date

TEST & MEASUREMENT LAB REPORT

REPORT NUMBER: 830423  
REPORT TITLE: M/700 MODIFIED TRIGGER CONNECTOR EVALUATION  
Supplement No. 1  
MODEL(S): 700  
GAUGE OR CALIBER: .308  
DATE: 2/23/83  
WORK ORDER NO.: G-0460-000X  
PART NAME: Trigger Connector  
DESIGNER/ENGINEER: J. W. Brooks

TEST TYPE:

1. PHOTO LAB
2. STRENGTH TEST - NO. OF GUNS TESTED \_\_\_\_\_
3. FUNCTION TEST - NO. OF GUNS TESTED 7
4. ACCURACY TEST - NO. OF GUNS TESTED \_\_\_\_\_
5. MEASUREMENTS - TYPE: Sear Lift Safe "On-Off", Trigger Pull
6. ENVIRONMENTAL TEST
7. AMMUNITION TESTING & EVALUATION - TYPE: \_\_\_\_\_
8. VISUAL EVALUATION - \_\_\_\_\_ OUT OF \_\_\_\_\_ GUN SAMPLE
9. ENDURANCE - NO. OF GUNS TESTED: 7  
Dry Cycle Rounds - 25,000  
NO. OF ROUNDS PER GUN: 100  
Total Dry-Cycle Rounds - 175,000  
TOTAL ROUNDS FIRED IN TEST: 700  
AMMO TYPE: MAGS. \_\_\_\_\_; TARGET: \_\_\_\_\_  
RIM FIRE \_\_\_\_\_ CENTER FIRE X

REMINGTON ARMS CO., INC.  
Firearms Research Division

Report No. 830423  
Supplement No. 1  
Page 1

February 23, 1983

TO: C. B. WORKMAN  
FROM: R. W. HOWE  
REPORT TITLE: M/700 MODIFIED TRIGGER CONNECTOR EVALUATION  
Supplement No. 1

#### ABSTRACT

Recently R & D Test Lab received seven (7) more M/700's with trigger connectors from the vendor which were slightly (0.001" to 0.003") undersized. Process Engineering through J. W. Brooks, Supervisor, Current Products Design, requested a follow-up test of these assemblies to supplement the original Report No. 830423 of February 12, 1983, to determine whether this dimensional difference would adversely affect the safe operation of the trigger assembly or the M/700 rifle itself.

#### SCOPE OF TEST

To evaluate the undersized M/700 trigger connector by testing seven (7) specially prepared M/700 rifles. Three (3) rifles would have a minimum stack-up of dimensional tolerances and four (4) would have a maximum stack-up of dimensional tolerances.

Refer to sketches in Appendix "A".

#### TEST RESULTS

At no time during the entire test of the seven (7) M/700 rifles, with the specially prepared fire controls, did any trigger related malfunctions occur.

REPORT TEXT

1. Sear Lift measurements were taken and recorded on all seven (7) test rifles before dry-cycling.
2. All seven (7) test rifles were dry-cycled to 25,000 cycles each with no trigger related malfunctions.
3. Sear Lift, Safe "On-Off" pound forces and trigger pull measurements were taken at the conclusion of 25,000 each dry-cycle test.

Present Remington Specs. are:

Sear Lift - 0.005" to 0.018"

Safe "On-Off" forces - none established

Trigger Pull - 3.0 lbs. to 5.0 lbs.

4. The seven (7) rifles were then Jack Fired 100 live rounds each using Remington 180 grain P.S.P. ammo. with no trigger related malfunctions.
5. All seven (7) rifles were then pendulum drop tested against both a neoprene and a hardwood back stop at the three foot level in the following modes:

Muzzle first with Safe "On" and with Safe "Off"

Butt first with Safe "On" and with Safe "Off"

Left side with Safe "On" and with Safe "Off"

Right side with Safe "On" and with Safe "Off"

NOTE: It was noted that the three <sup>MINIMUM</sup> ~~minimum~~ condition test rifles had a higher reading on trigger pull, Safe "On-Off" and Sear Lift measurements than the four maximum condition rifles.

Refer to Appendix "A" Data Sheets for individual results.

TEST PROCEDUREA. Measurements:

1. Sear Lift was measured at the start and the conclusion of the dry-cycle test.
2. Safe "On - Off" forces and trigger pull measurements were taken at the conclusion of the dry-cycle test.

B. Test Conditions:

1. Sear Lift was measured on all seven (7) rifles at the start of the test using the optical comparitor in the R & D Model Shop.
2. All seven (7) test rifles were dry-cycle tested on the four cock and fire dry-cycle machines in the R & D Test Lab Dry-Cycle Room. Each rifle was lubricated liberally with DuPont Teflon Wet Lubricant in and around the bolt cocking cam surface, sear safety cam (top) and trigger housing inspection hole every 5,000 cycles starting at 0 cycles.
3. Sear Lift, Trigger Pull and Safe "On - Off" forces were then taken on the seven (7) rifles; Sear Lift—using the above mentioned optical comparator. Trigger pull was taken using a Chatillon Model In-10 Spring Pull Scale. Safe "On-Off" forces were measured using a Chatillon DPP - 25 lb. Push-Pull Scale.
4. After above measurements were taken, all seven (7) rifles were live fire jack tested 100 rounds each with Remington 180 grain P.S.P. Ammunition in the R & D Lab Shooting Room. All rifles were shot 20 rounds each, then allowed to cool (able to touch with the hand) until all 100 rounds had been shot.
5. A Pendulum Drop Test was then conducted on all seven (7) rifles at the three foot test height on both hardwood and neoprene back stops from the muzzle, butt and both sides.

C. Ammunition:

Remington .308 cal. 180 grain P.S.P. Code R-308W3.

D. Rifles used in test:

Rifle No. 2	Serial No. B6440199	} Max. Condition
Rifle No. 3	Serial No. B6440277	
Rifle No. 11	Serial No. B6440458	
Rifle No. 1	Serial No. B6440172	
Rifle No. 9	Serial No. B6438686	} Min. Condition
Rifle No. 4	Serial No. B6438163	
Rifle No. 6	Serial No. B6439730	

" A P P E N D I X " A "

REPORT # 830423


M/700 MODIFIED TRIGGER CONNECTOR EVALUATION  
SUPPLEMENT #1

R. HOWE


2-23-83

GUN SER No.	86440199	86440277	86440458	86440172	86438686
FIRE CONTROL No.	2	3	11	1	9
CONDITION	MAX.	MAX.	MAX.	MAX.	MIN.
SEAR LIFT CYCLES	.008"	.010"	.007"	.009"	.022"
DRY CYCLES	25,000	25,000	25,000	25,000	25,000
RESULTS	OK	OK	OK	OK	OK
SEAR LIFT 25,000 CYCLES	.008"	.010"	.007"	.009"	.022"
TRIGGER PULL LBS. (RESULT OF THREE MEASUREMENTS)	5.00	4.50	5.00	5.50	6.00
SAFE "ON" LBS. (RESULT OF THREE MEASUREMENTS)	6.3	7.0	6.7	5.0	20.0
SAFE "OFF" LBS. (RESULT OF THREE MEASUREMENTS)	7.0	6.7	7.6	5.1	9.5
DROP TEST 3' SAFE POSITION →					
NEOPRENE PAD	ON OFF	ON OFF	ON OFF	ON OFF	ON OFF
MUZZLE FIRST	OK OK	OK OK	OK OK	OK OK	OK OK
BUTT FIRST	" "	" "	" "	" "	" "
RIGHT SIDE	" "	" "	" "	" "	" "
LEFT SIDE	" "	" "	" "	" "	" "
HARD WOOD PAD	OK OK	OK OK	OK OK	OK OK	OK OK
MUZZLE FIRST	" "	" "	" "	" "	" "
BUTT FIRST	" "	" "	" "	" "	" "
RIGHT SIDE	" "	" "	" "	" "	" "
LEFT SIDE	" "	" "	" "	" "	" "
No. LIVE ROUNDS FIRED	100	100	100	100	100
RESULTS	OK	OK	OK	OK	OK
ARMO. - CAL 308 180GR PSP					

GUN SER No.	86438163	86439730	REMINGTON SPEC.
FIRE CONTROL No.	4	6	
CONDITION	MIN.	MIN.	
SEAR LIFT CYCLES	.023"	.023"	.005" to .018"
DRY CYCLES	25,000	25,000	
RESULTS	OK	OK	
SEAR LIFT 25,000 CYCLES	.023"	.023"	.005" to .018"
TRIGGER PULL LBS.	6.33	8.91	3.0 to 5.0 LBS
SAFE "ON" LBS.	24.0	11.2	NONE ESTABLISHED
SAFE "OFF" LBS.	7.6	6.0	NONE ESTABLISHED
DROP TEST 3' SAFE POSITION →			
NEOPRENE PAD	ON OFF	ON OFF	
MUZZLE FIRST	OK OK	OK OK	
BUTT FIRST	" "	" "	
RIGHT SIDE	" "	" "	
LEFT SIDE	" "	" "	
HARD WOOD PAD	OK OK	OK OK	
MUZZLE FIRST	" "	" "	
BUTT FIRST	" "	" "	
RIGHT SIDE	" "	" "	
LEFT SIDE	" "	" "	
No. LIVE ROUNDS FIRED	100	100	
RESULTS	OK	OK	

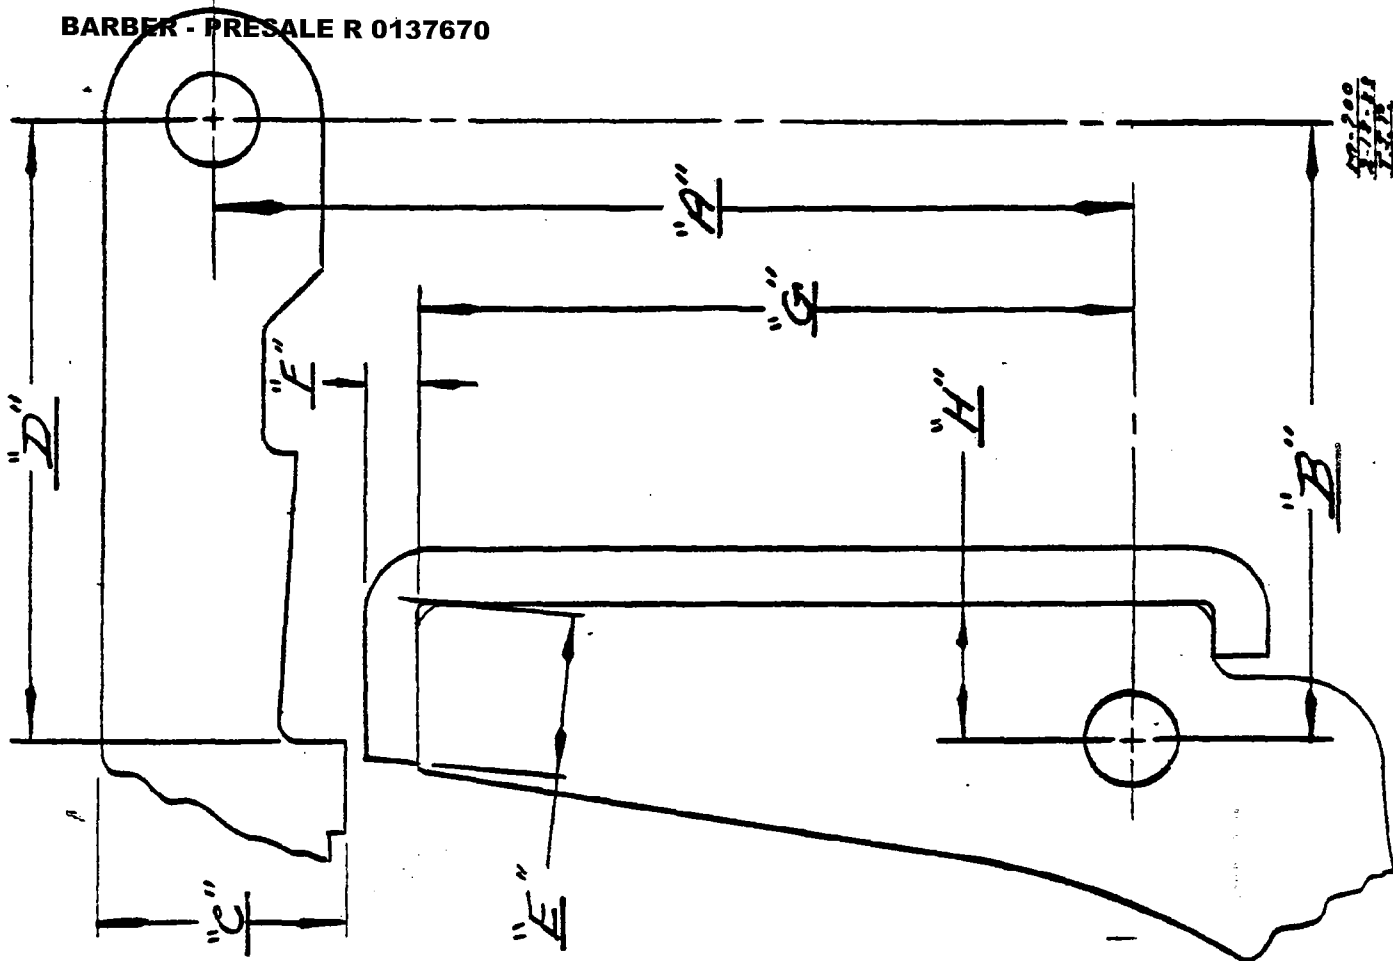

Condition No. 1

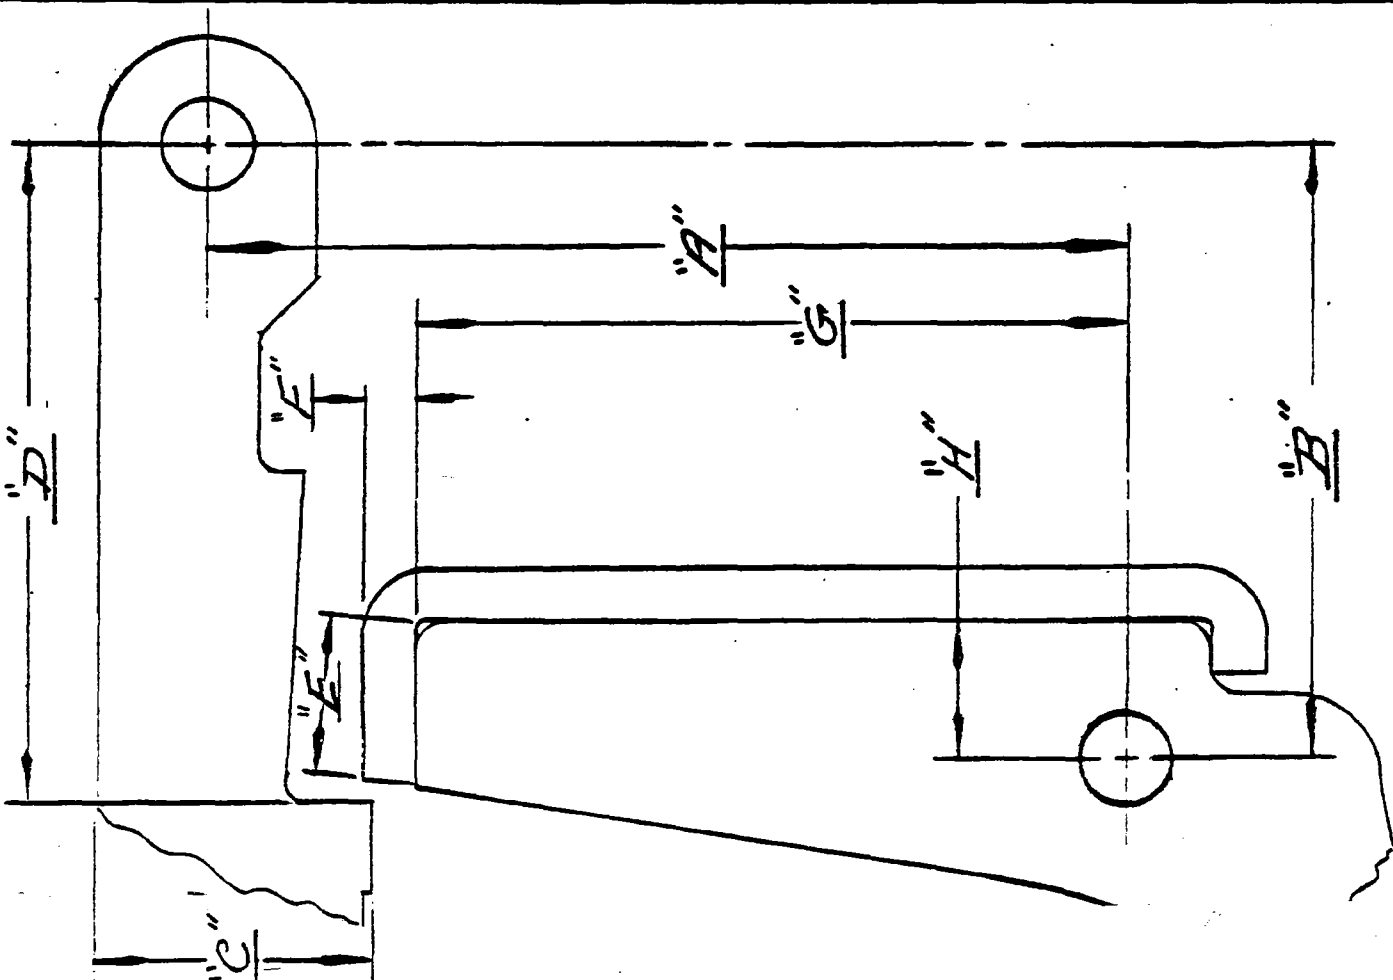

Report No. 830423  
 Supplement No. 1  
 2-23-83

BARBER - PRESALE R 0137671

CONDITION NO.		1	1	1	2	2	2	1	2	2	1	1	2
TRIGGER HOUSING ASSEMBLY NO.		①	②	③	④	5	⑥	7	8	⑨	10	⑪	12
	<u>Dim.</u>												
HOUSING	A	1.2395	1.2385	1.2395	1.241	1.2405	1.240	1.2385	1.2385	1.2405	1.240	1.238	1.239
	B	.8395	.839	.8395	.841	.8415	.841	.840	.8405	.8405	.8385	.839	.842
SEAR	C	.1975- .198	.1975- .198	.1975- .198	.186	.1865	.1865	.1975	.1855	.1855	.1975	.1975- .198	.1865
	D	.8705- .871	.870- .8695	.8705- .871	.8655	.8655	.8645	.870- .8695	.863	.865	.871	.869- .8695	.8645
CONNECTOR	E	.215	.215	.215	.225	.225	.225	.215	.225	.225	.215	.215	.225
	F	.074	.072- .0715	.071- .0705	.071	.071	.071	.074	.071	.071	.074	.072- .0715	.071
TRIGGER	G	.972	.975	.975	.967	.967	.967	.9725	.967	.967	.9725	.975	.967
	H	.190	.190	.190	.186	.186	.186	.190	.186	.186	.190	.190	.186
		B6440172	B6440199	B6440277	B6438163		B6439730			B6438686		B6440458	

JWB:js  
 2/18/83

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
 KINZER V. REMINGTON

BARBER - PRESALE R 0137671  
 R2538659

## RESEARCH TEST &amp; MEASUREMENT LAB WORK REQUEST

<u>AREA OF TESTING</u> <input type="checkbox"/> Developmental <input type="checkbox"/> Design Acceptance <input type="checkbox"/> Pre-Pilot <input type="checkbox"/> Pilot <input type="checkbox"/> Production Acceptance		<input type="checkbox"/> Safety Related <input type="checkbox"/> Competitive Evaluation <input type="checkbox"/> New Design <input type="checkbox"/> Design Change <input checked="" type="checkbox"/> Plant Assistance		<input type="checkbox"/> Litigation <input type="checkbox"/> Warehouse Audit <input type="checkbox"/> Cost Reduction State: _____ <input type="checkbox"/> Other	
<u>FIREARM STAT'S.</u> MODEL: <u>700</u> CAL or GAGE: <u>AW4</u> BARREL TYPE: <u>—</u> PROOFED: YES <u>—</u> NO <u>—</u>		<u>REPORT REQ'D.</u> FORMAL <u>✓</u> TEST RESULTS ONLY <u>—</u>		DATE REQUESTED: <u>2-11-83</u> DATE NEEDED BY: <u>2-14-83</u> REQUESTED BY: <u>J. LINDE</u> WORK ORDER NO: <u>G0460-000X</u>	

<u>TEST TYPE</u>			
<input type="checkbox"/> Strength Test	<input type="checkbox"/> Ammunition Test	<input checked="" type="checkbox"/> Dry Cycle Test	<input type="checkbox"/> Photo/Video
<input checked="" type="checkbox"/> Function Test	<input type="checkbox"/> Environmental Test	<input type="checkbox"/> Measurements	<input type="checkbox"/> Other _____
<input type="checkbox"/> Accuracy Test	<input type="checkbox"/> Customer Complaint	<input checked="" type="checkbox"/> Endurance Test	_____

PLAIN IN DETAIL THE REASON FOR THIS TEST:

- Dry cycle rifles with sample Trigger assemblies (7), (10) and (4), (5) to 25,000 cycles
- Shoot 100 rounds - jack shooting + check for any Trigger related malfunctions
- Drop test from 3' on the muzzle, Butt, + sides. Check for rifle firing.

UNS REQUIRED: 4

New trigger connector (mm./max. conditions.

(Test Results to go to CB Workman immediately)

**NOTE:** NO firearms or parts will be tested in the Labs unless they are accompanied by a Work Request, and both are delivered to the Labs by the designer or engineer. All Work Requests are to be filled out in detail. No Exceptions.

DATE COMPLETED: \_\_\_\_\_  
 TEST COMPLETED BY: \_\_\_\_\_  
 REPORT DATE: \_\_\_\_\_

☐ FOR ENCLOSURE

DATE

2/22

TO: R. Howe

FROM: Evan

Please Discuss With	For Ap- proval	For At- tention	For Infor- mation	Note and Forward To File	Note and Return To Sender	Forwarded Per Your Request
---------------------------	----------------------	-----------------------	-------------------------	--------------------------------	---------------------------------	----------------------------------

Pls hold onto  
this material  
in the file

## DON'T SAY IT-WRITE IT

# 830423

To \_\_\_\_\_ Location \_\_\_\_\_ Phone No. \_\_\_\_\_  
 From \_\_\_\_\_ Location \_\_\_\_\_ Date \_\_\_\_\_  
 Subject \_\_\_\_\_

**FIRE CONTROL OR PACKET #**

# 8	SERIAL # B6440493	PACKET # 8	} DONE
# 5	" # B6438179	# 5	
# 7	" # B6438908	# 7	
# 10	" # B6438658	# 10	
# 9	" # B6438686		
# 4	" # 6438163		
# 6	" # 6439730		
# 2	" # 6440199		
# 3	" # 6440277		
# 11	" # 6440458		
# 1	" # 6440172		

G-88 REV. 10-62  
DUPLICATE PRINTING

SECURITY IS EVERYONE'S RESPONSIBILITY

CONDITION NO.		1	1	1	2	2	2	1	2	2	1	1	2
TRIGGER HOUSING ASSEMBLY NO.		1	2	3	4	5	6	7	8	9	10	11	12
	Dim.												
HOUSING	A	1.2395	1.2385	1.2395	1.241	1.2405	1.240	1.2385	1.2385	1.2405	1.240	1.238	1.2395
	B	.8395	.839	.8395	.841	.8415	.841	.840	.8405	.8405	.8385	.839	.842
SEAR	C	.1975- .198	.1975- .198	.1975- .198	.186	.1865	.1865	.1975	.1855	.1855	.1975	.1975- .198	.1865
	D	.8705- .871	.870- .8695	.8705- .871	.8655	.8655	.8645	.870- .8695	.863	.865	.871	.869- .8695	.8645
CONNECTOR	E	.215	.215	.215	.225	.225	.225	.215	.225	.225	.215	.215	.225
	F	.074	.072- .0715	.071- .0705	.071	.071	.071	.074	.071	.071	.074	.072- .0715	.071
TRIGGER	G	.972	.975	.975	.967	.967	.967	.9725	.967	.967	.9725	.975	.967
	H	.190	.190	.190	.186	.186	.186	.190	.186	.186	.190	.190	.186

WB:js  
2/18/83

CONDITION NO.		1	1	1	2	2	2	1	2	2	1	1	2
TRIGGER HOUSING ASSEMBLY NO.		1	2	3	4	5	6	7	8	9	10	11	12
	<u>Dim.</u>												
HOUSING	A	1.2395	1.2385	1.2395	1.241	1.2405	1.240	1.2385	1.2385	1.2405	1.240	1.238	1.2395
	B	.8395	.839	.8395	.841	.8415	.841	.840	.8405	.8405	.8385	.839	.842
SEAR	C	.1975- .198	.1975- .198	.1975- .198	.186	.1865	.1865	.1975	.1855	.1855	.1975	.1975- .198	.1865
	D	.8705- .871	.870- .8695	.8705- .871	.8655	.8655	.8645	.870- .8695	.863	.865	.871	.869- .8695	.8645
CONNECTOR	E	.215	.215	.215	.225	.225	.225	.215	.225	.225	.215	.215	.225
	F	.074	.072- .0715	.071- .0705	.071	.071	.071	.074	.071	.071	.074	.072- .0715	.071
TRIGGER	G	.972	.975	.975	.967	.967	.967	.9725	.967	.967	.9725	.975	.967
	H	.190	.190	.190	.186	.186	.186	.190	.186	.186	.190	.190	.186

JBW:js  
2/18/83

CONDITION NO.		1	1	1	2	2	2	1	2	2	1	1	2
TRIGGER HOUSING ASSEMBLY NO.		1	2	3	4	5	6	7	8	9	10	11	12
	<u>Dim.</u>												
HOUSING	A	1.2395	1.2385	1.2395	1.241	1.2405	1.240	1.2385	1.2385	1.2405	1.240	1.238	1.2395
	B	.8395	.839	.8395	.841	.8415	.841	.840	.8405	.8405	.8385	.839	.842
SEAR	C	.1975- .198	.1975- .198	.1975- .198	.186	.1865	.1865	.1975	.1855	.1855	.1975	.1975- .198	.1865
	D	.8705- .871	.870- .8695	.8705- .871	.8655	.8655	.8645	.870- .8695	.863	.865	.871	.869- .8695	.8645
CONNECTOR	E	.215	.215	.215	.225	.225	.225	.215	.225	.225	.215	.215	.225
	F	.074	.072- .0715	.071- .0705	.071	.071	.071	.074	.071	.071	.074	.072- .0715	.071
TRIGGER	G	.972	.975	.975	.967	.967	.967	.9725	.967	.967	.9725	.975	.967
	H	.190	.190	.190	.186	.186	.186	.190	.186	.186	.190	.190	.186

JWB:js  
2/18/83

CONDITION NO.		1	1	1	2	2	2	1	2	2	1	1	2
TRIGGER HOUSING ASSEMBLY NO.		1	2	3	4	5	6	7	8	9	10	11	12
	<u>Dim.</u>												
HOUSING	A	1.2395	1.2385	1.2395	1.241	1.2405	1.240	1.2385	1.2385	1.2405	1.240	1.238	1.2395
	B	.8395	.839	.8395	.841	.8415	.841	.840	.8405	.8405	.8385	.839	.842
SEAR	C	.1975- .198	.1975- .198	.1975- .198	.186	.1865	.1865	.1975	.1855	.1855	.1975	.1975- .198	.1865
	D	.8705- .871	.870- .8695	.8705- .871	.8655	.8655	.8645	.870- .8695	.863	.865	.871	.869- .8695	.8645
CONNECTOR	E	.215	.215	.215	.225	.225	.225	.215	.225	.225	.215	.215	.225
	F	.074	.072- .0715	.071- .0705	.071	.071	.071	.074	.071	.071	.074	.072- .0715	.071
TRIGGER	G	.972	.975	.975	.967	.967	.967	.9725	.967	.967	.9725	.975	.967
	H	.190	.190	.190	.186	.186	.186	.190	.186	.186	.190	.190	.186

HWB:js  
2/18/83


CONDITION NO.		1	1	1	2	2	2	1	2	2	1	1	2
TRIGGER HOUSING ASSEMBLY NO.		1	2	3	4	5	6	7	8	9	10	11	12
	<u>Dim.</u>												
HOUSING	A	1.2395	1.2385	1.2395	1.241	1.2405	1.240	1.2385	1.2385	1.2405	1.240	1.238	1.2395
	B	.8395	.839	.8395	.841	.8415	.841	.840	.8405	.8405	.8385	.839	.842
SEAR	C	.1975- .198	.1975- .198	.1975- .198	.186	.1865	.1865	.1975	.1855	.1855	.1975	.1975- .198	.1865
	D	.8705- .871	.870- .8695	.8705- .871	.8655	.8655	.8645	.870- .8695	.863	.865	.871	.869- .8695	.8645
CONNECTOR	E	.215	.215	.215	.225	.225	.225	.215	.225	.225	.215	.215	.225
	F	.074	.072- .0715	.071- .0705	.071	.071	.071	.074	.071	.071	.074	.072- .0715	.071
TRIGGER	G	.972	.975	.975	.967	.967	.967	.9725	.967	.967	.9725	.975	.967
	H	.190	.190	.190	.186	.186	.186	.190	.186	.186	.190	.190	.186

HWB:js  
2/18/83


CONDITION NO.		1	1	1	2	2	2	1	2	2	1	1	2
TRIGGER HOUSING ASSEMBLY NO.		1	2	3	4	5	6	7	8	9	10	11	12
	<u>Dim.</u>												
HOUSING	A	1.2395	1.2385	1.2395	1.241	1.2405	1.240	1.2385	1.2385	1.2405	1.240	1.238	1.2395
	B	.8395	.839	.8395	.841	.8415	.841	.840	.8405	.8405	.8385	.839	.842
SEAR	C	.1975- .198	.1975- .198	.1975- .198	.186	.1865	.1865	.1975	.1855	.1855	.1975	.1975- .198	.1865
	D	.8705- .871	.870- .8695	.8705- .871	.8655	.8655	.8645	.870- .8695	.863	.865	.871	.869- .8695	.8645
CONNECTOR	E	.215	.215	.215	.225	.225	.225	.215	.225	.225	.215	.215	.225
	F	.074	.072- .0715	.071- .0705	.071	.071	.071	.074	.071	.071	.074	.072- .0715	.071
TRIGGER	G	.972	.975	.975	.967	.967	.967	.9725	.967	.967	.9725	.975	.967
	H	.190	.190	.190	.186	.186	.186	.190	.186	.186	.190	.190	.186

IWB:js  
2/18/83


CONDITION No. 2

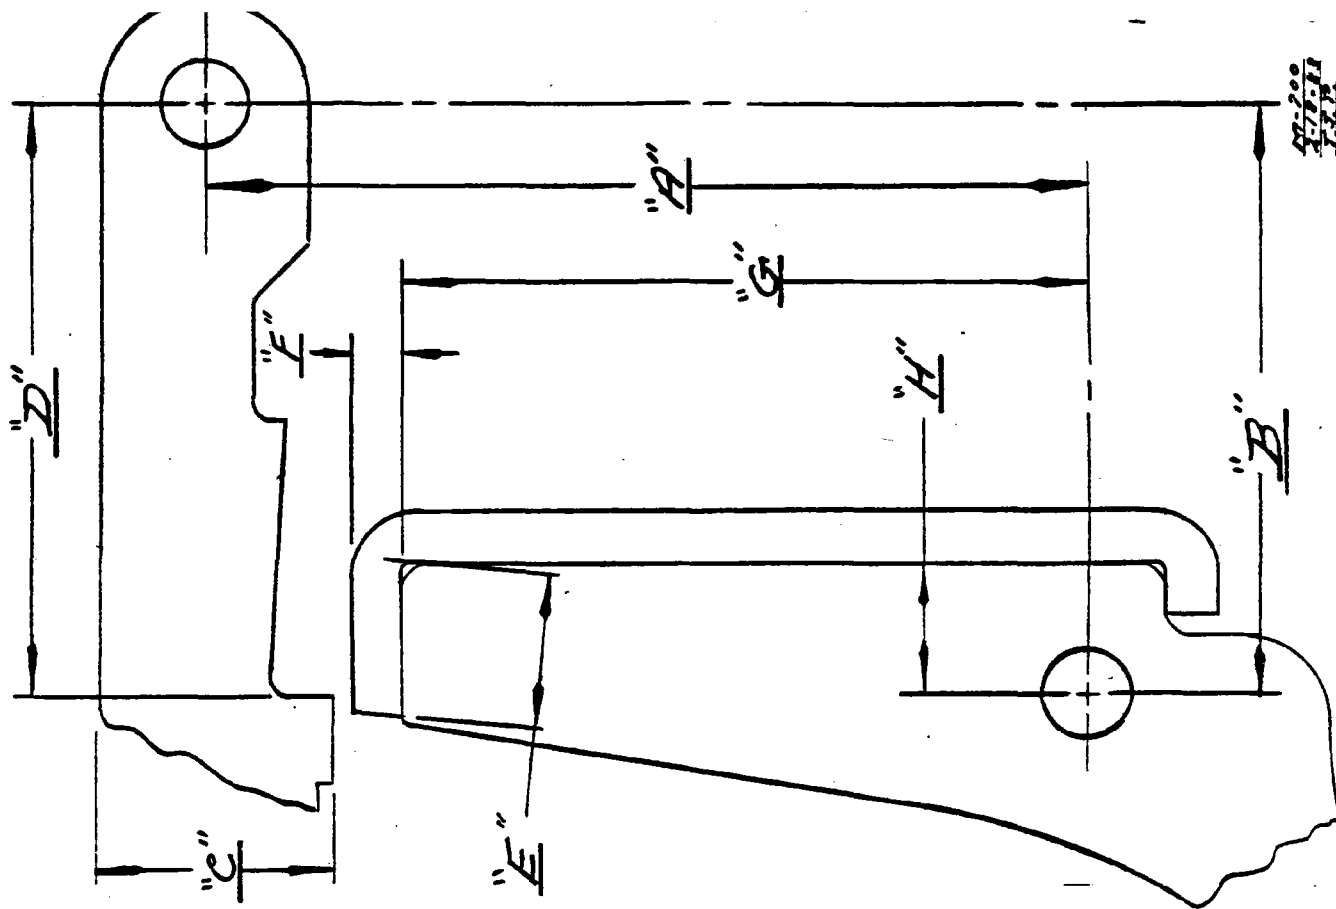


CONDITION No. 1

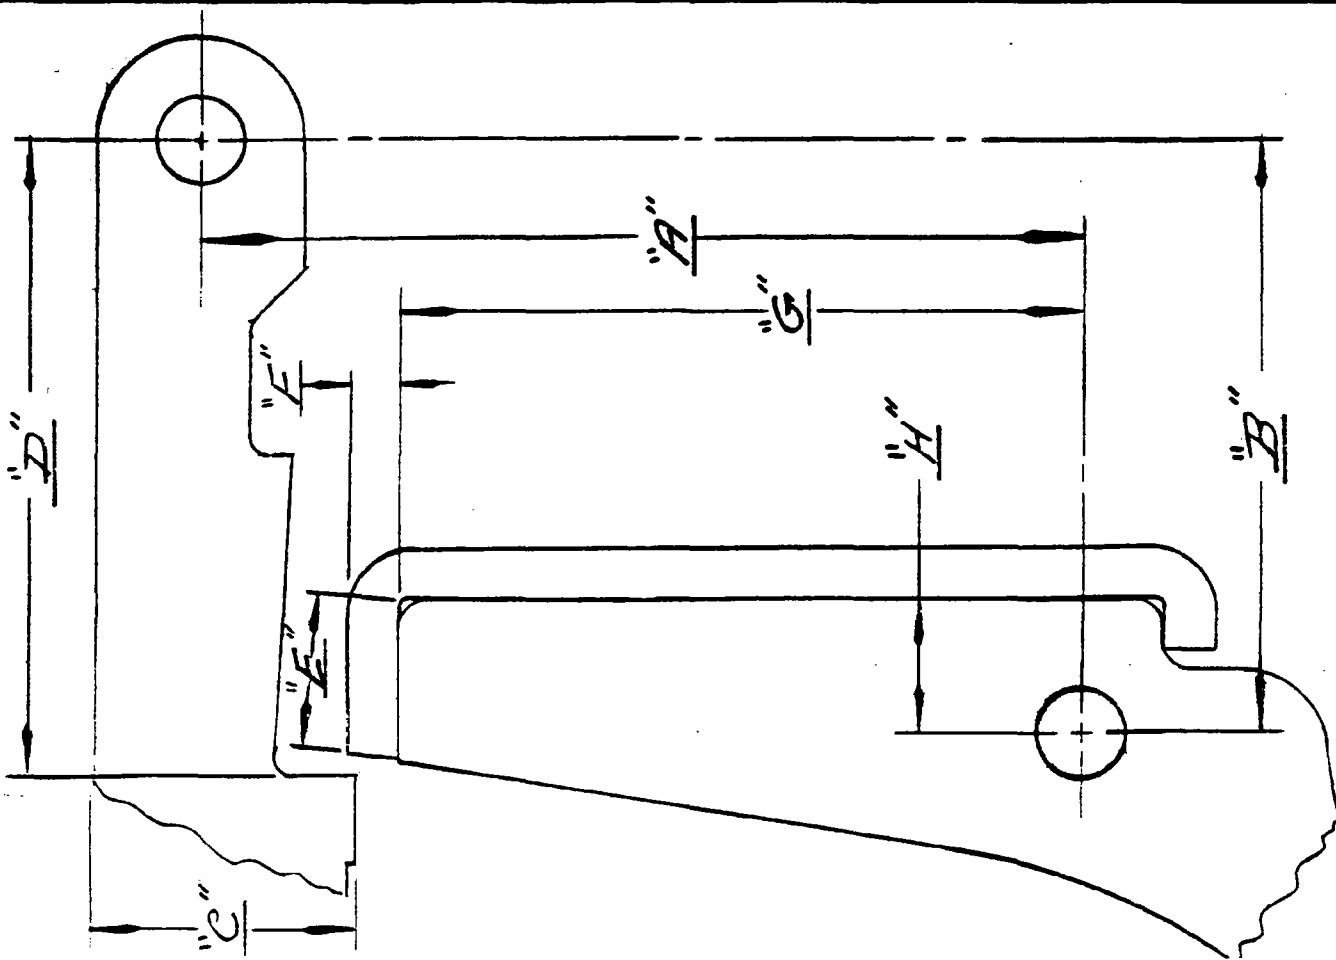


CONDITION No. 2

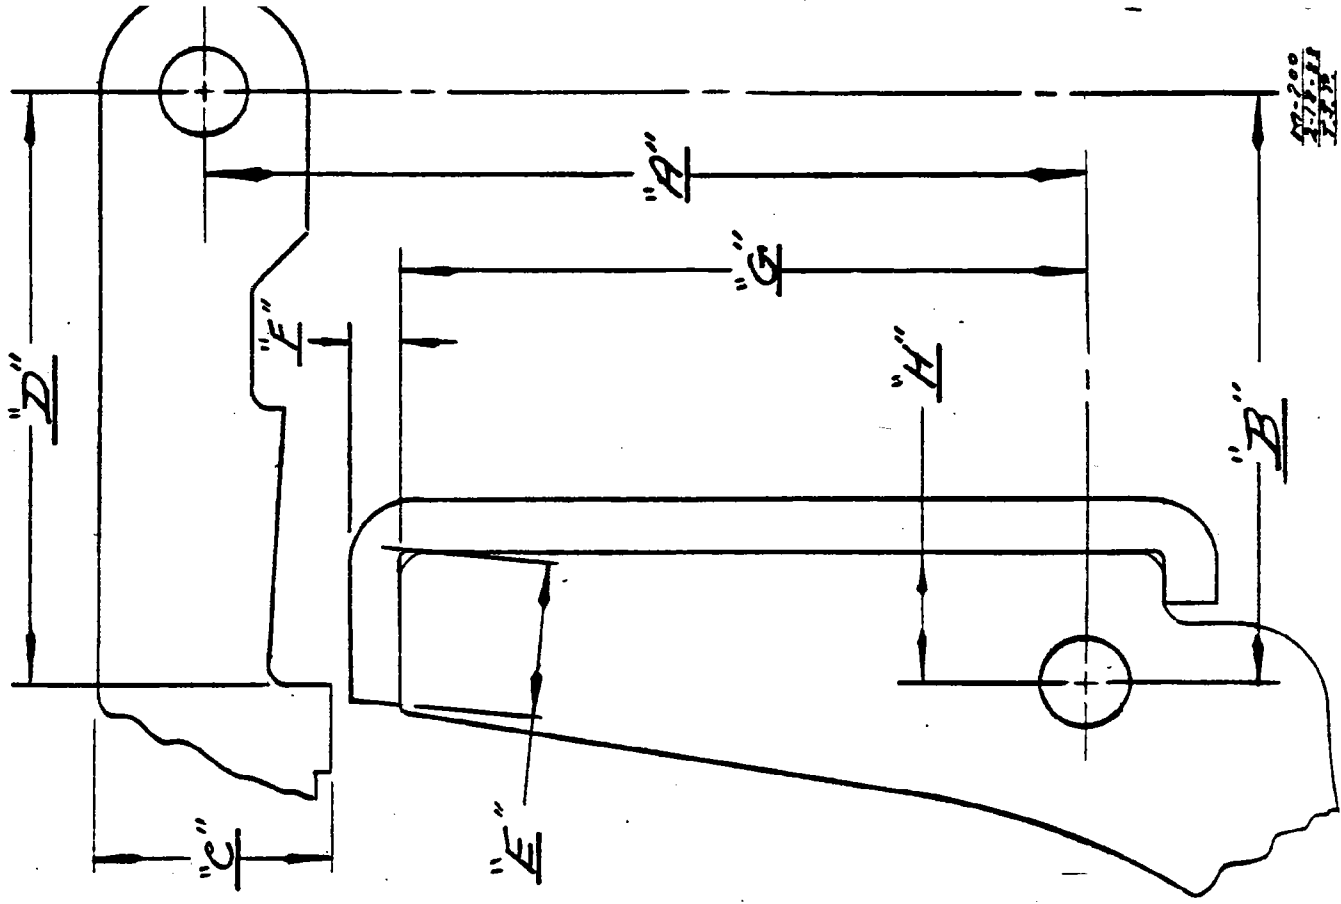


CONDITION No. 1

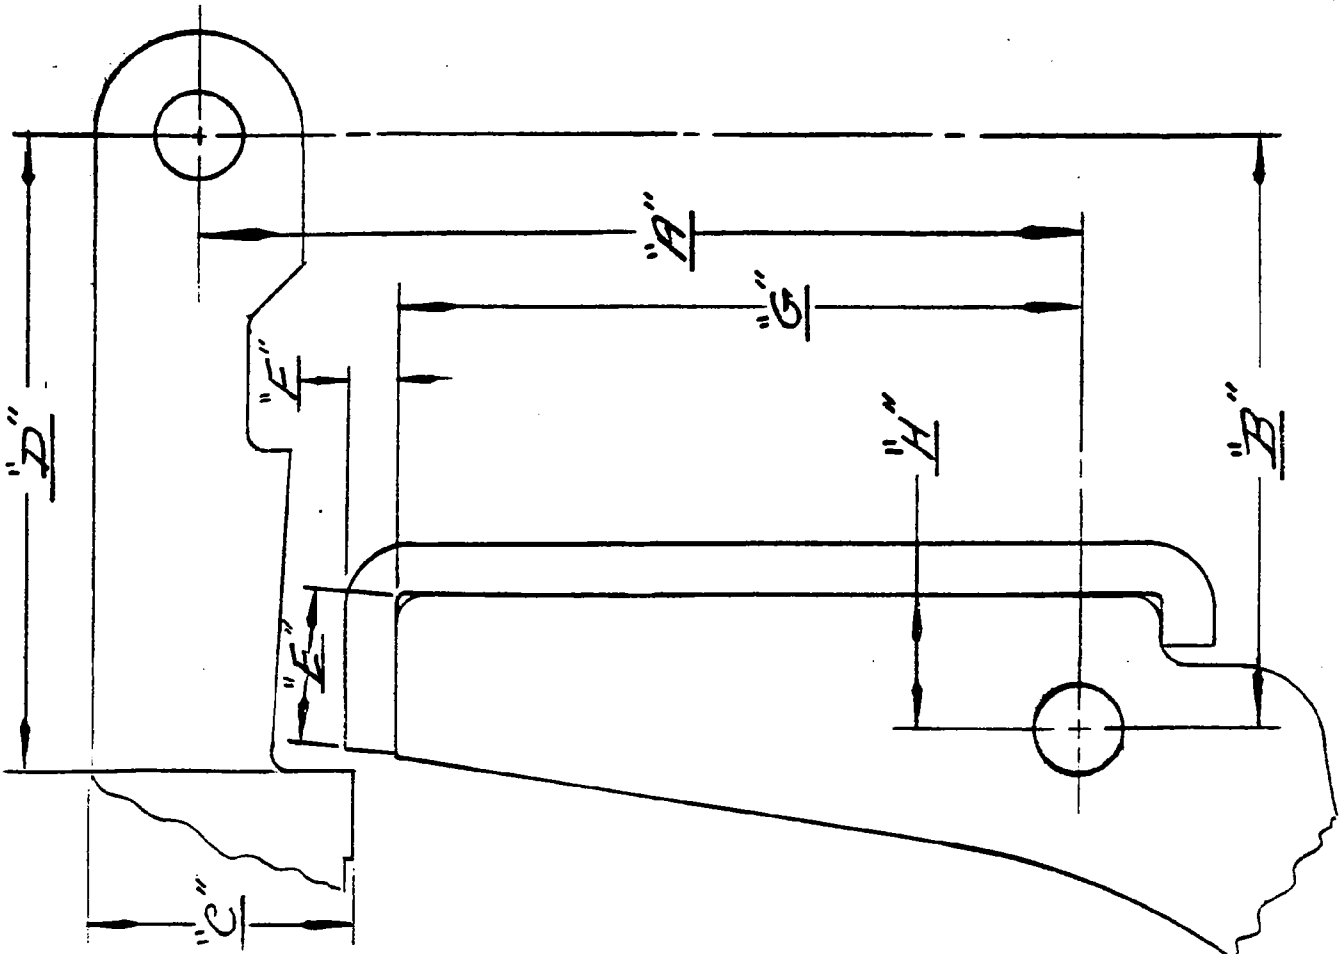


CONDITION No. 2

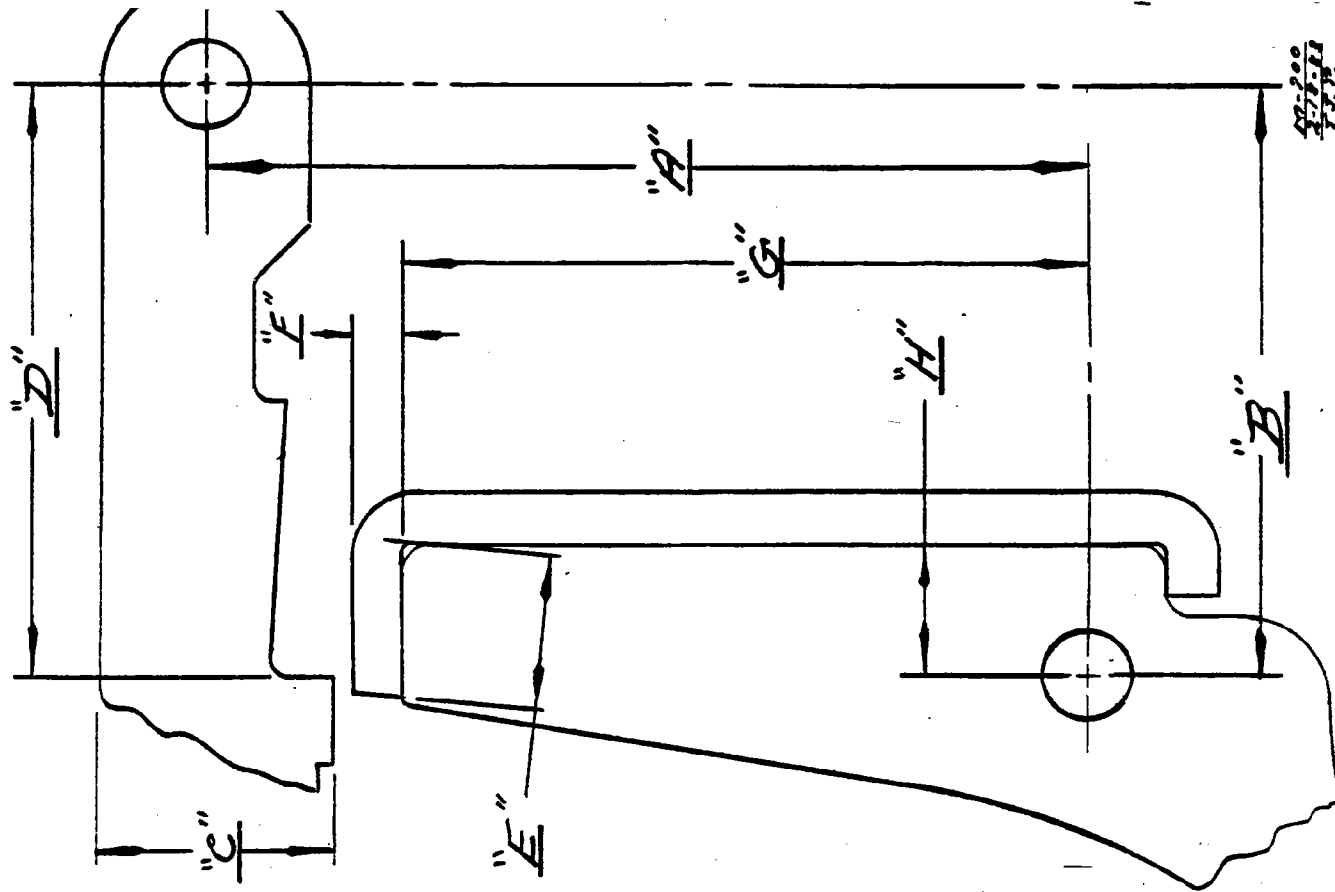

CONDITION No. 1

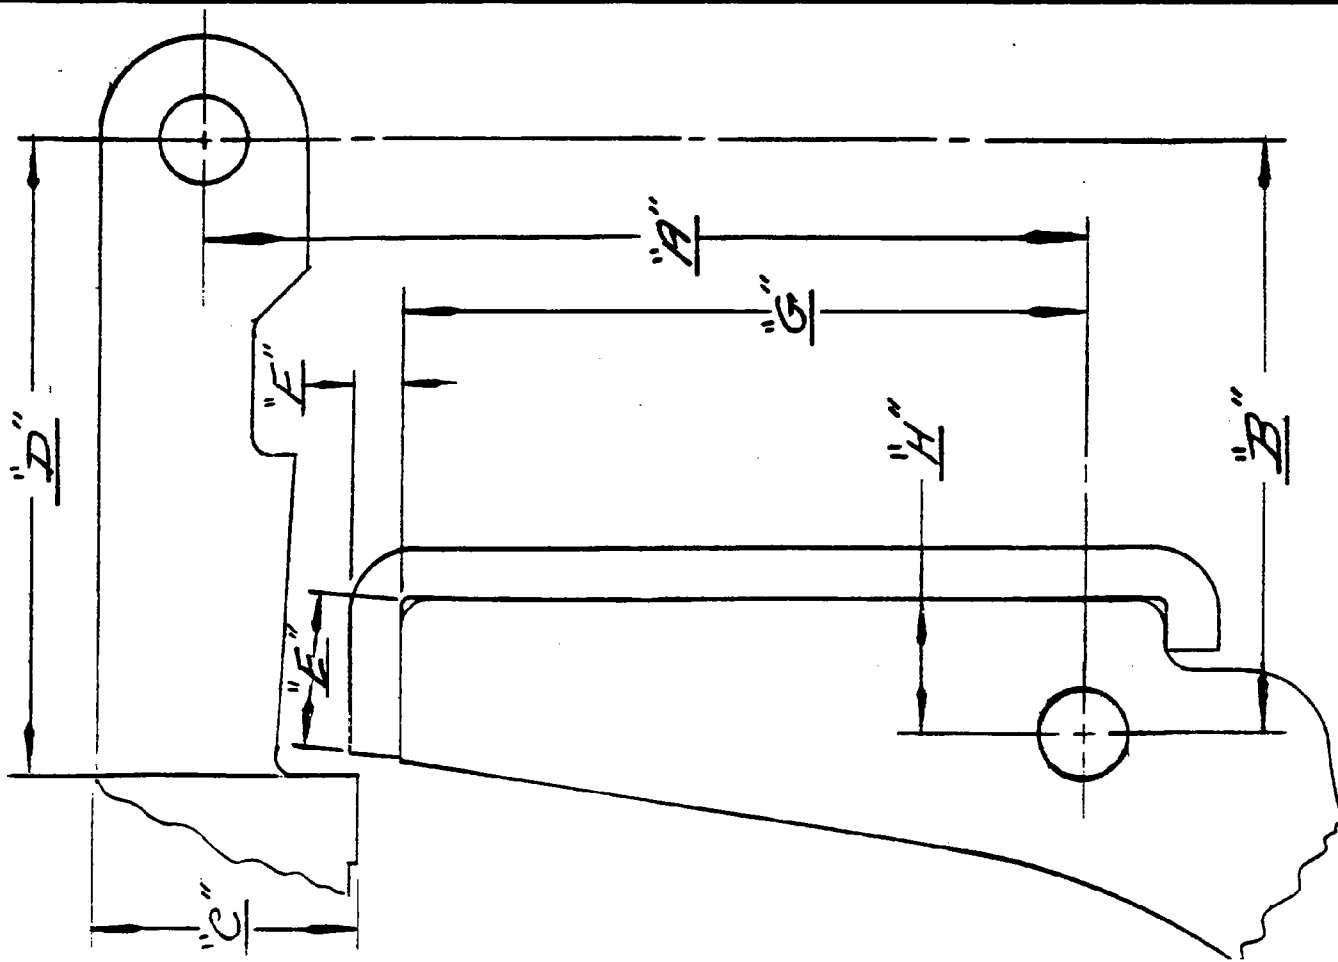


CONDITION No. 2

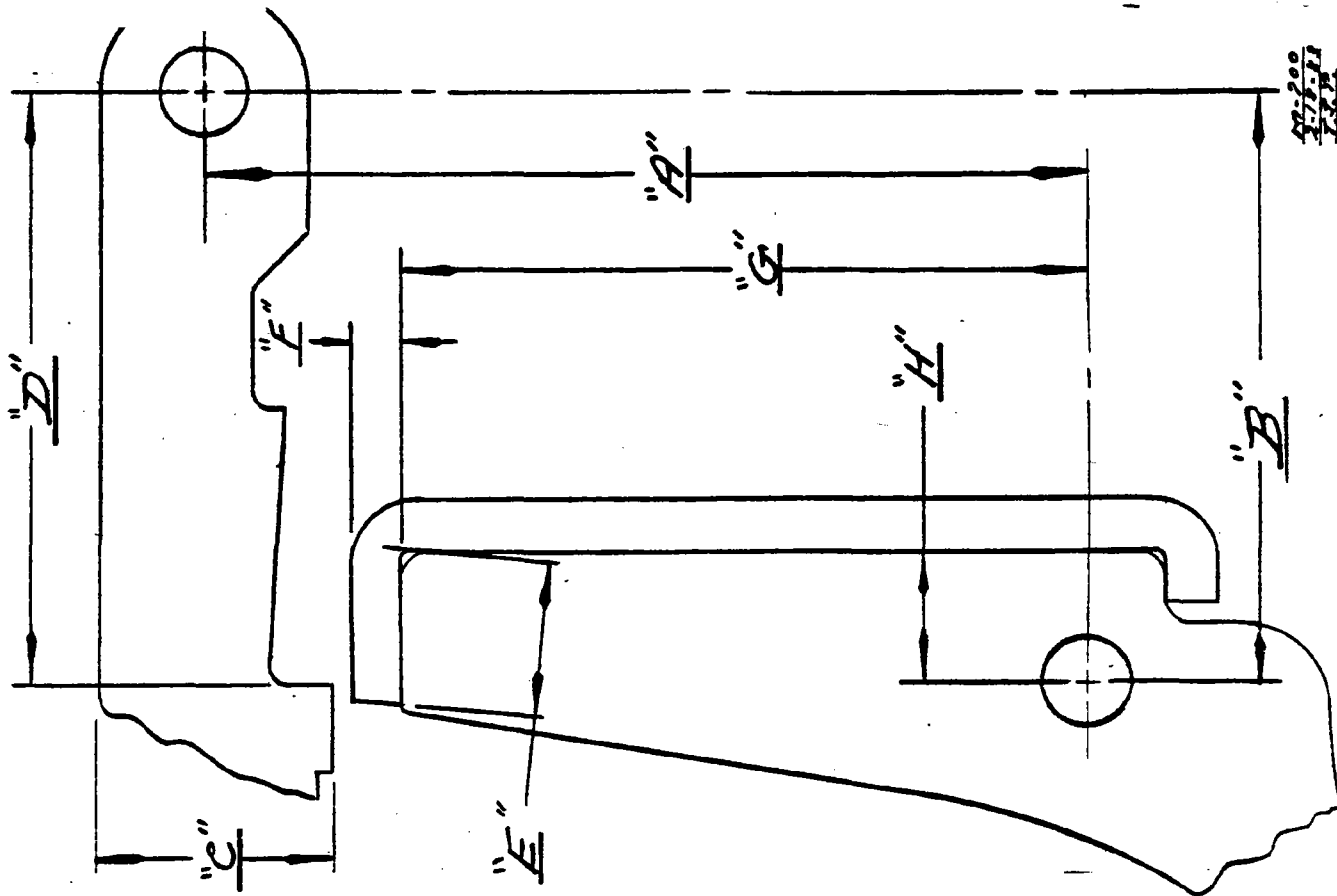


40-200  
416-11  
1-2-2


CONDITION No. 1

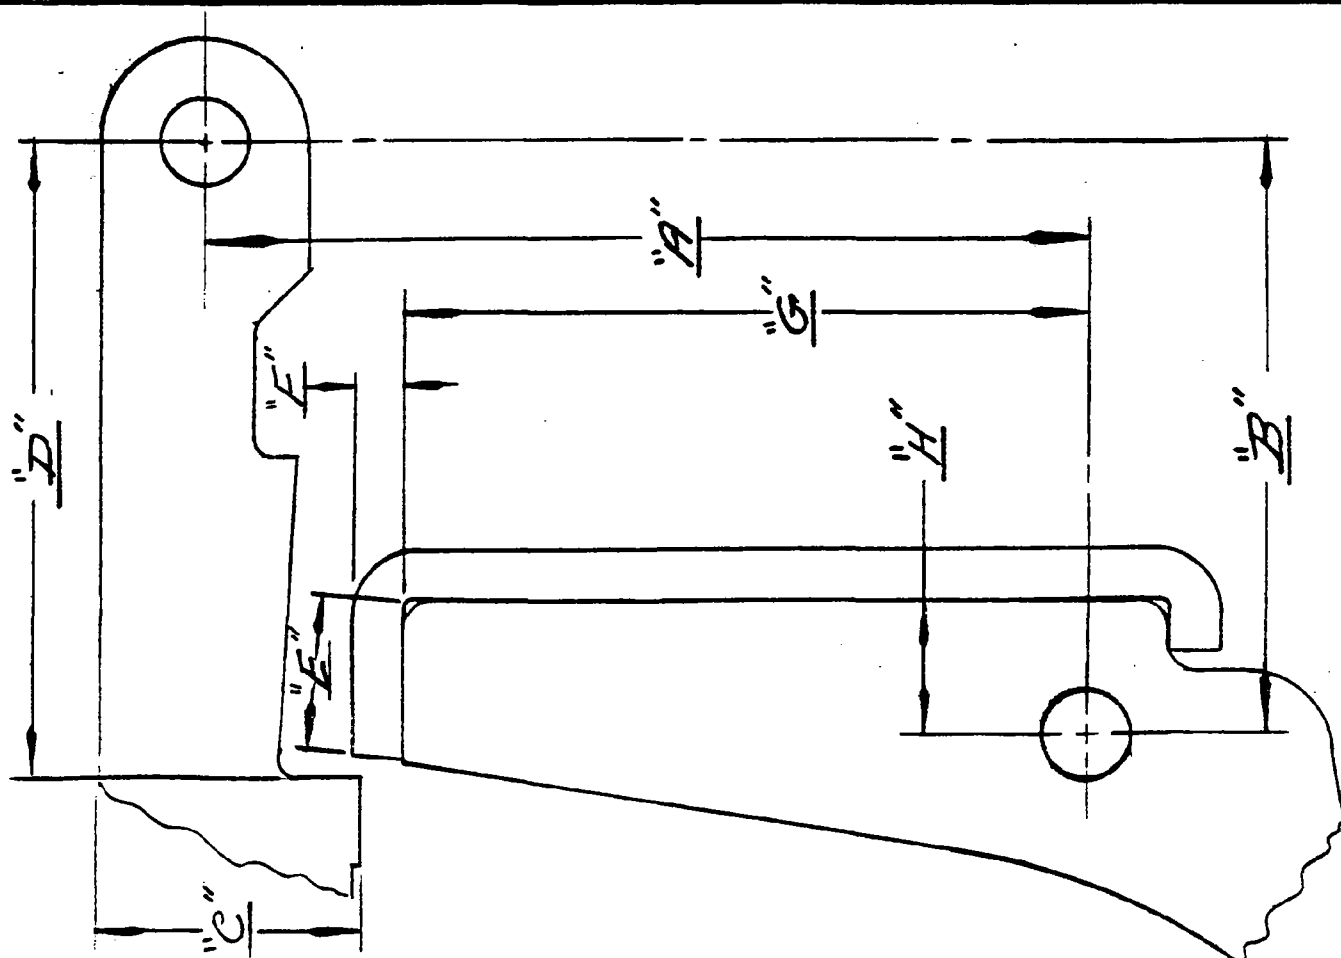


CONDITION No. 2

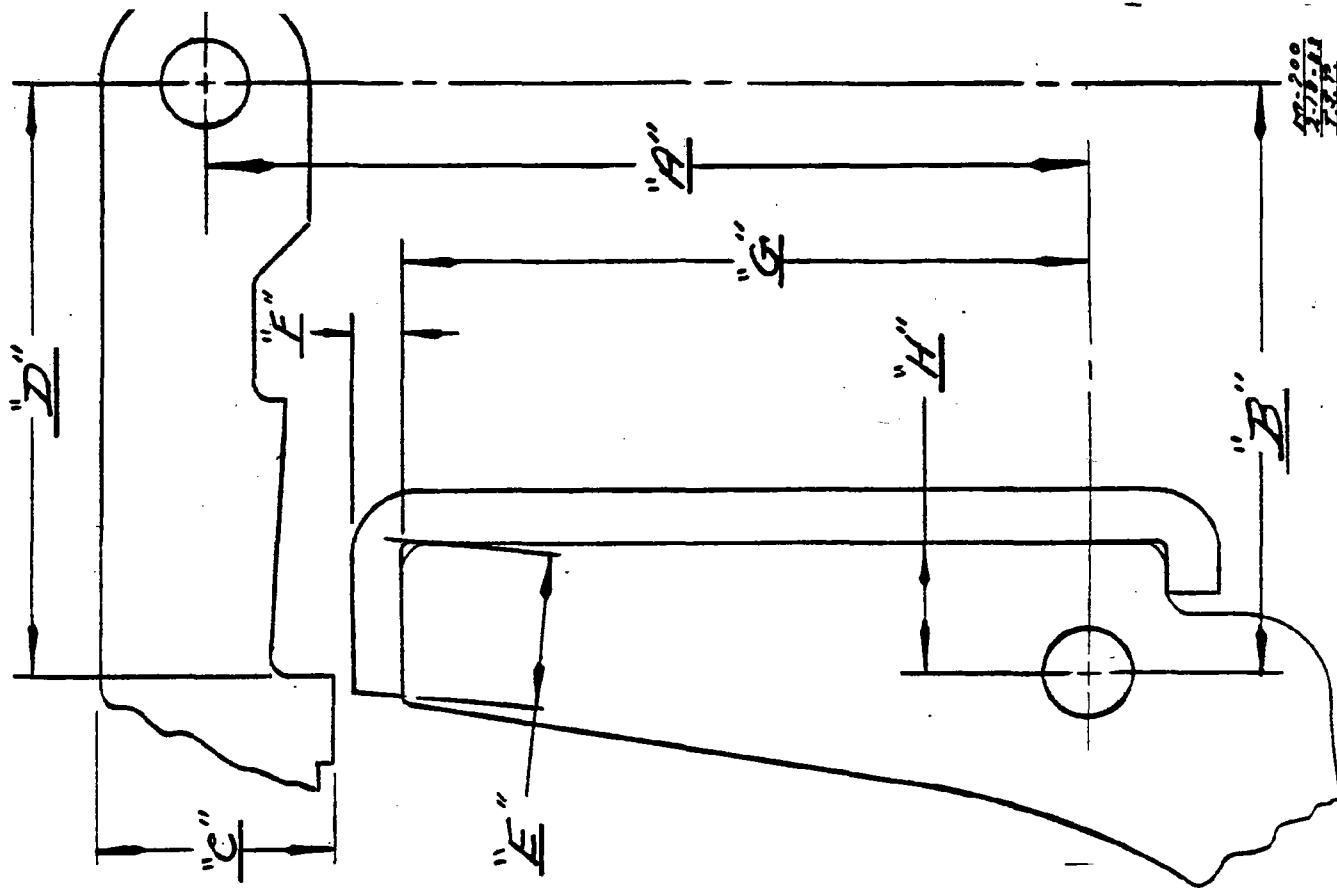


CONDITION No. 1

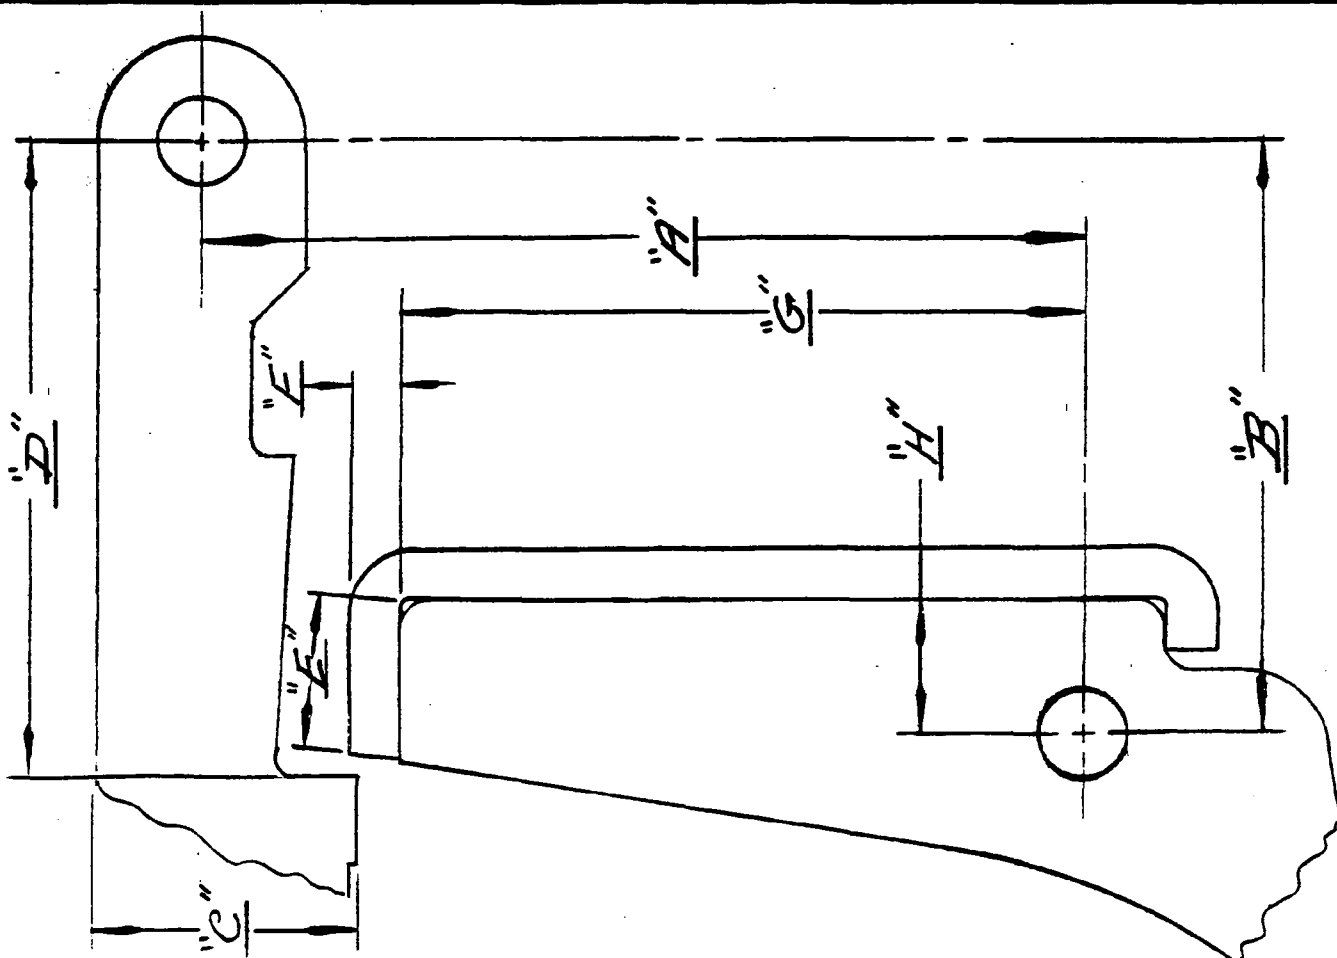


CONDITION No. 2

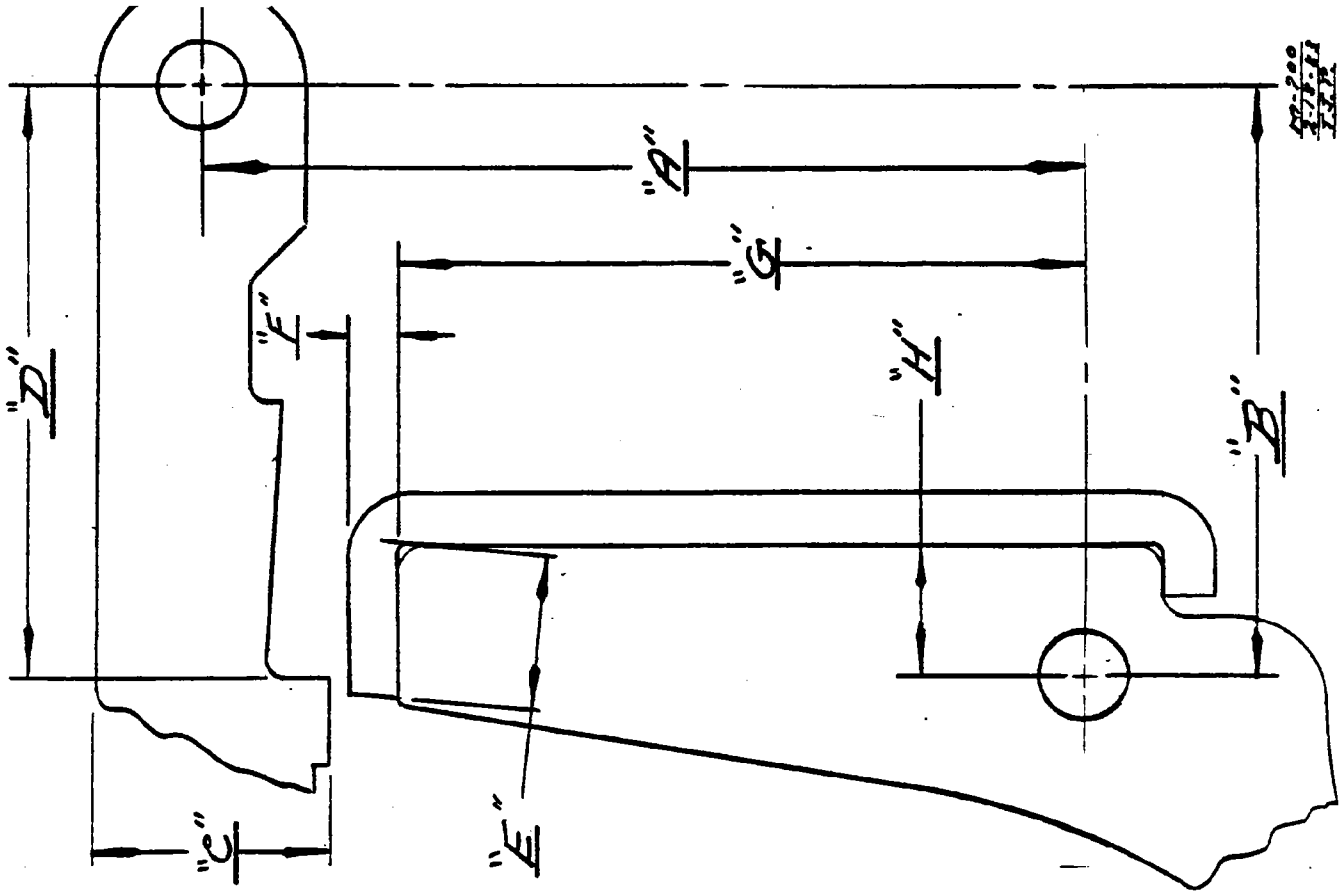

CONDITION No. 1

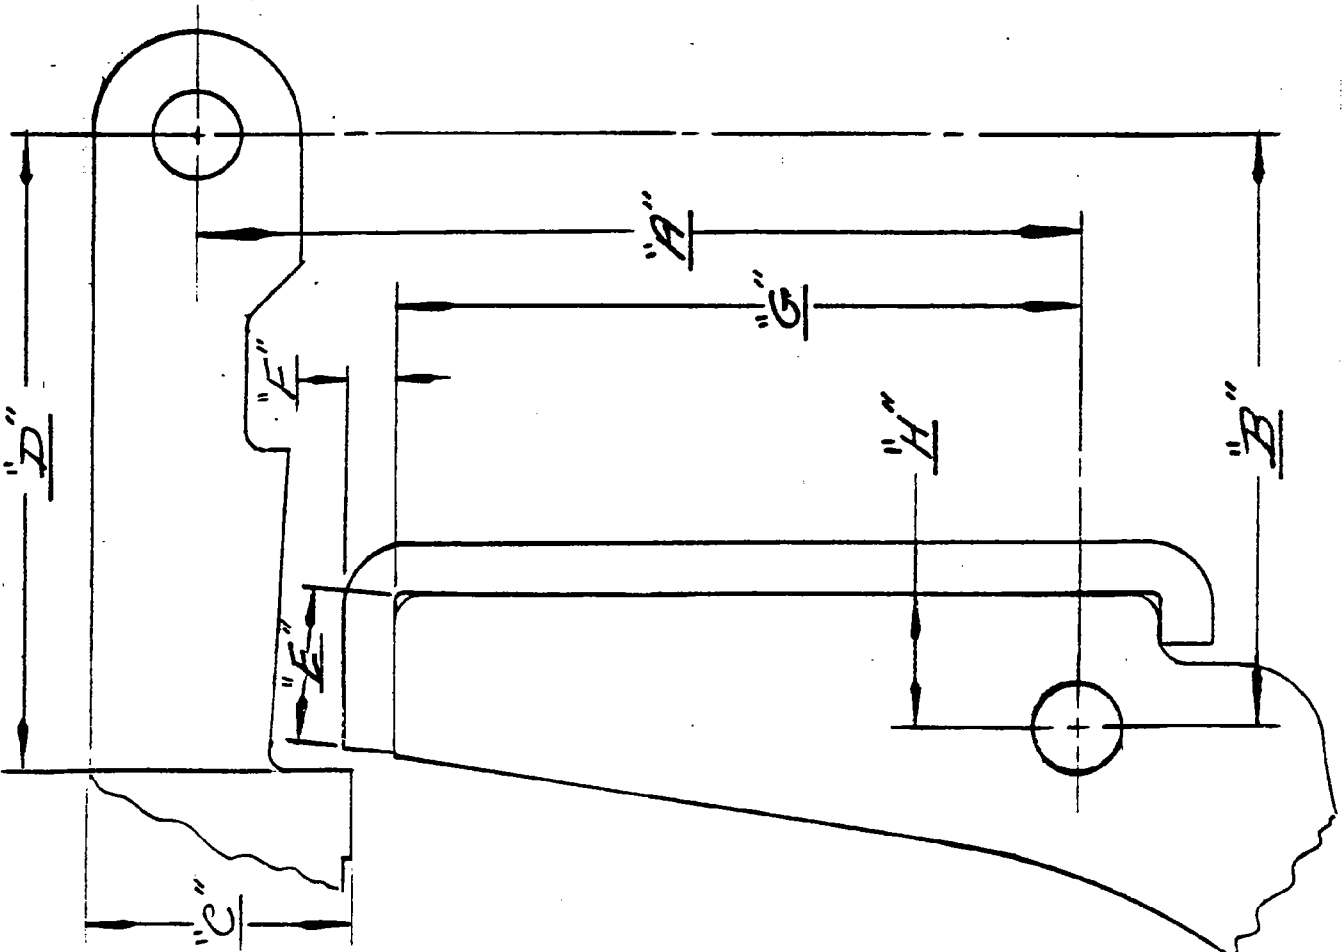



CONDITION No. 2

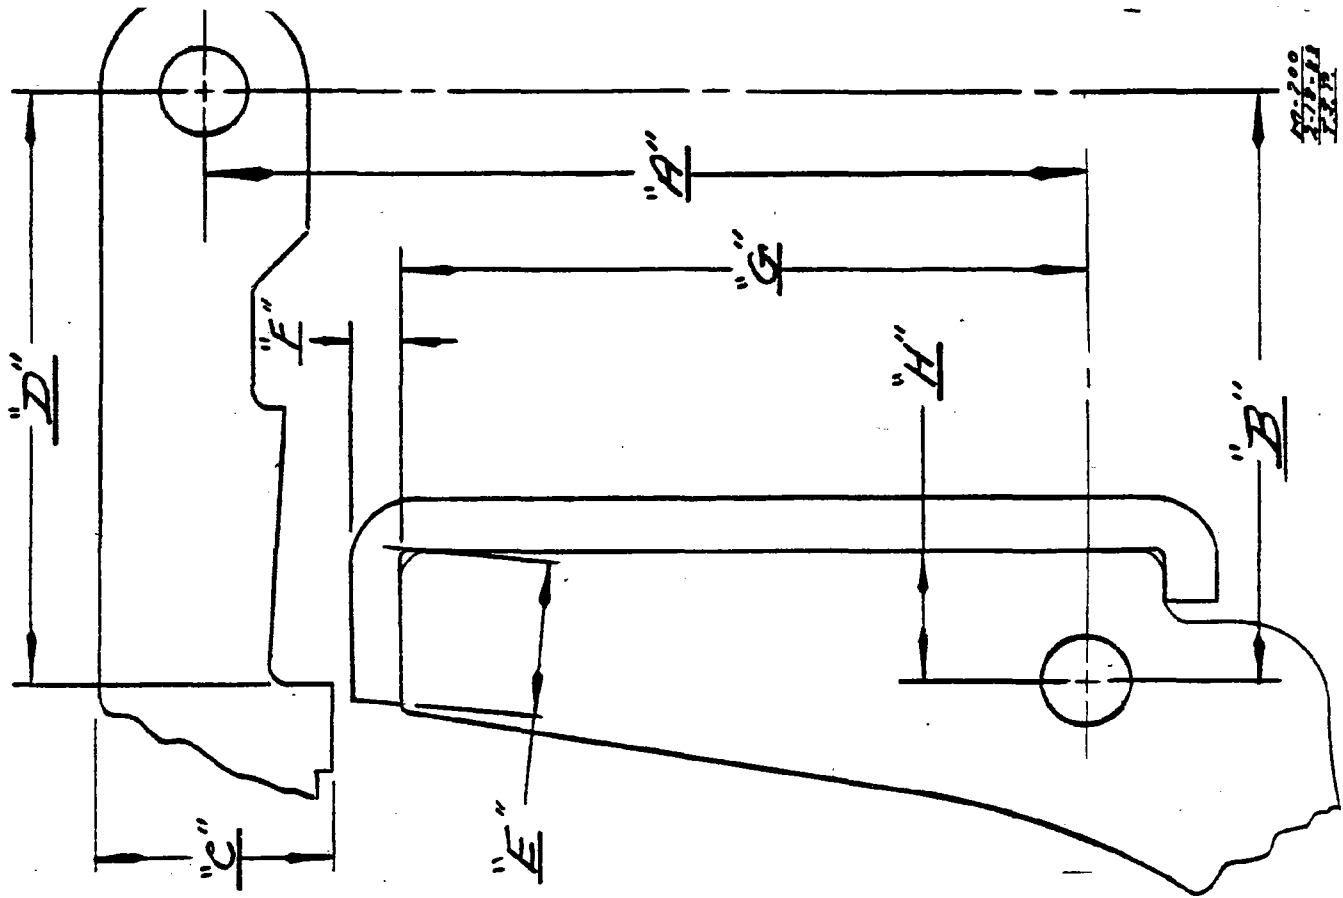


42-200  
42-201  
42-202

CONDITION No. 1

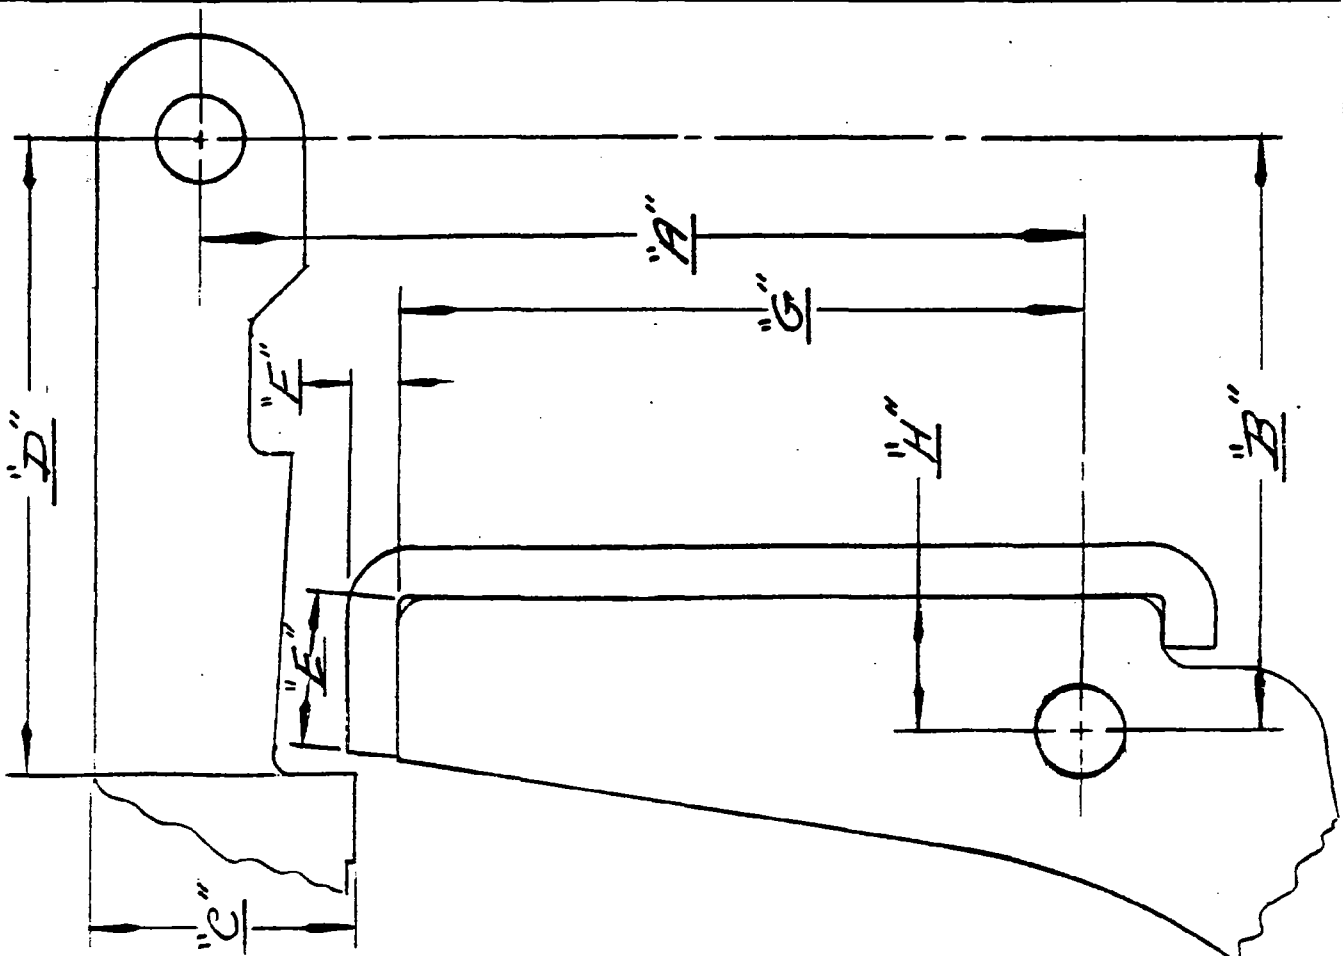

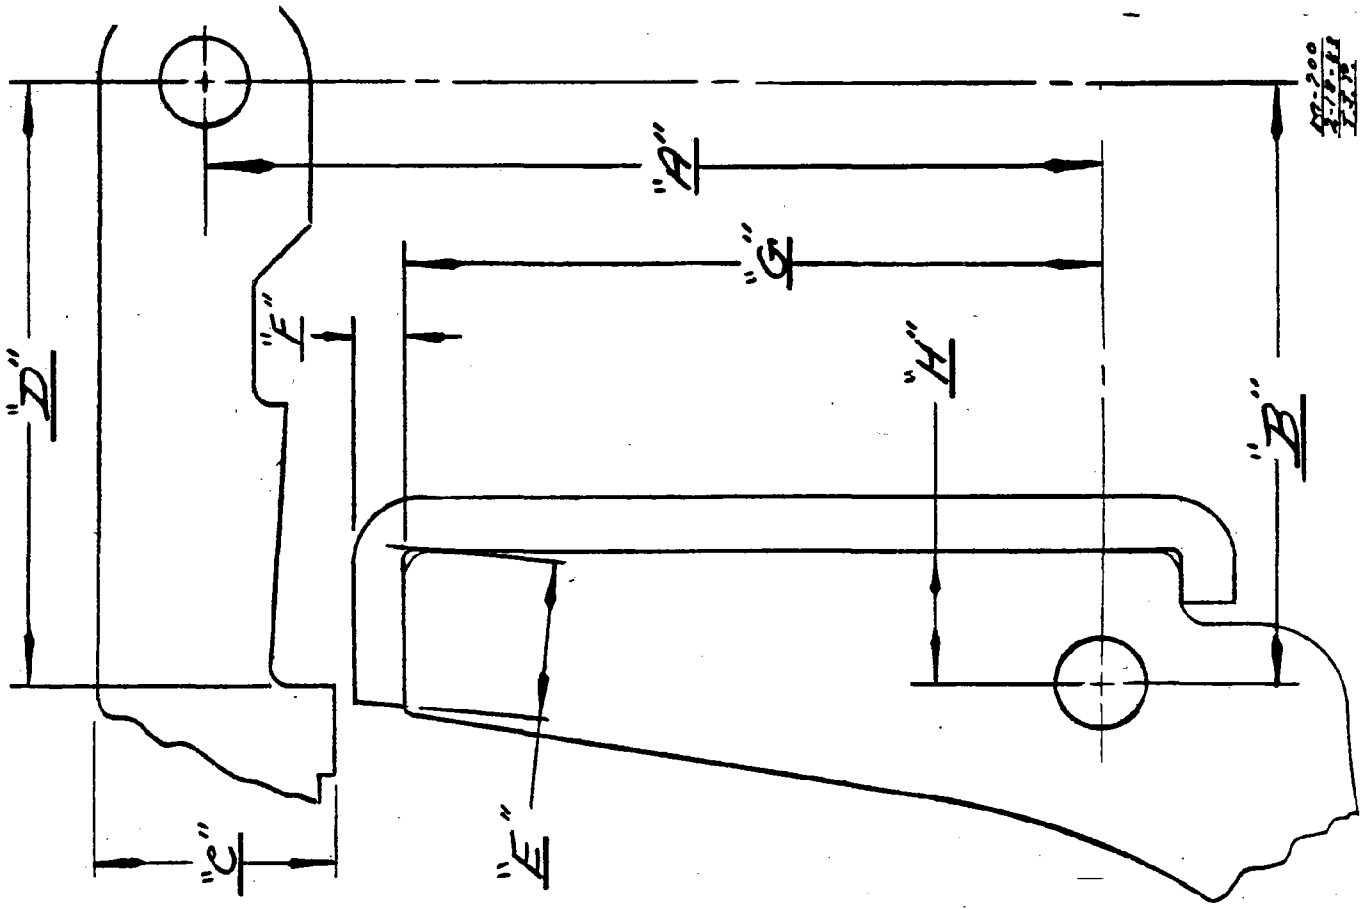

CONDITION No. 1

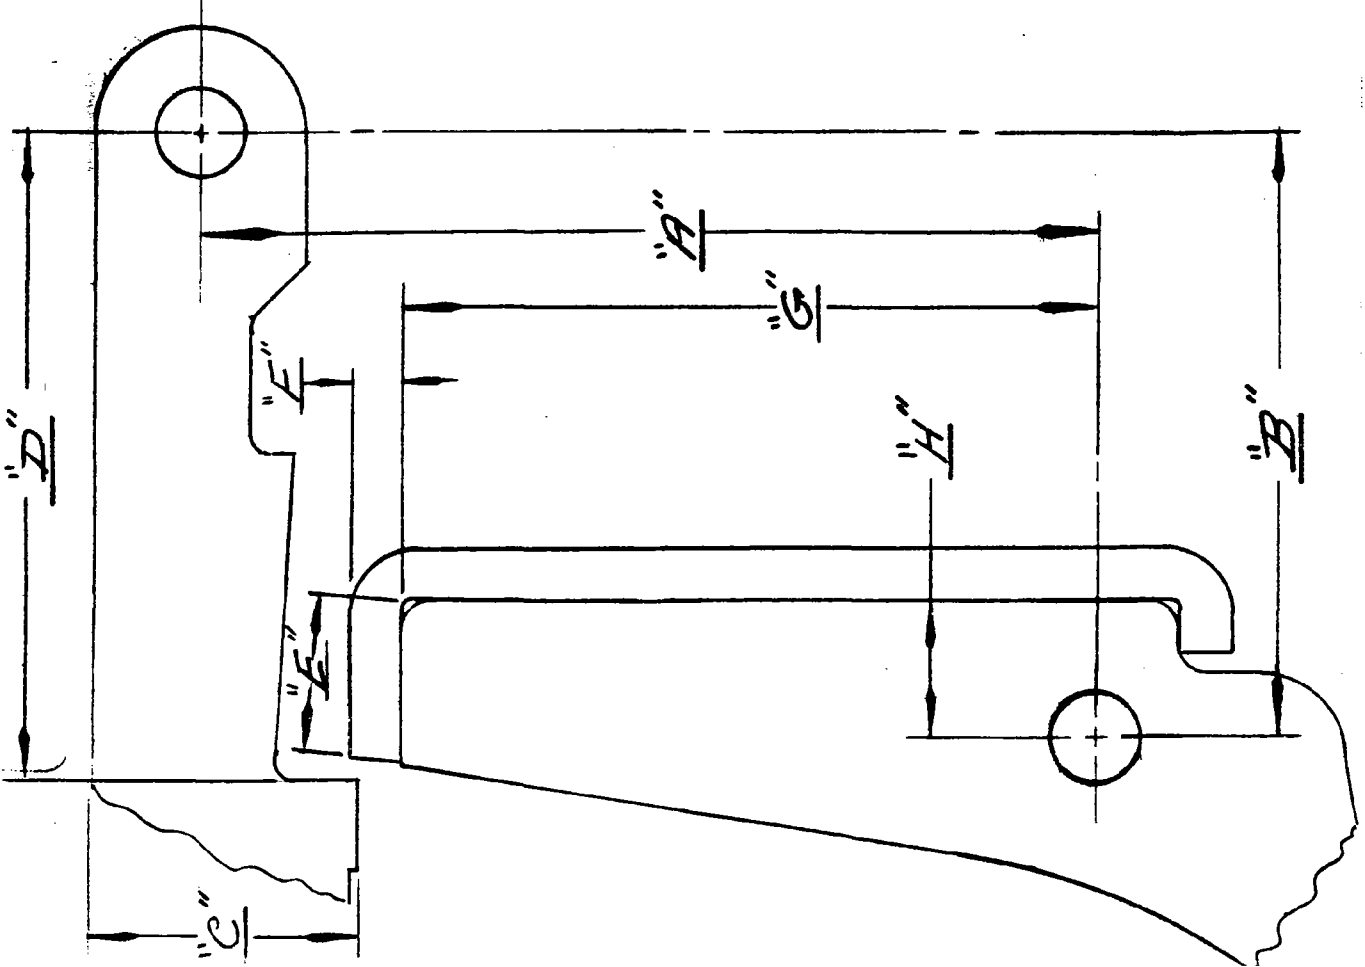

CONDITION NO.		1	1	1	2	2	2	1	2	2	1	1	2
TRIGGER HOUSING ASSEMBLY NO.		1	2	3	4	5	6	7	8	9	10	11	12
	<u>Dim.</u>												
HOUSING	A	1.2395	1.2385	1.2395	1.241	1.2405	1.240	1.2385	1.2385	1.2405	1.240	1.238	1.2395
	B	.8395	.839	.8395	.841	.8415	.841	.840	.8405	.8405	.8385	.839	.842
SEAR	C	.1975- .198	.1975- .198	.1975- .198	.186	.1865	.1865	.1975	.1855	.1855	.1975	.1975- .198	.1865
	D	.8705- .871	.870- .8695	.8705- .871	.8655	.8655	.8645	.870- .8695	.863	.865	.871	.869- .8695	.8645
CONNECTOR	E	.215	.215	.215	.225	.225	.225	.215	.225	.225	.215	.215	.225
	F	.074	.072- .0715	.071- .0705	.071	.071	.071	.074	.071	.071	.074	.072- .0715	.071
TRIGGER	G	.972	.975	.975	.967	.967	.967	.9725	.967	.967	.9725	.975	.967
	H	.190	.190	.190	.186	.186	.186	.190	.186	.186	.190	.190	.186

JWB:js  
2/18/83