

THIS DRAWING OR INFORMATION IS  
PROPRIETARY INFORMATION TO THE  
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES  
UNLESS OTHERWISE NOTED.  
TOLERANCES ON DECIMAL DIMENSIONS ARE:  
1 PLACE (0.1) - TOLERANCE  $\pm 0.015$   
2 PLACE (0.01) - TOLERANCE  $\pm 0.010$   
3 PLACE (0.001) - TOLERANCE  $\pm 0.005$   
& ON FRACTIONAL DIMENSIONS  $\pm 1/64$   
& ON ANGULAR DIMENSIONS  $\pm 0.5^\circ$   
FINISHES ARE DESIGNATED BY ROOT MEAN  
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS  
VALUES AND ARE THE MAXIMUM ROUGHNESS  
ACCEPTABLE. UNLESS OTHERWISE SPECIFIED,

FINISH ROUGHNESS TO BE  
DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE  
WITH ASME Y14.5-1994.

MATERIAL AND HEAT TREAT

MATERIAL : ASME B18.3 STAINLESS

HEAT TREAT : VENDOR'S SPEC


HARDNESS : HRb 80-100

FINISH : NONE

~~HEAT TREAT AND FINISH TO BE DONE BY REMINGTON~~

ALTERATIONS

ALT.	ZONE	WAS	REF.	BY	DATE
A	E1, E2	CORRECTED THREAD IN VIEW		JWR	10-17-06

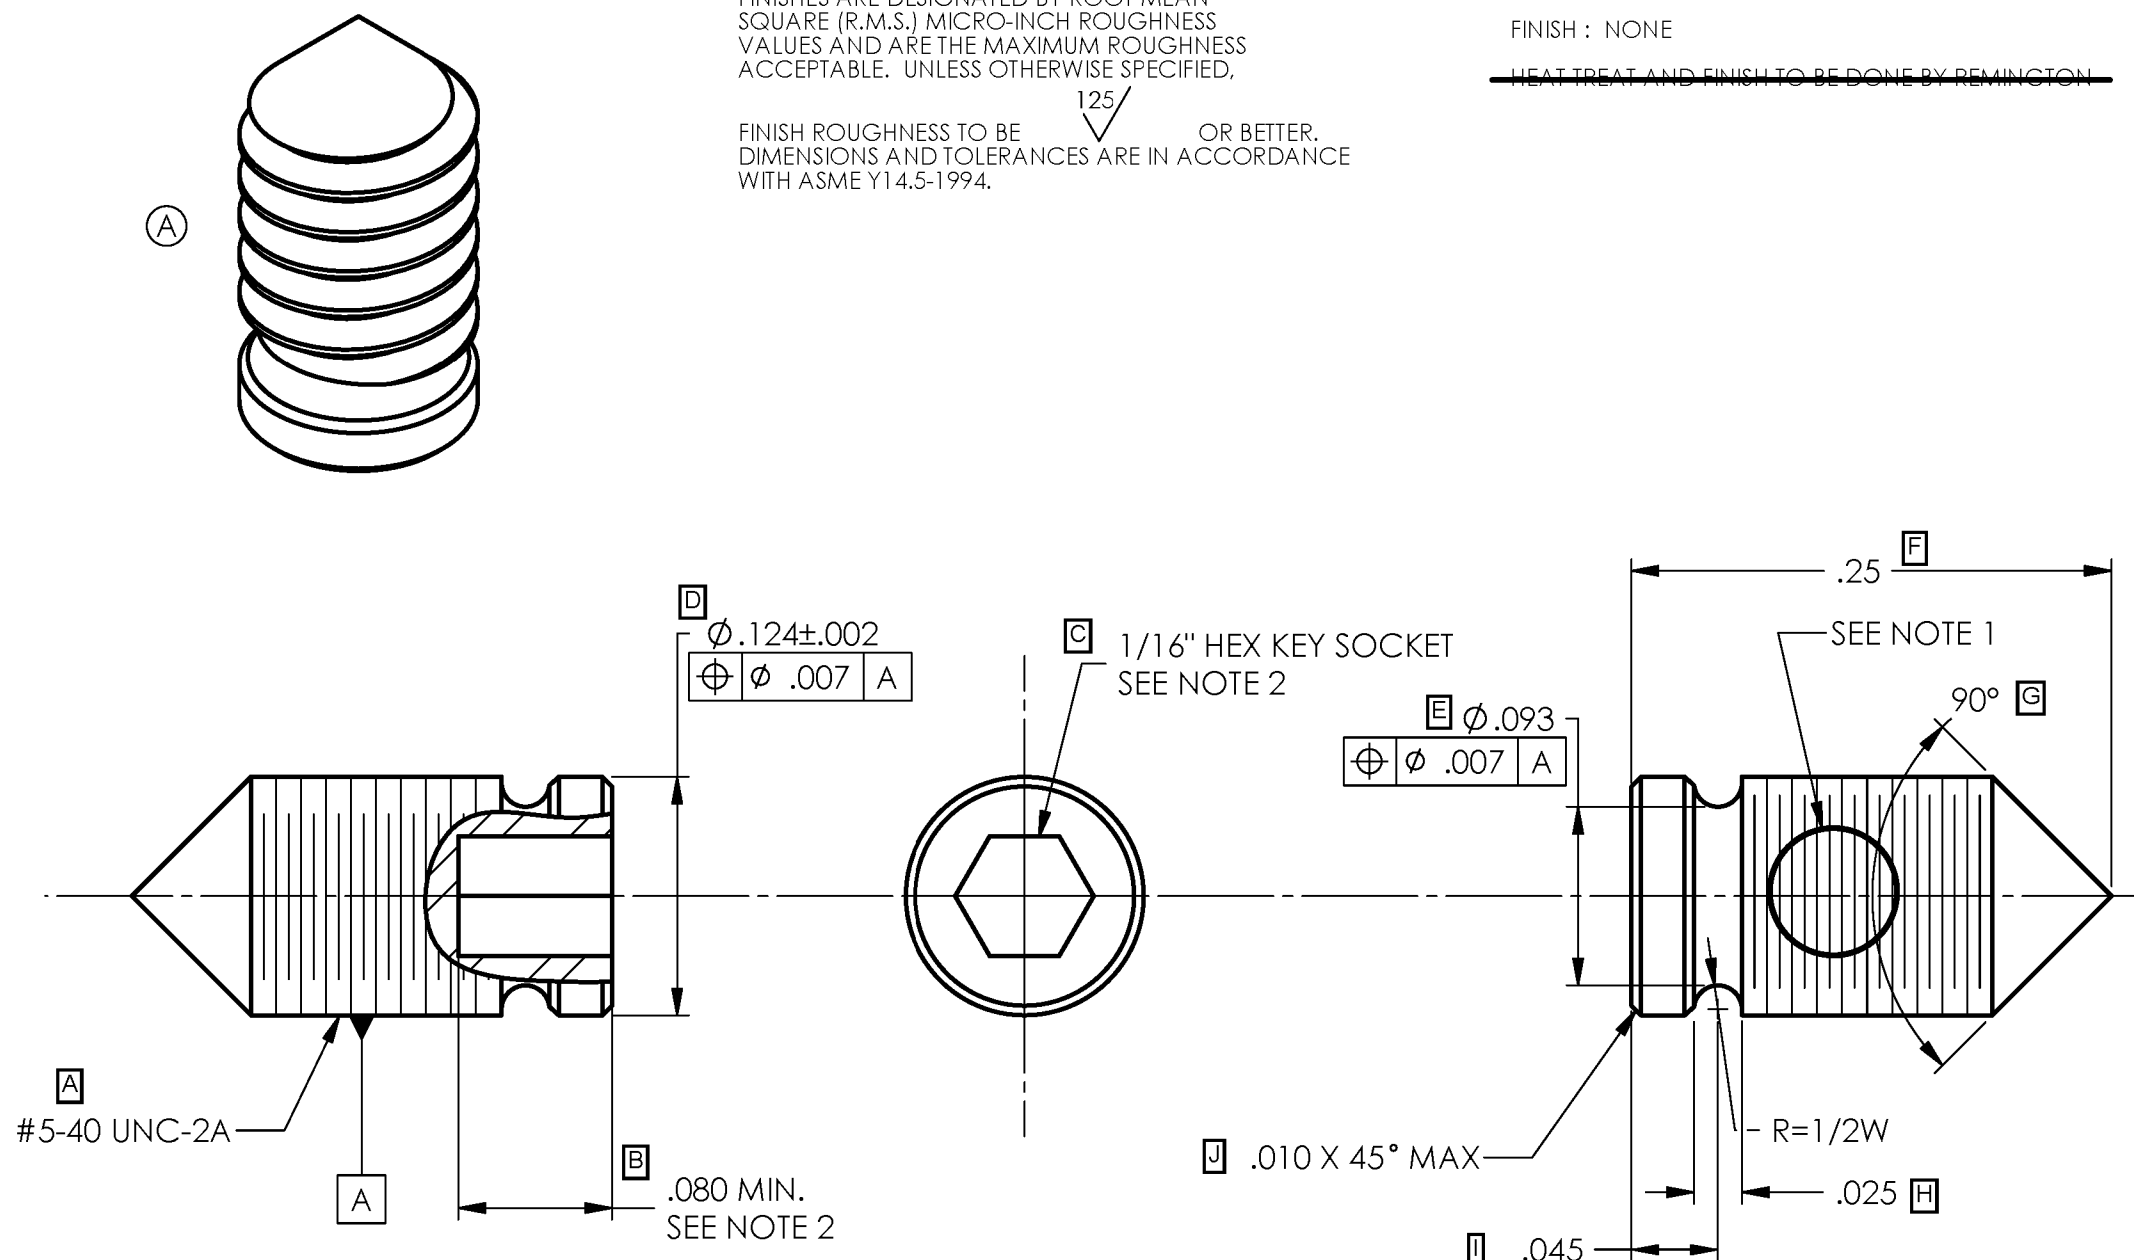

- NOTES:
1. NYLON LOCKING ELEMENT OR ENGINEERING APPROVED EQUIVALENT  
REQUIRED ON THREADS AS INDICATED.
  2. HEX KEY SOCKET TO CONFORM TO ASME B18.3-1998.

SolidWorks Filename: 301429 - Trigger Pull Adjustment Screw

NOT RELEASED FOR PRODUCTION

MODEL	PART NO.	PART USE
DES. BY DATE JWR 8-30-06	DRN. BY DATE JWR 8-31-06	CHK. BY DATE
TITLE TRIGGER PULL ADJUSTMENT SCREW		
SHEET SIZE B	NUMBER 301429	SCALE 10X
SUPERSEDES REFERENCE REMINGTON ARMS CO., INC. Madison, NC 27025		