
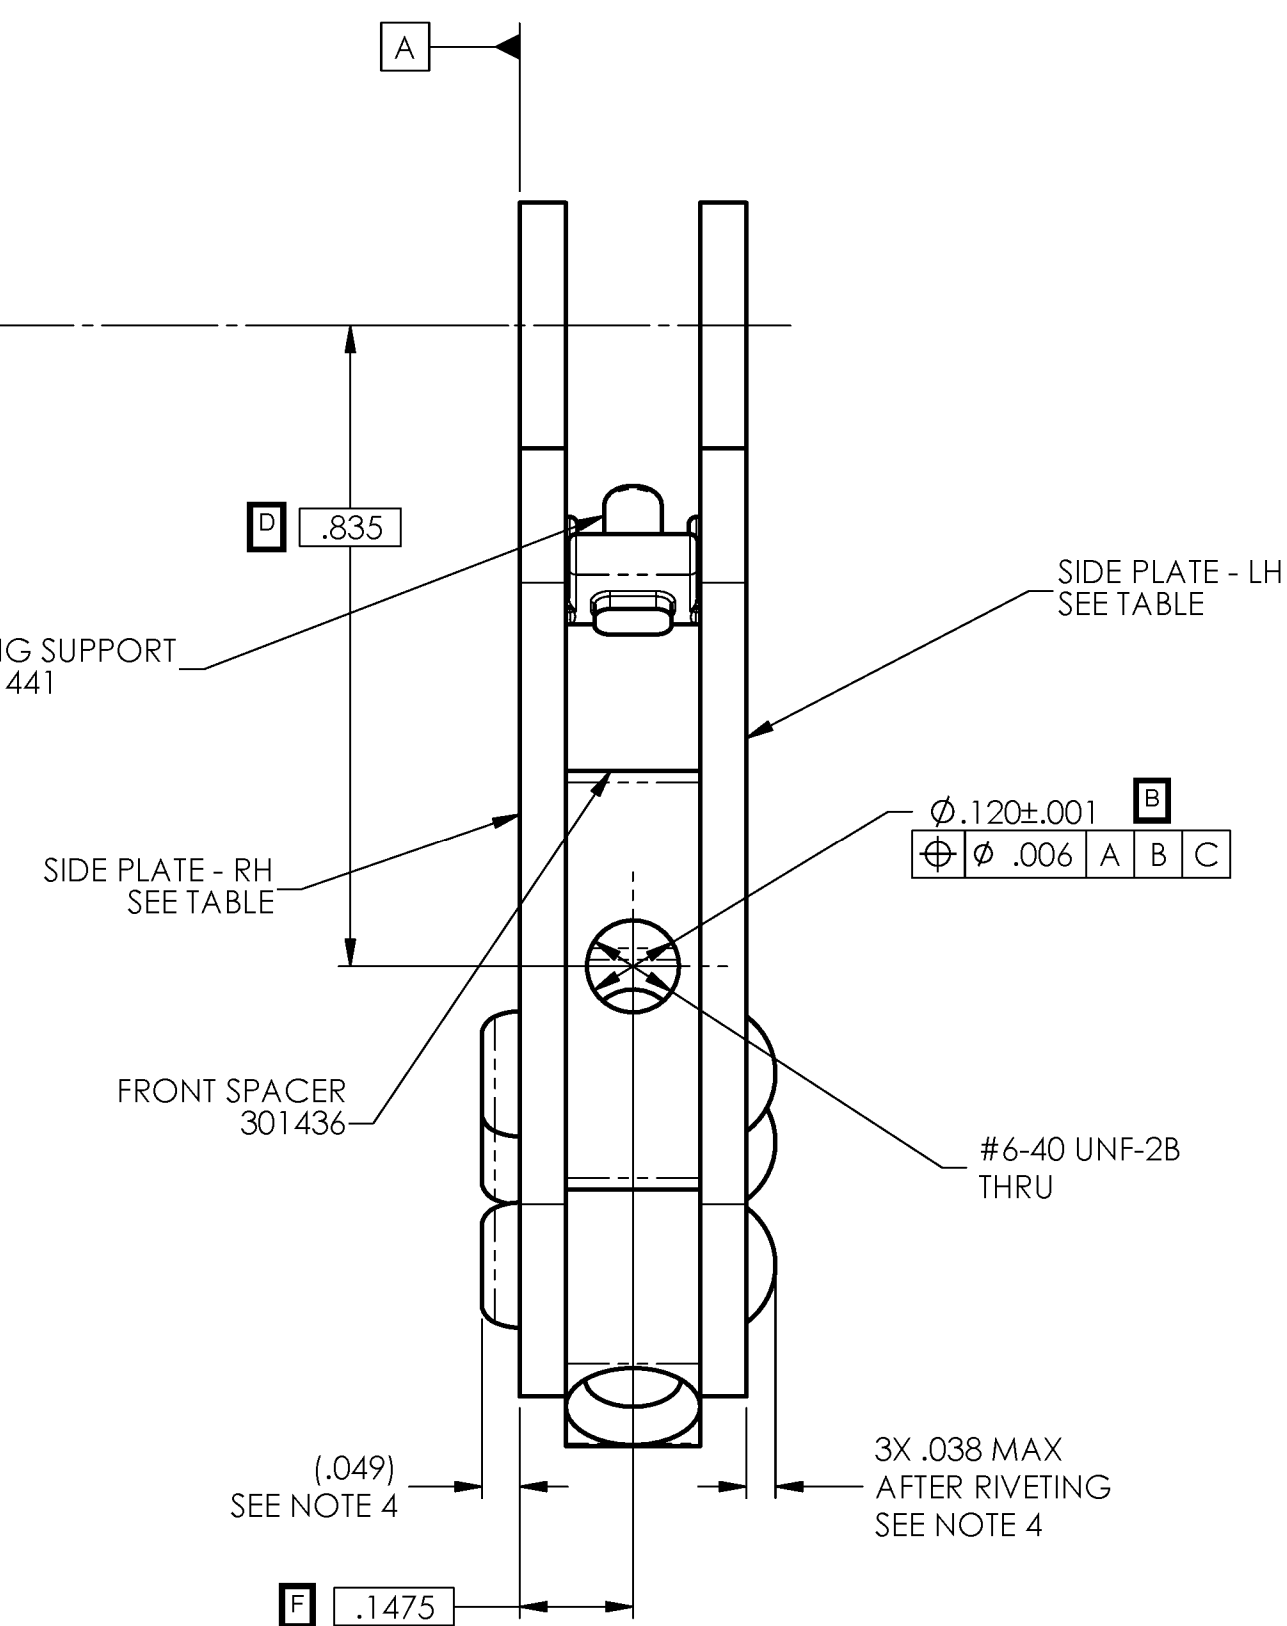
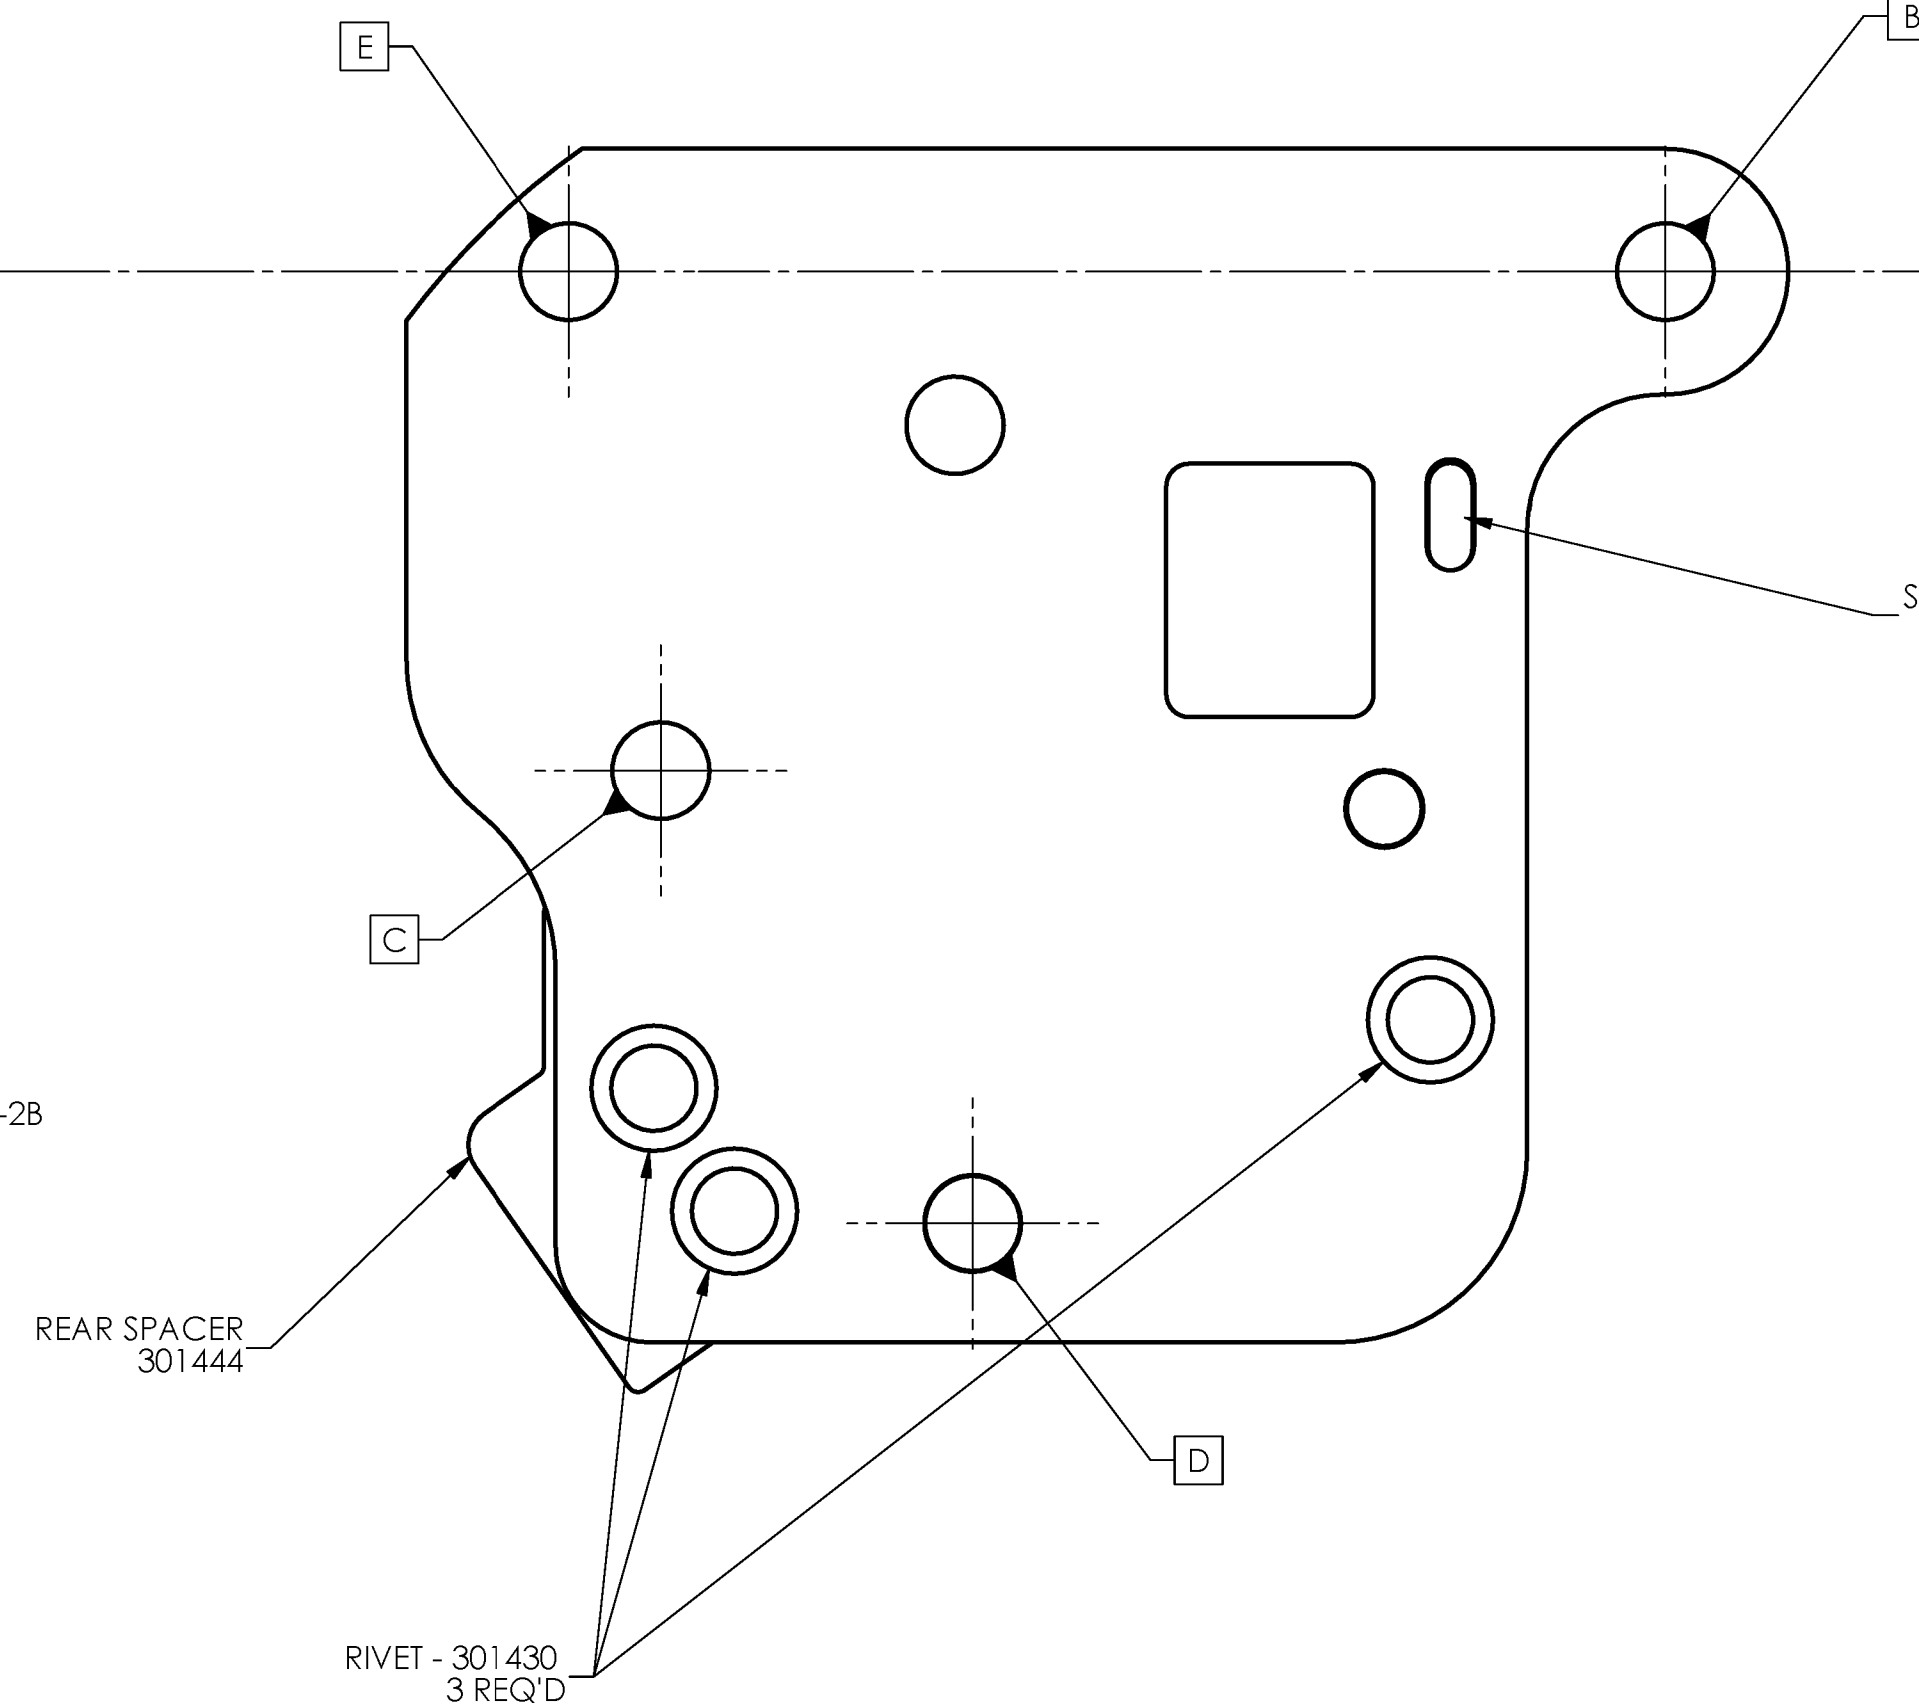
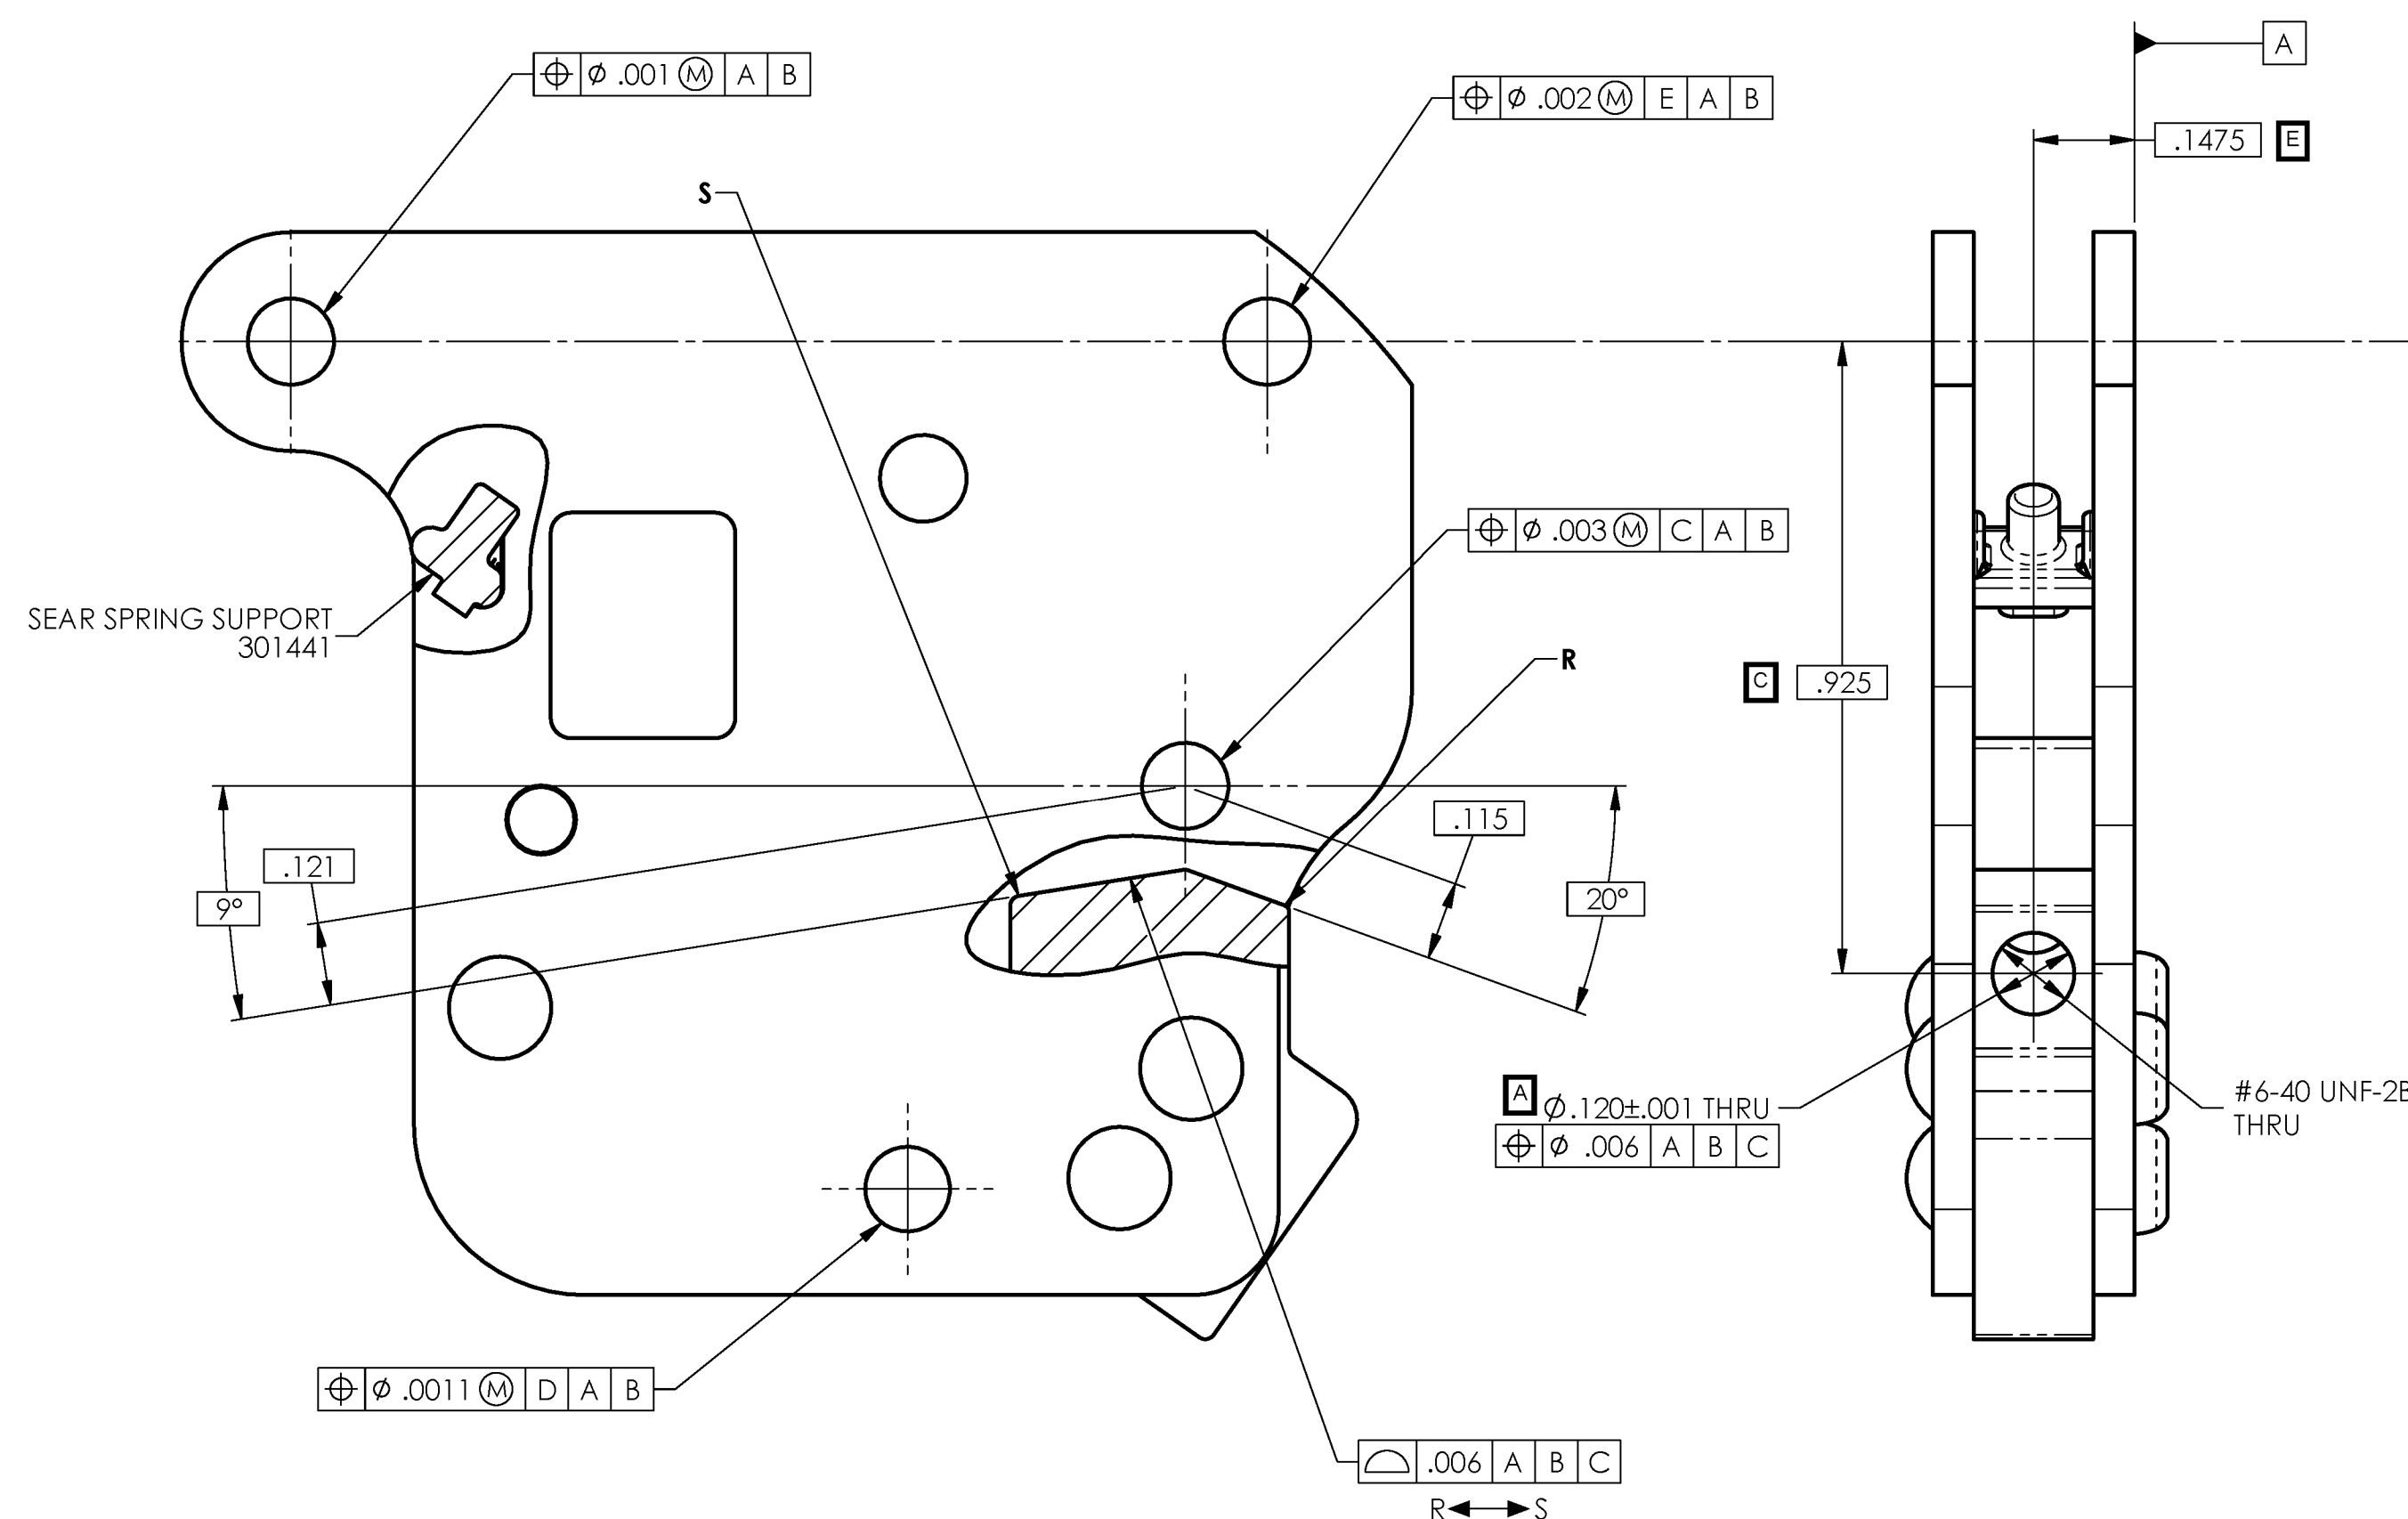
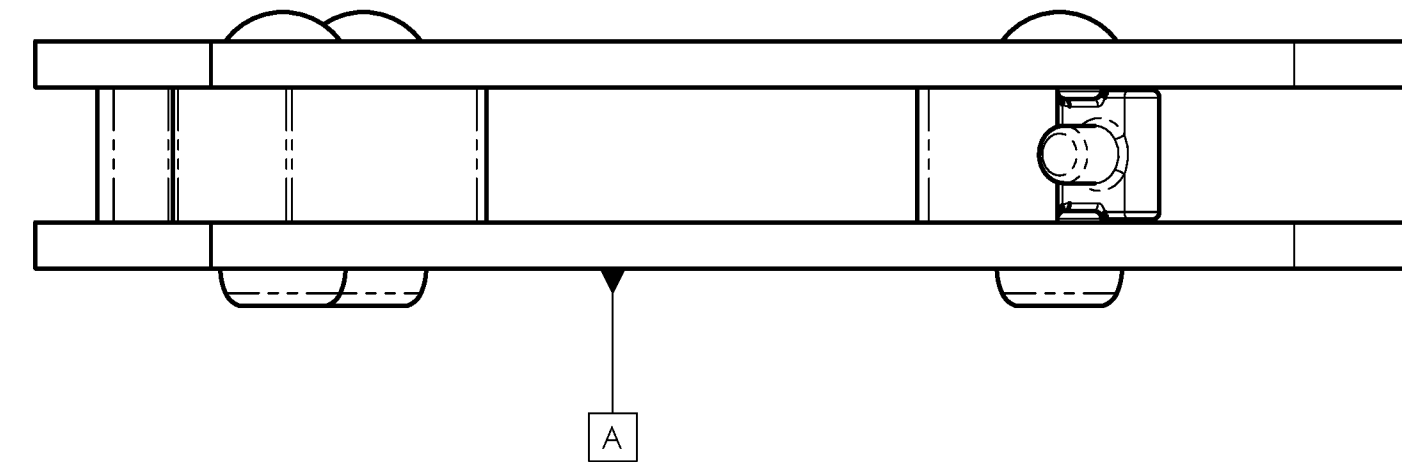


THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE [0.1] - TOLERANCE ± 0.015
2 PLACE [0.01] - TOLERANCE ± 0.010
3 PLACE [0.001] - TOLERANCE ± 0.005
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS ± 0.5
FINISHES ARE DESIGNATED BY THE MEAN
SQUARE (R.A.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS \sqrt{Ra} FROM BROKEN LINE
DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE
WITH ASME Y14.5-1994.

MATERIAL : SEE COMPONENT DRAWINGS
HEAT TREAT : NA
HARDNESS : NA
FINISH : SEE NOTES
HEAT TREAT AND FINISH TO BE DONE BY REMINGTON

ALT.	ZONE	WAS	REF.	BY	DATE
------	------	-----	------	----	------

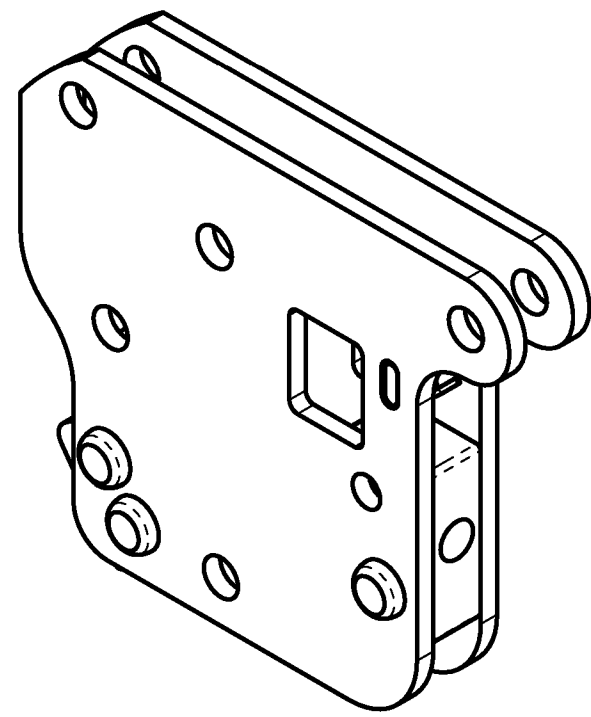

TRIGGER HOUSING ASSEMBLY	ASSEMBLY DESCRIPTION	SIDE PLATE - RH	SIDE PLATE - LH
306365	TRIGGER HOUSING ASSEMBLY - RIGHT HAND	301442	301435
306366	TRIGGER HOUSING ASSEMBLY - LEFT HAND	301435	301442

NOTES:

1. ASSEMBLY TO BE PLATED WITH 0.0002" - 0.0004" HIGH PHOSPHORUS ELECTROLESS NICKEL. ALL COMPONENTS BULK FINISHED AND BAKED AT 375° F FOR 24 HOURS OR POST-PROCESS HEAT TREATED PER ASTM B850, CLASS ER-1 OR ER-17, WHICHEVER IS APPLICABLE.
2. DRILL AND TAP HOLES AFTER PLATING.
3. ALL DRILLED AND TAPPED HOLES TO BE DEBURRED.
4. NOTE THAT RIVET POSITIONS ARE REVERSED ON ASSEMBLY 306366. ASSEMBLY 306365 SHOWN IN ALL VIEWS UNLESS OTHERWISE NOTED.

SOLIDWORKS FILE - 306365 - Trigger Housing Assembly

[illegible]

NOT RELEASED FOR PRODUCTION

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - R 0000101 R 2193603