
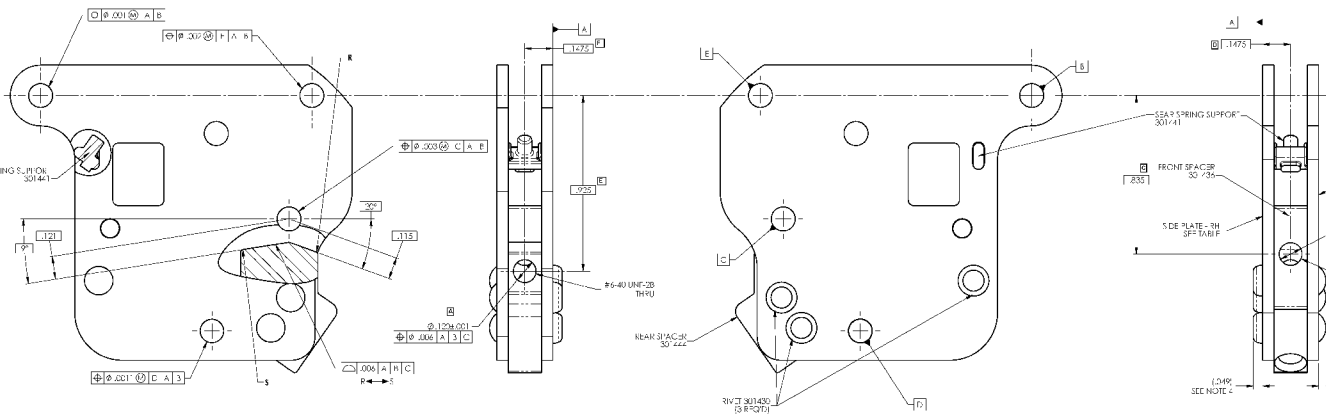



[illegible]

MATERIAL: SEE COMPONENT DRAWINGS
 1-21 P-612 -2A
 4-ARENESS: -2A
 8-5 1: 5: 10-15
 4-AT TREAT AND FINISH TO REF. DRAWING

8					
ALTERATIONS					
A	IME	TIME	X1	BY	DATE
A		WAS 3-X1902			9-1-58
B		REVISED NOTIFS		ENR	10-1-58
C		REVISED AND REDRAWN		ENR	21-1-58
D	42	NOT RELEASED FOR PRODUCTION			1-4-60
E	67	ADDED MOF "SAGF (M)		ENR	6-4-67



TRIGGER HOUSING ASSEMBLY	RCH™ F-HAND SIDE PLATE	LET™ F-HAND SIDE PLATE	DESCRIPTION
303305	301442	301435	TRIGGER HOUSING - RH
303366	301435	301442	TRIGGER HOUSING - LH

NOTES:
1. ASSEMBLY TO BE PLATED WITH 0.002" - 0.004" HIGH PHOSPHORUS ELECTROLESS NICKEL.
ALL COMPONENTS MUST BE FINISHED AND BAKED AT 375°F FOR 24 HOURS, OR POST-PROCESS
HEAT TREATED PER ASTM B280, CLASS F OR F1 OR F7, WHICH EVER IS APPLICABLE.
2. DRILL AND TAP HOLES AFTER PLATING.
3. ALL DRILLED AND TAPPED HOLES TO BE DEBURRED.
4. NOTE THAT REVERSE ORIENTATION IS REVERSED ON ASSEMBLY 306356. ASSEMBLY 306365
SHOWN UNLESS OTHERWISE SPECIFIED.

(E)	XR 00	306366	BRIGGGS HOUSING - LI		
	XW 00	306366	BRIGGGS HOUSING - R-		
	MODEL	PART NO.	PART DES		
	EPR. ESR	FIN. YEAR	C-CLER. SWR		
	JWW	7-16-00	WR 01-10-06		
**	TRIGGER HOUSING ASSEMBLY				
DIT. ST	QTY	UNIT	CYCLE/PS	SPEED	
D	305365	4X			
		ROBINSON ARMS CO., INC. JACKS - ROC 2922			

® RELEASED FOR PRE-PRODUCTION ONLY