

BARBER RO003034




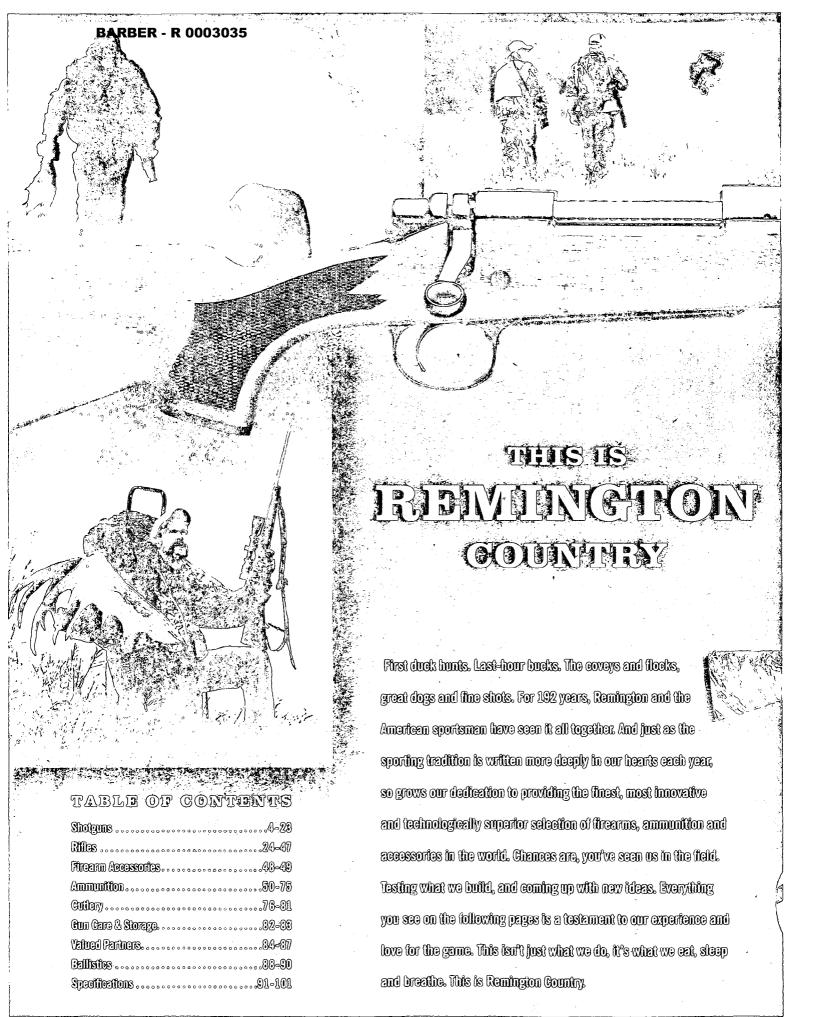

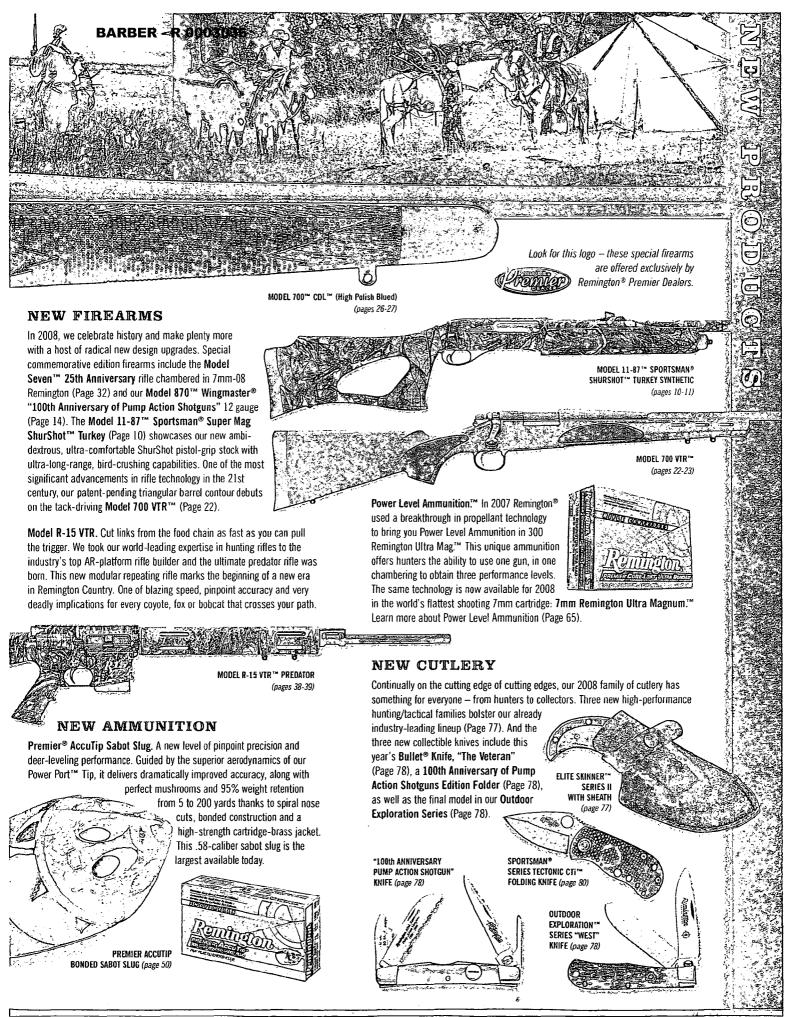

NEW SUPERCELL™ RECOIL REDUCTION:

EFFECTIVE, OUR PUMP GUN BEATS THEIR AUTOS.

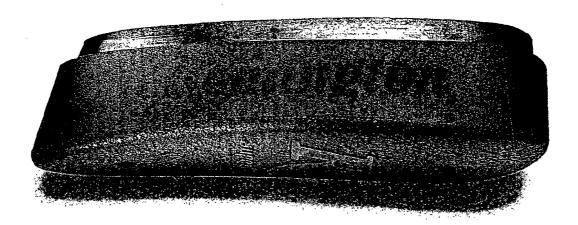


Ten years of rigorous R&D has produced a recoil pad far superior to anything the world has seen before. So effective in fact, our Model 870 pump shotgun now produces 54% less recoil than competing autoloaders with their factory pads. Welcome the most effective recoil pad on the planet, the 21st century's most remarkable development in recoil reduction. SuperCell.

Look for the logo - SuperCell recoil pads are standard equipment on select products for 2008. Also available as an accessory (page 49).



Absorbs force more efficiently than any pad in the world. "Kick" is reduced to a gentle push.



Lightweight and tough. Also enhanced with a smooth surface for rapid gun mounting.

Our pump gun now kicks less than their auto. SuperCell cuts the recoil and crushes the hype of other systems tike no other.

THE WORLD'S MOST EFFECTIVE RECOIL

PAD. This year, the new SuperCell^{***} recoil pad will single-handedly revolutionize the shooting sports. Its development marks the beginning of a new era in which a pump-action Model 870 produces up to 54% less recoil force than competing autoloaders. Where high-velocity magnum rifles become mild, and introducing new shooters to our sport is smoother and less intimidating. A time of better first shots, and faster second and third shots.

RECOIL'S HOLDING CELL. SuperCell technology is the product of 10 years' rigorous R&D by the top recoil-suppression experts in the industry. Using a complex matrix of millions of SuperCells, this advanced polymer construction harnesses and releases energy over a much longer time period. Rearward force of your gun is reduced from a "kick" to a gentle push and muzzle travel is diminished, resulting in the softest shooting experience possible. All from a pad that's extremely lightweight, durable and enhanced with a smooth surface for rapid gun mounting.


MAKING RECOIL-REDUCTION HISTORY.

AGAIN. For more than 200 years, we've pioneered better shooting through improved recoil reduction. Beginning in 1885 with rubber pads, vented pads in 1948, TPE (thermoplastic elastomer) pads in 1987 and now with SuperCell, an entirely new technology that will forever change the way recoil is harnessed. Welcome to the SuperCell era.

BARBER - R 0003038


MODEL 870" WITH SUPERCELL" VS. MODEL 870 WITH COMPETITORS' PADS.

"Felt recoil" is peak force vs. the amount of time that force is applied to the shoulder. By spreading force over a longer period than any other pad. SuperCell is proven most effective at reducing felt recoil. We fitted the competitors' pads to our Model 870 – SuperCell dominated.

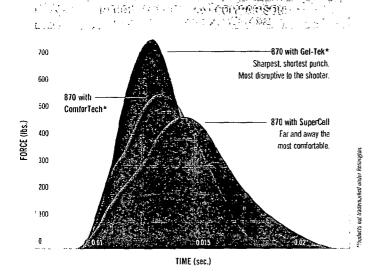

OUR PUMP BEATS THEIR SEMI-AUTOS.

By absorbing force over a longer time period, SuperCell helped our Model 870 produce up to 54% less recoil than a competitor's autoloading shotgun with factory pad. The Model 11-87 with SuperCell™ was the softest shooting of all shotguns tested.

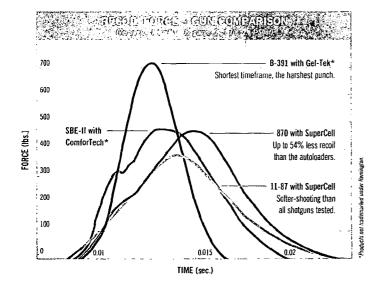

WWW.REMINGTON.COM/SUPERCELL

Log on, watch the video, and see more conclusive proof SuperCell is this century's most remarkable development in recoil reduction.












Highlights of pad comparison.

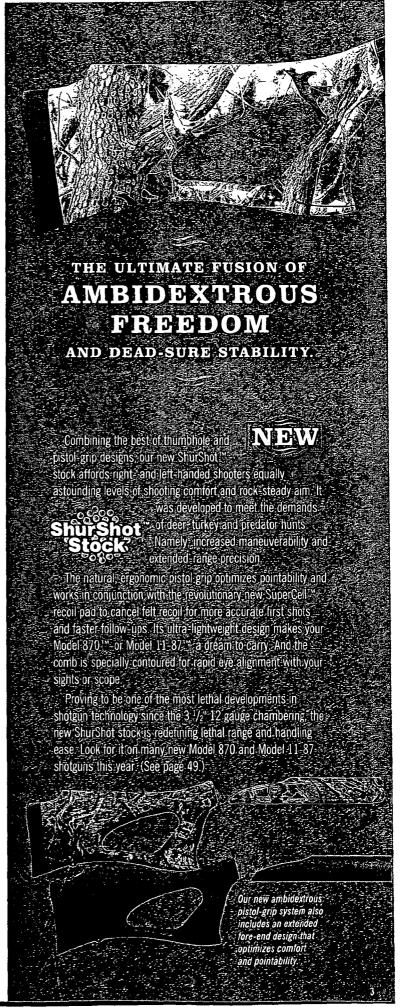

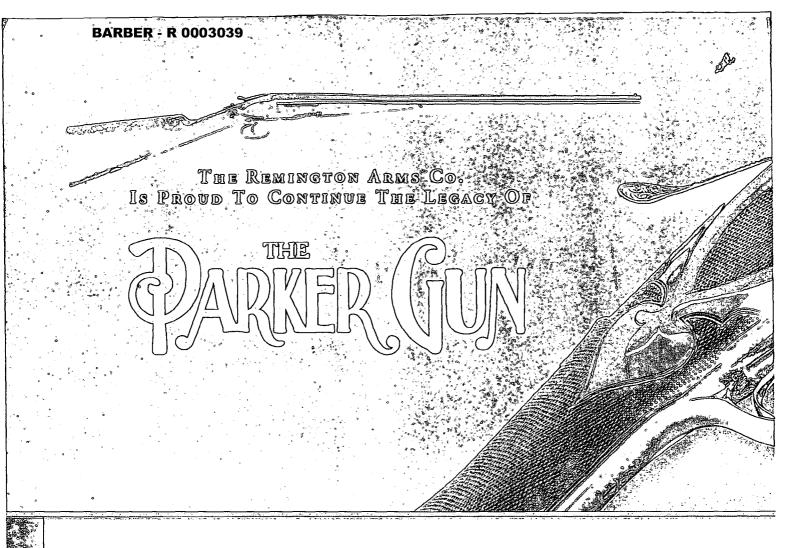

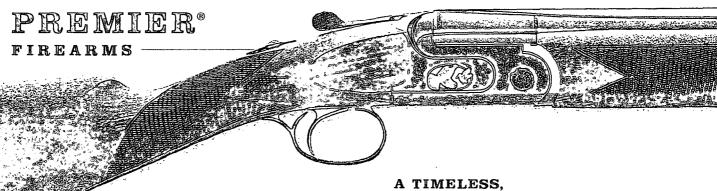



PERFORMANCE-DRIVEN DESIGN FROM AMERICA'S OLDEST GUNMAKER.

Every bit as wicked on the birds as they are beautiful to the eye, our Premier® series Over and Unders have taken the hunting community and upland fields by storm. The combination of meticulous craftsmanship, incredible balance, superior pointing characteristics and rock-solid reliability has earned these shotguns high marks with America's most serious shotgunners. Trim, low-profile receivers and an overall sleek form make them a dream to carry and lightning-responsive at the flush.

The prestigious **Premier Over & Under Ruffed Grouse** edition showcases the Ruffed Grouse Society logo in 14k gold on both sides of the black onyx frame. It also features a gold-script Remington insignia "R" on the floorplate, which has become the premier symbol of our status as America's Oldest Gunmaker. This remarkable 20 gauge has 26" barrels and features a straight-grip, English-style stock. The refined appearance of its woodwork is topped off with a satin finish.

Field Grade and Upland Grade Over & Unders are intricately engraved with game scenes and available in 12, 20 and 28 gauge with 26" or 28" barrels. Upland Grade has oil-finished woodwork and a case-colored receiver. The Field Grade is equipped with a nickel receiver and deep satin-finished stock and fore-end. No matter which model from this lineup you choose, it will be a hunting companion to last a lifetime.

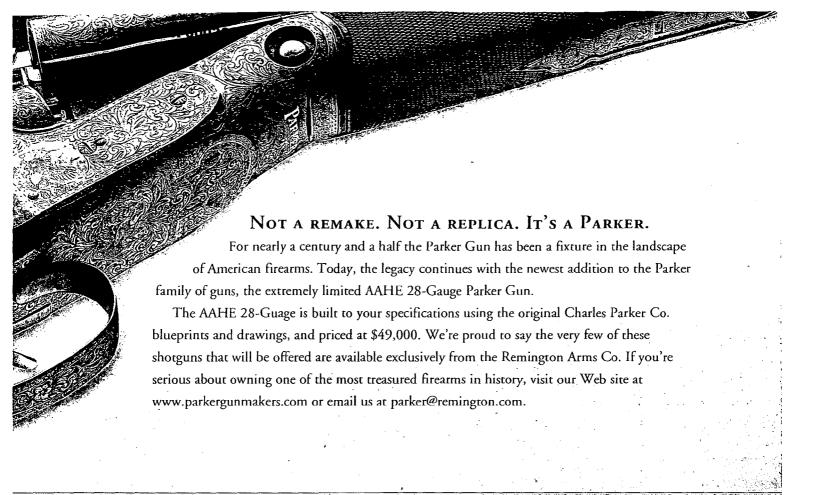

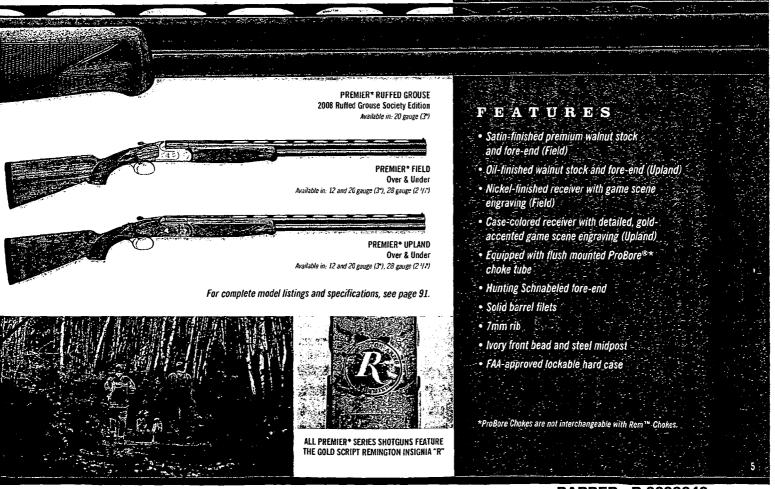



OVER & UNDER



Developed using input from professional shooters worldwide, our 12-gauge Premier® STS® Competition Over and Unders are quickly crushing their way to the top of the competitive scene. Superbly balanced with a sleek, low-profile receiver and built rock-solid, they're a serious competitor's dream.

Every facet is optimized to excel in high-speed, high-volume shooting sports arenas. The barrels are overbored (0.735") with lengthened forcing cones to enhance pattern consistency and lessen felt recoil. For ultra-smooth operation and long-term protection from heat and wear, we added a nickel-plated receiver. A 10mm target-style rib with ivory front bead and steel midpost aid in target acquisition. We even fine-tuned the point of impact using input from professional target shooters. A set of five ProBore® Choke tubes with knurled extensions helps you quickly adapt to changing conditions and courses.

For added comfort, there's a right-hand palm swell, and the lustrous satin wood finish is complemented by a gold trigger and engraved receiver. Other features include a target-Schnabeled fore-end and premium hard case. Barrels are offered in 28", 30" and 32" lengths with standard stock and 30" or 32" with adjustable comb.

COMPETITION

SHOTGUNS



No shotguns have won more titles, or are better equipped for the high-volume regimen of today's elite shooters. Prepare to see record scores crushed at a rapid rate by our latest upgrade to the lineup — the new Model 1100™ Premier Sporting series. Featuring nickel receivers with intricate fine-line embellishments and gold accents, they're as aesthetically impressive as they are sweet to point and shoot. Gold triggers and a custom Premier Sporting hard case complete the package. The Premier is offered alongside our original Model 1100 Sporting shotguns. Both the Model 1100 Sporting and Sporting Premier series offer discriminating shooters 12, 20, 28 and 410 options with semi-fancy American walnut stocks and fore-ends, vent-rib Rem™ Choke barrels and four Briley™ extended chokes as standard equipment.

Our Model 1100 Competition is super-tuned for the competitive scene. By overboring the 30" barrel and lengthening the forcing cones, we improved shot-to-shot pattern consistency and made what was one of the softest-recoiling actions in the world even easier on your shoulder. The receiver and all internal parts feature a nickel-Teflon[®] finish for the smoothest, most reliable cycling ever. It's optimized for 2 3/4" target loads and light field loads. Its optional adjustable comb can be fine-tuned to your shooting preference, and the barrel has a 10mm target-style rib. All these, plus a host of other upgrades, transform an already legendary design into an unstoppable force at the range.

Generations of die-hard competitors have made our Model 1100 Classic Trap and famous Model 870™ Classic Trap venerable mainstays. From 16s to the very back line, they continue to shoot their way to the top of major events every year.



(Included with each Model 1100" Premier Sporting)







AUTOLOADER



THAT FEELING, WHEN THE BIRDS SEEM TO FOLD THEMSELVES... WE BUILT IT.

It transforms the shot to a fluid, effortless motion. With 48% less recoil and weighing a mere 7 lbs., the Model 105 CTiTM is the softest-shooting, lightest 12-gauge semi-auto shotgun we've ever built. It's truly the world's most advanced autoloader, inside and out. The first-ever skeletonized titanium shotgun receiver accommodates both 2 ³/₄" and 3" shells and is wrapped with a stout carbon-fiber covering to create the ultimate fusion of toughness and reduced weight. It's also home to the only bottom feed and eject mechanism on a semi. This "Double-Down" system is truly ambidextrous and produces no peripheral distraction from ejecting shells.

Recoil is reduced to a gentle push by the four-part dampening process, including an optimized gas system, overbored barrel with lengthened forcing cones, in-stock hydraulic recoil suppressor and recoil pad. The simplified gas system has very few moving parts, requires less cleaning and there's virtually nothing to wear out or replace. Along with reducing felt recoil, the overbored barrel enhances pattern consistency.


Available with a 26" or 28" barrel, this revolutionary 12 gauge also features a tournament-grade trigger and our PVD coating that forms a protective outer barrier to corrosion and scratching. Our ProBore® choke tubes are optimized for the overbored barrel and measure 0.735", as opposed to the standard 0.727" found on most 12-gauge bores.



LOCKABLE HARD CASE

MODEL **1100**[™] G3

AUTOLOADER

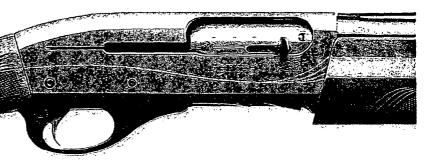


THE MOST TRUSTED IN HISTORY, ENGINEERED FOR THE FUTURE.


Soft recoil, dependability, balanced pointing characteristics — the Model 1100^{**} G3 is all that made the original Model 1100 America's most trusted semi-auto shotgun, only better.

Available in 12 and 20 gauge, its improved, technologically advanced gas system cycles 2 ³/₂" and 3" magnum loads with equal efficiency. By coating key internal parts with Teflon,[®] we've created an action that's easier to clean, smoother and more reliable. The plated receiver adds durability and a great new look. Felt recoil is reduced and pattern consistency is improved by the overbored barrel.

Then there's Realwood,[®] our exclusive high-grade walnut construction that meshes genuine American walnut with carbon reinforcements for striking looks that will withstand extreme abuse.


No autoloader has folded more birds or crushed more targets than the venerable Model 1100. We're proud to announce the legacy has advanced — welcome the next generation — the Model 1100 G3.

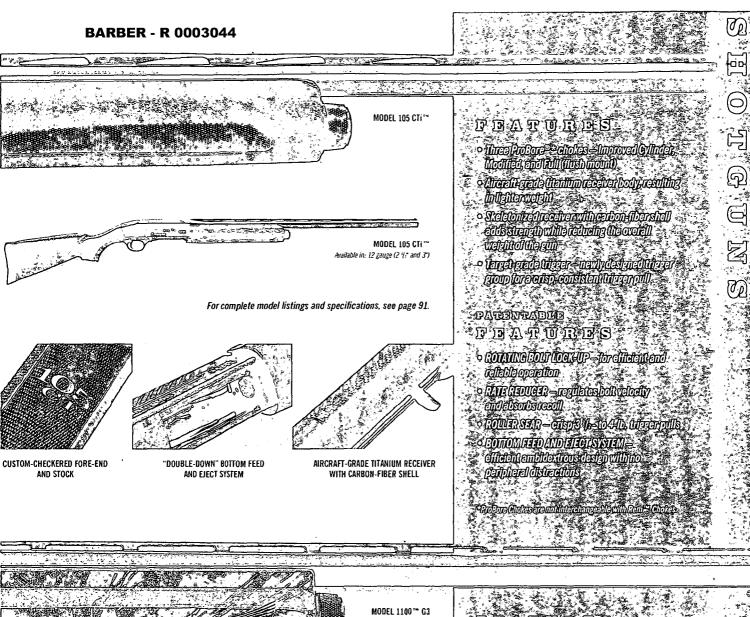

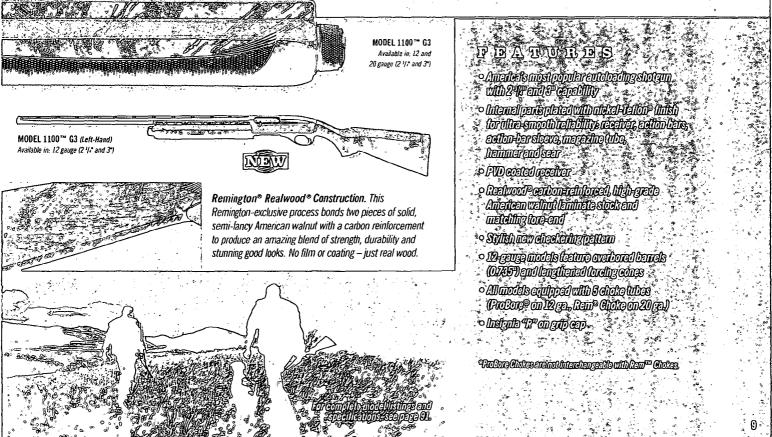

MODEL 11-87[™]

SPORTSMAN®




No matter the season, our Sportsman® answers the call with the lethal blend of speed, reliability and smooth operation that has made the Model 11-87 a standard since its introduction. These are workhorse shotguns built to our legendary and uncompromising standards for autoloader performance. This year's expanded lineup includes 12- and 20-gauge field versions, 12- and 20-gauge fully rifled slug guns with cantilever barrels in black and camo, a 20-gauge youth model, as well as specialized options for turkey and waterfowl.

Consider the Model 11-87 Sportsman ShurShot™ Camo Cantilever 2008's deer season MVP. Featuring our new ShurShot™ synthetic pistol-grip stock, it launches 2 ³/4" or 3" 12-gauge slugs with ambidextrous accuracy. Right- and left-handed shooters alike will marvel at the exceptional comfort, maneuverability and rock-steady hold offered by this new stock design. The new SuperCell™ recoil pad tames hard-hitting slug rounds with unmatched efficiency. Its superior shock absorption, when combined with the soft-shooting Model 11-87 action, facilitates rapid, accurate followup shots and gives you more confidence on your first shot. It's dressed from butt to bore in Realtree Hardwoods® HD™ camo and has a 23" barrel that's quick to point. A built-in cantilever mount makes adding optics a cinch. With its unfailing reliability, superior handling characteristics and breadth of line, the Model 11-87 Sportsman is redefining semi-automatic shotgun performance, year after year, buck after bird.

MODEL 11-87[™]

SPORTSMAN® SUPER MAGNUM

(SuperCell

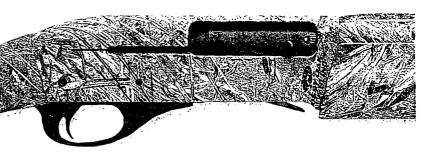


THE QUICKEST & SMOOTHEST IN SUPER MAGNUM STRENGTH.

When it's time to reach out and crush a big bird, reach for the awesome speed, bone-crushing power and swift pointing characteristics of our Model 11-87¹¹⁶ Super Magnum. Offered in specialized waterfowl and turkey configurations as well as in a standard black synthetic version with a 28" Rem¹¹⁶ Choke barrel, these shotguns tame the biggest, baddest 3 ¹/₂", 12-gauge rounds with a soft-shooting action and our revolutionary new ultra-shock-dissipating SuperCell¹¹⁶ recoil pad. Along with world-renowned dependability, these shotguns are equipped with a wealth of specialized features for your game of choice.

Our new Model 11-87 Sportsman Super Magnum Waterfowl definitely looks the part with full Mossy Oak® Duck Blind™ camo coverage. The 28" Rem Choke barrel features a HiViz® interchangeable sight system for rapid sight acquisition in low-light conditions. And the included Wingmaster HD™ Specialized Waterfowl choke tubes are a lethal ticket when the birds are cupped and committed.

The Model 11-87 Sportsman Super Magnum ShurShot* Turkey is the cutting edge in comfort and precision shot placement. Our new ambidextrous ShurShot synthetic pistol-grip stock provides right- and left-handed shooters alike with a rock-steady hold and awesome maneuverability. Its design also aids in lessening felt recoil. When you combine this attribute with the world-leading recoil-suppressing capability of our new SuperCell recoil pad, you have one soft-shooting machine. The quick-pointing 23" barrel has fully adjustable TruGlo® fiber-optic sights for pinpoint shot placement. We've also included a Wingmaster HD Turkey extended Rem Choke that'll help you flatten gobblers at the farthest reaches of shotgun range.

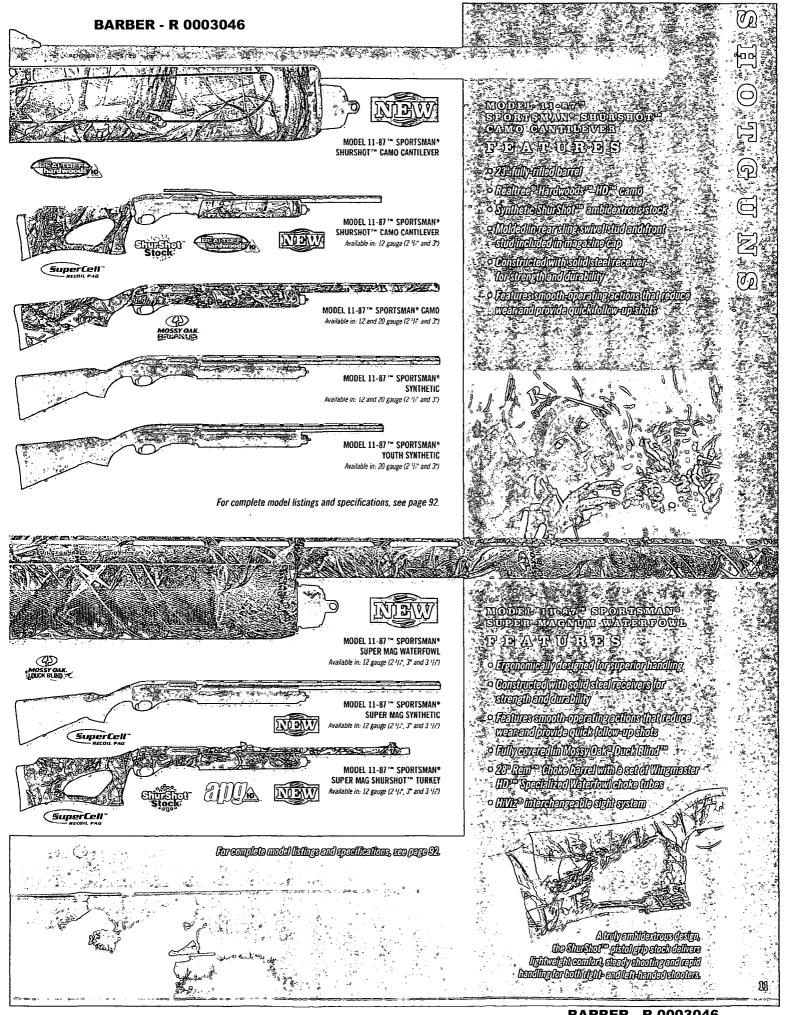

MODEL SP-10[™]

SPECIAL PURPOSE



For serious extended-range shotgunners, the Model SP- 10^{TM} is the ultimate in lethality – from duck blinds to the turkey woods and everywhere in between. Its $3^{1}/2^{\text{H}}$ 10-guage payloads are significantly superior in patterning efficiency to 12-gauge $3^{1}/2^{\text{H}}$ guns, and even produce less felt recoil. It features a corrosion-resistant gas-operated action in which the cylinder – not the piston – moves, helping dampen rearward force. Ultra-reliable and smooth, it's the only shotgun worthy of the ultimate bird-leveling payload.

Ducks and geese beware: The big gun is now available with the state-of-the-art wetlands concealment — new Mossy Oak® Duck Blind $^{\text{TM}}$ camouflage. The **Model SP-10** $^{\text{TM}}$ **Waterfowl** features a 26" Rem $^{\text{TM}}$ Choke barrel with a high-visibility fiber-optic sight system, and comes with a full set of three Briley extended specialized waterfowl choke tubes.

Our **Model SP-10 Thumbhole** came will reach out and bust a tom in grand fashion. Its thumbhole stock, adjustable Williams® fiber-optic Fire Sights™ and handy 23" barrel make it the ultimate gobbler stopper. It's also fully dressed in Mossy Oak® Obsession™ came.

The **Model SP-10 Magnum Camo** and **Model SP-10 Magnum Satin** come equipped with 26" or 30" vent-rib Rem™ Choke barrels with twin beads and interchangeable Full and Modified Rem chokes. Choose from a Mossy Oak® Obsession or a traditional wood-stocked Satin finish.

MODEL SPR453™

AUTOLOADING SHOTGUNS




FOR FIELD, WOODS & WATER.

We made it more affordable than ever to own a gas-operated 12 gauge that handles everything from 2 3 / 4 " field loads to 3 4 / 2 " magnum rounds. This slick-handling, reliable autoloading shotgun is an incredible value for today's hunter. For a morning's dove shoot with No. 8s, pounding ducks with steel 2s or anchoring a tom with a heavy payload of No. 4's, its manually tunable gas system delivers smooth cycling and softens felt recoil for fast follow-up shots. Dual extractors on the bolt face ensure reliable, ultra-positive ejection.

The vent-rib barrel and receiver have a matte finish for non-glare concealment. Its black synthetic stock is impervious to the elements and stands up to abuse. And it comes from the factory with four choke tubes — improved cylinder, modified, full and super-full — to cover a full season of applications.


We just made your next shotgun purchase an automatic decision - no matter what you're hunting for.

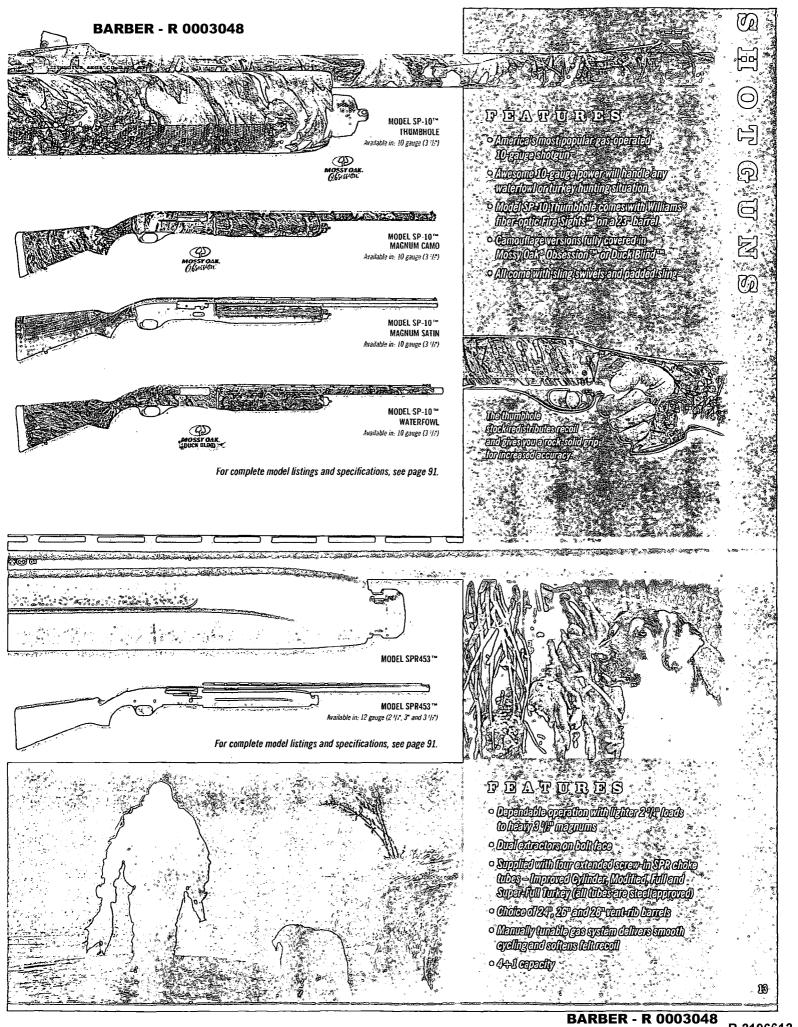

MODEL 870

WINGMASTER®

SuperCell

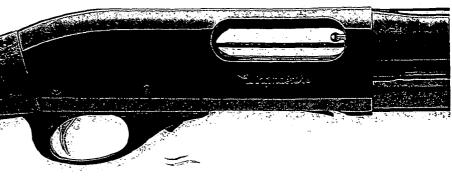

THE MOST POPULAR SHOTGUN IN HISTORY COMMEMORATES OURS.

One hundred years as the world's foremost innovator of pump-action shotguns is cause for celebration — and our leader is dressed for the occasion. In the field or in a showcase, the 12-gauge Model 870™ Wingmaster® "100th Anniversary of Pump Action Shotguns" Commemorative Edition makes a grand entrance with gold inlays and exquisite fine-line accents on the receiver and a striking, high-gloss walnut stock and fore-end featuring our nostalgic fleur-de-lis checkering. For a century, Remington® pump shotguns have reigned supreme over every other. Now owning a piece of the legend is more attractive than ever.

The original **Model 870 TM Wingmaster** is so smooth and reliable that today — more than 57 years after its introduction — it's still the standard by which all pump shotguns are judged. Available in 12 gauge 2 ³/₄" and 3", 20 and 28 gauge, and .410 bore, it has the ultra-positive chambering and ejection, flawless balance and natural pointing qualities that have made the Model 870 Wingmaster an American icon. The original Model 870 Wingmaster has a custom-quality finish and handsome American walnut woodwork. Our Premier Dealers can step the aesthetic appeal up a notch with a version featuring a high-gloss claro walnut stock and fore-end, as well as a handsome pheasant and duck scene embellishment engraving on the receiver.

MODEL 870[™] EXPRESS[®]

AMERICA'S
FAVORITE
PUMP SHOTGUN.


Its solid, dependable action makes it America's favorite, and our continual upgrades make it the most advanced, well-rounded family of pump shotguns around. Along with continually evolving designs, this shotgun's superiority is a matter of rugged dependability, great pointing characteristics and versatility. In fact, the Model 870™ has been the standard for slide-action performance for over 57 years.


Our new Model 870 Express® ShurShot™ Synthetic Turkey is optimized for big birds with the revolutionary ShurShot synthetic pistol-grip stock. It's contoured to accommodate both right- and left-handed shooters, while offering an incredibly steady-aiming platform that handles like lightning and lessens felt recoil. The 21" barrel adds to its superb maneuverability, and the Turkey Extra Full Rem™ Choke channels maximum payload to the sweet spot. Mossy Oak® Obsession™ coverage on the stock and fore-end keeps you concealed.

With our new Model 870 Express ShurShot Synthetic Fully Rifled Cantilever, the buck stops a lot farther out than you ever imagined. It features the incredible stability and comfort of our ambidextrous ShurShot stock and a 23" fully rifled barrel.


The Model 870 Express Turkey Camo and the Model 870 Express Turkey/Deer Combo utilize our synthetic stocks in Mossy Oak Break-Up.™ Choose the Model 870 Express Super Magnum with a 28" barrel and full Mossy Oak Break-Up coverage.



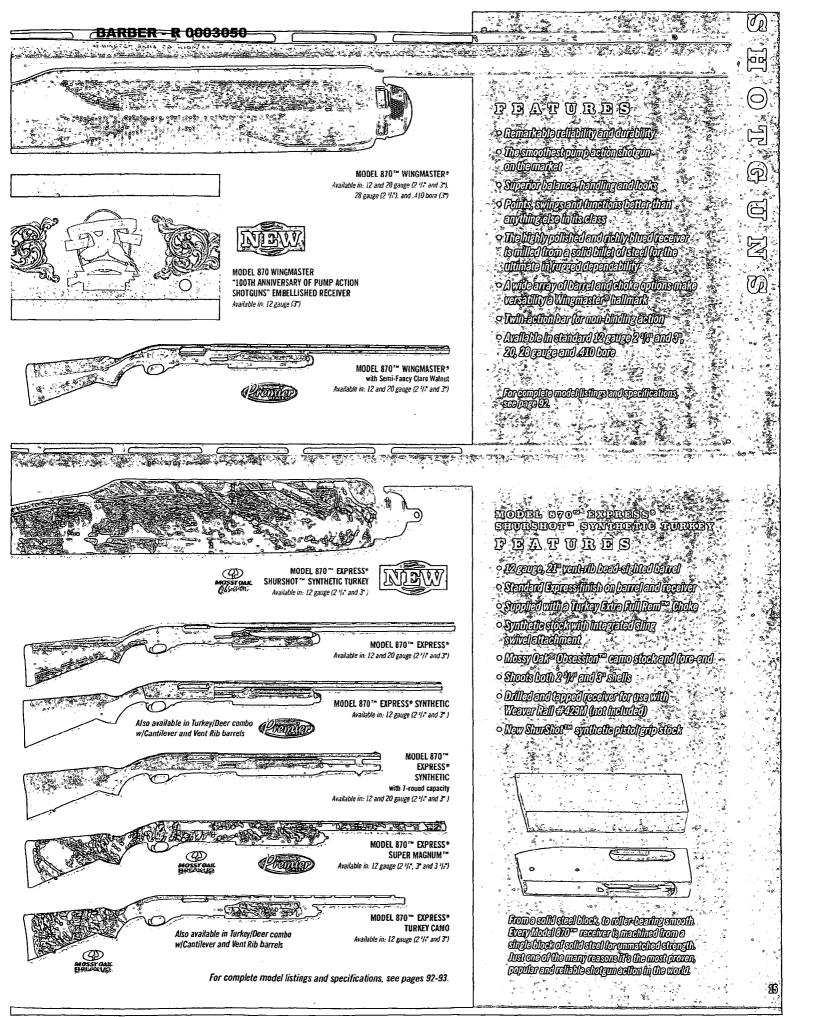

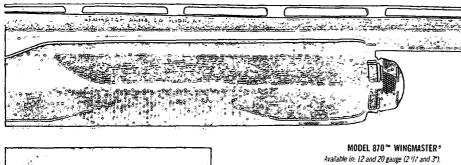

28 gauge (2 1/1), and .410 bore (3")





MODEL 870 WINGMASTER "100TH ANNIVERSARY OF PUMP ACTION SHOTGUNS" EMBELLISHED RECEIVER Available in: 12 gauge (3")




MODEL 870" WINGMASTER® with Semi-Fancy Claro Walnut Available in: 12 and 20 gauge (2 1/1" and 3")

PBATURDS

- s Daniel Le Constitution de la c
- on (tipmatie)
- o Signator belance, handling and looks
- Politis sulicisend dunations baller them ayilingisəlinilədəs
- kinille)(ක්කීලින්(Hille)න්යල්(brille
- ultimatellifurgeddependebilliy Nulleamayollbandlandlobologotionsmal vakitiliyo Vilogoestar hellordi.
- Action of the second of the se
- ் Aralleble in Standard 12 குற்ற 29 Prand இ M.M. Green and All Company of the All Company of th

forcomplete model listings and specifications gangay.

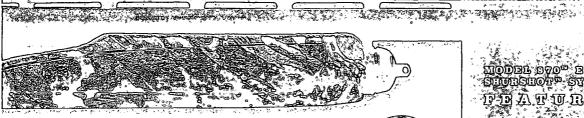



MODEL 870™ EXPRESS® SHURSHOT™ SYNTHETIC TURKEY Available in: 12 gauge (2 1/1 and 3")





MODEL 870™

SYNTHETIC Available in: 12 and 20 gauge (2 4/2 and 3")

EXPRESS®

TURKEY CAMO




Available in: 12 gauge (2 1/1, 3" and 3 1/2)



For complete model listings and specifications, see pages 92-93.

aloner ekon ekoneriek Penden ekoneriek

- ATURES
- Mang Afficilith beat-aghed bar
- Sendard Express Hillshon barrel and rec ippliedwithe turkey Extra Full Remi^{ng} Choke
- Synthethologickyrthintegretedilling sylvelletledillient
- o Mossy Oct P Obsession como stock emiliore en il
- Spots both 2 France Stells
- Dillici endiciped receive de la company Weiver lied #42000 (not tind uplet)
- · Nav Shu Shu Shot symboth plately food




Gome solid great block to collect bearing smooth. Every Model 2002 reserver is meditined from a single block of sollid steel for primatched strength. accordance of the control of the con popular and cellable shotgun gettom in the world.

 (\mathcal{O}_p)

MODEL 870

SPECIAL PURPOSE

SuperCell



The most dependable slide action of all time in three advanced designs that will go the distance with deadly precision, whether your target is a big red head or the crease behind a buck's shoulder. All feature our new SuperCell™ recoil pad, which dramatically reduces felt recoil through a potent matrix of shock-dissipating cells. The turkey shotguns are fully covered in Realtree® APG™ HD™ camo and deliver 3 1/2" Super Magnum™ payloads with lethal authority at the longest ranges. Now featuring our new ShurShot™ synthetic pistol-grip stock, the updated Model 870™ SPS™ ShurShot Synthetic Turkey offers both right-and left-handed hunters the pinnacle of lightweight shooting comfort and handling ease. With this stock in your grip, repositioning for the shot is quick and efficient, plus the position of your hand naturally diffuses recoil. The 23" barrel offers awesome maneuverability, while the fully adjustable TruGlo® fiberoptic sights and an extended Wingmaster HD™ Turkey Rem™ Choke maximize pattern placement.

Recoil suppression and adaptability are hallmarks of the Model 870 Super Magnum MAX Gobbler™ thanks to its Knoxx® SpecOps™ pistol-grip stock. Length of pull is adjustable, so you can customize the fit to your shooting style. This highly advanced stock also incorporates state-of-the-art recoil-dampening technology — with dual shock-absorbing springs — to tame 3 1/2" super magnum thunder. Other features include a swift-pointing 23" barrel with bright, fully adjustable Williams® fiber-optic Fire Sights™ for precision, and an included Turkey Super-Full Rem™ Choke.

The Model 870 SPS ShurShot Synthetic Fully Rifled Cantilever shotgun puts exceptional accuracy and swift handling characteristics in the hands of left- and right-handed deer hunters. With its cantilever mount, adding optics couldn't be easier, and its fully rifled 23" barrel maximizes reach with today's high-performance slug loads. The stock and fore-end are dressed in Realtree® Hardwoods HD.™

When it's time to add a sling, the swivel studs are built-in for your convenience.

XTREME CONDITIONS **SHOTGUNS**

OUR WORKHORSE ACTIONS.

NOW RUSTPROOF & WRAPPED IN ARMOR.

The primary design premise of our Model 870™ and Model 11-87™ actions is dependability – add the tremendous corrosion and abrasion resistance of our proprietary TriNyte® Corrosion Control System, and they're virtually invincible. Fact is, these are the most durable, reliable shotguns on land or sea. All have electroless-nickel-coated internals and a plated trigger group for dramatically enhanced resistance to fouling and oxidation. Plus, the same sleek lines and swift pointing characteristics you love about Remington® shotguns.

Built on the most trusted slide action of all time, the Model 870 XCS Marine Magnum® is the new standard for all-weather reliability. It has a Black TriNyte coating, a tactical-style SpeedFeed[®] I stock, 7-round capacity and an 18" cylinder bore. The stock's shell holder keeps up to four extra rounds at your fingertips.

Our Premier Dealers have four Xtreme Conditions Shotguns to choose from. The 12-gauge Model 870 XCS Super Magnum and Model 11-87 XCS Super Magnum with TriNyte PVD coatings, black synthetic SpeedFeed® I shell-holding stocks. The Model 870 XCS Super Magnum Waterfowl and Model 11-87 XCS Super Magnum Waterfowl have all the same great features plus Mossy Oak® Duck Blind ™ camo stocks and fore-ends.



MODEL 870™ SPS™ SHURSHOT™ SYNTHETIC TURKEY railable in: 12 gauge (2 1/3, 3* and 3 1/2)





BARBER - R 0003053

MODEL 870™ SPS™ SHURSHOT™ SYNTHETIC CANTILEVER Available in: 12 gauge


(2 1/:" and 3")



For complete model listings and specifications, see pages 92-93.

SuperCell

The Knoxx® SpecOps™ stock features a recoil-compensation system that dramatically reduces felt recoil and muzzle jump.

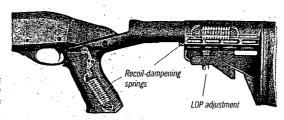

MODEL 870" SPS" SHURSHOT SYNTHETIC TURKEY

日間の間に関いている。

- 23" rifle-sighted barrel
- TruGlo® fiber optic sights
- Wingmaster HD ™ extended Rem¹ Choke (Turkey)
- Receiver drilled and tapped for scope mounts (Weaver Rail #429M)
- Realtree® APG'" HD™ camo
- Black sling included
- Molded in rear sling swivel stud and front stud included in magazine cap
- Featuring Remington's new SuperCell recoil pad technology



MODEL 870™ XCS MARINE MAGNUM®

Available in 12 gauge (2 3/, and 3*)



MODEL 870™ XCS SUPER MAGNUM

Available in: 12 gauge (2 1/1, 3" and 3 1/2")



MODEL 11-87™ XCS SUPER MAGNUM WATERFOWL Available in: 12 gauge (2 1/4, 3* and 3 1/2*)

For complete model listings and specifications, see pages 92-93.

TriNyte® Corrosion Control System (Patent pending). Consisting of electroless nickel and proprietary PVD, this armor-tough, multi-layer coating is the world's most effective barrier against rust and abrasion for firearms, yet is only a fraction of a human hair in thickness. The only thing you'll notice is the near invincibility.

MODEL 870™ XCS

FEATURES

- TriNyte® Corrosion Control System on barrel and receiver creates an armor-tough barrier against rust and abrasion.
- Its Model 870™ action is the rugged standard for dependability and smooth operation
- 18" cylinder bore, bead-sighted barrel
- 2-shot magazine extension 7-shot capacity
- SpeedFeed® I stock with shell holder keeps 2-4 extra rounds at your fingertips
- Corrosion-resistant trigger group with plated components
- Sling swivel studs


MODEL SPR310™

OVER & UNDER

GRACEFUL FORM MEETS RUGGED, RELIABLE FUNCTION.

For good looks and dependability in the field, there's nothing like an over and under. And you won't find a more impressive integration of features and price than our SPR Over and Unders. Similar guns go for twice the price. Each of the three models in this line has a single selective trigger, auto selective ejectors, rich-blued chrome-lined barrels, checkered walnut stock and fore-end, and more.

Put it to your shoulder and feel its superb balance and natural point. Put it to the test and experience its flawless dependability. The Remington® SPR line of over-and-under shotguns. Destined to be a field favorite.

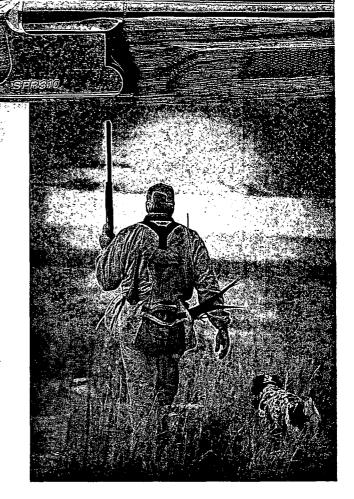

MODEL SPR210[™] & SPR220[™]

SIDE-BY-SIDES




Deeply rooted in the sporting tradition, the side-by-side shotgun is a classic design cherished by collectors and hunters for its graceful lines, reliability and unique handling characteristics. Over the years, we've watched as production costs of the double-gun caused it to become a prize attainable only by the wealthy. Not anymore.


Thanks to the Remington® SPR line, the side-by-side will, once again, become a fixture of America's hunting landscape. Our lineup includes four premium side-by-side shotguns capable of evoking nostalgia at a glance, yet priced to fit into the budget of virtually any hunter. SPR side-by-side shotguns. Start your collection today.




STANDARD SCREW-IN CHOKES



SINGLE SELECTIVE TRIGGER (SPR210 MODELS ONLY)

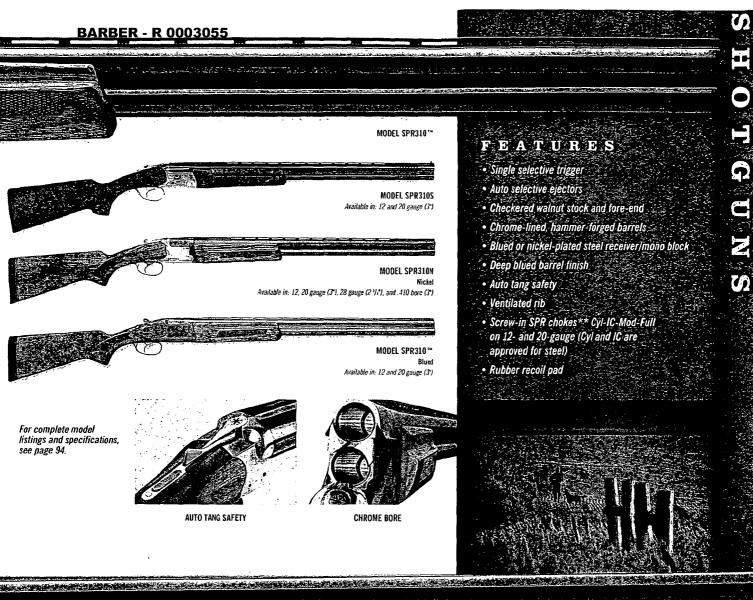

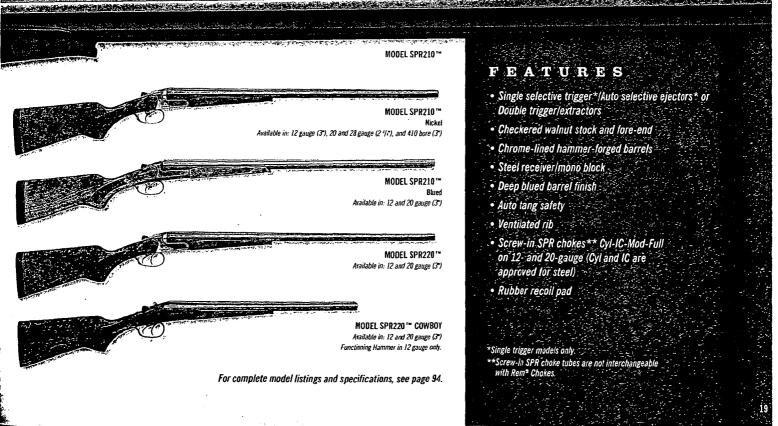

MODEL SPR100™

SINGLE SHOT

FIRST CLASS IN THE GAME OF FIRST SHOTS.

If you're the type who prefers the simplicity and challenge of hunting with a single shot, you're definitely the kind who will appreciate the balanced feel and natural pointing characteristics of our SPR100 $^{\text{TM}}$ family. Built by some of the world's best craftsmen, it's a rugged, dependable companion destined to be your perennial favorite for field and range.

This smooth-handling lineup includes something for every hunter — from beginner to seasoned veteran. Choose from Blued Field, Nickel Field, Sporting/Trap and Youth Vent Rib. These single shots are premium shotguns we produce for a modest price without skimping on features. One shot, one choice: Remington® SPR.

SPR SPECIALTY

AN OPEN & SHUT CASE OF QUALITY & VERSATILITY.


This lineup is forged in tradition and old-world craftsmanship, but built to take on the diverse pursuits of today's multifaceted hunter.


First, the head-turning over-and-under shotgun/rifle combination. It's an amazingly versatile combination of short-range knockdown and long-distance precision.

The time-honored single-shot rifle. Its simplicity, sleek lines and superior accuracy make it a favorite of those confident in their ability to make one bullet count.

We're proud to offer a line of firearms anchored deep in our sporting heritage, yet built for modern demands and priced for everyone.



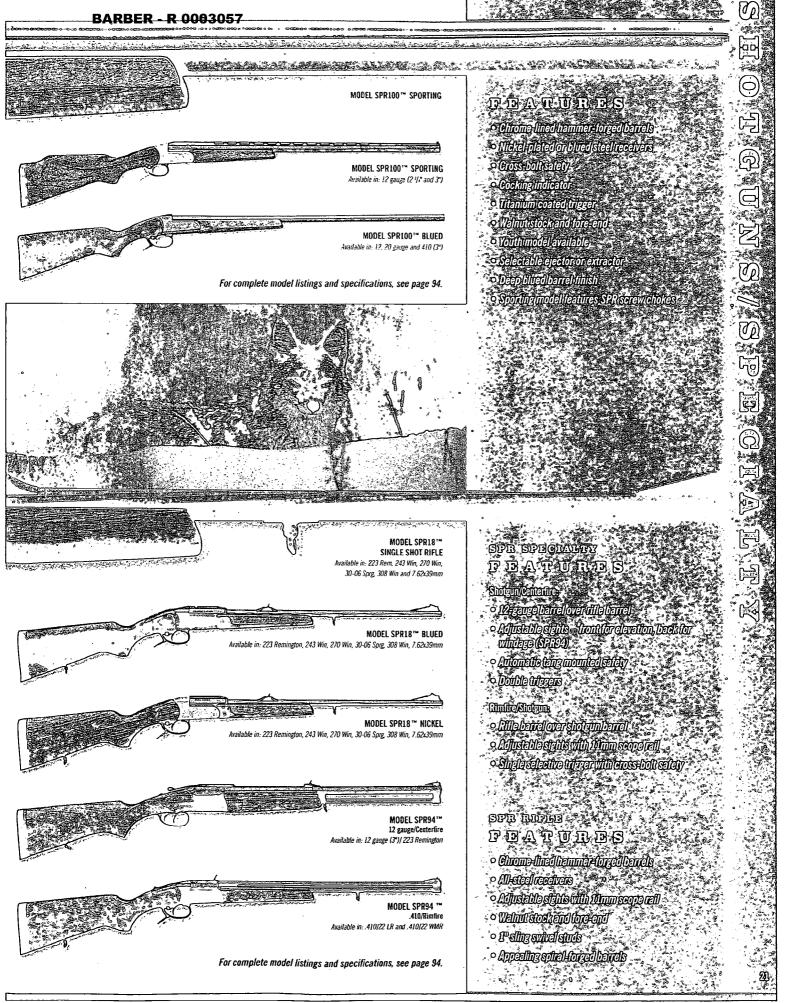

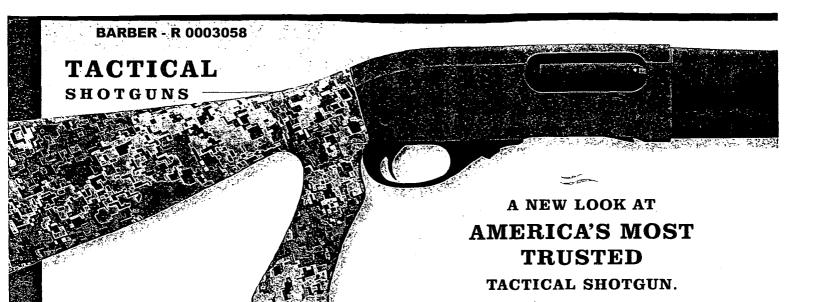

Still the #1 choice of top law enforcement agencies across the country, Remington® tactical shotguns are rugged, ultra-dependable and continually evolve as they're called to serve in new, increasingly demanding environments. The **Model 870™ Tactical Desert Recon** series shotguns are equipped with Tiger Stripe Products® Digital Tiger™ Desert camo stocks and fore-ends, and military-style olive drab powder-coated metalwork for looks as distinctive as their performance. These shotguns are available with two different stock designs, 18" or 20" barrels and two- or three-shot magazine-tube extensions. To reduce muzzle jump and recoil, both Desert Recon models come with our special ported Tactical Extended Rem™ Choke tube.

Our all-black **Model 870 Tactical** shotguns are offered with 18" and 20" barrels, three stock options, including a Knoxx® SpecOps[™] folding stock with recoil-reducing springs and two- or three-shot magazine-tube extensions. All 870 tactical shotguns are chambered for 2 ³/₄" and 3" 12-gauge rounds. For Premier Dealers, there's a 20-gauge version with an 18" barrel, 7-shot magazine and Knoxx SpecOps stock.

The famous **Model 1100™ Tactical** shotguns are all-black as well, come with our standard stock or the Knoxx SpecOps SpeedFeed® IV pistol-grip stock and a choice of 18" or 22" barrels. They're chambered for 2 3/4" 12 gauge.




A fusion of our most advanced performance features in target, tactical and varmint rifles, the new Model 700TM Varmint-Target Rifle (VTRTM) is optimized for extended-range precision and mobility. Its patent pending triangular barrel contour is a product of years of rigorous R&D focused on reduced weight, enhanced barrel rigidity and rapid heat dissipation. To decrease recoil and muzzle jump, we machined the 22" barrel with an integral muzzle brake. Our famous Model 700 action gives it the highest degree of out-of-the-box accuracy available today. Plus, its X-Mark ProTM Trigger delivers the ultimate in crispness and shot control. The ergonomic green synthetic stock has a vented beavertail fore-end that promotes rapid cooling, and its black overmold accents provide a firm gripping surface.

In long-range ability and rugged endurance, our **Model 700 XCR Long Range Tactical Rifle** truly stretches the limits. It's Black TriNyte® PVD coating creates a diamond-hard layer of defense against the elements. For tighter groups, the tactical Bell & Carlson stock features a full-length aluminum bedding block. The tactical beaver-tail fore-end and recessed thumb-hook optimize performance off flat surfaces. And barrel cooling is accelerated with wide tactical-style fluting. A compact version of this rifle is available to Premier Dealers.


Our quick-handling, pump-action **Model 7615** ** **Tactical** carbine features a Knoxx SpecOps ** NRS ** (Non Recoil Suppressing) stock with an adjustable length of pull. A durable parkerized finish protects the metalwork, and a 10-round magazine is included. Also available is the **Model 700 SPS Tactical**. It has a 20" heavy-contour barrel, dual-pillar-point bedding and our X-Mark Pro Trigger.





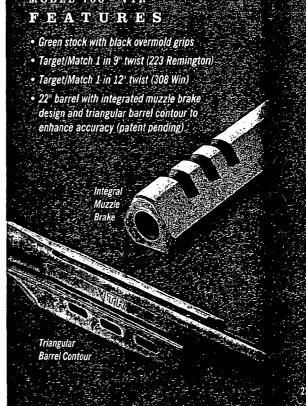

THE LEGENDARY MODEL 70 ADVANCING THE MOST ACCURATE & MOST

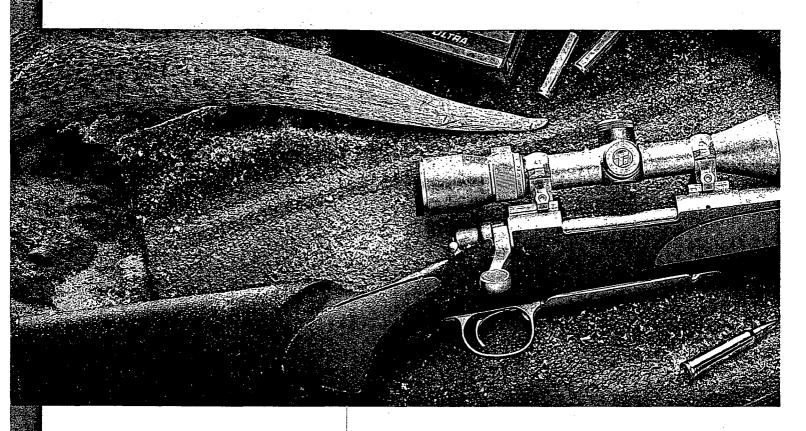

When the Model 700™ was introduced in 1962, it was ahead of its time. And it's even more so over 45 years later. With enhancements such as our new X-Mark Pro™ Trigger, the TriNyte® Corrosion Control System and the continual addition of hot new calibers, barrel contours and stock designs; the strongest and most accurate line of factory-built rifles in the world, is now also the most technologically advanced and versatile. We're proud of the Model 700's heritage — the superior out-of-the-box accuracy, the rock-solid dependability and the generations it's linked. But we're even more excited about where it's headed.

LEADING THE WAY ANYWHERE, ANYTIME.

The Model 700" family has evolved into the most diverse rifle line available to today's hunter and shooter. There are stainless, rich blued and matte finishes to choose from with a variety of stock options, including camo and colored synthetic, American walnut and wood laminate in standard and thumbhole configurations. And the range of calibers available is unrivaled in the industry.

For those who take the hunt to extremes, we offer the world's most advanced protection against corrosion and scratching: Our TriNyte® Corrosion Control System featured on the Model 700 XCR™ (Xtreme Conditions Rifle). This proprietary coating creates a virtually impenetrable barrier from the elements and abuse. New for 2008 is the RMEF Limited Edition XCR™ rifle, chambered in 7mm Remington® Ultra Magnum with a stock camouflaged in new Realtree® AP™ camo. The 25-06 Remington and 7mm-08 Remington have also become standard chamberings in the XCR line (Page 26).

Check out the hot 17 Remington Fireball in the Model 700 "SPS" Varmint (Page 30), and this year's Model 700 CDL Stainless Fluted Limited Edition rifle (Page 32), chambered for the tack-driving 260 Remington. Read on, and you'll find an awesome selection of new chamberings and options in Model 700" rifles, including the addition of the 257 Weatherby Magnum to our Model 700 CDL SF lineup, more left-handed options than we've ever offered before — including the first-ever southpaw youth rifle, the Model 700 SPS Youth. By popular demand, the classic, eye-catching looks of high-polish bluing is now featured on a member of our Model 700 CDL family.

USTED IN HISTORY.



THE BEST KEEP GETTING BETTER. The Model 700[™] is the most accurate production rifle available today. After years of intense R&D, we're taking technology up a notch with our new X-Mark Pro[™] Trigger. It breaks like 'glass', has virtually zero creep and offers a level of shot control unmatched by any factory trigger today. While others use gadgets and add-ons to hide inconsistencies, Remington® eliminates them with state-of-the-art manufacturing techniques and the

Remington X-MARK

tightest possible production tolerances. A mirror-like finish on its components enhances corrosion resistance and adds to its ultra-crisp feel. The X-Mark Pro™ is standard equipment on select Model 700 and Model Seven rifles, but one shot and you'll know — it's extraordinary by anyone's standards. It's also 100% adjustable for pull weight by a qualified gunsmith. But we seriously doubt you'll need it.

With up to a 40% lower out-of-the-box pull weight, virtually zero creep, one of the most crisp breaks you'll ever feel and 100% adjustability, the new X-Mark Pro is the finest production trigger you'll ever squeeze.

STRENGTH IN NUMBERS. The Model 700 is undoubtedly the strongest action ever conceived. The cylindrical receiver is dramatically more rigid than the traditional flat-bottom types it replaced. Additionally, our famous 3-Rings-of-Steel make it an unshakable vault of strength.

3-RINGS-OF-STEEL


1. Recessed bolt face completely encloses cartridge head for maximum protection against case rupture



2. Barrel surrounds bolt shroud for additional strength

3. Barrel threaded into receiver machined from hardened steel

XCR: THE WORLD'S MOST RESILIENT RIFLE.





As proved in a rigorous saltwater test by an independent laboratory, our armor-tough, multi-


layer TriNyte® coating forms a virtually impenetrable barrier to corrosion. It's the most effective on the planet, in fact. (More on page 26)

KING OF THE MOUNTAIN IN 2008



POWER LEVEL AMMUNITION 7mm Remington Ultra Mag** (Page 65)

Additional firearms chambered for 7mm Remington® Ultra Mag.™ Model 700 SPS, Model 700 SPS Stainless, Model 700 XCR Camo RMEF and Model 700 XCR.

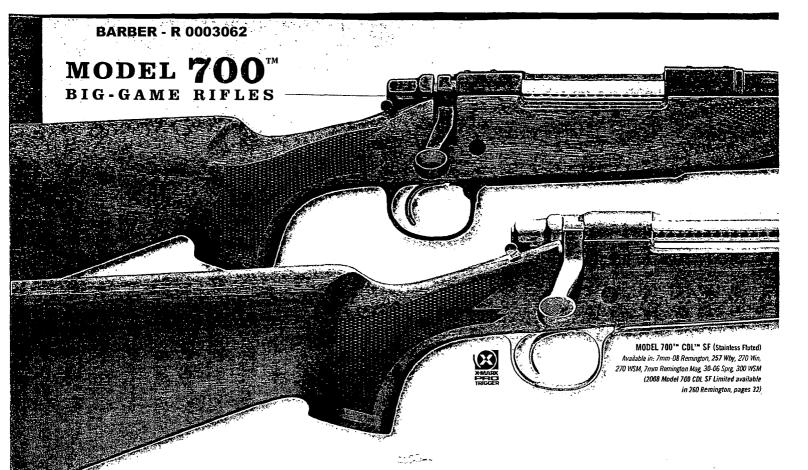

POINTING THE WAY TO PEAK ACCURACY & PERFORMANCE FOR MORE THAN 45 YEARS.

The Remington Model 700, ** a rifle with no equal, and a superior performer in every way. Its accuracy and dependability have become the standard by which all other centerfire rifles are measured and continually fall short. Still the most accurate out-of-the-box rifle made, the Model 700 brings its famous action and renowned consistency to some new additions to the prestigious family of guns.

With our armor-tough TriNyte® Corrosion Control System, the **Model 700 XCR** is the most durable rifle ever built. And, this year's special Limited Edition Rocky Mountain Elk Foundation Model is dressed in the Realtree® AP $^{\text{TM}}$ Camo pattern and chambered for 7mm Remington Ultra Magnum — a caliber famous for its ability to make short work of big game at the longest ranges.

Also new this year is the Model 700 CDLTM with a distinctive high-polish blued finish. It's offered in our three best-selling chamberings — the 270 Win, 30-06 Sprg. and 7mm Remington Magnum. Premier Dealers keep demanding the Model 700 CDL Boone and Crockett. Its laminated stock, fluted barrel and medallion insert on the grip cap make it a high-performance rig we're proud to offer again in 2008. Last year, we launched a full line of Model 700 CDL SF rifles with incredible success. We've expanded the family with an additional caliber offering — the flat-shooting, hard-hitting 257 Weatherby Magnum.


The workhorse **Model 700 SPS™** line is as solid and dependable as ever, and we're proud to keep the Buckmasters Edition, including the "Young Bucks" version, filling freezers across America.


TriNyte® Corrosion Control System (Patent pending). Consisting of electroless nickel and proprietary PVD, this armor-tough, multi-layer coating is the world's most effective barrier



against rust and abrasion for firearms, yet is only a fraction of a human hair in thickness. The only thing you'll notice is the near invincibility. Available in a variety of finish colors.




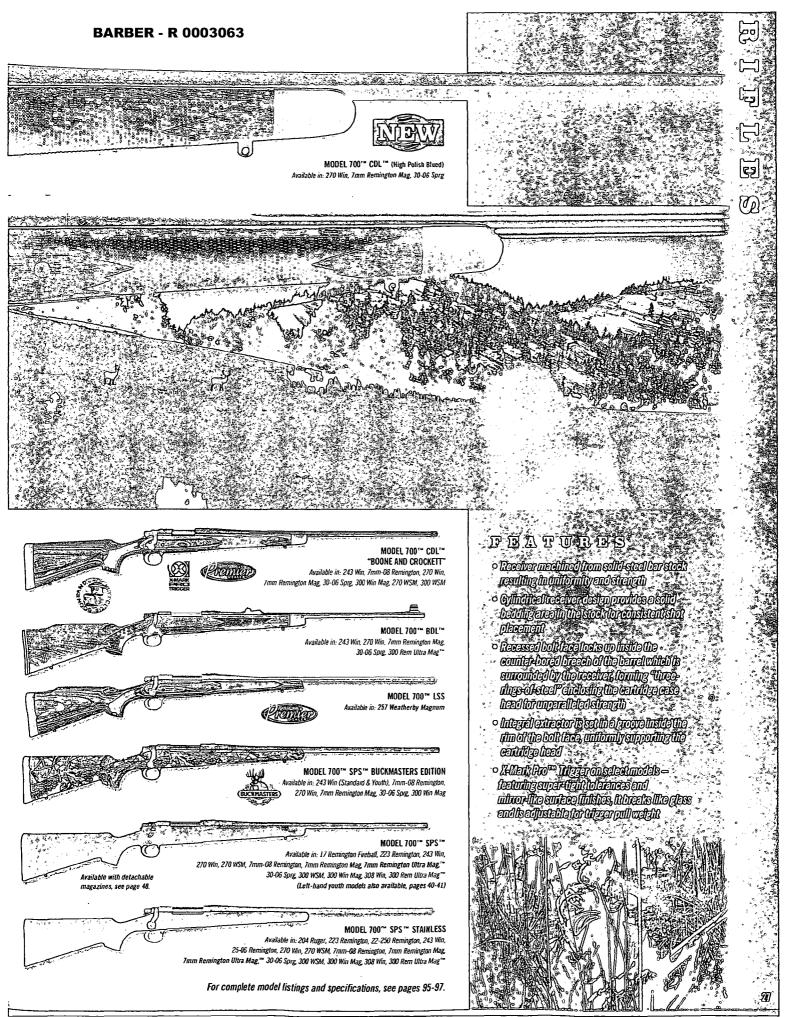

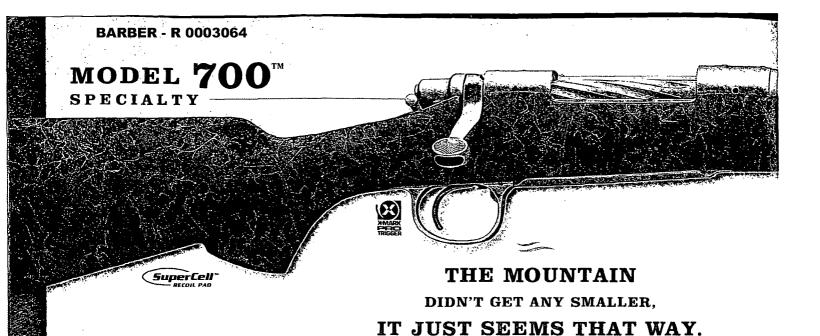

We know the high country demands high standards, that's why we've built the all-new, amazingly light **Model 700™ Alaskan Ti**. Weighing only 6 ¼ pounds long action and 6 pounds short action — it's the ultimate rifle for high-altitude spot-and-stalk hunting. The key to its lightweight feel starts with a titanium receiver that's impervious to weather (drilled and tapped for mounts), incredibly strong and half the weight of steel. Complementing the super-light receiver is a bolt featuring spiral-cut flutes and a 24" magnum contour barrel with light-varmint-style fluting. The action is pillar bedded for outstanding shot-to-shot consistency. Its premium Bell & Carlson stock features their MaxxGuard finish for enhanced durability and SuperCell® recoil pad.


Another favorite for those high-country pack-in hunts is the aptly named **Model 700 Mountain Rifle**. Extremely lightweight, it features a compact stock and tapered barrel to deliver fast, carbine-like handling with full-bore range and accuracy. Its sleek lines, classic shape and superb feel have made it one of our most popular rifles.

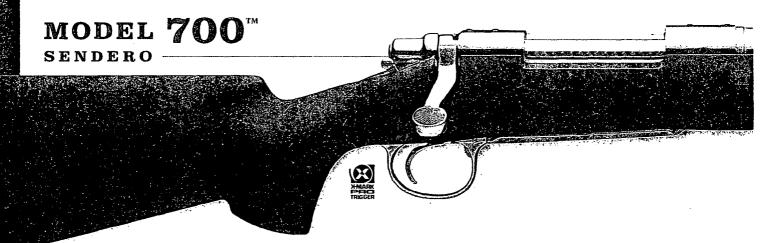

VARMINT-GRADE ACCURACY TO THE NEXT POWER.


Although it has all the great features of a varmint-style gun, the Model 700™ Sendero is designed for something much bigger than a prairie dog. That's because the Sendero is chambered for long-action magnum cartridges for long-range, big-game performance. Hone your skills to match, and you can reach out to the most extreme ranges, thanks to its varmint-influenced target-grade accuracy.

Like our VSSF II, the Sendero is equipped with an H.S. Precision composite stock reinforced with aramid fibers and featuring a contoured beavertail fore-end with ambidextrous finger grooves and palm swell. Full-length aluminum bedding blocks create accuracy-enhancing platforms for its barreled action and its 26" heavy contour barrel features six longitudinal flutes for rapid cooling. Long-range accuracy meets big-game performance in the Remington² Model 700 Sendero.

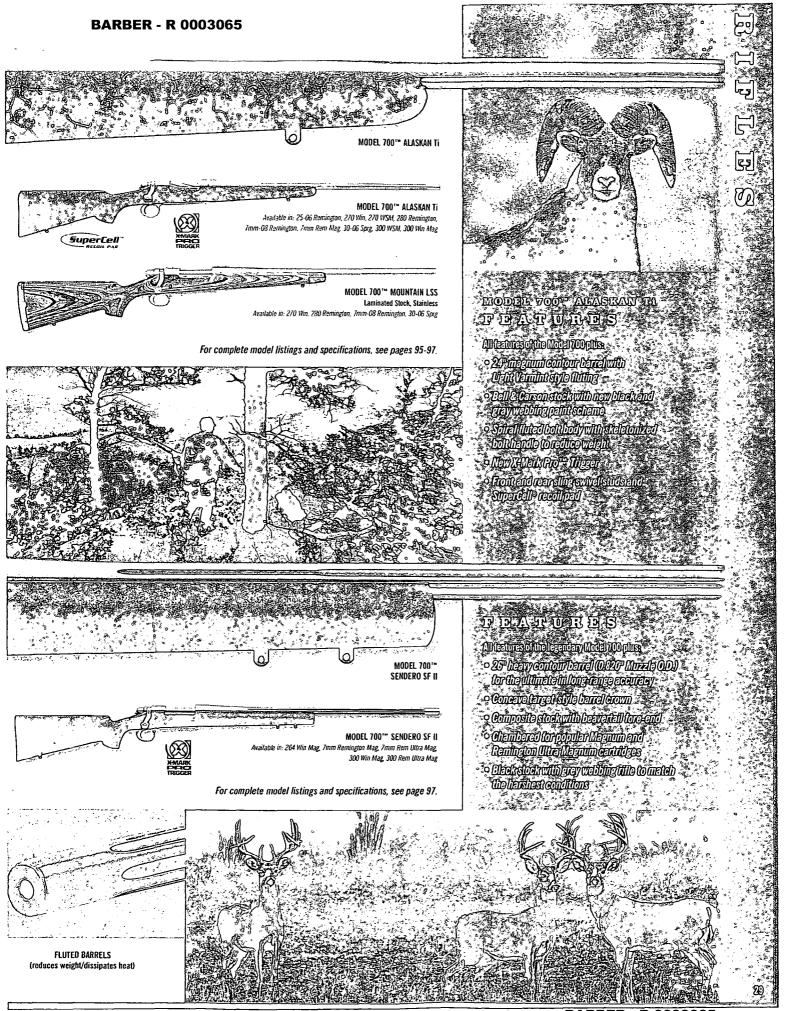



VARMINT



"Why yes, that's really five shots." Tell your friends it's genetics. Fact is, when it comes to precision, there's no finer pedigree in the industry than Remington® varmint rifles. And with the introduction of our new Model 700™ SPS™ Varmint, staking claim to our legendary accuracy is a more attainable feat than ever.

The Model 700 SPS Varmint is capable of punching tiny groups straight out of the box because it's built on the Model 700 action, the most solid, dependable and trusted in existence.

Its 26" heavy contour barrel is perfectly matched to its high-velocity caliber offerings, including the hot new 17 Remington Fireball. Plus, the ergonomically designed black synthetic stock has a vented beavertail fore-end for enhanced grip, reduced weight and better heat dissipation. And sharp predator eyes won't spot the tough, non-reflective matte blued finish on the barrel and receiver. Other standard features include a hinged floorplate magazine, sling swivel study, and a drilled and tapped receiver. The Model 700 SPS Varmint is destined to leave a lasting impression on any varmint that crosses its line of sight.

MODEL 7 VARMINT RIFLES



STUNNING FROM THE BENCH,


LETHAL IN THE FIELD.

Built on the famous Model 700™ cylindrical action, Remington[®] Varmint rifles are the most accurate production rifles we produce. You'll be stunned by the degree of precision you get straight out of the box. The varmints won't be so lucky.

The Model 700 VL SSTM TH features a thumbhole stock design for enhanced stability and comfort. Offering great looks and exceptional durability, the stock is crafted of laminated wood. Vents in its widened fore-end facilitate rapid cooling of the heavy-contour stainless barrel, so you can keep driving tacks with any one-of-three hot varmint chamberings.


There's also the Model 700 VS SFT II, a finely tuned machine with full-length aluminum bedding block that creates an ultra-stable, accuracyenhancing platform. Further improving its shot-to-shot consistency is a 26" heavy contour barrel that's fluted for rapid cooling. Its H.S. Precision composite stock is reinforced with aramid fibers and features a contoured beavertail fore-end, ambidextrous finger grooves and a palm swell. Twin front swivel studs accommodate a sling and a bipod.

For those who prefer the more traditional varmint rifle, there's the time-tested Model 700 VLS, with its classic laminated stock and satin-blued barrel. Last but not least is the Model 700 VSF™ with its distinctive desert tan stock with black webbing. All offer the highest level of out-of-the-box accuracy for your small-target pursuits.

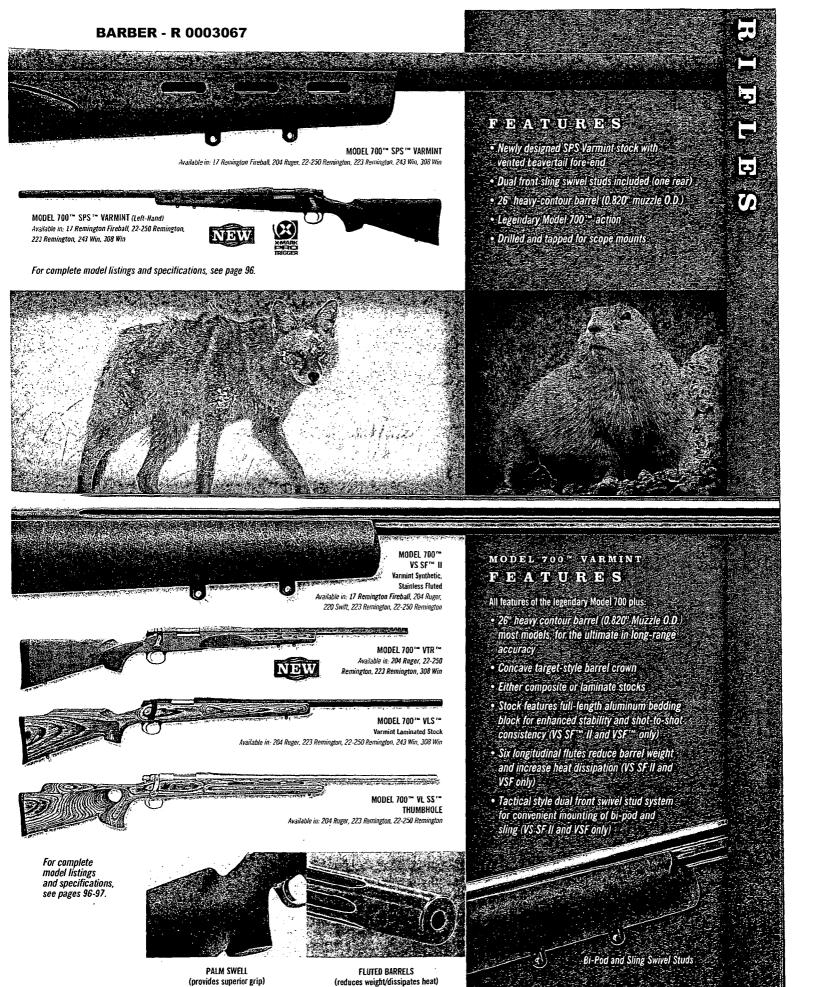



LIMITED EDITION

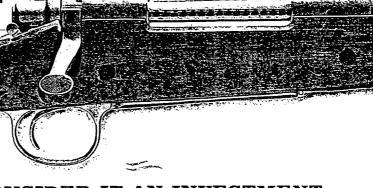

CONSIDER IT AN INVESTMENT FOR YOU, AND YOUR TROPHY ROOM.


You can try to keep this limited edition rifle in the box, but one shot and it'll be your big-game rifle of choice for life. Chambered for the accurate, flat-shooting 260 Remington,® the Model 700 CDL Stainless Fluted Ltd. is the ultimate embodiment of our world-famous action's sleek lines, good looks and unrivaled out-of-the-box precision.

The 260 Remington is an incredible all-around big-game cartridge. To commemorate its chambering in our newest limited edition rifle, the floorplate is intricately engraved with the cartridge and "260 Remington." The rifle's receiver is heavily roll marked with "Model 700 Limited."

To achieve optimum velocity, the magnum contour barrel is a full 24". It features Light Varmint-style fluting for rapid heat dissipation, and the action and barrel are solidly bedded in our distinctive CDL walnut stock. And prepare to be amazed by the shot control and breaks-like-glass feel of our X-Mark Pro™ trigger.

MODEL SEVEN

COMPACT RIFLES

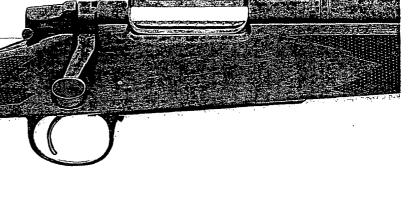


HONORING 25 YEARS OF KNOCKDOWN, DRAG-OUT DOMINANCE.



Lightning fast and superbly accurate, the compact, short-action Model Seven has been a leader in the woods since it was introduced in 1983. Join us as we celebrate a quarter century of proven performance with the Model Seven™ 25th Anniversary Edition rifle chambered in 7mm-08 Remington. This rifle is a quintessential Remington classic with some striking commemorative upgrades. Its American walnut Classic Deluxe-style stock is custom laser engraved with "Model Seven 25th Anniversary" and has an intricate 25th anniversary medallion inset at the pistol grip cap area. Adding to its traditional good looks is a high-sheen blued finish on the receiver, bolt and 22" standard-contour barrel. Our ultra-crisp X-Mark Pro Trigger and SuperCell recoil pad are where the good old days stop, and you realize you're experiencing the greatest era in rifle advancement yet.


Our new Model Seven™ Predator® is a dream to handle and officially every predator and varmint's worst nightmare. It's decked from butt to bore in Mossy Oak® Brush® camo for concealment, and its fluted, magnum-contour 22" barrel cools quickly when the action heats up. Speaking of hot, the lineup of calibers includes our 17 Remington Fireball. At 4,000 fps, it's sure to light 'em up.

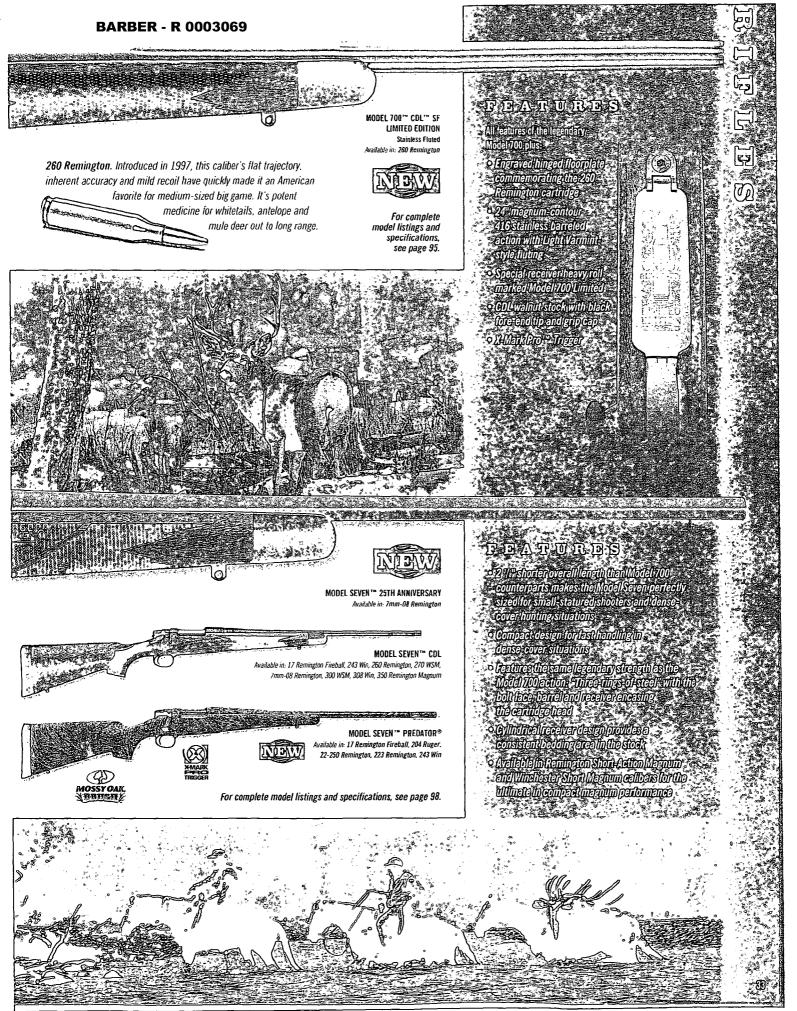



770, but is equipped with a standard black synthetic stock and doesn't include a scope.

MODEL 798TM/799TM

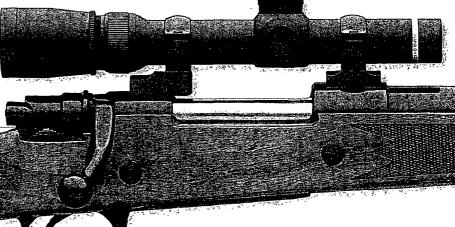

PROVEN ON SAFARI. MADE AFFORDABLE BY REMINGTON.

Welcome custom-shop features in a factory-built rifle. Famous on safari for its amazing strength and reliability, the controlled-round-feed Mauser action is back in mainstream production. That's right, what used to only be available through surplus suppliers and custom shops is now well within reach. We have carefully reworked every aspect of these rifles to meet the tastes and performance demands of today's hunter and shooter. And this year, we're offering the Model 798 chambered in the venerable 375 H&H and 458 Win Mag. Built around a long-action Mauser 98, it's your ticket to dropping the toughest game on earth. Its Realwood™ walnut laminate stock combines the enduring stability and toughness of lamination with the classic good looks of highly figured walnut. This striking woodwork is accented by a richly blued barrel and receiver.

The Model 798 SPS™ is also new to the lineup, featuring a durable black synthetic stock and blued finish. And for 2008, a new walnut stock is offered.


Our quick-handling, compact Model 799™ is a scaled-down version of its big brother, the Model 798. It features a miniaturized receiver with the famous Mauser bolt release; a crisp, single-stage trigger; two-position safety; and an all-steel trigger guard and magazine assembly for longevity. It has a rugged, good-looking laminated stock, a deep blued finish and its receiver is drilled and tapped for easy scope mounting. Choose from five popular short-action chamberings.



22-250 Remington, 223 Remington, 7.62x39mm

For complete model listings and specifications, see page 98.

MODEL **7615**[™]/**7600**[™]

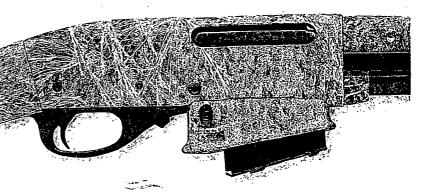

BECAUSE SOMETIMES YOU NEED A QUICK ONE-TWO

THREE-FOUR-FIVE ...

Maybe you flinched? Or the animal turned at the last split-second? Either way, our Model 7615™ and Model 7600™ centerfire rifles get you back on target — instantly. Because not only are they built to deliver legendary Remington® first-shot accuracy, they're also designed for ultra-fast follow-up shots — without ever having to unshoulder your rifle.

The **Model 7615** Ranch Carbine is similar in function to our Model 7615 Tactical, but features a more traditional styling. Its satin-finish American walnut stock houses a 7615 action with a 10-round AR-15 magazine and an 18 ½ high-polished blue clean barrel. It's drilled and tapped for standard Model 7600 scope mounts. The **Model 7615 Camo Hunter** is essentially a synthetic version of the Ranch Carbine. Fully covered in Mossy Oak® Brush® Camo, it features a velocity-boosting 22" barrel with rifle sights. It's also drilled and tapped for scope mounts.

Our ever-popular **Model 7600** is one of the most proven deerslayers in the woods. It has a 22" barrel, a four-round magazine and is available in wood and durable synthetic models. All of our centerfire pumps feature quick-release magazines and Remington's rotary bolt lock-up design for exceptional strength, safety and reliability.


MODEL 750TM
AUTOLOADING RIFLES

PUT FIVE SHOTS
THROUGH DEER HUNTING'S
NARROW WINDOW.

In the field, patience is a virtue but when it's time to take action, sometimes you need the speed of a Model 750." Its improved gas system provides faster, smoother cycling. And its balanced low-profile design handles like lightning. Rapid follow-ups are its specialty, but famed Remington one-shot accuracy comes standard.

The **Model 750™ Woodsmaster™** features a restyled American walnut stock and fore-end with machine-cut checkering. Felt recoil is diminished by its ultra-efficient gas operated action.

For added durability in all conditions, the **Model 750 Synthetic** features all the Model 750 improvements only with a synthetic stock and fore-end. Go ahead, throw that narrow window wide open with the quickest gun in the woods, the Model 750.

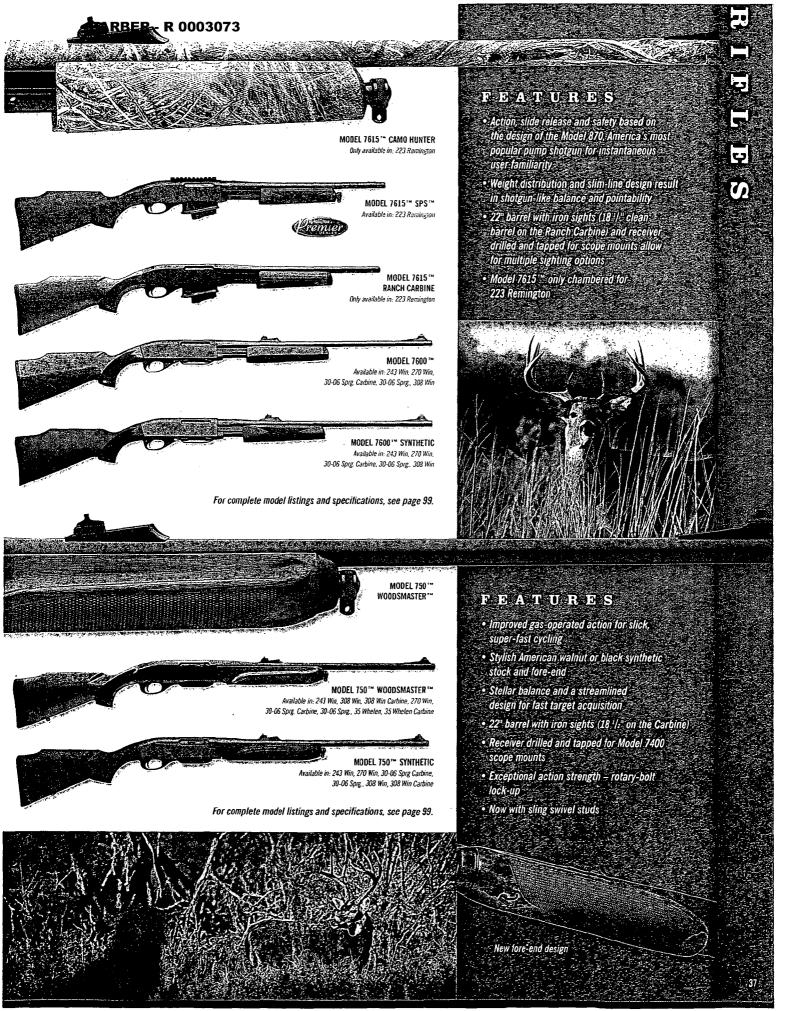

MODEL R-15 VTR



OPENING UP A NEW ERA,

AND THE SPEED LIMIT,

IN REMINGTON COUNTRY.


We created an unrivaled combination of precision accuracy, blazing-fast follow-ups and hunt-specific features. The new R-15 VTR $^{\text{\tiny M}}$ modular repeating rifle was born of the most advanced design aspects of AR-15-style rifles available today with a strong emphasis on optimizing form and functionality for the modern predator aficionado. The results are astounding — with very, very fatal implications for every coyote, fox or bobcat that crosses your path.

For peak accuracy, the R-15's 0.680" OD barrel is precision-crafted from ChroMoly steel. It's free-floated within the machined-aluminum fore-end tube and given a recessed hunting crown to ensure gasses escape evenly around the bullet for the ultimate in shot-to-shot consistency. Six longitudinal flutes forward of the gas block promote rapid barrel cooling and increase rigidity while reducing weight, further contributing to this rifle's ability to print tiny clusters at an incredible pace. And our new hunting single-stage trigger design is as clean-breaking as they come. Whether you choose the 223 Remington or 204 Ruger version, the semi-automatic gas action all but eliminates muzzle jump and recoil so your target remains in the crosshairs. And when it's time to add optics, the receiver-length Picatinny rail makes it a rock-solid cinch.

Control comes naturally with the ergonomic pistol grip and lightweight overall design of the R-15. Its uppers and lowers are machined from aluminum forgings for featherweight durability, and the fore-end tube is drilled and tapped for accessory rails.

This new family of firearms consists of three models. Each was designed with input from leading predator authorities and decked in the ultra-effective Advantage[®] MAX-1 HD™ camouflage to blend with sage, open country and a multitude of hunting terrains. All come with five-round magazines and are compatible with all aftermarket AR-15 magazines and other accessories.

The R-15 VTR Predator Rifle has a 22" barrel with a fixed stock and pistol grip. At 7 ³/₄ lbs, it's extremely stable – the best choice for long shots. Our R-15 VTR Predator Carbine and R-15 Predator Carbine CS* (Collapsible Stock) handle like lightning with their 18" barrels and weigh a mere 6 ³/₄ lbs. – perfect for high-speed hunting scenarios. The Predator Carbine CS features a telescoping stock with a fully adjustable length of pull for a custom fit.

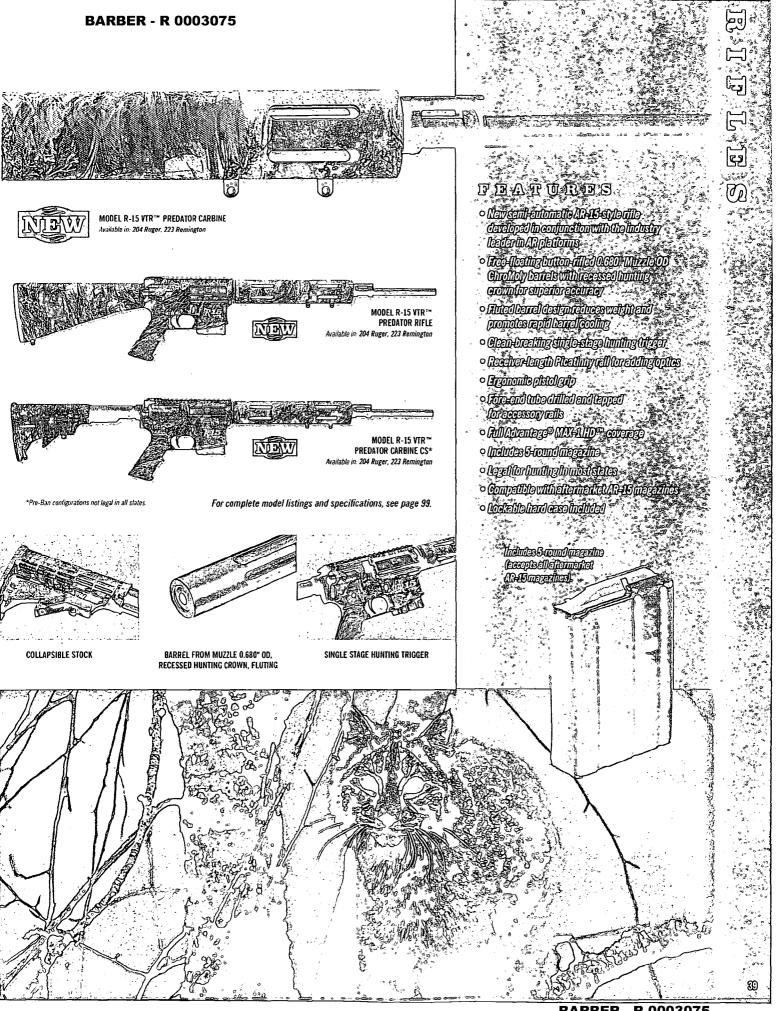

LEFT-HANDED RIFLES

IEGENDARY PERFORMANCE IS MORE THAN JUST RIGHT.

Southpaws are people too, and all people deserve the legendary accuracy and dependability of Remington® Model 700[™] rifles. New for 2008, our expanded family of left-handed offerings includes four high-performance additions — the Model 700 SPS Marmint, Model 700 XCR, the Model 700 CDL and Model 700 SPS Youth Synthetic, the industry's first-ever left-handed youth offering. The Managed Recoil Ammunition line expands to include 7mm-08 Remington, nicely complementing this upgrade to the youth firearms family. Along with our unrivaled standards for out-of-the-box accuracy, all include the new X-Mark Pro™ Trigger system, which offers the highest degree of crispness and shot control you can get from the factory.

The **Model 700 SPS Varmint** sports a 26" heavy-contour barrel complemented by a vented beavertail fore-end for rapid cooling and improved shot-to-shot consistency. It comes in five great short-action calibers including the hot new 4,000-fps 17 Remington Fireball. Other standard features include a non-reflective black matte finish, hinged floorplate magazine, sling swivel studs and a drilled and tapped receiver.

Test your limits with the stainless **Model 700 XCR**. It's the most durable, corrosion-resistant rifle on the planet thanks to exclusive TriNyte® coating. Along with being nearly invincible, it features a sleek black synthetic stock enhanced with gray overmolded rubber grips for superior handling in the most adverse weather conditions.

The **Model 700 CDL** is the quintessential hunting rifle, embodying the best in traditional good looks as well as our leading-edge standards for precision, durability and cartridge chamberings. Only from Remington — our **Model 700 SPS Youth** left-hand has a 1" shorter length of pull, swift-handling 20" barrel and is offered in two venerable big-game calibers: 243 Win and 7mm-08 Remington.




THE PIVOTAL FACE
OF MUZZLELOADING
SPEED & EFFICIENCY.


Magnum power, easy cleaning and legendary Remington[®] accuracy in a hot new design that defines reliable. Our innovative TorchCam[™] action rotates from the fixed breech for fast priming and locks your 209 primer in a vault of weather resistance. It delivers rapid, super-hot ignition in the most extreme conditions. And to clean, simply unscrew the breech plug, swab the barrel and you're finished.

With a full 28" of powder-burning steel, the Genesis™ generates maximum velocity from magnum 150-grain charges. And you get the swift-handling characteristics of a much shorter gun — the ultra-compact design of the TorchCam action keeps overall length and weight to a minimum.


For safety, the over-travel hammer never comes in contact with the firing pin unless the gun is fully cocked and the trigger is pulled. A crossbolt safety adds extra assurance. Plus, the HammerSpur offers right- and left-handed shooters a rigid grip through cocking and hammer letdown without scope interference.

From the base model equipped with a standard synthetic stock and blued barrel to our super-stable thumbhole models with stainless, fluted barrels, this lineup includes a muzzleloader to suit the preferences and budget of every hunter.

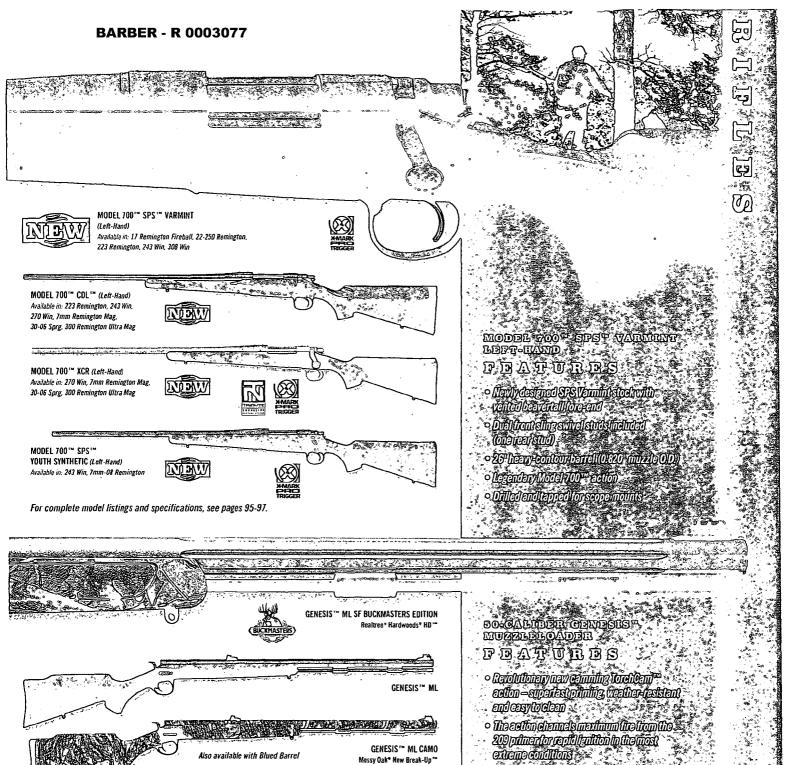

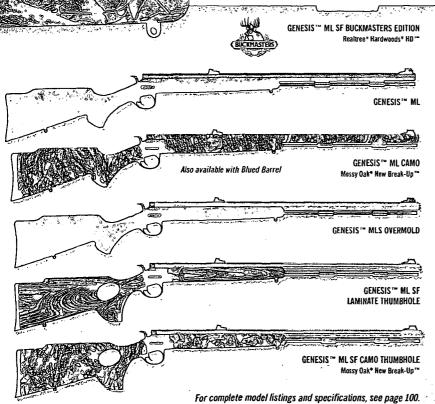


- ् Velocity-boosting 20-bencil ensures (व्या bumod unegrum 140-grain charges
- · And Edition (1) and the Collina of the Collina of
- o Williams with continuing the
- · Alumijuum emoolised väimod väitib jeg :
- · Gront and tear swipel strets
- o Goodboll selety
- · Danouelle Ver breedh plug
- · Bullet-guldling courselp
- Optimized for use with Remington Cleenbore 200 Muzzletoeding Pytmers

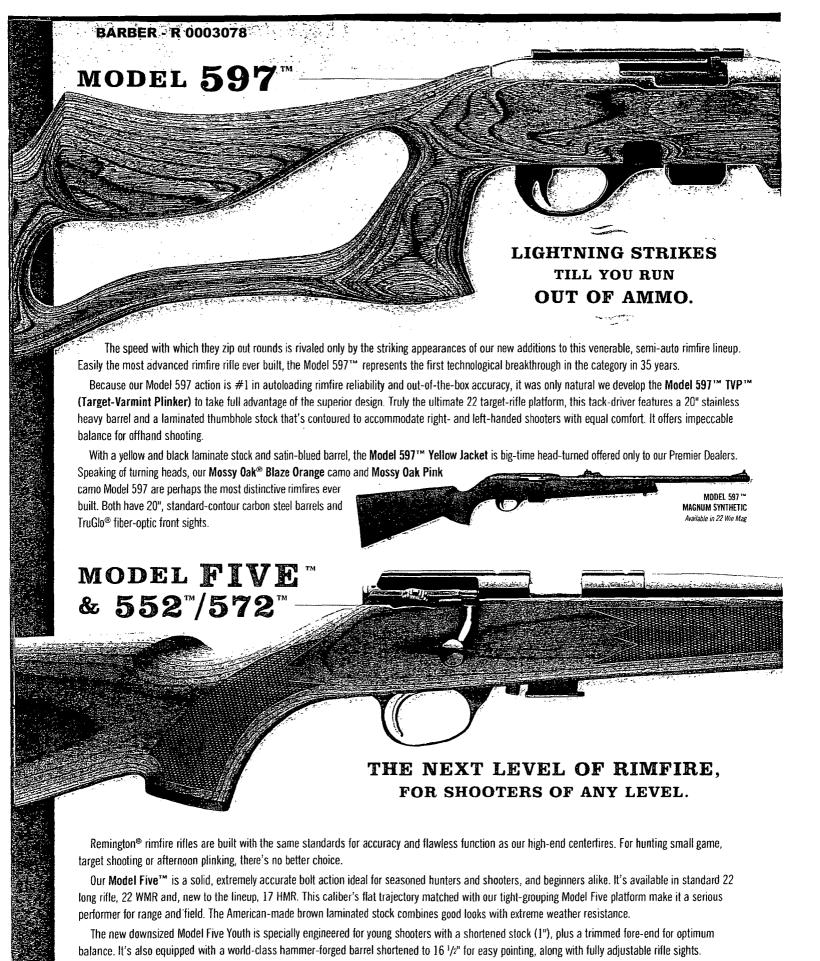

Our classic **Model 552 BDL Speedmaster** autoloader and pump-action **Model 572 BDL Fieldmaster** are two of America's favorites. And they're not only fast, they'll put an entire magazine into the same hole. Both have high-gloss American walnut woodwork with cut checkering, richly blued carbon

steel barrels and fully adjustable iron sights with grooved receivers for easy scope mounting.



MODEL 597™ TVP™ Available in: 22 LR





MODEL 597 " YELLOW JACKET" Available in: 22 LR





MODEL 597™ **BLAZE CAMO** Available in: 22 LR



MODEL 597 " PINK CAMO Available in: 22 LR



For complete model listings and specifications, see page 100.

REATURES

- Bolt-guidance system features twin, tool-steel guide rails
- Offered in both textured finish synthetic or laminated wood stocks
- Non-glare matte finish
- Patented, 10-shot metal detachable magazine, 8-shot for magnum
- · Last-shot hold-open bolt for added safety
- TruGlo® fiber-optic sights on camo models
- Scope rail included on Model 597 ™ TVP. and Yellow Jacket


Model 597 bolt travels on twin tool-steel guide rails for flawless

Unique attachment system rigidly joins barrel to receiver for perfect alignment and enhanced accuracy




Last-shot for positive of empty

Sear, and hammer are Tetlon°/ nickel-plated for crisp smooth trigger pull Patented drop-out style staggered-stack box magazine assures reliable leeding and fast, easy reloading



MODEL FIVE™

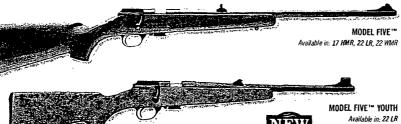





For complete model listings and specifications, see page 100.

MODEL FIVE FEATURES

- · Smooth solid steel bolt action
- 22" blued barrel
- · Five-shot detachable magazine
- Adjustable rifle sights
- · Receiver grooved for scope mounts
- Youth model features 5-shot detachable magazine and single shot adapter


MODEL 552"/572"

FEATURES

- Handles 22 Short, 22 Long and 22 Long-Rifle cartridges
- High-gloss American walnut stock and fore-end with cut checkering
- Tubular magazine fed
- · Richly blued carbon-steel barrel
- · Adjustable iron sights for open sight plinking
- Receiver grooved for scope mounts for precision shooting with optics

YOUTH FIREARMS



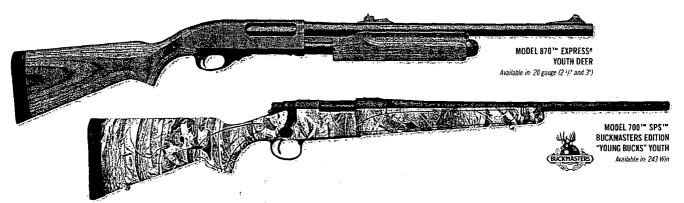

FOR EVERY TRADITION, THERE IS A BEGINNING.

Young shooters are more likely to become stewards of the shooting sports if they start with a gun that fits properly. Exactly why we crafted our standard, premium-grade stocks with a shorter length of pull, then fit them to some of our finest firearms. Adults requiring a shorter length of pull will also benefit from this lineup. Rifles feature 20" barrels and youth shotguns have 21" barrels (20" for deer gun).


The **Model 770™ Youth** is the ultimate first centerfire. The next generation of the hunt-ready Model 710, it's chambered for the mild-recoiling 243 Win. and comes out of the box with a pre-mounted, boresighted 3-9x40mm scope.

Other centerfires include our workhorse, short-action Model 700 SPS™ Youth Synthetic. Now in a left-handed version chambered for 243 Win and 7mm-08 Rem, it's the first-ever southpaw youth rifle offering. Our new Managed Recoil 7mm-08 Rem ammunition is the perfect complement to this addition. Our Model 700 SPS™ Buckmasters "Young Bucks"

model comes in 243 Win., and features a specially engraved floorplate and Realtree® Hardwoods® Grey HD™ stock.

In shotguns, we have the 20-gauge Model 870™ Express® Jr. and Model 870 Express Youth Turkey Gun with Mossy Oak® Break-Up™ stocks and fore-ends. And we still offer the Model 870 Express Youth line, Model 870 Express Jr. and a Model 870 Express Synthetic Youth Combo featuring a 21" vent-rib barrel and a 20" fully rifled barrel. All Jr. offerings have a 1" shorter length of pull than standard Youth models. The gas-operated action of the 20-gauge Model 11-87 Sportsman Youth makes it the ultimate light-recoiling youth shotgun.

Our **Model Five™ Youth** rimfire completes the lineup with superior accuracy and a simple, rugged design that make it a great first rifle. It has a shortened stock and fore-end, a world-class hammer-forged barrel shortened to 16 ½ and fully adjustable rifle sights.

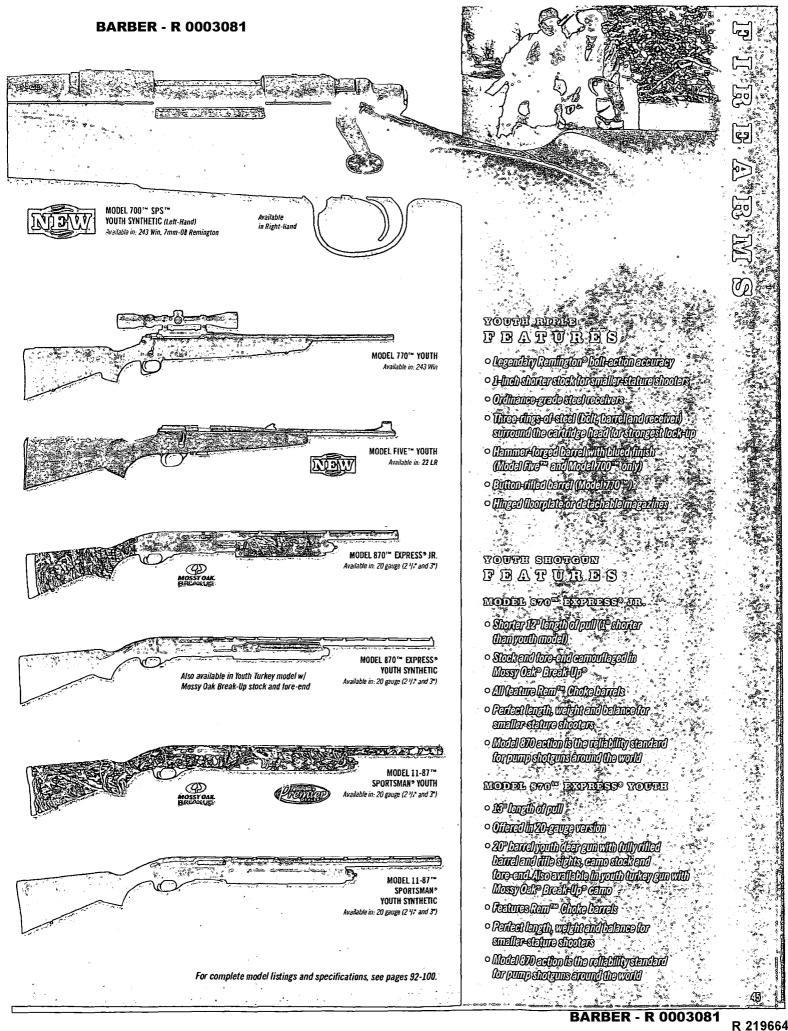

BARBER - R 0003082

CUSTOM SHOP

When your zeal for fine equipment is surpassed only by your love for the shooting sports, you owe it to yourself to visit the Remington® Custom Shop. The 500-yard rifle, 40 shots in the bull, an ultra-specialized companion for your hunt of a lifetime, stunning aesthetics and one-of-a-kind exclusivity — no matter the aspiration, we singularly craft long arms to meet and exceed the most elevated standards for excellence. Our limited number of craftsman is testament to the rarity of their skill level. They hone components, engrave and accurize to a benchmark best described as perfection. We employ the most advanced gunmaking equipment available today to fulfill a wide range of critical applications, with the unyielding constants being supreme accuracy and robust integrity to last a lifetime and more.

WWW.REMINGTON.COM

You've arrived. Remington Custom Shop is home for those with an undying dedication to excellence. We bring the dream of perfection to fruition. From benchrest aficionados to collectors, passionate hunters to lovers of aesthetic refinement, your rifle is here. Even if you're not currently in the market for a custom firearm, one look and you will be. Stop wishing. Visit us on the Web today.



REMINGTON CUSTOM SHOP PERFORMANCE


MODEL 40-XR** KS

Engineered Accurate. Custom-turned and chambered barrels, trued actions and bolt lugs lapped to ensure full contact and deliver pinpoint accuracy.

Engineered Reliable. The extreme precision with which a Custom Shop rifle is built creates a flawless meshing of components and a piece of machinery that will go the distance. Everlasting? You be the judge.

Engineered to Fit. Your firearm is designed and crafted by serious shooters. From our hands to yours, a Custom Shop rifle is a finely tuned instrument.

Engineered Tough. A Remington Custom rifle is a true shooter's tool, designed and built to weather the harshest conditions.

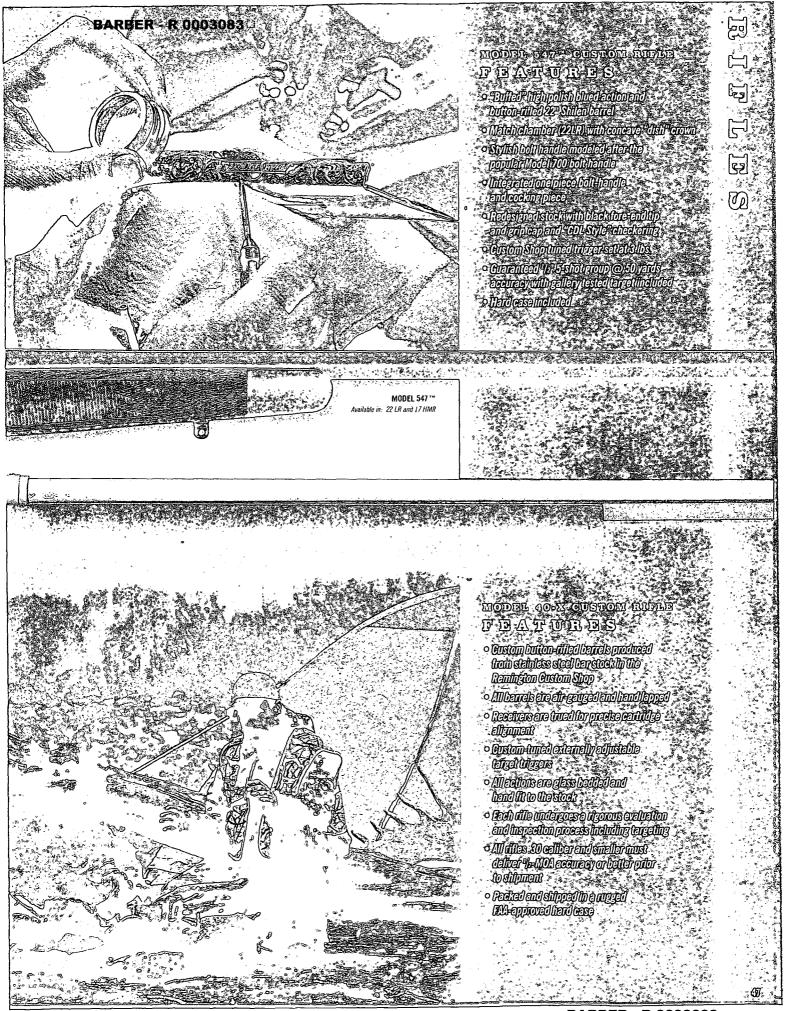


PACKAGED FACTORY PARTS

THE ONLY FITTING CHOICE FOR YOUR REMINGTON

SHOTGUN. If you own a Remington shotgun you know quality and when it comes to replacement parts there's only one brand good enough - Remington. We offer a wide variety of original factory barrels ranging in styles from vent rib, to cantilever to riflesighted, so you never have to compromise the superb craftsmanship and dependability that make Remington ownership a matter of pride. Whether you want your Remington shotgun to perform like two, or you're looking to restore "an old friend," there's no substitute for Remington replacement barrels.

(For complete model listings and specifications, see page 101.)

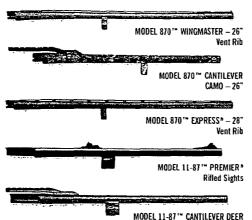

MODEL 597™ SCOPE RAIL


- · One piece scope mount rail
- · Allows use of Weaver-type rings for full-size 1" scope
- · Lightweight and easy to install
- · Made in the USA


MODEL 1100 TM / 11-87 TM GAS SYSTEM KIT

- Genuine factory replacement parts
- · Nickel-plated piston/piston seal
- Teflon®-coated barrel seals



SHOTGUN PLUG





- Easy to install and lightweight
- Perfect for adding magnification and the precision of scope sighting

UNIVERSAL MAGAZINE CAP

- Fits all 12, 16 and 20 gauge Model 870's, 'Model 1100's and Model 11-87's
- · Allows you to add a sling to your Remington shotgun



PROBORE® CHOKE TUBES

- 12 gauge extended and flush
- Fits Remington Models 1100 ™ G3 12 ga., Model 1100™ Competition, Model 105 CTI,™ Premier® Over & Unders 12 gauge that are equipped with interchangeable



REMINGTON® CHOKE TUBES

- · Performance tuned for all Remington shotguns
- Field and target constrictions for optimal pattern performance
- · Fully rifled tubes for today's high performance sabot slugs
- · Turkey tubes for maximum pattern density



SPR™ CHOKE TUBES

- · Fit Remington® Model SPR™ shotguns with screw-in chokes
- · Compatible with Baikal/EAA products that are equipped with interchangeable chokes in the same gauge

 All SPR choke tubes approved for lead/ steel shot



MODEL 597" MAGAZINE



- · High quality polymer construction
- · Chrome-silicone spring for max spring life
- · Comes in Black or Clear
- · 30-round capacity for 22 LR
- Made in the USA



METAL MAGAZINES

- · Constructed from a lightweight, magnesium-based alloy
- · Cast as one piece
- · Ideal for demanding. high-volume use
- Six-round magazine (Model 504™)
- 8-shot magnum, and 10-shat - long-rifle capability (Model 597™





MODEL 597**

MODEL 504™

MODEL FIVE 151 MAGAZINE

- 22 LR or 22 WMR
- · 5-round capacity
- · Constructed from stamp steel



CENTERFIRE MAGAZINE BOXES




BARBER - R 0003085

SUPERCELL® RECOIL PAD

OUR PUMP BEATS THEIR SEMI-AUTOS.

The world's most effective recoil pad. So potent, in fact, it single-handedly helped our Model 870 generate up to 54% less recoil than our leading competitors' autoloading shotguns with factory pads. Its millions of tiny Super Cells absorb and release energy over a longer time period to create a more comfortable shooting experience than was ever before possible with conventional materials.

(For more information, see pages 2-3.)

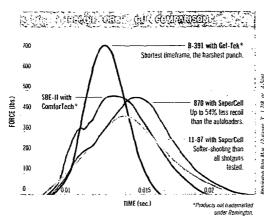



STOCKS/FORE-ENDS

MODEL 870™ & 11-87™ SHURSHOT™

- · Ambidextrous design for turkey, deer and predator hunters
- · Ergonomic grip for solid shot placement
- · Lightweight synthetic construction
- Available in Black and Mossy Oak® Obsession™
- Comb designed for perfect eye-alignment with sights and/or scope
- · Molded in sling swivel stud







For more information, see page 3.

Mossy Oak® Obsession™

MODEL 870.™ 1100™ & 11-87™

- · Available in Black and Mossy Oak® Break-Up®
- 16-ga. and 12-ga. youth and adult













MODEL 700™ & MODEL SEVEN™

· Available in Black synthetic



Visit www.remington.com for our complete line of stocks & fore-ends.

DECALS

- · White vinyl die cut decals
- · Waterproof
- . Oil, acid and alkali resistant
- · Usable on smooth and corrugated surfaces
- Heat resistant up to 350 degrees
- Up to 7 years outdoor durability







PREMIER® ACCUTIP BONDED SABOT SLUG

A NEW LEVEL OF PINPOINT PRECISION AND DEER-LEVELING PERFORMANCE.


It doesn't just look intimidating, it's flattening whitetails and competitors in the tipped-slug market with devastating ferocity. Guided by our new Power Port™ Tip, the AccuTip Bonded Sabot Slug delivers a degree of accuracy and terminal performance unmatched by any other we tested. This masterpiece of aerodynamics consistently prints tiny 100-yard groups and transfers tremendous knockdown force out to the farthest reaches of shotgun range. It's the largest tipped slug you'll find anywhere. In field testing, this huge .58-caliber slug produced gaping wound channels and crumpled every deer it touched with a single shot. From 5 to 200 yards, it yields perfect mushrooms and over 95% weight retention thanks to its spiral nose cuts, bonded construction and high-strength cartridge brass

jacket. With performance as revolutionary as its appearance, this is one tip sure to get stunning results. Available in 2 3/4" or 3"

12-gauge versions for 2008.


FEATURES


- Power Port™ Tip delivers dramatically superior accuracy
- Spiral nose cuts and proprietary bonding technology control expansion at all ranges from 5 to 200 yards
- Huge .58-caliber slug is the largest tipped slug available today
- Over 95% weight retention weighs more after impact than all the others start with!
- Slug jacket made from high-strength cartridge brass
- Designed for use in fully-rifled barrels only



EXPANSION — ANOTHER DEADLY MUSHROOM

	ma@ind			(LyC1) (hy)		de Di	OJ.	Clus		od Odf	y to		9 1971
				PREM	IER: AC	CUTIP P	OLYMER-	IPPED S	LUGS				
NEW	PRA12	12	23/4	385-gr.	1850	1511	1401	2925	2218	1677	2.7	3.6	0.0
NEW	PRA12M	12	3	385-gr.	1900	1656	1439	3086	2344	1771	2.5	3.4	0.0



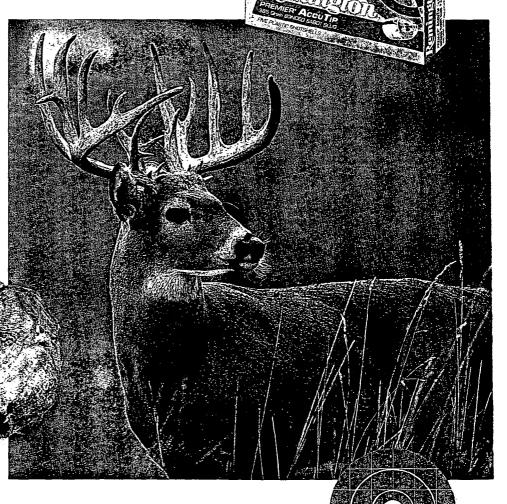

The Premier*
Acculip slug
exhibits impressive
accuracy at all
ranges. (5-shot @
100 yds. with 2.2° groups)

BARBER - R 0003087


HIGH-PERFORMANCE SLUGS

PREMIER* CORE-LOKT* ULTRA

BONDED ** **SABOT SLUGS**. This is one slug that's anything but sluggish when it comes to performance. The Remington** Core-Lokt Ultra Bonded** is a sleek, ultra-fast, flat-shooting shotgun sabot slug that's virtually in a class of its own. With incredible accuracy, it delivers a 385-grain, .50-caliber, jacketed, bonded bullet that yields near 100% weight retention and expands to 2x in diameter.

Designed for use in fully rifled barrels only, the Core-Lokt³ Ultra Bonded offers a high-tech blend of sabot

power and surgical precision that could be just what the doctor ordered.

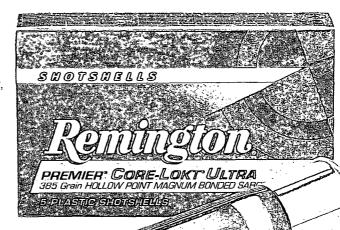



MANAGED-RECOIL* COPPER SOLID* SABOT

SLUGS. The best-selling terminal performance and accuracy of our Copper Solid Slug is now available in a reduced recoil load. With 40% less recoil, they're perfect for anyone who wants outstanding on-game results without the rearward punch. Or, use them to sight-in, then step up to full loads. There's no finer slug load for young or recoil-sensitive hunters.



diam'r.	Cro	. 60		100			10		Od'	. Edr	i Dr	(E)(1)
			PREMIER	CORE-L	OKT° U	ILTRA BONI	DED" SAE	OT SLUG	iS			
PR12CLU	. 12	. 21/	385-gr.	1900	1770	1648	3086	2682	2325	1.8	. 24	0.0
PR20CLU	20	2 1/4	260-gr.	1900	1750	1615	2084	1774	1506	2.0	2.7	0.0
PREMIER® COPPER SOLID® SABOT SLUGS												
PR12CS	12	2 1/4	1 _	1450	1320	1208	2040	1689	1417 -	0.01	- 3.5	: <u></u>
PR12MCS	12	3	1	1550	1408	1283	2331	1923	1597	0.01	-2.9	~-
-PR20CS	20	2 1/4	1/4	1500	1360	1240	-1444	: 1187	986	0.01	-3.1	
			MANAG	ED REC	OIL" C	OPPER SOL	ID" SABO	T SLUG				
RL12CS	- 12	21/	11	1200	1113	1046	- 1400	1204	1063	0.0	5.5	لنمست

† 0.0 indicates yardage at which shotgun was sighted in

PREMIER® COPPER SOLID® SABOT SLUGS. The

unique, all-copper shotgun deer load. Designed specifically for use in fully rifled barrels. Outstanding on-game performance with 2x

caliber expansion and virtually 100% weight retention. Consistently delivers 2 1/2", 5-shot groups at 100 yards.



HIGH-PERFORMANCE SLUGS

BUCKHAMMER® LEAD SLUGS. When it's time to put the hammer down, this lead slug delivers a devastating one-two punch of precision and explosive power. Specifically designed for rifled barrels and rifled choke tubes, it has an attached stabilizer that optimizes flight to produce 3-inch, 100-yard groups. And weight retention at impact is consistently 100 percent. Choices include 12- and 20-gauge

full-power and Managed-Recoil™ versions. This season, put that big buck down for the count with the hardest-hitting, most accurate lead slug in the woods. BuckHammer.®

THE BUCKHAMMER® LEAD SLUG FEATURES AN IMPRESSIVE
MUSHROOM PROGRESSION. THIS EXPANSION CREATES DEVASTATING ON-GAME PERFORMANCE.

The BuckHammer's lead slug offers near 100% weight retention

with full 12-gauge

(.73 cal.) diameter.



25 Yards



50 Yards



75 Yards






SHOTSHELLS


5 PLASTIC SHOTSHELLS

125 Yards

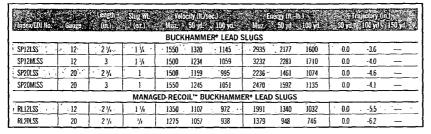


The unique design of the slug causes it to literally bond with the stabilizer as it travels down the barrel, resulting in unprecedented true flight.





The BuckHammer* Lead Slug exhibits impressive accuracy by putting 100 shots inside an amazing 3 ½ group at 100 yards. (2 ½, 1 oz. 20 gauge)

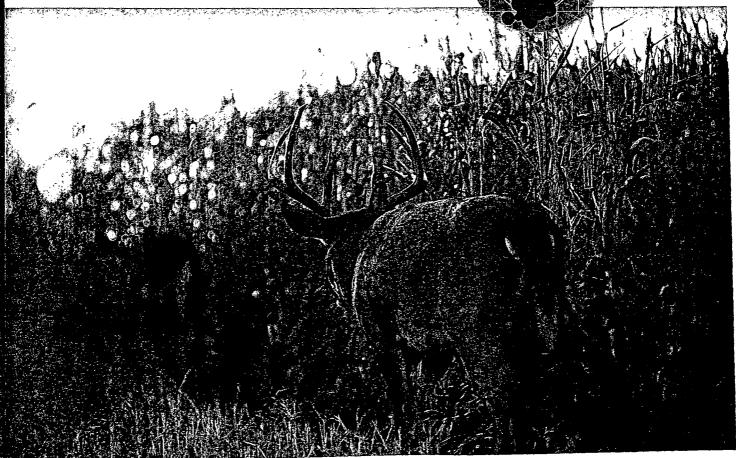


BARBER - R 0003089

SLUGGER° & SLUGGER° HV

SLUGGER' HIGH VELOCITY RIFLED SLUGS.

This higher velocity slug exits the barrel at 1,800 fps, 13% faster than standard 1 oz. slugs. The $^{7}/_{3}$ oz. Slugger High Velocity delivers more energy at 50 yards with flatter trajectory on deer than standard 1 oz. slugs. Produced in most popular slug loadings -2 $^{3}/_{4}$ " and 3" 12 gauge and 2 $^{3}/_{4}$ " 20 gauge. Designed for the avid deer hunter using smooth bore guns.



QOILS SLUGS

SLUGGER® RIFLED SLUGS.

Remington's most popular, accurate, hard-hitting slug. Slightly oversized for great smoothbore shotgun performance, resulting in better sealing against the barrel wall for greater accuracy.

	Out)		Galle (In)		ÈTHE ENL	TAU.	, ·[]		11151 11151	Terri OM	
			SLU	GGER" HI	GH VELO	CITY RIFLE	D SLUGS				
SPHV12RS	12	21/4	3/5	1800	1252	978	2751	1517	813	0.01	-4.1
SPHV12MRS	12	3	7/4	1875	1302	998	2989	1442	847	0.0 [‡]	-3.7
SPHV20RS	20	2 1/-	<i>'h</i>	1800	1321	1037	1575	848	523	0.0 ^t	-3.6
				SLUG	GER* RIF	LED SLUG	s				
SP12RS	12	21/4	ı	1560	1175	977	2361	1340	926	0.01	-4.8
S12SRS	12	2 3/:	l	1680	1285	1045	2738	1605	1059	0.0 t	-3.8
S12MRS	12	3	ı	1760	1345	1075	3005	1753	1121	0.0 [†]	-3.4
SP16RS	16	2 1/1	3/5	1600	1175	965	1989	1072	724	0.01	-4.8
SP20RS	20	2 1/:	1/3	1580	1240	1034	1513	931	648	0.01	-4.2
SP41RS	.410	2 1/2	1/5	1830	1335	1040	654	348	211	0.01	-3.5
			MANA	AGED-REC	OIL" SLU	JGGER* RI	FLED SLUG	i			
RL12RS	12	2 1/4	1	1200	988	873	1397	948	739	0.01	-7.4

BUCKSHOT -



EXPRESS* MAGNUM AND EXPRESS* BUCKSHOT.

One of the great values in shotgun deer loads. A combination of heavy cushioning behind the shot column and a granulated polymer buffering helps maintain pellet roundness for tight, even patterns.

		Sigil Consib	. Viciy (Ws:3-@30)	(100/4)(d) (31:0	. 69191 Comit
1 Ganas			BUCKSHOT LOADS		
12SB00	12	21/4"	1290	. 00	12
12HB000	12	3"	1225	000	10
12HB00	12	3"	1225	00	15
12HB4	12	3"	1225	4	41
1235B001	12	31/2" -	1125	- 00	18
	- EX	PRESS* BUCK	SHOT LOADS - B	JFFERED	
128000	12	2 1/-	1325	000	8
128001	12	2 %	1325	00	9
1280	- 12	27/1	1275	. 0	12
1281	12	2 1/10	1250	i	16
1284	12	2 %*	1325	4	27
2083	20	2 1/4"	1220	3	20
		MANAGED-	RECOIL™ BUCKSI	нот	
RL12BK00	- 12	21/4"	1200	00	8

1 Utilizes Remington® Power-Piston one-niece was

WINGMASTER HD

DROP-DEAD BETTER.™

The company that redefined lethal shotgun range is proud to unveil the next generation of heavy-density devastation. Wingmaster HD.™

This hard-hitter stretches the kill zone with an ultra-tuned combination of density, shape and energy. At 12.0 grams/cc, it's 10% denser than lead; the scientifically proven optimum density for pellet count and pattern density. Plus, its smooth, round shape delivers awesome aerodynamics and sustained payload energy. It all adds up to the most devastating patterns possible.

Wingmaster HD is nearly as soft as steel shot, which makes it easier on your barrel. And it's more responsive to chokes, allowing you to open up the pattern for close-range hunting or stretch shotgun range to its farthest reaches.

Absolutely no shotshell on the market can touch Wingmaster HD at long range. All of its revolutionary characteristics — optimized density, ultra-round shape and consistent size — come together on game with an unmatched level of deadly force. Patterns with Wingmaster HD will put 60% of the pellets in a 30" circle at 60 yards. Waterfowl, turkey and varmints don't know harm's reach yet. It's Wingmaster HD.



THE ULTIMATE EXTENDED-RANGE PAYLOAD

· Devastating pellet energy

· Denser patterns

Wingmaster HD™ Waterfowl and Predator Payloads


FEATURES

- HD = Heavy Density
- 12.0 g/cc density for optimal combination of pellet count and pattern density
- · Proprietary composite of Tungsten-Bronze-Iron
- · Round, consistent pellets:
 - Travel straighter and longer
 - Improve long-range lethality
 - Tighter patterns
- More even pellet distribution
- · Uniform pellet density
- Softer pellets are easier on your barrel and more responsive to chokes
- Better patterns at long and short ranges more lethal than lead
- Approved for waterfowl hunting by the USF&W and Canada

Non-toxic, 56% denser than steel and 10% denser than lead, it's the most lethal choice whatever you're shotgunning for:

WATERFOWL • TURKEY • PREDATORS

• Flies true – near perfect shape

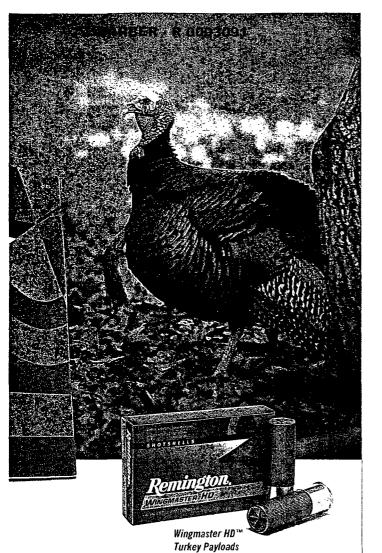


Index		Length	Velocity	Cunces	Shot
MIN.	NGMASTER H	ID'" WATERFO	OWL PAYLOADS -	10 ROUNDS PI	ER BOX
RWIOB	1. 2.11				B8
RW102 RW104	10	3 ½ +-	1300	1 1/4	2 4 :
RW12S4 RW12S6	. 12	21/4	1325	1%	6 1
RW122 RW124 RW126	12.	76 (3 . M	1450	Taiwil	2
RW12M2 RW12M4	12	3	1450	1%	4
RW12M6 RW12HMB	S 10 08 0 7			<u> </u>	6 l BB
RW12HM2 RW12HM4	12	3	1300	11/2	2.3
RW1235MB	Teat fill	عاداري مسدي	المعاضات الما		A SEB A
RW1235M2 RW1235M4 RW1235M6		31/2	- 1300	11/4	.4
RWZOSM4 RWZOSM6	20	,	1300	مكواسه	6
RW20M4 RW20M6	20	3	1300	11/,	6
WING	MASTER HD	™ MAGNUM T	URKEY PAYLOAD	S = 5 ROUNDS	PER BOX
RW12HMH4	12:	المستهونة أوالم	1225 -	1%	
RW1235HM4 RW1235HM6	12	3 1/2	1225		4.5 mg
RWZOHM4 RWZOHM6	-320 · ·	-1-3	1185	1%	6
			OR PAYLOADS -	10 ROUNDS PE	
RW12VT	12	3 - 3	1300	- 1½ ·	
RW1235VT	12	3 1/2	1350	1 1/.	T

EW


EW

WINGMASTER HD™ VS. STEEL MAGNUM

Use pellets three sizes smaller with Wingmaster HD and get per-pellet energy equal to steel – with double the pellets on the target.

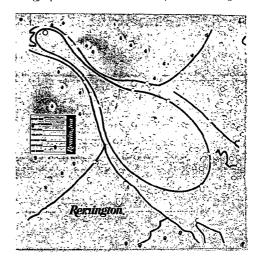


Wingmaster HD -12-ga., $3^{\circ}-1^{3}/8$ oz., #6 shot

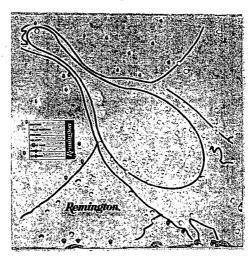

Steel Magnum – 12-ga., 3" – 1 3/8 oz., #3 shot

12.0 G/CC - BEST PELLET MATERIAL DENSITY

Testing proves Wingmaster HD™ delivers the best combination of pellet energy and pattern density.

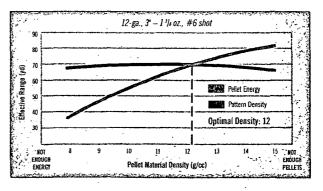

MORE UNIFORM WEIGHT


Wingmaster HD's (Heavy Density) smooth, round pellets are extremely aerodynamic. They are uniform in weight and true to listed shot size.

NITRO-STEEL*

WATERFOWL

THE MIGRATION'S STEEL WALL.

Short or long, Nitro-Steel $^{\text{TM}}$ stops 'em dead with tight, consistent patterns and premium zinc-plated steel pellets - it's premium performance at a very reasonable price. And we make it in a wide range of loads to suit any hunt - 10 to 20 gauge, maximum payloads and high velocities. Trust your dollar to a legend. Remington. $^{\text{©}}$

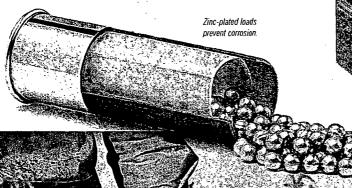



FEATURES

- · Loaded with top-quality, premium steel shot
- · Zinc-plated shot to prevent corrosion
- Wetproof[™] sealed at primer and mouth
- High-velocity and magnum loadings
- · Complete line for all waterfowl hunting situations

100				U.S.						
	NITRO-STEEL™ HIGH VELOCITY MAGNUM LOADS									
NS10M	10	3 h	1260	1 1/4	T, BBB, BB, 2					
NS12HVS	12	2 1/4	1390	1 %	2, 4					
NS12S	. 12	2 1/4	1275	1 1/4	BB, 2, 4					
NS12HV	12	3	1550	1 ½	BB, 2, 4					
NS12M	12	3	1450	1 1/2	T, BBB, BB, 1, 2, 3, 4					
NS12HM	12	3	1300	1 1/4	T. BBB, BB, 2, 3, 4					
NS1235HV	12	3 ½	1550	1 1/2	T, BBB, BB, 2					
NS1235	12	3 1/2	1300	J %	T, BBB, BB, 2					
NSIEHV	16	21/4	1300	Ľ/s	2, 4					
NS20HVS	20	23/4	1425	3/1	2, 4					
NS20M	20	3	1330	1 .	2, 4					

SPORTSMAN" HI-SPEED" STEEL LOADS



HIGH VELOCITY, HIGH VALUE.

- Economical, Hi-Speed™ steel loads
- · Waterfowl loads for every hunting situation
- Upland loads for use in non-toxic zones and for practice shooting
- · Shot size selection to match your game

	SF	ORTSMAN" H	II-SPEED" STEE	EL LOADS	
OIVHT22	10	3 1/2	1500	12/1	BB, 2
SST12	12	2 %	1355	1	6,7
SST12S	12	23/4	1375	11/4	2.4
SSTHV12H	12	3	1550	1 1/4	6B, 2, 4
SSTHV12HM	12	3	1400	11/4	BB. i, 2, 3, 4
SST12HIA	12	3	1300	1 1 1/4	6B, 2
SSTHV1235	12	3 1/1	1550	1 1/4	BB, 2
SS120	20	23/2	1425	3/4	7

BARBER - R 0003093

LEAD MAGNUMS

PREMIER® HIGH VELOCITY MAGNUM COPPER-PLATED BUFFERED TURKEY LOADS.

The high-performance lead load for avid turkey hunters. 3" and 3 1/2" 12-gauge payload leaves the muzzle at 1,300 fps. Delivers hard-hitting knockdown power. Loaded with our Power Piston® one-piece wad and

Magnum-grade Copper-Lokt[®] lead shot for dense patterns and deep penetration.

PREMIER* MAGNUM COPPER-PLATED BUFFERED TURKEY LOADS.

Our original Magnum turkey loads. As fine a lead shotshell as you can carry in the woods. Magnum-grade Copper-Lokt® shot is cushioned with special polymer buffering and further protected by our Power Piston® one-piece wad for dense, even patterns. Delivers superb performance and devastating knockdown power out of tightly constricted turkey chokes.



NITRO MAG® BUFFERED MAGNUMS.

Excellent for turkey or long-range pheasants. Heavy payloads of Magnum-grade shot are packed with polymer buffering and enclosed in our patented Power

12

Piston® one-piece wad to provide dense, even patterns and uniform shot strings.

PREMIER* DUPLEX* MAGNUM COPPER-PLATED BUFFERED LOADS.

A specialized layering of Magnum-grade Copper-Lokt® No. 4 shot over No. 6

shot. Larger pellets deliver excellent retained energy and penetration, while smaller pellets enhance pattern density. Awesome versatility for uncertain shooting distances on

turkeys and late-season pheasants.



		Length	Velocity	Ounces	C.D.
PREMIER	HIGH VELOCI	TY MAGNUM	COPPER-PLATED TU	RKEY LOADS	– BUFFERED
PHV12M	12	3.	1300	1%	4, 5, 6
PHV1235M	12	3 1/2	1300	2	4, 5
PREM	IIER' MAGNU	M COPPER-PL	ATED LEAD TURKEY	LOADS - BU	FFERED
PIOHM ~	10	3 1/2	1210	. 21/4	. 4,
PE2SM	12	21/4	1260	11/2	4, 5, 6
P12XHM	12.	3	1175	2	4, 5, 6
P1235M	12	3 1/2	1150	2 1/4	4,6
P20XHM	20	3	1185	1%	6
PR	EMIER' DUPL	EX' MAGNUM	COPPER-PLATED L	OADS – BUFF	ERED
MP12S	12	21/1	1260	55. 1%	4x6
MP12H	12	3	1210	11/4	4x6
l		NITRO MAG	LOADS - BUFFERE	D	
NM12S	12	21/4	1260	1 1/4	2, 4, 6
NM1Z	. 12	. 3	1280	1 %	4,6
NM12H	12	3	1210	1%	2, 4, 6
NM20S	20	21/1	1175	1%	4,6
NM20H	3 20	- 3	1185	1%	- 4,6
	NITRO	TURKEY" M	AGNUM LOADS – BL	JFFERED	
NT12S4	12	21/4	1260	11/4	4
NT12S5	12	21/4	1260	11/2	5
NT12H	12	3	1210	11/4	4, 5, 6
NT1235	12	31/4	1300	2	4, 5, 6
NT20M	20	3	1185	11/4	



NITRO TURKEY



NITRO TURKEY™ EXTENDED RANGE BUFFERED MAGNUMS.

- · Nitro Mag® extra-hard lead shot
- · Patterns over 80% with Super Full choke
- · Patterns like copper-plated shot
- Value price

UPLAND

NITRO PHEASANT™ LOADS.

For pattern, energy and performance, nobody beats Nitro Pheasant. The best of our Pheasant load offerings, Nitro Pheasant uses Remington's own Copper-Lokt® copper-plated lead shot with high antimony content, the hardest lead we make for hunting. Hard shot stays rounder for truer flight, tighter patterns and greater penetration. So when it comes to bringing down tough birds like pheasant, you need a load that delivers maximum pattern density and lethal energy — you need Nitro Pheasant. Available in both high velocity and magnum loadings in both 12 and 20 gauge.



PHEASANT LOADS.

For the broadest selection in game-specific upland lead shotshells, Remington® Pheasant Loads are the perfect choice. Their high velocity and long-range performance are just right for any pheasant hunting situation. Standard high-base payloads include 12, 16, and 20 gauge.

EXPRESS* EXTRA LONG RANGE LOADS.

Time-proven performance for all upland game. The choice of experienced small game hunters across the country because our Express line offers the best balance of payload and performance. Available in a broad selection of loadings — from 12 gauge to 410 bore — with shot sizes ranging from BB all the way down to 9.





SHURSHOT® HIGH BASE PHEASANT LOADS.

The renowned ShurShot brand is available in a new high-base offering. ShurShot High Base Pheasant offers an ideal balance of velocity and payload to create near-perfect patterns, while its lower recoil helps to minimize fatigue over a long day in the field.


LEAD GAME LOADS.

Budget-stretching shotshells for a wide variety of hunting. Available in 410 bore, 20-, 16- and 12-gauge loadings.



SPORT LOADS.

Economical, multi-purpose loads. Built with our premium Power Piston® wad and plastic Unibody hulls. Loaded with No. 8 shot. Ideal for skeet, trap and sporting clays, as well as quail, doves and woodcock.

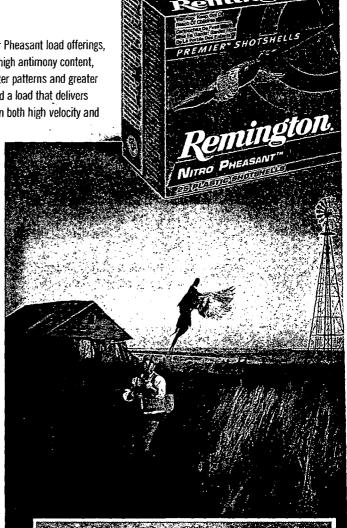

NPTO		Gaure/ Bore			Ounces God Shall F	Shot Sizes			
NP12M	Distance of the State of the Land	NITR	O PHEASANT	" LOADS - COPP	ER-PLATED	AC DESCRIPTION OF THE PARTY OF			
NP20	NP12	12	2 3/4	1400	1%	4, 5, 6			
NP20M 20 3 1185 11/4 5.6 PHEASANT LOADS	NP12M	12	21/4	1300	11/4	4, 5, 6			
PHEASANT LOADS	NP20	20	2 3/4	1300	1	5, 6			
PLIZ 12 2 ½ 1330 1 ½ 4.5, 6, 7 ½ PLIG 16 2 ½ 1295 1 ½ 6 PLZO 20 2 ½ 1220 1 4.5, 6, 7 ½ EXPRESS' EXTRA LONG RANGE LOADS SP12 12 2 ½ 1330 1 ½ 88, 2, 4, 5, 6, 7 ½, 9 SP16 16 2 ½ 1295 1 ½ 4, 6, 7 ½ SP20 20 2 ½ 1220 1 4, 5, 6, 7 ½ SP28 28 2 ½ 1295 ½ 6, 7 ½ SP28 28 2 ½ 1295 ½ 6, 7 ½ SP410 410 2 ½ 1250 ½ 4, 6, 7 ½ SP413 410 3 1135 ½ 4, 6, 7 ½ SHURSHOT' HIGH BASE PHEASANT LOADS RI2P 12 2 ½ 1220 1 ½ 4, 5 SHURSHOT HEAVY FIELD AND HEAVY DOVE LOADS RP12H 12 2 ½ 1220 1 ½ 6, 7 ½, 8 RI2HD 12 2 ½ 1255 1 ½ 6, 7 ½, 8 RI2HD 12 2 ½ 1255 1 ½ 6, 7 ½, 8 RI2HD 12 2 ½ 1255 1 ½ 6, 7 ½, 8 RI2HD 20 2 ½ 1165 1 6, 7 ½, 8 RI2HD 21 2 ½ 1290 1 6, 7 ½, 8 CL16 16 2 ½ 1290 1 6, 7 ½, 8 CL16 16 2 ½ 1290 1 6, 7 ½, 8 CL16 410 2 ½ 1255 ½ 6, 7 ½, 8 CL17 410 2 ½ 1255 ½ 6, 7 ½, 8 CL18 410 2 ½ 1290 1 8 RI2SL 12 2 ½ 1290 1 8	NP20M	20	3	1185	1 1/4	5,6			
PU6			PHE	ASANT LOADS					
PL20 20 2½ 1220 1 4.5.6.7½	PL12	12	2 1/4	1330	1 1/4	4, 5, 6, 7 1/2			
SPI2	PL16	16	2 1/4	1295	1 1/4	6			
SP12	PL20	20	2 3/4	1220	1	4, 5, 6, 7 1/2			
SP16	EXPRESS* EXTRA LONG RANGE LOADS								
SP20 20 2 1/4 1220 1 4,5,6,7 1/4, 9	SP12	12	2 1/4	1330	1%	BB, 2, 4, 5, 6, 7 1/2, 9			
SP28 28 2½ 1295 ½ 6,7½	SP16	16	23/4	1295	1 1/4	4, 6. 7 1/:			
SP410	SP20	20	21/4	1220	1	4, 5, 6, 7 1/2, 9			
SP4 3	SP28	28	23/4	1295	1/1	6, 7 1/2			
SHURSHOT' HIGH BASE PHEASANT LOADS R12P 12 2½ 1220 1½ 4,5	SP410	.410	2 1/:	1250	1/2	4, 6, 71/2			
R12P 12 2 ½ 1220 1 ½ 4,5	SP413	.410	3	1135	11/2	4.6.71/.			
SHURSHOT* HEAVY FIELD AND HEAVY DOVE LOADS		SHI	JRSHOT [,] HIG	H BASE PHEASAN	IT LOADS				
RP12H 12 2 ½ 1220 1 ½ 6,7 ½ 8 R12HD 12 2 ½ 1255 1 ½ 5,7 ½ 8 R2DHD 20 2 ½ 1165 1 5,7 ½ 8 R2DHD 20 2 ½ 1165 1 5,7 ½ 8 RECHT 12 2 ½ 1290 1 6,7 ½ 8 GL12 12 2 ½ 1290 1 5,7 ½ 8 GL20 20 2 ½ 1225 ½ 6,7 ½ 8 GL410* 410 2 ½ 1290 ½ 6 SPORT LOADS R12SL 12 2 ½ 1290 1 8	R12P	12	21/1	1220	1 1/4	4, 5			
R12H0		SHURSI	OT HEAVY F	IELD AND HEAVY	DOVE LOAD	s			
PROMOTIONAL GAME LOADS	RP12H	12	23/4	1220	1%	6, 7 1/1, 8			
PROMOTIONAL GAME LOADS	RI 2HD	12	21/4	1255	1 1/4	6,71/.8			
GL12 12 2 ½ 1250 1 6.7 ½.8 GL16 16 2 ½ 1200 1 6.7 ½.8 GL20 20 2 ½ 1225 ½ 6.7 ½.8 GL410* 410 2 ½ 1290 ½ 6 SPORT LOADS R12SL 12 2 ½ 1290 1 8	R2OHD	20	27/.	1165	1	6, 7 1/2, 8			
GL16 16 2½ 1200 1 6,7½,8 GL20 20 2½ 1225 ½ 6,7½,8 GL410° 410 2½ 1290 ½ 6 SPORT LOADS R12SL 12 2½ 1290 1 8			PROMOTI	ONAL GAME LOAD	os				
Ci20 20 2½ 1225 ½ 6,7½,8 Ci410° 410 2½ 1290 ½ 6 SPORT LOADS R12SL 12 2½ 1290 1 8	GL12	12	2:/4	1290	1	6.7 1/5.8			
Gl410° .410 2 ½ 1290 ½ 6 SPORT LOADS R12SL 12 2 ½ 1290 1 8	GL16	16	21/1	1200	1	6,71/5,8			
SPORT LOADS	G120	20	2 1/4	1225	1/4	6, 7 1/2, 8			
R12SL 12 2 ⁻¹ / ₂ 1290 1 8	GL410"	.410	21/:	1200	½	6			
			SF	ORT LOADS					
R20SI 20 21/4 1200 1/4 8	R12SL	12	23/4	1290	1	8			
	R20SL	20	21/4	1200	1/6	8			

*20-round ba

BARBER - R 0003095 TARGET LOADS

PREMIER' NITRO 27' HANDICAP TRAP LOADS.

Designed for long-yardage trapshooting and long-range sporting clays, our custom powder blend, Power Piston³ wad and Premier³ STS³ primer mix have improved the Nitro 27's performance, allowing more consistent velocities, 15% better pattern performance and softer

recoil. So if you're looking for tremendous targetbreaking performance choose the improved Nitro 27.



GUN CLUB™ TARGET LOAD LINE.

An excellent choice for economical shooting. These high-quality shells are loaded with the same care as our top-of-the-line STS® loads and feature a Power Piston® wad and the reliable STS® Primer mix. Many shooters are discovering that they can get acceptable reloading life while stretching their shooting dollar.

PREMIER* STS* TARGET.

The standard in target shooting reliability. Absolutely consistent from shot to shot. Bar none, the most reliable, most reloadable shells you can shoot. Available in 12, 20, 28 gauge and 410 bore.



STS.

MANAGEDRECOIL ™ STS*
TARGET. Dramatically reduced recoil – 40% less in the 12-ga. load — with target-grinding STS* consistency and pattern density. Ideal for new shooters and recoil-sensitive individuals.




COMPETITORS AT THE GRAND CHOOSE REMINGTON*
AS THEIR WINNING AMMUNITION.

Great champions think alike. For the fifth year in a row, shooters who used Remington shells won more trophies than competitors using other brands at the 2007 ATA Grand American World Trapshooting Championship. And for good reason! Remington STS® and Nitro 27® target loads

provide softer recoil, better pattern performance, and more consistent velocities (not to mention the most reloadable hull on the market). Isn't it time you switch to Remington and step into the winner's circle?

		C alle Tope			Mon.		Shot Sizes
	Pi	REMIER" STS" TARGET LOA	DS - EX	TRA HARD	STS' TARGET	SHOT	
STS121 .	12 .	Premier STS Target	2 %	- 23/:	1185	1	71/28,81/29
STS12LR	12	Premier STS Low Recoil	23/1	2://2	1100	11/4	7 1/1, 8, 9
STS12L	12	Premier STS Light Target	21/	23/4	1145	1 1/4	7.1/2,8,8 1/2,9
STS12LH	12	Premier STS Light Handicap	23/.	3	1200	11/4	71/1,8
STS12H	12	Premier STS Heavy Target	21/4	1	1200	~1%	9
STS12NH1	12	Premier Nitro 27 Handicap	21/4	HNDCP	1290	1	7 %.8
STS12NH	12	Premier Nitro 27 Handicap	2 1/4	HNDCP	1235	1%	7 1/2 8
STS12NSC	12	Premier STS Nitro Sporting Clays	23/4	Max	1300	1%	7 1/2, 8
STS12P	. 12	Premier STS Pigeon	· 2 1/4	3 //	1235	1%	71/28:
STS12IT	12	Premier STS International	21/:	3 1/1	1325	24 gm.	7 1/2, Cu-P, * 8 1/2
STS20LR	20	Premier STS Low Record	21/	21/2	1135	1/1	- 9
STS20SC	20	Premier STS Target	23/4	2 1/2	1200	7/4	8
STS20	20.	Premier STS Target	23/4	2 1/2	[200	η,	- 9
STS28SC	28	Premier STS Target	21/4	2	1200	1/4	8
STS28	28	Premier STS Target	23/4	2	1200	- 3/.	9 .
STS410NSC8	.410	Premier STS Target	21/2	Max	1300	1/4	8
· STS410SC	.410	, . Premier STS Target	21/2	Max -	1200	· 1/2	81/2
STS410	.410	Premier STS Target	21/2	Max	. 1200	¹/t	9
		MANAGED-RECO	OIL" ST	S' TARGET	LOADS		 -
RISTS1285	12	Managed-Recoil STS Target	- 21/4	1	1100	. 1/4	81/4
RLS1S2085	20	Managed-Recoil STS Target	2 1/4		1100	7/1	81/1
		GUN CLU	B™.TAR	GET LOAD	s		-
GC121	12	Gun Club	2%	2.1/-	. 1185	ī	71/28
GC12l	12	Gun Club	2 1/4	21/4	1145	1 1/4	7 1/2, 8, 9
GC12	12	Gun Club	21/4	3	1200	1%	71/4.8
GC20	20	Gun Club	21/4	21/1	1200	1/4	7 1/2, 8, 9

*Copper-plated shot.

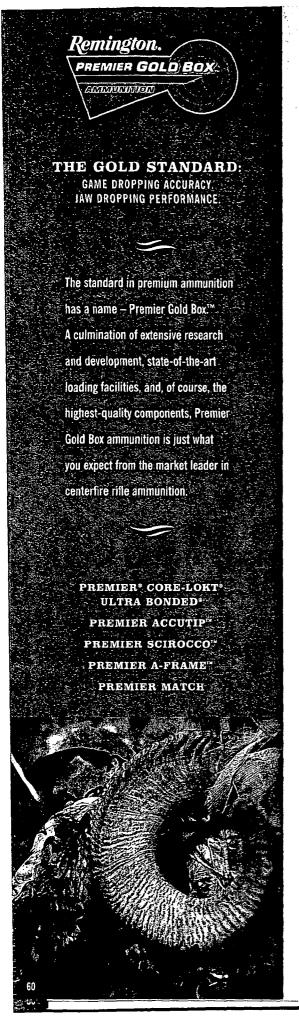

PREMIER CORE-LOKT ULTRA BONDED



THE NEW STANDARD OF ACCURACY IN BONDED HUNTING BULLETS. Premier® Core-Lokt® Ultra Bonded®

is a bullet in a class of its own. It is the first and only bullet to successfully maximize the best features of two great types of hunting bullet construction. It delivers the extreme accuracy and retained energy you would expect from a tipped bullet, in combination with the outstanding penetration and weight retention that only a bonded non-tipped bullet could deliver. This unique design provides the hunter a Premier bullet that yields devastating on-game performance from 50 to 500 yards. Premier Core-Lokt

CORE-LOKT* ULTRA BONDED* EXPANDS RELIABLY AT ALL REASONABLE HUNTING DISTANCES.

Ultra Bonded – the new standard in high-performance hunting bullets.





100 Yards



200 Yards





30-06 SPRG, 150-GR. PREMIER² CORE-LONT² ULTRA BONDED, 5 SHOTS, .6", 100 YDS.

More accurate. Our unique manufacturing process eliminates jacket stretch for near-perfect wall thickness, which results in better flight stability.

- More versatile. A 20% heavier jacket engineered with an innovative wall profile provides better expansion and penetration over a broad range of terminal velocities. NEW

More reliable. 50% thicker Core-Loht section increases mechanical locking of the rear core into the jacket and better controls expansion at higher velocities.


 More deadly. Bonded jacket/core design further insures controlled expansion (2x diameter) with up to 95% weight retention for ultimate on-game performance.

The finest big-game bullet in the world is now available to handloaders.

(See page 75 for complete listings.)




Caller			biliany -
PREM	IER CORE-LO	OKT" ULTRA B	ONDED:
223 Remington	PRC223R4	62	Core-Lokt* Ultra Bonded
243 Win	PRC243WC	100	Core-Lokt* Uitra Bonded
25-06 Remington	PRC2506RA	115	Core-Lokt* Ultra Bonded
260 Remington	PRC26ORE	140	Core-Lokt* Ultra Bonded
270 Win	PRC270WB	140	Core-Lokt* Ultra Bonded
6.8mm Rem SPC	PRC68R4	115	Core-Lokt* Ultra Bonded
7mm Remington Mag	PRC7MMRA	140	Core-Lokt* Ultra Bonded
7mm Remington Mag	PRC7MMRC	150	Core-Lokt: Ultra Bonded
7mm Rem. SA UM	PR7SM1	140	Core-Lokt ^a Ultra Bonded
7mm Rem. SA UM	PR7SM4	160	Core-Lokt' Ultra Bonded
7mm Rem. Ultra Mag	PR7UM1	140	Core-Lokt* Ultra Bonded
30-06 Springfield	PRC3005A	150	Core-Lokt Ultra Bonded
30-06 Springfield	PRC3006B	168	Core-Lokt* Ultra Bonded
30-06 Springfield	PRC3006C	180	Core-Lokt* Ultra Bonded
300 Win Mag	PRC300V/A	150	Core-Lokt* Ultra Bonded
300 Win Mag	PRC300WC	180	Core-Loki* Ultra Bonded
308 Win	PRC308WA	150	Core-Lokt! Ultra Bonded
308 Win	PRC30EWC	180	Core-Lokt: Ultra Bonded
300 Rem. SA UM	PR300SM1	150	Core-Lokt* Ultra Bonded
300 Rem. SA UM	PR300SM4	180	Core-Lokt' Ultra Bonded
300 Rem. Ultra Mag	PR300UM4	180	Core-Lokt' Ultra Bonded
338 Win Mag	PRC338WA	225	Core-Lokt' Ultra Bonded

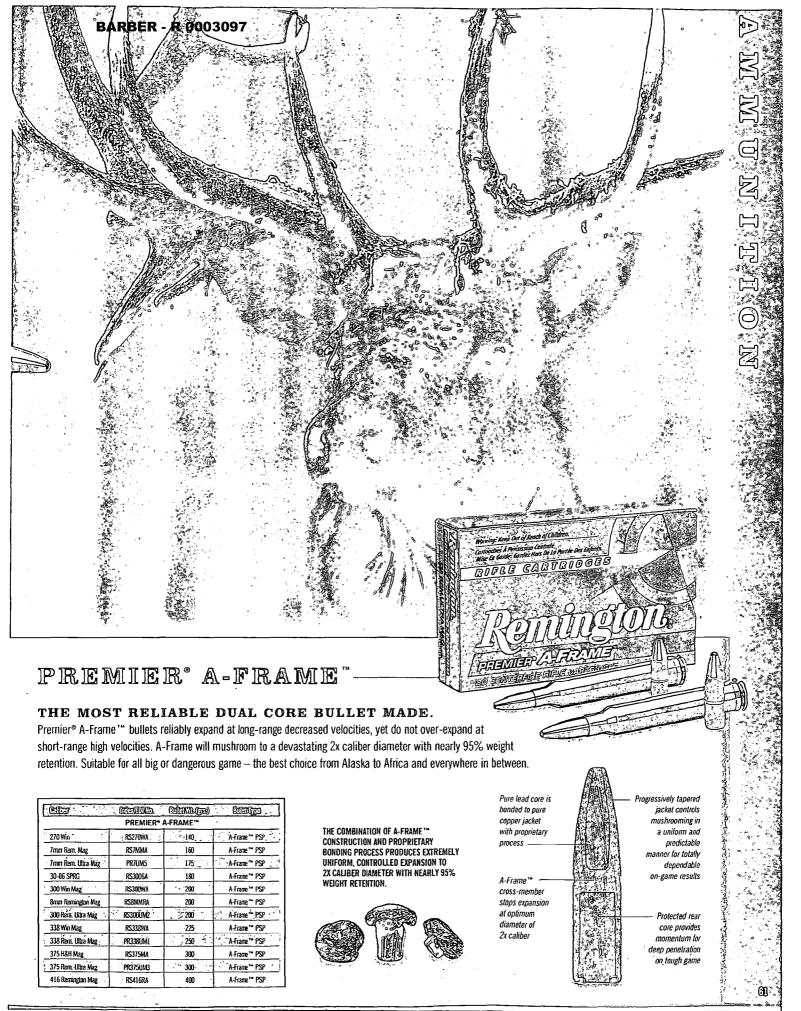

PREMIER® ACCUTIP

PRECISELY THE BIG-GAME BULLET OF YOUR

DREAMS. It's the most accurate, polymer-tipped big-game bullet available today. Along with match-grade precision, it delivers an unprecedented combination of laser-flat trajectory and devastating terminal performance. Accutip bullets expand quickly – producing an awesome level of transferred energy — to dispatch medium and big game with lightning authority. A thicker jacket and harder lead core regulate weight retention and optimize penetration. Make the switch and, trust us, big game won't know what hit 'em.

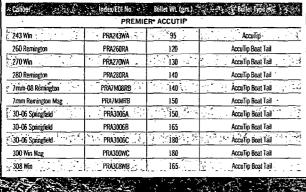






Gold polymer-tip initiates expansion for maximum on-game energy transfer

Sleek secant ogive profile for high ballistic coefficient and reduced drop and wind drift


Thicker mid-iacket and heavy base for progressive expansion and maximum weight retention

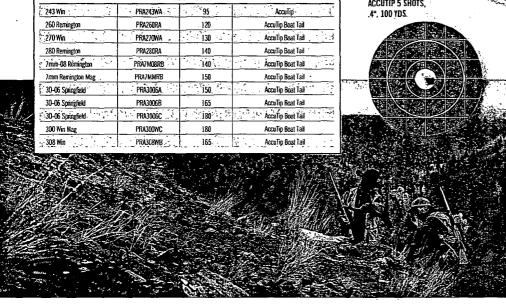

PREMIER SCIROCCO BONDED

THE ORIGINAL BONDED POLYMER-TIPPED

BULLET. Proof that innovation beats imitation every time. The remarkable Swift™ Scirocco™ Bonded bullet maintains its status as the industry leader in bonded tipped bullets by delivering the highest ballistic coefficient of any bullet of its kind for the flattest trajectory and maximum retained energy. Combine that with unsurpassed accuracy and superior weight retention, Premier® Scirocco is unquestionably the most effective bonded, tipped bullet to sit atop a factory load.



Boat tail base design for reduced air drag



30-06, 180-GR. PREMIER* SWIFT** SCIROCCO BONDED 5 SHOTS. .8". 100 YDS.

SWIFT™ SCIROCCO™ BONDED BULLETS EXPAND **RELIABLY OVER A WIDE RANGE OF** TERMINAL VELOCITIES







300 Yards



em jaga,	ME POOR		OUL OTTO
	PREMIER' SCIRO	CCO" BONDE	ED .
243 Win	PRSC243WA	90	Scirocco ** Bonded
270 Win	PRSC270WA	130	Scirocco™ Bonded
7mm Remington Mag	PRSC7MMB	150	Scirocco™ Bonded
7mm Rem. Ultra Mag	PRSC7UM1	150	Scirocco ** Bended
30-06 Springfield	PRSC3006C	150	Scirocco** Bonded
30-06 Springfield	PRSC3006B	180	Scirocco " Bonded
300 Win Mag	PRSC300WB	180	Scirocco ** Bonded
300 WSM	PRSC300WSMB	180	Scirocco** Bonded
308 Win	PRSC308WA	150	Scirocco *** Bonded
308 Win	PRSC308WB	165	Scirocco * Bonded
300 Rem. Ultra Mag	PR300UM5	150	Scirocco** Bonded
300 Rem. Ultra Mag	PR300UM3	180	Scirocco " Bonded

PREMIER ACCUTIP-V

PINPOINT DETONATION. Expect dynamite results. In varmint calibers, AccuTip-V combines superb flight characteristics and match-grade accuracy with a design optimized for explosive on-game results. At impact, AccuTip's gold polymer tip is driven rearward causing the thin jacket and soft lead core to fragment violently. First and foremost, though, it gets there precisely shot after shot — it's the most accurate varmint bullet you can shoot.



AccuTip component bullets are now available to handloaders. (See page 75 for complete listings.)

NEW


17 REMINGTON FIREBALL. LIGHTING UP VARMINTS AND THE WORLD OF SMALL-CALIBER PERFORMANCE.


The newest addition to the lineup, our exclusive 17 Remington Fireball breaks the 4,000 fps barner with one of the smallest powder charges ever — this means less fouling and more shots between cleanings. It shoots flatter than a 22-250 Remington 55-grain loading and produces virtually no recoil or muzzle jump, so you never lose sight of your target. Now available with 25-grain JHP bullet. (See page 73.)



Gold polymer tip acts as a wedge, splintering bullet into fragments at impact

> Thin jacket and soft lead core disintegrate and cause massive terminal damage at all ranges



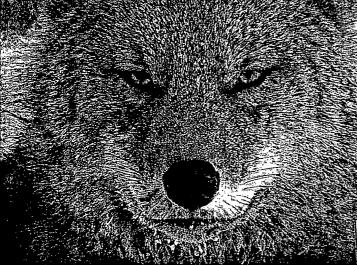

	PREMIE	R* ACCUTIP-V	
17 Remington Fireball	PRAL7F8	20	AccuTip-V
17 Remington	PRA17RA	20	AccuTip-V
204 Ruger	PRA204A	32	AccuTip-V
204 Ruger	PRA204B	40	AccuTip-V Boat Tail
221 Remington Fireball	PRAZŽ1FB	. 50	AccuTip-V Boat Tail
22 Hornet	PRA22HNA	35	AccuTip-V
222 Remington	PRA222RB	50 .	AccuTip-V Boat Tail
223 Remington	PRA223RB	50	AccuTip-V Boat Tail
223 Remington	PRA223RC	55	AccuTip-V
22-250 Remington	PRA2250RB	50	AccuTip-V Boat Tail
243 Win	PRA243WB	. 75	AccuTip-V Boat Tail

Acculip-V: Varmint-Specific Cartridges

PREMIER® MATCH

IF THERE WERE A STRONGER WORD THAN ACCURATE, WE'D USE IT HERE.

Ever hear the phrase, "you could drive tacks with 'em?" Well they're probably talking about Remington® Premier® Match ammunition. Using only match-grade bullets, Premier Match ammunition employs special loading practices to ensure world-class

performance and accuracy with every shot.

Maybe some day there will be a stronger word than accurate to describe Premier Match. Until then we'll continue to prove it on paper.

308 WIN, 168-GR. PREMIER® MATCH 5 SHOTS, .6", 100 YDS.



	Caliber	Index/EDI No.	Bullet Wt. (grs.)	Bullet Type		
	PREMIER* MATCH					
	223 Remington	R223R6,	62	- Hollow Point Match		
	223 Remington	RM223R1	69	MatchKing® BTHP		
1EW	223 Remington	RM223R3	$\dot{\tilde{\pi}}$	MatchKing* BTHP		
	6.8mm Rem. SPC	RM68R1	115	MatchKing* BTHP		
	300 Rem. SA UM	RM300SM7	-190	MatchKing® BTHP		
	300 Win Mag	RM300W7	190	MatchKing® BTHP		
	308 Win	RM308W7	168	MatchKing® BTHP		
EW	308 Win ,	RM308W8	175	MatchKing* BTHP		


REMINGTON' ULTRA MAG.™

BIG GAME'S HIGHER POWER.

REMINGTON® ULTRA MAG.™

A revolution in high-performance big-game ammunition. In each of its calibers, the Remington Ultra Mag™ cartridges produce the highest velocities, the flattest trajectories and the highest energy levels available to big-game hunters today. This is due to their large case capacities and innovative non-belted magnum case designs. These cases hold dramatically more powder and align with unmatched precision within the bore, making the world's most lethal family of cartridges the most accurate, as well. Available in the most trusted bolt-action rifle of all time — the Model 700™ — the Ultra Mag™ family is a truly superior gun and ammunition system geared for today's most discriminating hunters.

INNOVATIVE CASE DESIGN RESULTS IN A "NON-BELTED MAGNUM" WITH A LARGER CASE DIAMETER WHICH ALLOWS FOR DRAMATICALLY INCREASED POWDER CAPACITY.



375 Rem 375 H&H

20% MORE



Remington.

PREMIER CORELOKT ULTRA BONDED

PREMIER DESCRIPTION ULTRA BONDED

Remington.

EXPRESS RIFLE

375 REMINGTON ULTRA MAG.

270 GR. SOFT POINT PROTSUM

Remington.

PREMIER' SCIROCCO" BONDED

PREMIER' SCIROCCO" BONDED

PREMIER' A-FRAME

935 REMINGTON ULTRAMAG.

300 REMINGTON ULTRAMAG.

300

7mm Remington® Ultra Mag." With a muzzle velocity over 3,450 fps, it's one of the flattest-shooting big-game rounds on the planet — flatter than 7mm STW, flatter than a 22-250 varmint load. It's the perfect choice for long-range shots on any North American big game.

315 Remington® Ultra Mag.™
The ultimate in stopping power.
With over 5,000 ft-lbs of energy
at the muzzle, it delivers more
energy at 200 yards than 375
th8H at 100 yards — and with
the same flat-shooting trajectory
as a 150-grain 270 Win load.

300 Remington® Ultra Mag.™
The extreme standard for big game. With a 180-grain bullet, it delivers a muzzle velocity of 3,250 fps with 2,160 ff-lbs of retained energy at 500 yards. That's right, a trained marksman could knock an elk off its feet at nearly a quarter of a mile.

338 Remington® Ultra Mag.™
An excellent cartridge for bear,
elk and moose, Loaded with
a 250-grain bullet, it delivers
over 600 ft-lbs greater muzale
energy than 338 Win Mag and
retains a flatter trajectory all
the way out to 500 yards.



300 Rem, SA UM

300 Rem. SA UM

SHORT-ACTION ULTRA MAG.™

Magnum performance in a lightweight, short-action firearm and ammunition package. Premier[®] Short-Action Ultra Mag[™] cartridges offer ballistic performance equivalent to the two most popular belted magnums – 300 Win Mag and 7mm Remington Mag – in a fast handling short-action rifle. They feature a highly efficient case design that duplicates or exceeds belted magnum ballistics with less powder, in turn, generating less felt recoil.

Plus, they're inherently more accurate. The cartridge headspaces off the shoulder of the case, rather than a belt, promoting more precise bore alignment. It's big-time performance in a little package.

165

PR300SM2

PR300SM4

Core-Lold* PSP

Core-Lota* Ultra Bonded


POWER LEVEL AMMUNITION.


One gun. One chambering. The ballistic characteristics of three cartridges.

Power Level Ammunition™ allows you to incrementally tailor the performance of your rifle and ammunition to match your intended game species and hunting range, similar to the way shotgunners use 2 3/4", 3" and 3 1/2" loads. The point of impact between Power Level loads stays within 2" out to 200 yards, so you'll have little to no scope adjustment when changing Power Levels. Now when you choose the 7mm or 300 Remington Ultra Mag[™] you're getting three guns in one. Simply put, never before has one cartridge offered this kind of versatility.

POINT OF IMPACT ACROSS ALL POWER LEVELS WITHIN 2", OUT TO 200 YARDS Power Level I

THE CONCEPT - SHOTGUN/SHOTSHELL

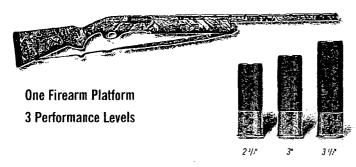

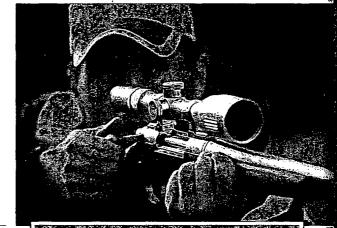

THE IDEA - APPLIED TO THE CENTERFIRE RIFLE -



Performance Equivalent

	eledex EDI No.	Califier	Power Level	Performance Equivilent		
EW	PRTUMI	7mm Ultra Mag	111	7mm Ultra Mag	140	Core-Lokt® Ultra Bonded®
ew	PRSC7UM1	7mm Ultra Mag	III.	7mm Ultra Mag	. 150	Scirocco** Bonded
EW	PRSC7UM5	7mm Ultra Mag	111	7mm Ultra Mag	175	A-Frame™
	PR300UM5	300 Ultra Mag	II	- 300 Ultra Mag	150	Scirocco™ Bonded
	PR300UM3	300 Ultra Mag	18)	300 Ultra Mag	180	Scirocco™ Bonded
J	. PR300UM4	300 Ultra Mag	III	300 Ultra Mag	180	Core-Lokt* Ultra Bonded*
	RS300UM2	300 Ultra Mag	(1)	300 Ultra Mag	200	A-Frame"
cw	PR7UM2-P2	7mm Ultra Mag	.11	7mm Rem Mag	150	Core-Lokt® Ultra Bonded®
	RS300UM2-P2	300 Ultra Mag	- 11	300 Win/300 WSM	180	Core-Lokt® Ultra Bonded®
	RS300UM3-P2	300 Ultra Mag	- 11	. 300 Win/300 WSM	180	Scirocce™ Bonded
ew	R7UM1-PI	7mm Ultra Mag	1	270 Win	140	Core-Lokt*
	PRA300UM1-P1	300 Ultra Mag	91 .	30-06 Springfield	. 150	AccuTip**
	R300UM1-P1	300 Ultra Mag	T	30-06 Springfield	150	Core-Lokt®

POWER LEVEL III

MAXIMUM ENERGY -EXTREME RANGE


- 300 Remington Ultra Mag™ performance
- · The biggest, toughest game at extreme ranges



Simply the biggest, baddest, flattest-shooting 30 caliber in production today. At 200 yards, it delivers 485 ft.-lbs. more energy than the 300 Wby Mag and 28% more energy than the 300 Win Mag or 300 WSM

POWER LEVEL II

MAGNUM ENERGY -EXTENDED RANGE



 Medium and large big game at extended ranges



With velocity and down range ballistics that mirror the 300 Win Mag and 300 WSM, Level II is ideal for elk, muleys or whitetails at extended range.

POWER LEVEL I

TERMINAL ENERGY LONG RANGE

- 30-06 Springfield performance
- · Whitetail-sized game out to long range



Performs identically to the 30-06, the caliber that's dropped more big game than any other. The optimum deer hunting Power Level - coast to coast.



Remington® Core-Lokt® — a reputation deserved. Hunters with a knack for filling their deer tag tend to have more than success in common. They trust their hunt to Remington® Core-Lokt.® For more than six decades, it has remained the leader in centerfire deer ammunition. And deservedly so.


The Core-Lokt bullet design is the original controlled-expansion bullet — and one of the most effective ever developed. Its progressively tapered copper jacket is locked to a solid lead core, promoting perfectly controlled expansion and high weight retention for absolutely dependable on-game results. You'll find its time-proven performance in both soft point and pointed soft point versions — and in a range of bullet weights for virtually every centerfire hunting caliber made.




The Deadliest Mushroom in the Woods™

CORE-LOKT® SOFT POINT

CORE-LOKT® POINTED SOFT POINT

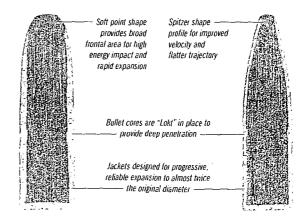

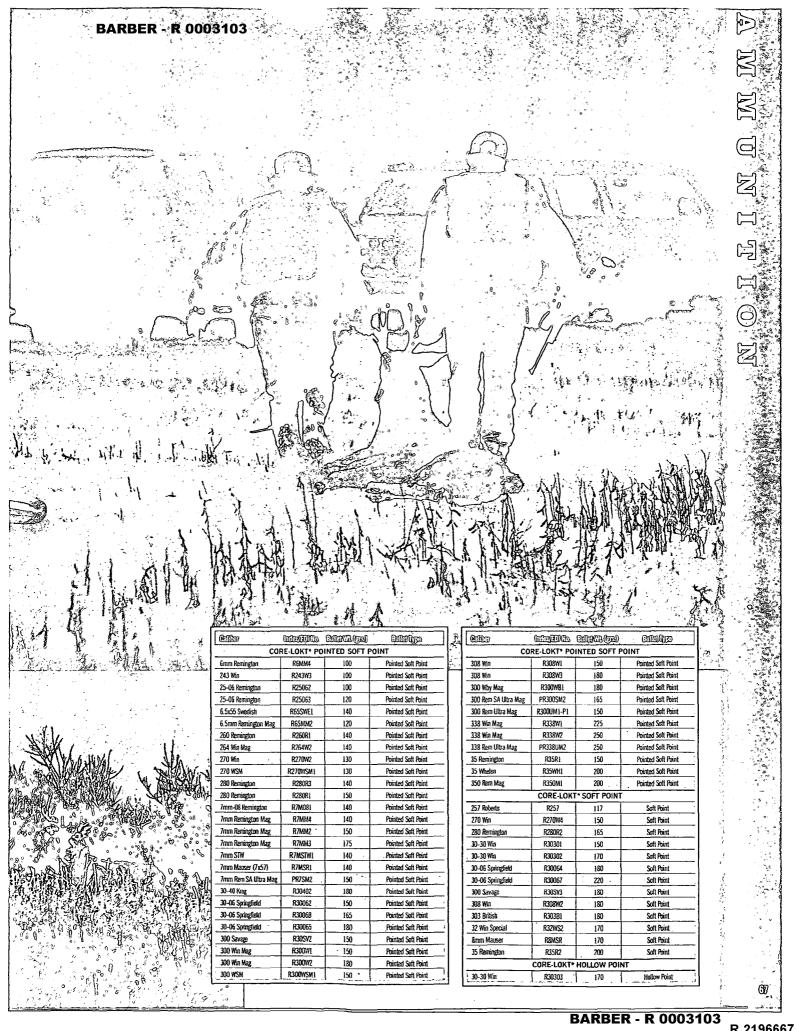

BARBER - R 0003104 REMINGTON® RIFLE

Proof of our dedication to providing you with the widest selection of centerfire ammunition in the industry, our Rifle series consists of a multitude of calibers and popular bullet styles to match your specialized hunting and shooting pursuits. All assembled with premium components and the ultra-tight tolerances that put more home reloading presses on the back shelf than any other brand. Remington Rifle.



1	Caliber	Index/EDI No.	Bullet WL (grs.) Bullet Type
ŀ		REMING	TONº RIFLE	
)	17 Remington	R17R2	25	Hoflow Point
l	22 Hornet	R22HN1	45	Pointed Soft Point
ľ	22 Hornet	R22HN2	. 45	Hollow Point
- 1	220 Swift	R220\$1	50	Pointed Soft Point
	222 Remington	R222R1	50	Pointed Soft Point
1	223 Remington	R223R1	55	Pointed Soft Point
l	223 Remington	R223R3	55	Metal Case
1	22-250 Remington	R22501	55	Pointed Soft Point
- [243 Win .	R243W1	80	Pointed Soft Point
- 1	25-20 Win	R25202	86	Soft Point
- 1	250 Savage	R250SV	100	Pointed Soft Point
	6.8mm Rem SPC	R68R1	115	Open Tip Match (OTM)
1	6.8mm Rem SPC	R68R2	115	Metal Case
ł	270 Win	R270W1	100	Pointed Soft Point
	7mm-08 Remington	R7M082	120	Hollow Point
.	30 Carbine	R30CAR	110	Soft Point
	30-30 Win Accelerator®	R30069	55	Pointed Soft Point
i	30-06 Springfield	R30061	125	Pointed Soft Point
	7.62x39mm	R762391	125	Pointed Soft Point
Ì	7mm Rem SA Ultra Mag	PR7SM3	160	Pointed Soft Point
ļ	32-20 Win	R32201	100	Lead
vew	338 Lapua Mag	RM338LMR1	250	Scenar
1	35 Whelen	R35WH3	250	Pointed Soft Point
- 1	375 H&H Mag	R375MI	270	Sett Point
Ì	375 Rem Ultra Mag	PR375UM2	270	Soft Point
ł	44-40 Win	R440W	200	Soft Point
	444 Mar	R444M	240	Soft Point
- 1	45-70 Government	R4570L	300	Semi-Jacketed Hollow Point
	45-70 Government	R4570G	405	Soft Point


Ch 1			erio-
	BRONZE PO	INT TIPPE)
270 Ván	R270W3	130	Bronze Point Tipped
30-06 Springfield	R30063	150	Bronze Point Tipped
30-06 Springfield	R30066	180	Bronze Point Tipped

BRONZE POINT® TIPPED

Introduced by Remington,® these were the first bullets to utilize a tipped design. Exceptional long-range performance on medium-sized game. Sleek profile generates flat trajectory. On impact, the bronze tip is driven backward to create rapid, but controlled expansion.




Aerodynamic tip for superior long-range ballistics and rapid expansion

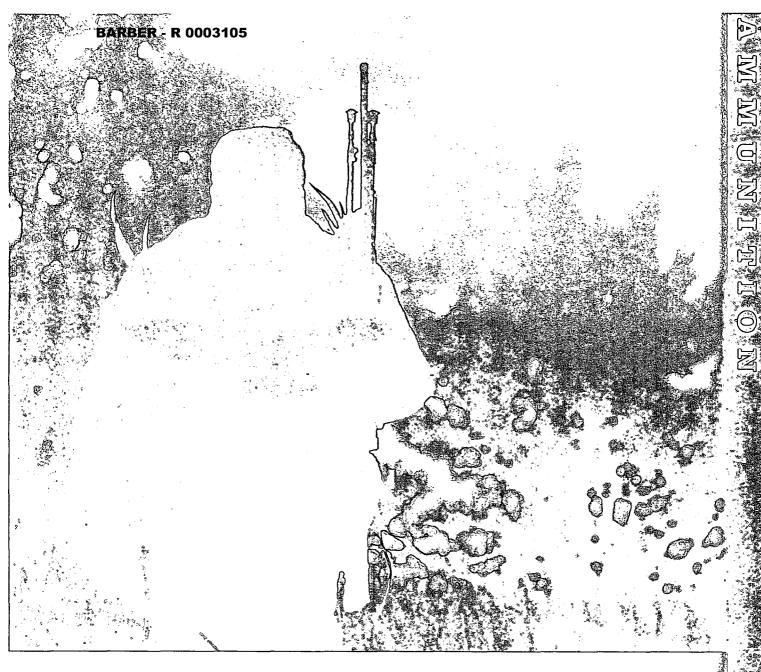

POWER-LOKT° HOLLOW POINT


Another breakthrough from Remington.® Express® Power-Lokt® delivers unmatched performance for small game and varmint hunting. The thin copper jacket is electrolytically plated to the lead core for near-perfect concentricity and gyroscopic balance. The result? Dead-on, benchrest-

type accuracy with instant fragmentation on impact.





Plated copper jacket for superior accuracy and instant fragmentation on impact

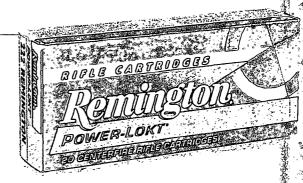

	identilio.		Diffe		
POWER-LOKT® HOLLOW POINT					
.222 Rémington	*R222R3	z. 50	Power-Lakt Hollow Point		
223 Remington	R223R3	55	Power-Lakt Hollow Point		
22-250 Remington	R22502	.55	Power-Lakt Hallow Point		
243 Win	R243W2	. 80	Power-Lakt Hollow Point		



MANAGED-RECOIL"

REDUCE RECOIL TO IMPROVE YO

At some point, all shooters feel the negative effects of recoil.

Some hunters experience the frustration of missing a target because of flinching. Others know the aggravation of losing the opportunity for a second shot because of the time it takes for scope recovery. Then there's the shoulder pain after a day of hunting or practicing, which may deter future practice sessions. To fight these effects of recoil, Remington® developed Managed-Recoil™ ammunition.

The Managed-Recoil ammunition succeeds where other recoilcontrol ammunition fails. Past attempts at curbing recoil have focused solely on the amount of gunpowder in the ammunition. Remington's Managed-Recoil focuses on the entire cartridge by incorporating a specially designed bullet built to perform at lower velocities.

FEATURES

- Fully effective hunting performance with less than 50% of the recoil of standard cartridges
- · Less anticipation of recoil
- · Increased shooter confidence and improved shot placement
- · Quicker scope recovery for faster second shot placement
- Point of aim is within 2" of a standard cartridge at 100 yards
- · Target practice without the recoil pounding
- Specially designed bullets are optimized to deliver 2x expansion with over 75% weight retention on shots out to 200 yards

FULLY EFFECTIVE ENERGY AND EXPANSION OUT TO 200 YARDS:











150 yards



200 yards

MANAGED-RECO




YOUTH AND WOMEN. Managed-RecoilTM allows youth and women to practice and hunt effectively and comfortably with half the recoil. It even lets you use an existing gun without readjusting the scope because "point of aim — point of impact" is nearly identical to standard cartridges at 100 yards.

PRACTICE MAKES PERFECT. For targetshooters and hunters who target shoot to improve their performance, Managed-Recoil cartridges provide more time on the range, without the bruises to prove it. After your practice session, you can switch to full-powe ammunition without scope adjustment.

MANAGED-RECOIL™ COPPER SOLID™ SABOT SLUG.

The best-selling terminal performance and accuracy of our Copper Solid Slugs is now available in Managed-Recoil loads. With 40% less recoil, they're perfect for anyone who wants outstanding on-game results without the rearward punch.



Or, use them to sight-in, then step up to full loads. There's no finer slug load for young or recoil-sensitive hunters.



MANAGED-RECOIL™ SLUGGER® RIFLED SLUG.

Managed-Recoil ™ Slugger® Rifled Slugs offer remarkably effective performance with 45% less felt recoil than full velocity Sluggers. With effective energy out to 80 yards, these 1-ounce slugs easily handle the majority

of shotgun deer hunting ranges. Also

check out Managed-Recoil Buckshot; it's an ideal close-range performer.

	7	e Euro	12				n ·		ing design		学器 .
-			MAI	NAGED	RECO	IL" SLUGO	ER' R	FLED	SLU	G	
RL12RS	T	12	T	21/4	T	1200	\top	1	Ţ		Rifled Stug
				MAN	AGED	-RECOIL"	BUCK	TOH			
RL12BK00	ļ	12		23/4	-	1200		_	٦	8	00 BK

ARKSMANSHIP IN THE FIELD.

No scope of Reming Point to the second secon

No scope readjustment necessary.

Remington® Managed-Recoil™

Point of Impact is nearly identical


to full velocity loads.

Point of impact comparison at 100 yards.

- 30-06 Sprg. 125-grain Managed-Recoil
- . 30-06 Sprg. 150-grain PSP Core-Lokt

May not operate all recoil or gas-operated firearms

A P P L I C A T I O N S

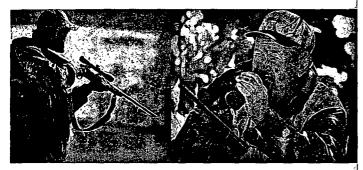

INTING WITH CONFIDENCE. Managedcoil Rille ammunition is designed for y effective hunting performance out to Dyards with less than half the recoil of a ndard load. A shooter not anticipating the ny recoil of a full load can better place ist shot on a game animal, and quickly acquire the target for a follow up shot.

and the state of the state of the

EW


(EW

RECOIL-SENSITIVE HUNTERS. For shooters that are unable or unwilling to tolerate the recoil of a standard cartridge on the range or on the field, Managed-Recoil**

Cartridges are the perfect solution. Effective performance with half the recoil.


50% LESS RECOIL

Remington^e Managed-Recoil ^{*} centerfire cartridges deliver 50% less recoil than standard velocity ammunition. Managed-Recoil 270 Win, 308 Win and 30-06 actually deliver less recoil than a standard velocity 243 Win!

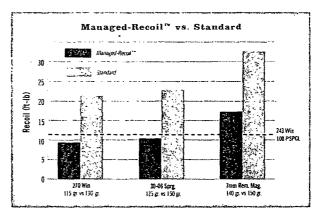

LETHAL PUNCH OUT TO 200 YARDS

Managed-Recoil*** rounds pack a lethal punch at the most common deer-hunting ranges. In fact, their energy levels exceed 1,100 ft.-lb. at 200 yards. Managed-Recoil 30-30 delivers 919 ft-lb. at 100 yards and is fully effective on deer sized animals out to 125 yards.

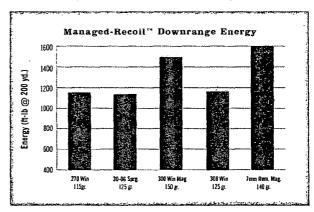

Name of the last	Caliber 2- val	Index/ seEDi No see	Bullet Wt.	Antono d		¥5074	e di	ity (it /sec (00 yd	15074	70,13	Milita	* Offic			Op	On	100		Z
					 MA	NAGED-	REC	OIL CE	NTERFI	RE RIFLE	CARTRI	DGES							
v]	260 Remington	RL2601	140	Core-Lokt* PSP	2300	2206		2115	2024	. 1935	1644	1512	1389	1273	1165	0.1	zero	-2.1	63
v ¯	7mm-08 Remington	RL7M081	140	Core-Lakt* PSP	2300	2195		2095	1995	1895	1644	1498	1361	1235	1118	0.2	zero	-2.1	-6.5
1	270 Win.	RL270W2	115	Core-Lokt* PSP	2710	2558		2412	2270	2133	1875	1671	- 1485	1315	1161	0.1	zero.	1.6	-4.B · · ·
- []	30-30 Win.	RL30301	125	Care-Lakt* PSP	2175	1993		1820	1658	1508	1313	1102	919	763	631	0.3	zero	-3.0	-9.1
	30-06 Springfield	RL30062	: 125	Core-Lokt* PSP	 2660	2495		2335~	2182	2034	1964	1727	1513	1321	1148	-0.1	zero	-L5	-4.9
[300 Win. Mag.	RL300W1	150	Core-Lokt* PSP	2650	2509		2373	2241	2113	2339	2097	1875	1672	1486	-0.i	zero	-1.5	-4.7
٦	308 Win.	RL308W1	125	. Care-Lakt* PSP	2660	2501	,	2348	- 2199 -	2057	1964	1736	1529	1342	1174	-0.1	zero	1.5 .	-4.9
	7mm Rem, Mag.	RL7MM4	140	Care-Lokt* PSP	2710	2594		2482	2372	2265	2283	2092	1915	1749	1595	0.0	zero	-1.5	-4.5
7 [.	300 Rem. Ultra Mag.	- RL300UM1	150	Care-Lakt* PSP	 2815	2669		2528	. 2391	2258	2639	- 2372	-2127-	1903	1698	0.3	0.8	zero	-2.1

MANAGED-RECOIL™ BUCKHAMMER® LEAD SLUGS. Managed-Recoil™ Technology has been applied to Remington's most devastating lead slug. We've reduced felt recoil by over 40% to make the BuckHammer® easier on the shooter without sacrificing its on-game performance. The Managed-Recoil BuckHammer 12-gauge slug travels at a fast 1,350 fps at the muzzle and maintains an impressive 1,032 ft-lb.

of deer-stopping energy at 100 yards. The 20-gauge, at 1,275 fps., delivers 746 ft.-lb. of energy at 100 yards. Standard

BuckHammer and Managed-

Recoil BuckHammer slugs are designed for use with fully-rifled barrels or rifled choke tubes

index/ EDI No.	Gauge	Length (in.)	Slug WL.	Ve Muz	locity (ft./sec 50 yd.) 100 yd.	Er Muz	ergy (ft. , 50 yd.)	lb.) F	Trajec 50 yd.	tory (in.) £ 100 yd.
l	. ~		MANAG	ED-RECO	IL" BUCK	HAMMER	P LEAD SLI	UGS			
RL12LSS -	12	~ 21/4 -	1%	1350	1107	972	1991	1340	- 1032	0.0	-5.5
RL20LSS	20	21/4	1/4	1275	1057	938	1379	948	746	0.0	-6.2

PISTOL & REVOLVER



EVERY APPLICATION,

ONE BRAND. Remington® has been making centerfire handgun ammunition longer than anyone. It should then come as no surprise that we offer the broadest line of pistol and revolver ammunition available. With loadings tailored to virtually every potential shooting application, our line includes vast choices of calibers, bullet weights, bullet styles and combinations of all these. Choose from a complete range of traditional bullet styles, as well as from some of the most sophisticated handgun bullets made. All cartridges are assembled from the highest quality components - with meticulous quality control - to assure reliability in all handgun actions.

GOLDEN SABER™ HPJ



DEAD-SERIOUS BULLET INNOVATION.

A superior bullet for when the stakes are at their highest. Designed for law enforcement and personal defense, the Golden Saber™ High Performance Jacket successfully combines: match-type accuracy, deep penetration, maximum expansion and near 100% weight retention.


					* ***	10.812.01.00	
Caliber	index/ EDI No.	Primer No.	Wt. (grs.)	Bullet Style	Velocity (ft/sec.)	Energy (ft-lbs.) Muz. 50 vds. 100 vds.	Mid-Range Trajectory Barrel 50 vds. 100 vds. Length*
	7		*2 (B)	<u> </u>	Nº P&R AMMUNITION		, , ,
25 (6.35mm) Auto.	R25AP	11%	50	Metal Case	760 707 659	64 56 48	2.07 8.7
32 S&W	R32SW	11/2		Lead Round Nose	680 645 610	90 81 73	2.5 10.5 3
32 S&W Long	R32SWL	11/2	98	Lead Round Nose	705 670 635	115 98 88	23 10.5 4
32 (7.65mm) Auto.	R32AP	11/2	71	Metal Case	905 855 810	129 115 97	1.4" 5.8" 4"
357 Mag.**	R357M7	-51/2.	110	Semi-Jacketed Hollow Point	1295 1094 975	410 292 232	-0.8° 3.5° 4°
	R357M1	51/2	125	Semi-Jacketed Hollow Point	1450 1240 1090	583 427 330	0.6" 2.8" 4"
FERRIT	R357M2	51/2	158	Semi-Jacketed Hollow Point	1235 1104 1015	535 428 361	
	R357M3	51/6	158	Soft Point	1235 1104 1015	535 428 361	0.8" 3.5" 4"
	R357M5	51/2	158	Semi-Wadcutter	1235 1104 1015	535 428 361	0.8" 3.5" 4"
	R357M10	514	180	Semi-Jacketed Hollow Point	1145 1053 985	524 443 388	0.9" 3.9" 8 %"
9mm Luger	R9MM1	1 %	115	Jacketed Hollow Point -	1155 1047 971	341 . 280 241	0.9" 3.9" 4"
	R9MM3	1%	115	Metal Case	1135 1041 973	329 277 242	0.9" 4.0" 4"
	R9MM6	1%	115	· Jacketed Hollow Point +P‡	. 1250° 1113 / 1019	399 316 265	0.8 3.5 4
	R9MM2	1%	124	Metal Case	1110 1030 971	339 292 259	1.0" 4.1" 4"
	R9MM8	1%	147	Jacketed Hollow Point (Subsonic)	990 941 900	320 289 264	1.1" 4.9" 4"
380 Auto.	R380A1	11%	88	Jacketed Hollow Point	990 920 868	191 165 146	1.2" 5.1" 4"
	R380AP	11/4	95	Metal Case	955 865 785	190 160 130	14- 59 4
38 S&W	R38SW	11%	145	Lead Round Nose	685 650 620	150 135 125	2.4" 10" 4"
38 Special**	R38S10	11/2	110	Semi-Jacketed Hollow Point +P ‡	995 926 871	242 210 185	12" 51" 4"
	R38S16	1 1/4	110	Semi-Jacketed Hollow Point	950 890 840	220 194 172	1.4" 5.4" 4"
	R38S2	11/2	125	Semi-Jacketed Hollow Point +P ‡	945 898 858	248 224 204	13" 54" 4"
	R38S3	1 1/2	148	Targetmaster® Lead WC Match	710 634 566	166 132 105	2.4" 10.8" 4"
	R38S5	11/	158	Lead Round Nose	755 723 692	200 183 168	20 83 4
	R38\$14	11%	158	Semi-Wadcutter +P ‡	890 855 823	278 257 238	1.4" 6.0" 4"
	R38S6	11/4	158	Semi-Wadcutter	755 723 692	200 183 168	20" 8.3" 4" 3
	R38\$12	1%	158	Lead Hollow Point +P ‡	890 855 823	278 257 238	1.4" 6.0" 4"
38 Short Cult**	R38SC	1 1/2	125	Lead Round Nose	730 685 645	150 130 115	22 94 6
357 Sig.	R357S1	5 1/2	125	Jacketed Hollow Point	1350 1157 1032	506 372 296	0.7 3.2 4
40 S&W	R40SW1	5 1/4	155	Jacketed Hollow Point	1205 1095 1017	499 413 356	0.8 3.6 4
	R40SW2	5 1/4	180	Jacketed Hollow Point	1015 960 914	412 368 334	1.3" 4.5" 4"
41 Rem. Mag.**	R41MGI	21/2	210	Soft Point	1300 1162 1062	788 630 526	0.7 3.2 4
44 Rem. Mag.**	R44MG2	21/2	240	Soft Point	1180 1081 1010	741 623 543	0.9" 3.7" 4"
N 62 6 1 1 1	R44MG3	21/3	240	Semi-Jacketed Hollow Point	1180 1081 1010	. 741 . 623 . 543	0.9 3.7 4
44 S&W Special**	R44SW	2 1/2	246	Lead Round Nose	755 725 695	310 285 265	2.0" 8.3" 6"
45 Cott **	R45C1	21/2	225	Semi-Wadcutter	960 890 832	460 395 346	1.3 5.5 5
	R45C	21/.	250	Lead Round Nose	860 820 780	410 375 340	1.6" 6.6" 5"
. 45 Auto.	R45AP2	21/2	185	Jacketed Hollow Point	1000. 939 889	411 362 324	1.1° 4.9° 5°
	R45AP4	21/2	230	Metal Case	835 800 767	356 326 300	1.6" 6.8" 5"
	R45AP7	21/2	230	Jacketed Hollow Point (Subsonic)	835 800 767	356 326 300	1.6" 6.8" 5"

			PREMIE	Re GOLDEI	N SABER	" HPJ (H	IGH PERFO	RMANCE	JACKET)			
357 Magnum*	GS357MA	5 1/2	125	1220	1095	1009	413	333	283	0.8"	3.5"	4.
9mm Luger	GS9MMB	1 1/2	124	1125	1031	963	349	293	255	1.0	4.0	4"
	GS9MMC	11/2	147	990	941	900	320	289	264	1.1"	4.9"	4"
9mm Luger (+ P)	GS9MMD	1 1/2	124	1180	1089	1021	384	327	287	0.8"	3.8"	4"
380 Auto.	G\$380B	11/2	102	940	901	866	200	184	170	1.2"	5.1"	4
38 Special (+ P)*	GS38SB	1 1/2	125	975	929	885	264	238	218	1.07	5.2"	4"
40 S&W	GS40SWA	5 V2	165	1150	1040	964	485	396	340	1.0"	4.0	4
	GS40SWB	5 1/2	180	1015	960	914	412	368	334	1.3"	4.5"	4"
45 Auto.	GS45APA	2 1/2	185	1015	951	899	423	372	332	1.1"	4.5	5*
	GS45APB	2 12	230	875	833	795	391	355	323	1.5*	6.1"	5*
45 Auto. (+P)	GS45APC	2 1/2	185	1140	1042	971	534	446	388	1.0"	4.0"	5"

#Ammunition with "+ P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this carridge and so recommended by the gun manufactured.

*Note: These ballistics reflected verted barrel.

Exclusive brass jacket with precision nose cuts controls mushroom and Cases are nickeloptimizes energy plated to reduce transfer oxidation and mprove teeding Case mouth and primer Specially treated waterproofing powders suppress for improved muzzle flash reliability



The bullet diameter directly ahead of the Driving Band is reduced from groove to bore diameter, so the bullet is precisely aligned before the Driving Band engages the rilling. The result: match-grade accuracy and reduced barrel friction that conserves velocity.

The high-performance jacket expands to a larger diameter than lead core — over 1.6x diameter. Minimal lead deformation retains energy for deeper penetration.



Pistol and Revolver Interchangeability chart is located on page 100.

BARBER - R 0003109

UMC® AMMUNITION

UMC® HANDGUN CARTRIDGES.

All UMC ammunition is American-made in Lonoke, Arkansas using first-quality factoryfresh brass and clean-shooting Kleanbore® primers to provide the best value for practice, personal defense and hunting



UMC* RIFLE

CARTRIDGES. Made in the USA, value-priced and ideal for high-volume shooting, our UMC centerfire rifle ammunition is loaded in seven popular calibers including the 30-06 Sprg, 308 Win, 7.62x39mm, 30 Carbine and 303 British. The 45 and 50 grain

jacketed hollow point loads in 223 Remington

and 22-250 Remington are perfect



17 Remington Fireball.


UMC® LEADLESS™ HANDGUN CARTRIDGES.

A must have for shooters that frequent indoor ranges, economical UMC® LeadLess™ cartridges virtually eliminate lead exposure at the firing line. Specially designed bullet actually prevents the vaporization of lead from the bullet's base upon firing. Standard



bullet weights duplicate the ballistics of conventional loads.

Nose profile designed to function smoothly in all action types



Clean-shooting, lead-free priming Solid lead core protected by thick



Enclosed base virtually eliminates airbome lead at firing line



				UMC'	HANDGL	JN CART	RIDGES		_			
9mm Ługer	L9MM1	1 1/4	115	лнР	1135	1041	973	329	277	242	0.9*	4.0
	L9MM2	1 %	124	MC	1100	1030	971	339	292	259	1.0"	4.1"
	L9MM3	1%	115	MC	1135	1041	973	329	277	242	0.9*	4.0"
	L9MM9	1 1/-	147	MC	990	941	900	320	289	264	1.1*	4.9*
10mm Auto	L10MM6	2 1/4	180	MC	1150	1063	998	529	452	398	0.9"	3.7"
25 Auto (6.35mm)	L25AP	1 1/-	50	MC	760	707	659	64	56	48	2.0"	8.7*
32 Auto	L32AP	1%	71	MC	905	855	810	129	115	97	1.4"	5.8°
357 Magnum**	L357M12	5 ½	125	JSP	1450	1240	1090	583	427	330	0.6"	2.8"
357 Sig.	L357S1	5 <i>1</i> /-	125	MC	1350	1146	1018	506	422	359	0.7"	3.3*
	L357\$2	5 1/4	125	JHP	1350	1157	1032	506	372	296	0.7*	3.2"
38 Super Auto + P	L38SUP	1%	130	MC	1215	1099	1017	426	348	298	0.8	3.6
38 Special + P**	L38S2	1 1/	125	JHP	945	898	858	248	224	204	1.3"	5.4"
38 Special** ·	L38S5	11/	158	LRN	755	723	692	200	183	168	2.0"	· 8.3"
	L38S11	IN	130	MC	790	766	743	173	163	153	1.7"	1.2
380 Auto	L380AP	1%	95	MC	955	865	785	190	160	130	1.4"	5.9* -
40 S & W	L40SW2	5 ⅓	180	JHP	1015	960	914	412	368	334	1.3"	4.5"
	· L40SW3	5 ×	180	MC	985	936	893	388	350	319	1.4"	- 5.0"
	L40SW4	51/	165	MC	1150	1040	964	485	396	340	1.0"	4.0*
44 Rem. Mag**	L44MG7	21/	180	JSP	1610	1365	1175	1036	745	551	0.5	2.3"
45 Auto	L45AP1	21/:	185	MC	1015	955	907	423	375	338	1.1*	4.8*
	L45AP4	2 ½	230	MC .	· 835	80G.	767	356	326	300	1.6*	6.8"
	L45AP7	2 ⅓	230	JHP	835	800	767	356	326	300	1.6"	6.8"
45 GAP	L45GAP4	2 1/2	230	MC	880	841	805	395	361	331	1.5"	6.2*

Caliber	Index/ EDI No.	Primer Na	Wt. (grs.)	Builet Style	Velo Muz	icity (ft:/s 100 yds.	se c.) 200 yds.	En Muz	ergy (It-II 100 yds,	is.) 200 yds.	50 S	ort-rai 100	ge Traje 150	ctory (in	inches 250	300
ł					UMC*	CENT	ERFIRE F	HFLE CA	RTRIDO	GES					_	
17 Rem Fireball	L17FBV	11/4	25	JHP	3850	3280	2780	823	597	429	0.0	0.9	0.9	zero	-2.0	-5.4
223 Remington	L223R3	14	55	MC	3240	2759	2326	1282	929	660	-0.1	0.6	zero	-1.9	-5.5	-11.0
	L223R7	7 1/1	45	JHP	3550	2953	2430	1259	871	590	-0.1	0.4	zero	1.7	-4.8	-9.7
	L223R8	7 Yz	50	JHP	3425	2899	2430	1302	933	655	-0.1	0.5	zero	-1.7	-4.9	-9.9
,	L223R9 ·	7 1/2	62	CTFB	3100	2734	2396	1323	. 1029	790	0.1	0.6	zero	-1.9	-5.4	-10.6
22-250 Rem	L22503	9 1/2	45	JHP	4000	3340	2770	1598	1114	767	-0.3	0.2	zero	-1.2	-3.5	-7.2
	L22504	9 1/2	50	JHP	3820	3245	2739	1620	1169	833	-0.1	0.8	0.9	zero	2.0	-5.4
7.62x39mm	L762391	7 1/2	123	MC	2365	2060	1780	1527	1159	865	0.1	zero	-2.2	-6.8	-14.1	-24.5
30 Carbine	L30CR1	61/2	110	MC	1990	1567	1236	967	600	,373	0.6	zero	-4.2	-12.9	-27.2	-48.6
308 Win.	L308W4 `	9 1/2	150	MC	2820	2533	2263	2648	2137	1705	-0.1	zero	-1.2	-3.9	-8.4	-14.7
30-06 Sprgfid.	L30062	9 %	150	MC	2910	2617	2342	2820	2281	1827	-0.2	zero	-1.1	-3.6	-7.7	-13.6
303 British	L303B1	9 1/2	174	MC	2475	2209	1960	2366	1885	1484	0.1	zero	-1.9	-5.9	-12.2	-21.4

Caliber	Index/ EDI No	Printer No.	Wt. (grs.)	Bullet Style	Veloc Muz.	ity (ft./se 50 yds.	c.) 100 yds.	Ei Muz.	ergy (fi-lbs 50 yds) 100 yds.	Mid-ran 50 yds.	ge Trajectory 100 yds.
			UMC	LEADI	ESS" HAI	NDGUN	CARTE	RIDGES				
9mm Luger	LLAWHII	1%.	115	FNEB	1135	1041	973	329	277	242	0.9	4.0"
	LL9MM2	1%	124	FNEB	1100	1030	971	339	292	252	1.0"	4.1*
	IL9MM9	-11/2	147	FNEB	990	941	900	320	289	264	8 LI*	4.9*
357 Magnum**	LL357M1	5½	125	FNEB	1450	1240	1090	583	427	330	0.6"	2.8"
38 Special**	1L38S17	11/2	125	FNEB	850	822.	796	20i	188	176	1.4*	6.4
38 Special + P**	IL38S2	1 1/2	125	FNEB	975	935	899	264	242	224	1.2	4.9"
380 Auto	11380AP2	11/2	95	FNEB	955	865	- 785	- 190	160	130	1.4"	5.9
40 S & ₩	LL40SW5	51/2	180	FNEB	985	936	893	388	350	319	1,4"	5.0"
45 Auto	LL45AP8	21/2	230	FNEÉ	835 €	800	767	356	326	. 300	1.6	6.8

-CIFB = Closed Tip Flat Base | MC = Metal Case | FNEB = Flat Nose Enclosed Base | HIP = Jacketed Hollow Point | ISP = Jacketed Soft Point | LRIV = Lead Round Nose

Match EPS

RIMFIRE

PREMIER GOLD BOX *** RIMFIRE. Premium rimfire cartridges super-tuned for accuracy and terminal performance. Available in 17 Mach 2, 17 HMR and 22 Win Mag, Premier Gold Box Rimfire Ammunition is loaded with AccuTip-V polymer-tipped bullets for incredible shot-to-shot consistency, flat trajectory and explosive expansion. Upgrading your rimfire rifle or handgun is as easy as shooting the right ammo. Think Premier Gold Box.



Caliber	Index/ EDI No.	(grs.)	Buller Style	Huz	elocity (fL/sec.) - 50 yds	100 yas	Miz	nergy (ft-lbs.) 50 yds.	100 yds.	50 yds	ajectory (in.) * 100 yds	150 yds 🐇
Premier* 17 HMR	PR17HM1	17	AccuTrp-V	2550	2212	1901	245	185	136	0.1	0.0	-2.6
Premier® 22 Win Mag	PR22M1	33	^ AccuTip-V	2000	-1730 🛴	1495	293	219	164	0.6	0.0.	-4.5 × j
Premier* 17 Mach 2	PR17LR	17	АссиТір-V	2100	. 1801	1532	166	122	88	0.7	0.0	-4.4

COMPETITION/TARGET RIMFIRE. When it comes to competition-grade rimfire ammunition, there's only one name good enough to share the Remington® brand — Eley. A company with a reputation for the world's most accurate and reliable rimfire ammunition, Eley, Ltd. has teamed up with

Remington to offer three grades of their premier 22 long rifle ammunition for the serious target shooter: Target Rifle, Club XTRA and the elite Match EPS. Remington Target ammunition offers the accuracy and economy for Match practice and developmental shooting.

Company Remington/Eley		8	i conseque	i ib		wat.	i dis		ione.	25/23	DID.	com
22LR Malch EPS	RE22EPS	40	- Lead Flat Nose	1085	1006	941	105	90	79	0.3	0.0	7.1*
22LR Club Xtra	RE22CX	40	Lead Round Nose	1085	1006	941	105	90	79	0.3	0.0	-7.1
22LR Target Rifle	RE221	40	Lead Round Nose	1085	1006	941	105	90	79	0.3	0.0	7.1
Remington Target												
22 Long Rifle	6122/6100+	40 -	Round Nose	1150	1048	976	117	98 .	85	.0.2	0.0	-6.4





RIMFIRE. Prairie dogs. Tin cans. Or a bulls-eye. No matter what you put in your sights, Remington® offers the perfect 22 rimfire ammunition for any occasion. Remington rimfire ammunition delivers the quality you expect. That's because we put the same level of care into making our rimfire ammunition as we do our centerfire ammunition, so you'll get the maximum performance from every shot.

Magnum												19073
22 Win Mag	R22M1	40	lacketed Hollow Point	1910	1610	1350	324	230	162	0.9	0.0	-5.7
	R22M2	40	Pointed Soft Point	1910	1600	1340	324	227	159	1.0	0.0	-5.8
eide ×		- GD-	00000			b Digital	TOM:) IDData	2 301 5		o Maja
Short												
22 Short	1022	29	Plated Lead Round Nose	1095	982	903	77	62	52	0.3	6.0	-7.4
High Velocity												
27 Long Rifle	1522/1500+	40	Plated Lead Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
	1622/1600÷	36	Plated Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
Hyper Velocity												
22 Yellow Jacket' Long Rifle	1722/1700+	33	Truncated Cone Hollow Point	1500	1247	1075	165	114	85	-0.2	0.0	-4.1
22 Viper* Long Rifle	1922/1900+	36	Truncated Cone Solid	1410	1198	1056	159	115	89	-0.1	0.0	-4.7
Subsonic'												
22 Surbsonic Long Rifle	SUB22HP	38	Hellow Point	1050	965	109	93	79	69	0.3	0.0	-7.7
Low Noise												
CBee Long Rifle	CB-22LI00	33	Hollow Point	740	687	638	+40	35	30	-1.5	0.0	-16.9
Promotional												
22 Thunderbolt* Long Rifle	TB 22A	40	Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
22 Cyclone* Long Rifle	CY 27HP	36	Hotow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
22 Long Rifle (High Velocity)	GL 27HP	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6

""Note: Sight height 1.5" above axis of bore. + These long rille 22s available in slide-open plastic packs of 100.

NEW

COMPONENTS

REMINGTON® RELOADING COMPONENTS. If you reload your own cartridges, then you shouldn't settle for anything but the best reloading components in the business – Remington. We offer industry-leading products that are changing the way sportsmen think about reloading.

More accurate. Our unique manufacturing process eliminates jacket stretch for near-perfect wall thickness, which results in better flight stability.

More versatile, A 20% heavier iacket engineered with an innovative wall profile provides better expansion and penetration over a broad range of terminal velocities.

More reliable. 50% thicker Core-Lokt section increases mechanical locking of the rear core into the jacket and better controls expansion at higher velocities.

More deadly. Bonded jacket/core design further insures controlled expansion (2x diameter) with up to 95% weight retention for ultimate on-game performance.



PREMIER? CORE-LOKT® ULTRA BONDED® BULLETS. World-class accuracy and unmatched reliability on-game were just two of the many reasons our handloading customers demanded Core-Lokt Ultra Bonded bullets.

NEW

PREMIER* ACCUTIP BULLETS.

Top off your handloads with the most accurate polymer-tipped big-game bullet available today. Near-perfect concentricity and an overall ballistically superior design make it one of the flattest-shooting bullets

in the world. It also expands quickly to dispatch medium and big game with lightning authority.

CORE-LOKT® BULLETS.

"The Deadliest Mushroom in the Woods," now a handloading component. It's the original controlledexpansion big-game bullet, delivering massive energy transfer as it expands to nearly 2x original diameter. For dead-sure reliability, the progressively thickened jacket is locked to the lead core.

🗓 Index/EDI No. 🥫	Description
	CENTERFIRE PRIMERS
X22600	1 1/2 Small Pistol
X22604	2 1/2 Large Pistol
X22626	5 1/2 Small Pistol
X22606	6 1/z Small Pistol
X22628	7 1/2 Small Rifle BR
X22608	9 1/2 Large Riffe
X22622	9 1/2 M Magnum Rifle
ETRONX	ELECTRIC CENTERFIRE PRIMERS
XEL22610	9 1/2 Large Rifle (Electric)

-			Bullet Type ->
	VER PACK BAG		
RB2241	224	45	HP*
RB2242	224	50	PSP
RB224P1	224	50	PLHP
RB2244	224	55	MC
. R82243	224	.55	PSP
RB224P2	224	55	PLHP
RB2247	< 224	62	A HP Match
RB243P1	243	80	PLHP
RB2432	243	- 80	PSP
RB2682	6.8mm	115	MC
. R83085	308.	K 150 ' y	MC 3
RB303B	310 (303 Brit.)	180	SP Core-Lokt
RB3231	8mm * -	185	* PSP Core-Lokt
RB4571	457	300	SJHP
CONSUM	IER PACK BAGO	ED PISTOL	BULLETS
RB9MM3 -	- 2 39mm 为 (5)	為115 🛩	THE MIC
RB9MM11	9mm	115	FNEB
			FNEB
RB9MM5 💸	9mm 🙈	₹5115 2 5	HP, MC
RB9MM5 📚	9mm 💉	₹5115 2 5 124	HP, MC
RB9MM5 SE RB9MM2 RB9MM8	9mm × 6 9mm 9mm 356 380 Auto	115 2≤ 124 147 95	MC MC
RB9MM5 SE RB9MM2 RB9MM8 RB380AP	9mm × 9mm 9mm 9mm 356 380 Auto	115 2≤ 124 147 95	MC MC JHP MC
RB9MM5 RB9MM2 RB9MM8 RB380AP RB38S11	9mm 9mm 9mm 356 380 Auto 356 38 Special	115 25 124 147 95	MC MC MC MC
RB9MM5 RB9MM2 RB9MM8 RB380AP RB357M7	9mm 9mm 9mm 356 380 Auto 356 38 Special 357/38	115 24 124 147 95 130	MC JHP MC SIHP
RB9MM5 RB9MM2 RB9MM8 RB380AP RB357M7 RB357M1	9mm 9mm 356 380 Auto 356 38 Special 357/38 357/38	115 21 124 147 95 130 110 125	MC MC MC MC SHP SHP SHP
RB9MM2 RB9MM8 RB380AP RB357M7 RB357M1 RB357M2	9mm 9mm 356 380 Auto 356 38 Special 357/38 357/38 357/38	115 21 124 147 95 130 110 125	MC MC MC MC SHP SHP SHP
RB9MM5 RB9MM2 RB9MM8 RB380AP RB38511 RB3857M7 RB357M1 RB357M2 RB40SW1	9mm 9mm 356 380 Auto 356 38 Special 357/38 357/38 357/38 40/10mm	115 21 124 147 95 130 110 125 138	MC MC MC MC SIHP SIHP SIHP MC MC
RB9MM5 RB9MM2 RB9MM8 RB380AP RB3511 RB357M1 RB357M1 RB357M2 RB40SW1 RB40SW3	9mm 9mm 356 380 Auto 356 38 Special 357/38 357/38 357/38 40/10mm 40/10mm	115 21 124 147 95 130 110 125 138	MC MC MC MC SIHP SIHP SIHP MC MC
RB9MMS RB9MM2 RB9MM8 RB380AP RB38SI1 RB357M7 RB357M1 RB357M1 RB357W1 RB40SW1 RB40SW3	9mm 9mm 9mm 356 38 Outo 356 38 Special 357/38 357/38 357/38 40/10mm 40/10mm 40/10mm	115 24 147 95 130 110 125 158 158 180 180	HP MC HP MC MC SHP SHP SHP HP MC MC
RB9MMS RB9MM2 RB9MM8 RB380AP RB38S11 RB357M7 RB357M1 RB357M2 RB40SW1 RB40SW3 RB40SW3	9mm 9mm 9mm 356 38 Outo 356 38 Special 357/38 357/38 357/38 40/10mm 40/10mm 40/10mm	115 24 147 95 130 110 125 158 158 180 180	HP MC HP MC MC SIMP SIMP SIMP FINE MP
RB9MMS RB9MM2 RB9MM8 RB380AP RB38S11 RB357M7 RB357M1 RB357M2 RB40SW1 RB40SW3 RB40SW5 RB40SW2 RB41MG1	9mm 9mm 9mm 9mm 356 380 Auto 356 38 Special 357/38 357/38 357/38 40/10mm 40/10mm 40/10mm 40/10mm 44/14 44	115 24 147 95 130 110 125 158 155 180 210 210	MP MC MC SHP SHP MC MC SHP SHP SHP MC MC SHP SHP SHP SHP SHP MC FREE SHP SHP MC FREE SHP SHP SHP SHP SHP SHP SHP
RB9MMS RB9MM2 RB9MM8 RB98MM8 RB380AP RB38S11 RB357M7 RB357M1 RB357M1 RB40SW1 RB40SW3 RB40SW3 RB40SW4 RB40M6	9mm 9mm 9mm 9mm 356 380 Auto 356 38 Special 357/38 357/38 357/38 40/10mm 40/10mm 40/10mm 40/10mm 44/14 44	115 24 147 95 130 110 125 158 155 180 210 210	MP MC MC SHP SHP MC MC SHP SHP SHP MC MC SHP SHP SHP SHP SHP MC FREE SHP SHP MC FREE SHP SHP SHP SHP SHP SHP SHP
RB9MMS RB9MM2 RB9MM8 RB380AP RB38S11 RB357M7 RB357M1 RB357M2 RB40SW1 RB40SW3 RB40SW3 RB40SW2 RB41MG1 RB44MG6 RB44MG5	9mm 9mm 356 380 Auto 356 380 Page 357/38 357/38 357/38 357/38 40/10mm	115 2 124 147 159 160 160 160 160 160 160 160 160 160 160	HP MC HP SHP SHP SHP HP SHP SHP SHP SHP SHP SHP S

COL	SUMER PACK RIFLE BRASS
RC17FB	17 Remington Fireball
RC17R	17 Remington
RC204R	204 Ruger
RC22H	22 Hornet
RC221FB	221 Remington Fireball
RC222R	222 Remington
RC223R	223 Remington
RC2250R	22-250 Remington
RC220S	220 Swift
RC243W	243 Win
RC6MMR	6mm Remington
RC2506R	25-06 Remington
RC2520W	25-20 Win
RC257R	257 Roberts
RC65S	6.5x55 Swedish Mauser
RC260R	260 Remington
RC68SPCR	6.8mm Remington SPC
RC270W	270 Win
RC270WSM	270 WSM
RC7M08R	7mm-08 Remington
RC7MMG	7mm Remington Magnum
RC7MMRS	7mm Remington SA Ultra Magnum
RC7MMRA 1	7mm Remington Ultra Magnum
RC280R	280 Remington
RC3030W	1. 130-30 Win 12-57 135 17 15-1
RC300RS	300 Remington SA Ultra Magnum
RC300RA	300 Remington Ultra Magnum
RC3006	30-06 SPRG
RC300WM	300 Win Mag
RC300WSM	300 WSM
RC303B	303 British
RC308W	308 Win
RC3220W #	32-20 Win
RC8MSR	8mm Mauser
RC8MMG - La	₹8mm Remington Magnum
RC338W	338 Win Mag
RC338RA	#338 Remington Ultra Magnum
RC350R	350 Remington Magnum
RC35W	35 Whelen
RC375H	375 H&H Magnum
RC375RA	375 Remington Ultra Magnum
RC4440W	44-40 Win
RC4570G	45-70 Government
CON	ISUMER PACK PISTOL BRASS
	357 Magnum
RC357X	357 Maximum
RC9MM	9mm Luger
RC38AS	38 Super Auta + P
RC38SP	4 38 Special

*****	Description
CONSUM	ER PACK PISTOL BRASS (cont.)
RC40SW	40 S&W
RC41RA	41 Remington Magnum
RC44RA	44 Remington Magnum
RC44SW	44 S&W
RC45C	45 Colt
RC45A	45 Auto
RC454C ***	454 Casuli

	· · Index/EDI No.	- Caliber	Wt. (gr.)	Bullet Type 📑
	PREMIE	R* CORE-LOK	T" ULTRA B	ONDED"
	RBC2433 .	. 243/6mm	100	PSP .
1	RBC2571	25	115	PSP
j	RBC2642	26/6.5mm	140	PSP
	RBC2682	27/6.8mm	115	PSP
	RBC2772	-27/6.8mm	40	PSP ·
	RBC2841	28/7mm	140	PSP
	RBC2843	28/7mm 🐣	160	PSP
l	RBC3081	30	150	PSP
	7 RBC3082 ⊕3	30	168	PSP .
	· RBC3083	30	180	PSP
	F ≥ RBC3381	_338	225	PSP
		PREMIER®	ACCUTIP	
NEW	RBA1771 ₩@	٠٠٠٠ 17 نام م	·= 20	AccuTip-V
NEW	RBA2042	20	40	- AccuTip-V
NEW	RBA2241	- 22	- 50	AccuTip-V
NEW	RBA2242	_ 22	55	AccuTip-V
NEW	RBA2431 💰	24/6mm	75	- AccuTip-V
NEW	RBA2432	24/6mm	100	AccuTip
NEW	RBA2642	3 26/6.5mm 🐃	140	AccuTip
NEW	RBA2771	27	130	AccuTip
NEW	R8A2841	28/7mm 😅	140	Accutip
NEW	RBA2842	28/7mm	150	AccuTip
NEW	RBA3081	∵ 30 %	150	AccuTip
NEW	RBA3082	30	165	AccuTip
NEW	R8A3083	30	180	Accutip 4
		CORE-L		
NEW	B2432 🔅	. • • 24/6mm ' 🎨	100	PSP
NEW	B2571	25	100	PSP
NEW	* 82462 % 66	26/6.5mm	140	PSP
NEW	B277Z	27	130	PSP
NEW	1272 B2842 544	(28/7mm →	150	PSP
NEW	E308t	30	150	PSP
NEW	B3083	- 14 × 30 × 2	180	PSP
NEW	B10301	30	150	SP
	BR = Bench Rest	/ FNEB = Flat Nos	e Enclosed Base	

HP = Hollow Point / JHP = Jacketed Hollow Point / MC = Metal Case

PLHP = Power Lokt Hollow Point | PSP = Pointed Soft Point SJHP = Semi-Jacketed Hollow Point | SP = Soft Point

PREMIER™ TACTICAL KNIVES

TANGO®

- · Civilian: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo
- Law Enforcement: 440C stainless steel Mill Spec: Mil-C 13924 blade with etched Remington® LE logo
- Military: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- G-10 handle
- Series I: Civilian Cordura sheath; LE Molle sheath; Military Molle plus leg extension
- Series I: 5 1/4" Blade, 10 1/2" Overall Length

Series II: 3 5/8" Blade, 4 3/4" Closed

• Made in Italy

TANGO[®] SERIES I - FIXED BLADE


CIVILIAN

Clip: 19697 - Boxed Drop: 19698 - Boxed Tanto: 19699 - Boxed

LAW ENFORCEMENT Clip: 19700 - Boxed **Drop.** 19701 - Boxed Tanto: 19702 - Boxed

MILITARY

Clip: 19703 - Boxed Drop: 19704 - Baxed Tanto: 19705 - Boxed

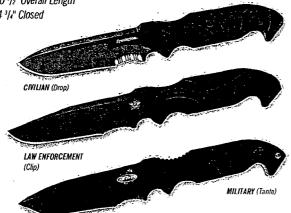




CIVILIAN Clip: 19706 - Boxed Drap: 19707 - Boxed Tanto: 19708 - Boxed

I AW ENFORCEMENT Clip: 19709 - Boxed **Drop:** 19710 - Boxed Tanto: 19711 - Boxed

MILITARY

Clip: 19712 - Boxed Drop: 19713 - Boxed Tanto: 19714 - Boxed





ECHO TM

- · Civilian: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo
- Law Enforcement: 440C stainless steel Mill Spec: Mil-C 13924 blade with etched Remington® LE logo
- . Military: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- · Anodized aluminum handle with 3M non-slip inserts
- 4 1/2" Blade, 4 1/2" Closed



MILITARY (Tanto)

ECHO™ SERIES II - FOLDER

CIVILIAN

Clip: 19578 - Boxed **Drop:** 19579 - Boxed Tanto: 19580 - Boxed

LAW ENFORCEMENT

Clip: 19581 -- Boxed **Drop**: 19582 - Boxed Tanto: 19583 - Boxed

MILITARY

Clip: 19584 - Boxed **Drop:** 19585 - Boxed Tanto: 19586 - Boxed

ZULU®

- Civilian: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo
- Law Enforcement: 440C stainless steel Mill Spec: Mil-C 13924 blade with etched Remington® LE logo
- Military: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- · Anodized aluminum handle with 3M non-slip inserts
- Series I: Civilian Cordura sheath; LE Molle sheath; Military Molle plus leg extension (shown above)
- Series I: 4 3/4" Blade, 10 1/2" Overall Length

• Series II: 3 5/ε" Blade, 4 3/4" Closed

Made in Italy

ZULU® SERIES ! - FIXED BLADE


CIVILIAN Clip: 19560 - Boxed Drop: 19561 - Boxed


Tanto: 19562 - Boxed

LAW ENFORCEMENT Clip: 19563 - Boxed **Drop:** 19564 - Boxed

Tanto: 19565 - Boxed

MILITARY Clip: 19566 - Boxed Drop: 19567 - Boxed

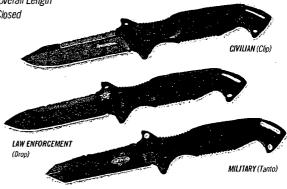



ZULU® SERIES II - FOLDER

CIVILIAN

Clip: 19569 - Boxed Drop: 19570 - Boxed Tanto: 19571 - Boxed

LAW ENFORCEMENT Clip: 19572 - Boxed

Drop: 19573 - Boxed Tanto: 19574 - Boxed

MILITARY


Clip: 19575 - Boxed **Drop:** 19576 - Boxed Tanto: 19577 - Boxed

PREMIER - R 0003113

HUNTING KNIVES

ELITE HUNTER®

- 440C stainless steel blade with satin finish and etched Remington® logo
- · 6061 aircraft aluminum handle
- · Genuine leather sheaths
- · Available in 3M non-slip, Olive Wood or Genuine Stag handles
- Series I: 4 1/1" Blade, 9 1/3" Overall Length
- · Series II:
- Clip & Drop: 3 3/3" Blade, 4 1/2" Closed
- -2-Blade: 3 3/3" Drop. 3 1/3" Saw. 4 1/2" Closed
- 3-Blade: 3 3/3" Drop, 3 1/3" Saw, 3 3/3" Gut Hook, 4 1/2" Closed
- Made in Italy

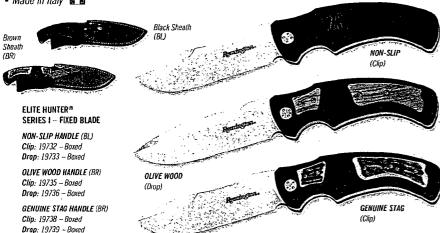



NON-SLIP HANDLE (HBL) Clip: 19741 - Boxed **Drop:** 19742 - Boxed 2-Blade: 19750 - Boxed 3-Blade: 19753 - Boxed

OLIVE WOOD HANDLE (HBR) Clip: 19744 - Boxed Drop: 19745 - Boxed 2-Blade: 19751 - Boxed 3-Blade: 19754 - Boxed

GENUINE STAG HANDLE (HBR) Clip: 19747 - Baxed **Drop:** 19748 - Boxed 2-Blade: 19752 - Boxed 3-Rlade: 19755 - Royed



GENUINE STAG

(2-Blade)





CUSTOM CARRY®

- · 440C stainless steel blade with bead blast finish and etched Remington® logo
- 6061 aircraft aluminum handle
- · Genuine leather sheath (Series I only)
- Available in aluminum or G-10 handles
- Series I: 43/8" Blade, 93/8" Overall Length
- Series II: 3 1/4" Blade, 4 1/2" Closed







SERIES II ALUMINUM GRIP





CUSTOM CARRY® SERIES 1 - FIXED BLADE ALUMINUM HANDLE (BR) **Drop:** 19724 - Boxed G-10 HANDLE (BL) **Drop:** 19725 - Boxed

CUSTOM CARRY® SERIES II - FOLDER ALUMINUM HANDLE Drop: 19726 - Boxed G-10 HANDLE **Drop**: 19727 - Boxed

ELITE SKINNER TM SERIES I (FIXED)

NON-SLIP (3-Blade)

- 440 stainless steel blade
- Available in Olive Wood or G-10 handles
- · Genuine handmade leather sheaths
- 3" Blade, 8" Overall Length
- Made in Italy









ELITE SKINNER'" SERIES I - FIXED BLADE OLIVE WOOD HANDLE (BR)

Guthook: 19851 - Boxed Skinner: 19853 - Boxed G-10 HANDLE (BL) Guthook: 19855 - Boxed Skinner: 19857 - Boxed



ELITE SKINNER SERIES II (FOLDER)

- 440 stainless steel blade
- · 6061 aircraft aluminum handle
- Available in Olive Wood inserts or G-10 handles
- Genuine handmade dual action leather sheaths (allows knife to be carried open or closed)
- · 3" Blade, 4" Closed
- Made in Italy





ELITE SKINNER™ SERIES II – FÖLDER OLIVE WOOD INSERTS HANDLE (BR) Guthook: 19852 - Roxed

Skinner: 19854 - Boxed G-10 HANDLE (BL) Guthook: 19856 - Boxed Skinner: 19858 - Boxed



PREMIER™ HUNTING KNIVES (cont.) -

EXCURSION™

- 420 stainless steel PTFE-Teflon® coated blade and etched Remington® logo
- · Injection molded black rubber handle with 420 SS frame
- · Cordura sheath
- Made in Italy







PREMIER™ RESCUE



- 440C SS 3 1/2" Sheepfoot Combo blade with Remington® etch
- 440C SS 3" push button auto belt/web cutter (double blade only)
- · Heavy duty Cordura sheath w/Molle system (double blade only)
- · Glass breaker
- Made in Italy.





(5 1/2" Closed) (Sheepfoot & Auto

(5 1/2" Closed) (Sheenfoot)

ESCAPE ** SERIES II - FOLDER BLACK HANDLE Sheeptoot: 19847 - Boxed Sheepfoot & Auto Belt/Web Cutter: 19848 - Boxed GREEN HANDLE Sheepfoot: 19849 - Boxed Sheeploot & Auto Belt/Web Cutter: 19850 - Boxed



TRADITIONAL COLLECTIBLES

"100TH ANNIVERSARY PUMP ACTION SHOTGUN" KNIFE


- Waterfowl pattern R-23
- Red smooth bone handle with 440 stainless steel blades
- Pump Action Shotgun" · Clip blade with First in Field logo, Made in the USA tang stamp on
- front and product code stamp on back
- · Choke tube wrench and pin punch
- · Certificate of authenticity
- · Made in the USA 🚍



100TH ANNIVERSARY "PUMP ACTION SHOTGUN" KNIFE (41/4" Closed) 18519 - Boxed

2008 "THE VETERAN' BULLET® KNIFE


- Classic barlow pattern RB473
- · Amber jigged bone handle
- 2 1/2" one-armed razor blade with long pull, vintage Remington logo etch, Made in the USA tang stamp on front and product code stamp on back



2008 "THE VETERAN" BULLET KNIFE (3 1/: "Closed) 18993


OUTDOOR EXPLORATION KNIFE SERIES - "WEST"

- Final Limited Edition in a set of four RB-473
- · Genuine jig bone handle
- · 440 stainless steel blades
- 3 1/z" clip blade with compass etch on blade and corresponding direction to West; vintage Remington logo
- 33/4" spey blade with 2008 year tang stamp
- · 4-color display box (stacking)
- Made in the USA ===



OUTDOOR EXPLORATION (WEST) (4 1/: " Closed) 18984 - Boxed

The West. This is the fourth in a series of four knives incorporating the famous Remington Compass onto the handle and blade. The direction of the compass arrow corresponds with the knife's name, thus, on this model, the needle points to "The West." The unique display box is designed to stack in a manner that progressively builds a Remington Country image on two sides.





BARBER - R 0003115 HERITAGE SERIES KNIVES

- 440 stainless steel blades and pins
- · Brass liners
- · Available in Green Jigged Bone or Laminated Wood handle
- · Bolster etch "Remington Arms Co." crest dates back from 1888-1914
- · Big Game comes with leather sheath
- Made in the USA





(3 1/3" Closed) (Clip, Choke Tube Wrench/Tool and Bird Hook) Green Jigged Bone R-13: 19833 - Boxed Laminated Wood R-11: 19841 - Boxed



(Drop Point) Laminated Wood R-51: 19835 - Boxed Green Jigged Bone R-53: 19827 - Boxed



Green Jigged Bone R-73: 19829 - Boxed Laminated Wood R-71: 19837 - Boxed



MINI TOOTHPICK (2 1/4" Closed) (Clip)

Green Jigged Bone R-83: 19831 - Boxed Laminated Wood R-81: 19839 - Boxed



Laminated Wood R-41: 19840 - Boxed Green ligged Bone R-43: 19832 - Boxed

lemington

SPORTSMANT SERIES F.A.S.T. FOLDING KNIVES

- "Fast Action Soft Touch"
- Rubber coated stainless steel handle w/pocket clip and lanyard hole
- 440 stainless steel blade with etched Sportsman™ Series logo
- · Available in matte black, Mossy Oak® Obsession® and Advantage® MAX-4 HD™ camouflage
- · Available in two sizes:
- Large: 3 % Serrated Blade, 5" Closed

- Medium: 31/8" Serrated Blade, 4 1/3" Closed



Large: 18219 - Clampack, 18212 - Boxed Medium: 19072 - Clampack, 19060 - Boxes

STAINLESS STEEL BLADE MATTE BLACK HANDLE

Large: 18220 - Clampack, 18213 - Boxed Medium: 19073 - Clampack, 19061 - Boxed

STAINLESS STEEL BLADE MOSSY OAK* OBSESSION* HANDLE Large: 18216 - Clampack, 18210 - Boxed Medium: 19070 - Clampack, 19058 - Boxed

STAINLESS STEEL BLACK BLADE ADVANTAGE® MAX-4 HD™ HANDLE Large: 18215 - Clampack, 18209 - Boxed Medium: 19069 - Clampack, 19057 - Boxen



SPORTSMAN™ SERIES F.A.S.T. FIXED KNIVES

- "Fast Action Soft Touch"
- · Rubber coated stainless steel handle w/lanyard hole
- 440 stainless steel blade with etched Sportsman™ Series logo
- · Available in matte black, Mossy Oak® Obsession® and Advantage® MAX-4 HD™ camouflage
- 53/4" Serrated Blade, 101/2" Overall Length
- Available with heavy-duty nylon sheath

STAINLESS STEEL BLADE MATTE BLACK HANDLE (Shown) 19785 - Clampack, 19779 - Boxed

STAINLESS STEEL BLACK BLADE MATTE BLACK HANDLE

19784 — Сіатраск, 19778 — Вохед


STAINLESS STEEL BLADE

MOSSY OAK* OBSESSION* HANDLE 19788 - Clampack, 19782 - Boxed

STAINLESS STEEL BLACK BLADE MOSSY OAK* OBSESSION* HANDLE (Sho 19786 - Clampack, 19780 - Boxed

STAINLESS STEEL BLADE ADVANTAGE® MAX-4 HD™ HANDLE (S 19789 - Clampack, 19783 - Boxed

STAINLESS STEEL BLACK BLADE ADVANTAGE® MAX-4 HD™ HANDLE 19787 - Clampack, 19781 - Boxed




D-SERIES™ KNIVES

- 6061 aircraft aluminum handle
- Available in black and Mossy Oak® Break-Up® camouflage
- · 420 high carbon stainless steel blade

D-SERIES™ BLACK HANDLE

- · Available with leather sheath
- Made in the USA

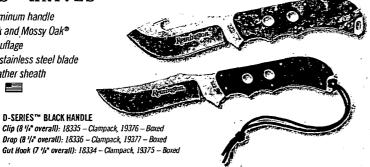

D-SERIES ** CAMO HANDLE Clip (8 '/# overall): 18328 - Clampack, 19373 - Boxe Drop (8 1/4" overall): 18329 - Clampack, 19374 - Boxed Gut Hook (7 '/i" overall): 18327 – Clampack, 19372 – Boxed





KNIVES

SPORTSMAN™ SERIES INSIGNIA EDITION™

- 440 stainless steel blade
- · Available in black laminated wood or Burl wood handle
- Sportsman™ Series medallion inlayed in handle
- Fixed: 3 1/2" Blade, 8" Overall Length
- Large Clip Folder: 3" Blade, 4" Closed
- Small Clip Folder: 2 1/2" Blade, 3 1/2" Closed
- · Black leather sheaths







INSIGNIA – FIXED BLADE
BLACK LAMINATED HANDLE
Drop: 19311 – Boxed
Guthook: 19312 – Boxed
BURL WOOD HANDLE
Drop: 19313 – Boxed
Guthook: 19314 – Boxed



BURL WOOD

(Guthook)

BLACK LAMINATE

SPORTSMAN™ SERIES TECTONIC CTi™

- 420HC stainless steel blades with titanium coating and etched Sportsman™ Series logo
- · Carbon fiber handle
- Fixed blades come with paddle style ABS plastic sheath
- Folders have push button closure and pocket clip







FIXED CLIP BLADE (3 '/-' Blade, 7 '/-' Overall) 19277 – Clampack



FIXED CLIP BLADE WITH TRIGGER RING (3 1/;" Blade, 6 1/;" Overall) 19278 – Clampack



OUICK RELEASE FIXED DROP BLADE WITH TRIGGER RING (3 '/:" Blade, 6 '/:" Overall) 19279 – Clampack



BIG GAME SKINNER SET

 Solid 440 Stainless Steel tip to tip
 Blade lengths: 3" Guthook, 3" Skinner and 2 7/s" Caping blade

• Overall lengths: 7 1/4" Guthook, 7 3/2" Skinner, 6 1/2" Caper

 All knives fit in the heavy-duty Cordura sheath

· Easy access finger hole





DUCK/PHEASANT CLEANING KIT

- 440 Stainless Steel
- Blade lengths: 2" Caping blade
- Overall lengths: 6 ³/₄" Caper, 7" Guthook, 6" Scissors with bone notch
- All knives fit in black nylon sheath for easy carry

DOVE/QUAIL CLEANING KIT

- 440 Stainless Steel
- Blade lengths: 1 2/4" Caping blade
- Overall lengths: 5 1/2" Caper, 4 1/4" Guthook, 4 1/2" Scissors
- All knives fit in black nylon sheath for easy carry





BARBER - R 0003117 BIRD HUNTER'S TOOL

- · The ultimate upland/waterlowl hunter's multi-tool
- · Includes game shears with wing notch, bird gut hook, 3" clip blade, saw, flathead screwdriver, metric ruler and patented 12- and 20-gauge chake tube wrench
- · 100% rust-resistant stainless steel
- · Black nylon sheath included
- 4 1/2" closed

18866 – Clampack



Drop

Tanto

SWIFT-LOKT® 2.0 KNIVES

- · Aluminum with dark gray anodized finish and tactile rubber inlays with bead blasted stainless steel pocket clip
- · Cryogenically tempered AUS8 high carbon bead blasted stainless steel blade with thumb stud
- · Patented assisted opening system using nine long beam springs for superior power and speed
- · Cold-forged liner lock with enlarged lock surface
- · Patent pending slide safety system



Medium (3" Blade, 3 1/4" Closed) Clip: 19294 - Boxed Dran- 19296 - Boxed Tanto: 19298 - Boxed

SWIFT-LOKT® 2.0 L Large (3 1/2" Blade, 4 1/2" Closed)


SPORTSMAN^{IM} SERIES FIXED KNIVES

- · 420HC high carbon stainless steel blade with etched Sportsman™ Series logo
- · Black synthetic non-slip handle
- · Black leather sheath









(4 '/-" Blade, 9 3/-" Overall Length) 18195 - Clampack, 18179 - Boxed

(4 5/3" Blade, 9 3/4" Overall Length) 18191 - Clampack, 18170 - Boxed

Drop w/Gut Hook

(4 1/3" Blade, 9 1/18" Overall Length) 18193 - Clampack, 18173 - Boxed

(4 3/16" Blade, 9 3/4" Overall Length) 18194 – Clampack, 18176 – Boxed

Skinner Clip

(3 11/16" Blade, 9 3/4" Overall Length) 18192 - Clampack, 18171 - Boxed

SPORTSMAN' SERIES BLACK DELRIN® FOLDERS

- · 440 stainless steel blade with etched Sportsman™ Series logo
- Satin finish stainless steel pins and bolsters
- Black delrin handle
- · Brass liners





PEANUT (2 1/4" Closed) (Clip and Pen) 18033 - Clampack



(3" Closed) (Drop Point) 18037 - Clampack



WHITTLER (3 1/z" Closed) (Clip, Short Clip and Pen) 18034 - Clampack



MINI TRAPPER (3 1/2" Closed) (Clip and Spey) 18040 - Clampack



SMALL TEXAS JACK (3 1/2" Closed) (Clip and Pen) 18042 - Clampack



(Spear and Pen) 18036 - Clampack



CAMPER'S KNIFE (3 1/4" Closed) (Spear, Can Opener, Punch. Screwdriver and Cap Lifter) 18041 -- Clampack



UPLAND (3 1/4" Closed) (Clip, Choke Tube Wrench) Tool and Bird Hook) 18035 - Clampack



MID-FOLDING HUNTER (4" Closed) (Clip with Thumb Stud) 18039 - Clampack



MEDIUM STOCKMAN (3 5/s" Closed) (Clip, Spey and Sheepsfoot) 18032 - Clampack



LARGE STOCKMAN (4 1/4" Closed) (Clip, Spey and Sheepsfoot) 18031 - Clampack


BARBER - R 0003118

CLEANING KITS

UNIVERSAL ALL-A-ROUND KIT

- Cleans all your shotguns, rifles & pistols (.22 caliber to 12 gauge)
- · Contains an assortment of brushes, 3-piece brass rod, patches, patch puller, & waterproof/stain resistant Rem Pad
- · Portable cleaning station packaged in a polyethylene storage tube that hangs on a peg or sits on a shelf for convenience



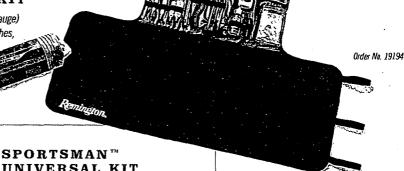



TARGETMASTER™ DELUXE KIT

- 52-piece (true count) kit has all you need includes 100 patches
- · Sturdy aluminum case with positive latches
- 3 sets of 3-piece rods: Rimfire rod (.17-.22), Centerfire rod (.22 and up) and Shotgun/muzzleloader rod
- Precision brass patch jags fit .17-.50 calibers
- Adapters allow for cleaning of handguns (.17-.50)
- · Solid assortment of brushes/mops and accessories




UNIVERSAL KIT

- 27-piece (true count) cleaning kit includes 50 patches (.22 caliber to 12-gauge)
- 3-piece brass rod accepts standard #8-32
- · Integral swivel handle
- · An assortment of most popular brushes, mops and patch sizes

· Brass and nylon brushes for cleaning actions, bolts, cylinders and



Order No. 19054





FIELDMASTER® KIT

- · Brass 3-piece rod with swiveling handle
- Rem[®] Oil (1-oz.) & Brite Bore[™] (2-oz.)
- · A wide variety of patches and patch pullers
- · Brass pistol and shotgun adapters
- · An assortment of bronze bore brushes for 22, 270 and 30 calibers as well as 12 and 20 gauges
- Attractive wooden box

Remington cleaning kits readily accept standard #8-32 cleaning brushes, mops, jags and standard shotgun brushes/ mops. (The rimfire rod in the Targetmaster accepts .17 components, and has an adapter for #8-32 accessories.)

GUN STORAGE & CLEANER

BORE LIGHT

- Ideal for inspecting used firearms, cleaning firearms and inspecting bore for obstructions
- · Includes both curved and straight light tubes
- LED light eliminates intense glare
- · Compact size



REM® PAD GUN CLEANING MATS

- · Surface material won't scratch guns or tabletops
- · Absorbent top material traps and holds up to eight times its weight in fluids
- · A non-slip vinyl bottom forms a barrier to prevent spilled fluids from soaking through
- · Fully machine-washable





Order No. 19950 (Clamnack)

MODEL 365 MINI **DEHUMIDIFIER**

- Protects 30-60 days before recharging is necessary
- Self-contained unit requires no wiring or extension cords
- · Recharges easily in a few hours
- 5-year warranty



16" PLUG-IN DEHUMIDIFIER

- · Works by gently warming the air inside your safe which helps in minimizing moisture
- 6' cord comes with easily assembled plug to allow installation using a small hole in back of safe
- Protects even up to 200 cubic feet more than enough for the largest gun safes

TRIGGER BLOCKS



3-Pack --Order No. 19439 Single -Order No. 18491



Order No.

CABLE LOCK

- · Fits most shotguns, rifles & pistols
- · California approved

Order No. 18364

REM DRIT 35 DESICCANT

- · Removes moisture to prevent rust corrosion and eliminates odors in
- gun safes and cabinets · No electricity required,
- easy-to-read indicator
- · Rechargeable for multiple uses, non-toxic
- · Protects up to 35 cu. ft. of enclosed space



Order No. 19952 (Clampack)

BARBER - R 0003119 Remington's Moistureguard™ VCI/Oil Blend is the most scientifically advanced formula for TECHNOLOGY lubricating and protecting metal surfaces and

equipment from rust and corrosion. It's the perfect combination of our premium Rem® Oil rust preventative and new Volatile Corrosion Inhibitor (VCI), providing ultimate protection against the harshest of elements. Designed for long term protection, it should be the last application prior to storing any metal equipment.

MOISTUREGUARD'M REM® OIL NEW

- · Guards your hunting, fishing and marine gear from rust and corrosion
- Protects all metals from rust and corrosion
- · Displaces moisture
- · Lubricates, cleans and protects
- Built from Rem Oil
- Using Volatile Corrosion Inhibitor Technology
- Comes in: 6 az. spray pump Order No. 18378





MOISTUREGUARD GREASE

- · 6cc multi-purpose grease syringe
- Using Volatile Corrosion Inhibitor Technology
- · Safe on all metal surfaces
- Instantly provides superior long lasting lubrication and protection
- · Penetrates into smallest cracks and crevices



Order No.



10" x 10" multi-

- purpose cloth wipe
- Using Volatile Corrosion Inhibitor Technology

REM® CLOTH

 Instantly protects all metals from rust and corrosion



MOISTUREGUARD™ GUN PLUGS

Using Volatile Corrosion Inhibitor Technology

VCI

- · Protects all metals from rust and corrosion
- · Place in chamber or mount in gun cabinet/safe to protect gun
- · Leaves no scent residue
- 30 cubic feet of protection Use as a snap cap

Order No. 19902

• Comes in: 12 gauge - Order No. 19463 20 gauge - Order No. 19464 Centerfire - Order No. 19465



MOISTUREGUARD™ SUPER SAFE PLUG

- · Using Volatile Corrosion Inhibitor Technology
- · Protects all metals from rust and corrosion
- Place or hang in gun cabinet/safe
- Superior storage protection
- · Leaves no scent residue
- 216 cubic feet of protection for up to one year



Order No. 19954

CLEANING CHEMICALS

REM: OIL

- · Cleans dirt and grime from exposed metal surfaces while displacing non-visible moisture from metal pores
- · Protects internal and external metal parts from rust and corrosion
- Exclusive Teflon formula provides a thin, long-lasting film that keeps actions working smoothly by reducing metal-to-metal wear
- Comes in: 10 oz. aerosol can Order No. 24027, 4 oz. aerosol can - Order No. 26610, 2 oz. bottle with child resistant cap in footed clamshell - Order No. 18366, 1 oz. squeeze bottle in footed clamshell - Order No. 26617



Ų

REM® ACTION CLEANER

- · Easily cleans dirt, powder residue and caked-on lubricants from disassembled actions and fire-control mechanisms
- Dries quickly and leaves no residue
- Comes in: 10.5-oz. can with jet-spray extension tube Order No. 18395

REM® DRILUBE TM

- · Teflon-based lubricant provides a tough, non-congealing film without the residue of dry graphite lubes
- Keeps firearms functioning dependably to -40°F
- Comes in: 4 oz. aerosol can Order No. 18396



REM® OIL WIPES

- 6" x 8" wipe cloth saturated with Rem Oil
- Comes in: 12 Count Clampack Order No. 18411 and 100 Count Display - Order No. 18473

SHOTGUN CLEANER

- · Cleans trigger groups, gas ports, choke tube threading, receivers, chambers, barrels and magazine tubes
- · Dissolves powder residue, fouled lubricants, burnt carbon deposits and gunk
- · Blasts away gummy caked on grime from hard to reach areas such as ejectors, firing pin assemblies, trigger components and bolt recesses
- Contains no CFC's or carcinogens safe for polymers
- Comes in: 18-oz. aerosol can Order No. 18472

40-X™ BORE CLEANER™

- · Formerly Remington Bore Cleaner
- 40-X name ties into the products origins in Precision Benchrest Shooting
- Uniquely formulated for rifles to improve cleaning, accuracy and performance
- Fast and easy to use no soaking or foul odors
- · Packaged in tri-fold clamshells
- · Comes in: 2 oz. white oval bottle with child resistant cap: Order No. 18359 and 4 oz. squeeze bottle: Order No. 18397



BRITE BORE™ SOLVENT


- · Dissolves carbon and powder fouling, removes copper, lead and plastic deposits
- · Handy size for field range use
- Low odor contains no CFC's
- Comes in: 6 oz. caп Order No. 18394 4 oz. iar - Order No. 18385 2 oz. bottle - Order No. 18367





BARBER - R 0003120

REMINGTON° VALUED PARTNERS

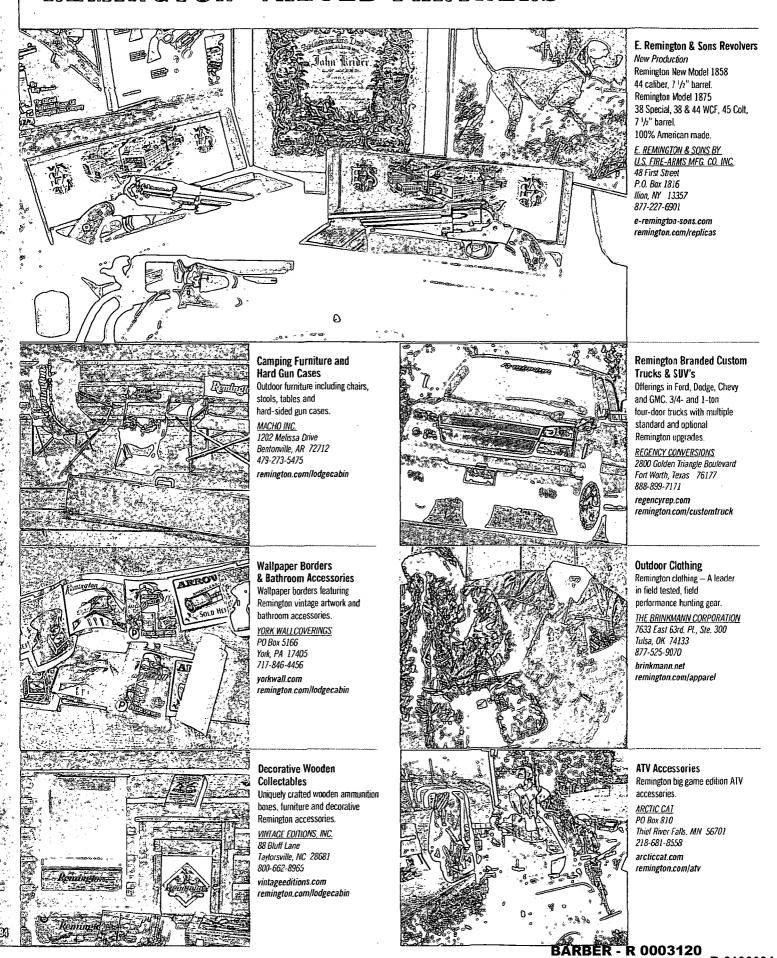



REMINGTON® VALUED PARTNERS



Eye & Hearing Protection, Safety Gloves, Hard Hats and Vests (for both the sporting and industrial markets) Eye and hearing protection and reflective and non-reflective safety gloves, hard hats and vests for both the sporting goods and industrial trades.

remington.com/safetygear

Footwear

Hunting boots, PAC boots, hiking boots, rubber knee boots and rugged casual footwear.

remington.com/footwear

RADIANS 2768 Appling Center Cove Memphis, TN 38133 901-388-7776

radiansinc.com



Area Rugs, Mats and Carpet

MILLIKEN & CO. 201 Lukken Industrial Dr. West La Grange, GA 30240 800-342-5539

remington.com/lodgecabin



Wildlife Feeders and Digital Game Cameras

Remington wildlife feeders with automatic and self-feeding models, timing units and accessories.

BA PRODUCIS PO Box 291730 Kerrville, TX 78028 800-847-8269


remingtonfeeders.com remington.com/wildlife



Plastic Molded Decoys

Remington decoys — exceptional detail for realistic look. Duck, goose and related waterfowl products.

CASL INDUSTRIES
PO Box 1280
Clayton, CA 94517
925-685-5055
caslindustries.com
remington.com/huntshoot




Gun Cases, Paper Targets and Shooting Accessories

The Allen Company manufactures high-quality soft gun cases, targets and other shooting accessories utilizing Remington trademarked logos.

THE ALLEN COMPANY
PO Box 445
525 Burbank St:
Broomfield, CO 80038
303-469-1857

allencompany.net remington.com/huntshoot



Thermal Underwear T-Shirts and Henleys

Men's screen printed graphic T-shirts depicting Remington themes and thermal underwear for hunters.

WRIGHT'S LLC 208 Walter Blvd. Suite 100 Bentonville, AR 72712 479-271-8488

intradecoapparel.com remington.com/apparel



Action Figures

Outdoor action figures with matching firearms and hunting accessories.

HUNTER DAN
PO Box 103
Greencastle, IN 46135
765-655-1400
hunterdan.com
remington.com/toys



Cutlery - European Markets

Premier hunting and tactical knives
– fixed blade and folders.

CONSORZIO CONTELLINAI MANIAGO Via Della Republica, 21 33085 Maiaso (PN) İtaly Tel: +39 0 42771185

remington.com/cutlery




Knife Storage Cases, Rolls, Packs and Zipper Pouches

Remington knife storage cases, rolls, packs and zipper pouches.

SMOKEY MOUNTAIN KNIFE WORKS 2320 Winfield Dunn Pkwy Sevierville, TN 37876 865-453-5871

eknifeworks.com remington.com/cutlery

BARBER - R 0003122



OOO3 Calendars Tile 2008 Remington calendar program features a collector's poster, calendar and daily

CALENDAR PROMOTIONS / GLOBAL MARKETING 1000 Highway 4 South Sleepy Eye, MN 56085 800-533-0498

countrygallerycalendars.com remington.com/lodgecabin



Wooden Signs, Tins and Magnets

Complete line of vintage Remington. UMC. Peters wooden signs, nostalgic tins and magnets.

AMERICAN SPORTSMAN SIGN CO. 4808 Chilton Court Columbia, MO 65203 573-449-9077

americansportsmansign.com remington.com/lodgecabin



T-Shirts

T-shirts, henleys, turtlenecks, fleece shirts, windbreakers and jackets.

SV3 LICENSING LLC 1057-521 Corporate Center Dr. Suite 160 Fort Mill, SC 29715 803-802-4304 remington.com/apparel



Fine Art Prints

Limited Edition fine art print reproductions of vintage Remington, Peters, UMC firearms and ammo promotional artwork. **WINFIELD GALLERIES** 748 Hanley Industrial Court

St. Louis, MO 63144 314-645-7636

remingtonartwork.com remington.com/lodgecabin




Back Packs, Bags and Pouches

Remington camo back packs, bags, pouches and related products.

CERF BROTHERS 4240 Rider Trail North Earth City, MO 63045 800-237-3224


cerfbag.com remington.com/huntshoot



Lighters and Lighter Accessories

The #1 name in American made lighters - now produces a great line of Remington branded products.

ZIPPO 33 Barbour Bradford, PA 16701 814-368-2700 zippo.com remington.com/personal




Black Powder Accessories

Complete line of Remington black powder accessories.

TRADITIONS BLACK POWDER 1375 Boston Post Road PO Box 776 Old Saybrook, CT 06475 860-388-4656


traditionsfirearms.com remington.com/huntshoot



Air Rifles & **Soft Air Rifles**

Pneumatic and break barrel air rifles and air gun ammunition. Plus Remington replica soft air rifles.

CROSMAN CORP. Rout 5 & 20 East Bloomfield, NY 14443 585-657-6161 crosman.com remington.com/airguns



Specialty Gifts

Windmills, thermometers, lanterns, wind chimes, ceiling fans, truck hitch covers and benches.

S & D, INC. 203 E. Mill St. Amboy, IN 46911 877-616-7495 harvest-farms.com remington.com/lodgecabin

FOR MORE INFORMATION OR LICENSEE OPPORTUNITIES.

CONTACT US AT 336-548-8535 OR VALUEDPARTNER@REMINGTON.COM

Thomps	
	EXTRICTS 500 CONTROLS
Marcine Marc	received the parties and the
Part	CARTINION GREET AND
March Marc	
Part	-32.0 0.187
Tenne	28.9 0.210
Part	A 14
Part	
25 - 1	-162.0 0.130
2. 2. 2. 2. 2. 2. 2. 2.	-162.0 £130
Part	-46.1 0.175
222 Marriages 2.000 1.000	588 0.238
222 Periodic	-728 0.175
22 Parishing (2290) 5. 3 Parishing (31) 5. 3 P	-67.1 0.188
	51.7 0.242
	-57.0, 0.202
Program Prog	-493, 0.173
Second Performance Second	527 0.192
Part	375 0.242
Part	46.3 0.255
Program Prog	-58.6 0.197
Programmen Pro	-55.1 0.209
Part	-57.0 0.202
	54.8 Q.234
Marcian Marc	-66.4 0.205
22-200 Remargingham 12-200 23-30	50.1 0.261
22 PM Remisple 12200. 46 1 More Authorise 1410 1510 151 151 151 151 151 151 151 151	-45.4 0.336
Programme Prog	-51.7 0.362
Part	3 Mary 11 15 15 16 16 16 16 16 16 16 16 16 16 16 16 16
Part	5 to 12 125
Seminary	2.75 y 2.75
Semi Reningan** Reningan** Reniman**	-38.3 0.197
24 Win. Regular Regula	-32.8 0.230
Figure F	-40.8 0.356
R243W2 R243W2 R243W3 R243W2 R243W3 R	::-30.6° - 0.330
PRICEASINA PRI	-37.3 0.255 -37.3 0.255
PRC249WC 101 Core-Later Pointed Sch Point 91/2 280 2709 2719 27	
PRC-43WG 100 Core-Lord** Unber Bonded** 9½ 2960 2795 241 2245 2833 1822 1935 1826 120 917 745 0.0 0.5 280 -2.0 -3.3 -10.3 1.6 1.5 280 -2.9 -7.3 -7.5	
25-06 Remiringian Residual Residua	-443 0.373
25-06 Remiringion Resident Point Point Point Remiringion Resident Point Remiringion Resident Remiringion R	45.4 0.356
PMC250GRA 115 Core-Lack*** Urba Bonded**** 91% 900 975 980 975	-41.7 0.292
25-27-19/14-1	-42.5 0.380
25-20 Win. Resident R	-44.1 0.362
257 Roberts R257 117 Core-Lotal* Soft Pointer Soft Po	-315.5 0.190
6.555 Swerich Ressington Mag RessMit 140 Core-Lotal* Pointed Soft Point 1914 2550 253 2164 1934 1814 1654 2021 1720 1456 1224 1023 850 10.0 tero 15 48 99 17.0 24 21 720 30 9.8 27 6.5mm Remington Mag RessMit 1910 Core-Lotal* Pointed Soft Point 1914 1914 2750 2830 2667 2512 2334 2163 2000 2332 2033 1807 1560 1340 1146 10.1 201 10.0 10.0 tero 18. 48 99 17.0 24 21 720 30 21 720 35 15 15 15 720 35 15 15 720 35 15 15 15 720 35 15 15 15 720 35 15 15 15 720 35 15 15 720 35 15 15 720 35 15 720 35 15 720 3	-58.6 0.285
6.5mm Remington Mag R65MMZ 120 Core-Lotal* Pointed Seit Paint 9½ M 3210 295 2821 233 2102 1867 2785 2786 1870 177 929 0.4 0.7 zero -1.8 -4.9 -9.5 2.7 3.0 2.1 zero -3.5 -1.5 260 Remington PRAGORA: 120 Reculps Beat Teal - 9½ 2830 2867 2512 2334 2153 2000 2332 2083 1807 1560 1340 1146 0.1 207 zero -1.8 -4.9 -9.5 1.6 1.5 zero -2.8 272 2000 2332 200	-78.2 0.240
FACSORR 1/40	-57.8 0.435
REGORI 140 Core-Lock* Pointed Seit Point 91/2 2750 254 237 2158 1919 1812 2351 2011 1712 1448 1217 1021 0.3 0.8 zero -2.3 -6.1 -1.1.7 1.9 1.7 zero -3.3 -8.3 -2.4 PRC-SORB 140 Core-Lock* Utura Bondeed** 91/2 2750 2554 265 2185 2013 1849 2351 2027 1739 1849 1250 1063 0.0 0.8 zero -2.2 -6.0 -1.1.5 1.9 1.7 zero -3.2 -8.1 -2.3 English Pointed Seit Pointed Sei	-35.3 0.323
PRC266RB 40 Core-Lock* Utbra Borded** 9 1/2 750 255 2185 2185 2185 2185 2185 2185 2185	417 2 0480
R64Win Mag. R64Win Mag. R764Win	-47.2 0.435
264 Win, Mag. R264W2 140 Core-Lotar Pointed Soft Point 91/4 M 3030 2782 2548 2326 2114 1914 2854 2406 2018 1682 1389 1139 0.1 0.6 zero -1.8 -5.0 -9.6 1.5 1.4 zero -2.7 -6.9 -2.0 6.8 min Rem. SPC R68R1 115 Open Tip Match (DTM) 91/5 2625 2373 2135 1911 1702 1513 1759 1437 1163 932 740 584 0.4 1.0 zero -2.7 -7.3 -14.1 2.3 2.0 zero -3.9 -10.0 -2.9 R68R2 115 Metal Case 91/5 2625 2329 2063 1797 1565 1363 1759 1385 1076 87.5 67.5 474 0.5 1.0 zero -2.7 -7.4 -14.3 2.4 2.1 zero -4.0 -10.1 -3.0 2.0 zero -1.0 -1.0 zero -2.7 -7.4 -14.3 2.4 2.1 zero -4.0 -10.1 -3.0 zero -1.0 zero -2.7 -7.4 -1.4 2.3 2.0 zero -3.9 -10.0 zero -1.0 zero -2.7 -7.4 -1.4 2.3 2.0 zero -3.9 -10.0 zero -1.0 zero -2.7 -7.4 -1.4 2.1 zero -4.0 -1.0 zero -2.7 -7.4 -1.4 2.1 zero -4.0 -1.0 zero -2.7 -7.4 zero -4.0 -1.0 zero -2.7 zero -4.0 -1.0 zero -2.7 zero -2.7 zero -4.0 zero -2	-47.6 0.457
6.8mm Rem: SPC R68R1 115 Open Tip Match (OTM) 9 ½ 2625 2373 2135 1911 1702 1513 1759 1437 1163 232 740 584 0.4 1.0 zero -2.7 -7.3 -14.1 2.3 2.0 zero -3.9 -100 -2.9 R68R2 115 Metal Case 9 ½ 2625 2329 2053 1797 1565 1563 1759 1385 1076 8 25 625 474 0.5 1.0 zero -2.9 -7.8 -15.1 2.5 2.1 zero -4.2 -10.6 -3.2 R66SR1 115 Metal Case 9 ½ 2625 2329 2053 1797 1565 1658 1679 1479 1479 1479 1479 1479 1479 1479 14	68.9 0.435
R68R2 115 Metal Case 91h 2625 2329 2053 1797 1565 1363 1759 1385 1076 875 625 474 0.5 1.0 zero -2.9 -7.8 -15.1 2.5 2.1 zero -4.2 -10.6 -3.2 RM65R1 115 Metal Gray BTHP 91h 2625 2365 2119 1889 1676 1454 1759 1428 1147 911 717 562 0.5 1.0 zero -2.7 -7.4 -14.3 2.4 2.1 zero -4.0 -10.1 -3.0	-41.3 0.384
RMGSRI 115 Matching BTHP 91/2 2625 2365 2119 1889 1676 1464 1759 1428 1147 911 717 562 0.5 1.0 zew -2.7 -7.4 -14.3 2.4 2.1 zero -4.0 -10.1 -30	-61.2 0.344
	-68.3 0.292
PRGSSR4 115 Core-Lust: Ultra Bonded* 91/h 2625 2332 2058 1805 1574 1372 1759 1389 1082 832 633 481 0.5 1.0 zero -2.8 -7.8 -15.0 2.5 2.1 zero -4.2 -10.7 -3.2	-62.5 0.333
	-67.8 0.295
270 Wm. PC270W1 100 Printed Soft Print 9 1/h 3320 2924 2561 2725 1916 1636 2446 1898 1456 1099 815 594 0.0 0.5 zero -1.6 -4.5 -9.1 2.3 2.8 2.0 zero -3.6 -1.6	
115 Core-later Pointed Set Point 59 ½ 2710 2412 2133 1873 1835 1425 1875 1485 1161 896 683 519 0.1 2200 -1.6 4.8 100 -17.8 10.0 220 -1.6 4.8 100 -17.8 10.0 220 -1.6 4.8 100 -17.8 10.0 220 -1.6 4.8 100 -17.8 10.0 220 -1.6 4.8 10.0 -17.8 10.0 220 -1.6 4.8 10.0 -17.8 10.0 220 -17.8 10.0 220 -17.8 10.0 220 -17.8 10.0 -17.	
PRAZ/ONA 130 Accist Boat Tal 91/h 3060 2845 2639 2442 2254 2076 2702 2335 2009 1721 1457 1243 0.0 0.5 zaro 1.17, 4.7 9.0 1.4, 1.3. zaro 24 6.4 18	
PRSC270WA 130 Swift Scircoco Bondes 91/s 3060 2838 2627 2425 2222 2048 2702 2325 1931 1697 1438 1211 0.0 0.6 zero -1.7 -4.7 -9.0 1.4 1.3 zero -2.5 -6.5 -18	
P270M2 130 Core-Lats! Pointed Sch Point 91/2 3060 2776 2510 2259 2022 1801 2702 2225 1818 1472 1180 936 0.1 0.6 zero -1.8 -5.1 -9.8 1.5 1.4 zero -2.8 -7.0 -2.0	
RZ70W3 130 Bronze Print 91/z 3060 2802 2559 2329 2110 1914 2702 2567 1890 1565 1285 1046 0.0 0.6 zero -1.6 -4.9 -9.5 1.5 1.3 zero -2.7 -6.8 -2.0	
PRCZ70WB 140 Core-Lotz Uttua Boroted** 9½ 2925 2667 2424 2193 1975 1771 2659 2211 1825 1495 1212 975 0.1 0.7 zero -2.0 -5.5 -1.0.7 1.7 1.5 zero -3.0 -7.6 -22	-46.4 0.360
RSZ70NA 140 SwittA-frame PSP 9½ 2925 2652 2394 2152 1923 1711 2659 2186 1782 1439 1150 910 02 07 zero -2.1 -5.6 -10.9 1.7 1.5 zero -3.1 -7.8 -7.3	-48.0 0.339 -61.0 0.001
R270W4 150 Core-List's Saft Print 91/s 2850 2504 2183 1825 1618 1385 2705 2027 1587 1185 872 639 0.3 0.8 zero -2.4 -6.7 -1.3.0 2.0 1.8 zero -3.6 -9.4 -28	-61.2 0.261
270 WSM R270 WSM 130 Core-List's Soft Point 51/kM 3265 2966 2707 2444 2196 1953 3114 2573 2114 1724 1392 1112 -0.1 0.4 zero -15 -4.2 -8.2 2.1 2.5 1.9 zero -3.2 -1.4 -1.5 -1	-32.2 0.336
PRAZ70WSAMS 150 According Book Teal 91/kM 3160 2972 1-7932 2618 2452 2791 3325 2941 2595 2283 2002 1748 -0.1 0.5 zero -1.5 -4.1 -8.0 2.1 .2.5 1.8 zero -3.0 -1.2	
250 Reminigron PRAZEURA 140 Accord 91/2 3000 2804 2517 2437 2255 2099 2797 2444 2129 1845 1594 1369 0.1 0.6 zero -18 -4.8 -9.2 25 2.9 2.1 zero -3.4 -14	
R280R3 140 Core-tata Printed Soft Point 91/2 3000 2758 2528 2309 2102 1905 2797 2363 1935 1557 1373 1128 0.1 0.6 zero -1.9 -5.1 -9.8 1.5 1.4 zero -2.8 -7.0 -7.0	-42.0 0.390

145 2 TO 1	्राजींक अ	sÇB:	a saganga	6	75.4		Trans.	<i>Y</i>		2000		N -3.8.0	10 of	- विदेश	il design	1000	1	- ind		22 603		3	क्षां जिल्ल
		0	Contract Con	<u> </u>	Contract of	0	છા જ		بنحصنه				<u></u>		ID (U)		7	D.W				<u></u>	
2SO Remirgton (cora)	RZ3CR1	150	Core-Lukt* Pointed Soft Point	91/2	2390	262‡	2373 21	35 191	2 1765	2731 2293	1875 15	18 1217 968	0.2	0.7 z	em -2.1	-53 -112	1.3	.6 zero	-3.1	-8.0	-23.6	48.3	0.346
i	R23CR2	155	Core-Latt* Soft Point	91/2	2320	2510	2220 13	50 170	1 1479	2913 2308	1805 13	3 1060 801	0.0	Z2TO -	1.3 -4.1	-3.6 -152	2.0	.8 · zem	-3.6	-9.1	-27.4	-57.3	0.290
7mm-03 Remiration	R/MO32	120	Hollow Point	91/2	3000	2725	2467 22	23 199	2 1773	2398 1979	1621 13	16 1058 842	0.1	0.6 2	aro -1.9	-5.3 -10.2	1.6	.4 zero	-2.9	-7.3	-21.7	44.9	0.343
. [R7M081	140	Core-Laht" Pointed Soft Point	91/2	2850	2625	2402 21	39 198	3 1793	2542 2142	1793 14	0 1228 1005	0.2	0.7 2	ezo -2.1	-5.7 -11.0	1.3	l.6 zem	-3.1	-7.8	-22.9	46.8	0.390
Ì	PRA7MOSRB	140	Acculing Boat Tail	91/2	2860	2670	2489 23	14 214	5 1986	2542 2215	1925 - 16	4 1432 1225	-02	0.7 2	ero -2.0	-5.4 -10.3	LJ :	.5 ZE0	-29	-73	-21.1	425	0.486
	RL7M081	140	Core-Loke Pointed Soft Point	91/2	2361	2151	1951 . 17	64 159	0 1433	1732 1437	1183 96	7- 786 638	01	zero -	20 -60	124 - 213	30	25 7910	4.8	-122	-35.6	728	0.390
7mm Rem Magnum	PRC7AMRA	140	Core-Lokt" Ultra Bonded "	91/2M	3175		2707 24		3 2036	****	2277 19	-1	0.1		aro -1.6		-	2 zen	-2.4	-60		-36.0	0,409
THEIT WAS THE STATE OF THE STAT	R7MM4	140	Core-Lokt* Pointed Soft Point	91/2 M			2684 24		3 2039	3133 2655			0.0		rero -1.6	4.4 -8.5		2.6 1.9	2210	-32		-32.0	0.390
ì	5 7 7 Vales		Friedrich Grant der eine								**********		10 10 10 10 1				P. S. S. 654						
ļ	RL7MM4	140%	Core-Lokt Pointed Soft Point	94 M	2 - 12				5 (1683)	2283 (1915	- 2 43 .	Be 6 25			13 42	28 A	09	<u> </u>			470	59.2	0.388
	PRSC7MMB	150	Swift Scirocco" Bonded	91/2 M	3110			82 241	9 2262			20 1948 1704	0.0	-	ero -1.6		ļ	1.2 zero	-23	-59		-34.0	0.533
	PRAZNAMRA	140	Accurio Boat Tail	91/2 M	3175	2971	2111 25	91 241	2 2241	3133 2744	2397 20	1560 1808	. 0.13	0.5	ero 15	42 -80	.21 :	25 18	. ZETO	3.0	-13.0	29.0	0.486
ļ	PRA7MMRB	150	Acculio Boat Tail	9 1/2 M	3110	2926	2749 , 25	79 241	5 2258	3221 2850	2516 22	15 1943 -1697	0.0	0.5, 2	uo -1.6	43 82	13	.2. zenî	23	5 <u>9</u> ·	:[-]/; · · ·	34.1	0.530
ĺ	R7MM2	150	Core-Lokt * Pointed Soft Point	91/2M	3110	2830	2568 23	20 208	5 1366	3221 2667	2196 17	22 1448 1160	0.0	0.6	ero -1.7	-4.8 -9.3	1.4	l.3 zen	-2.6	-6.7	-19.9	41.1	0.346
Ì	PRC7MMRC	150	Core-Lokt* Ultra Bonded "	91/2M	2950	2724	2510 23	05 210	9 1924	3091 2636	2237 18	87 1581 1315	0.1	0.6	ero -1.9	-5.2 -10.0	1.6	L.4 ZERO	-2.8	-7.1	-20.8	42.4	0.415
	RS7MMA	160	Swift A-Frame* PSP	91/2 M	2900	2659	2430 22	12 200	6 1812	2987 2511	2097 17	39 1430 1166	0.2	0.7 2	ero -2.0	-5.510.7	1.7	l.5 zem	-3.0	-7.5	-22.4	45.8	0.382
	RIMAIS	175	Core-Lokt* Pointed Soft Point	91/2 M	2360		2440 22		7 1379	3178 2718			0.2		ero -2.1	-5.6 -10.7		l.5 zem	-3.0	-7.6	<u> </u>	-44.8	0.427
T CDU				-						ļ							1						
7mm STW	RS7MSTWA	140	Swift A-Frame" PSP	91/2 M	3325	3020			5 1978	3436 2834	·	`	0.0		ero 1.5		 	2.5 1.8	2810		<u> </u>	-31.5	0.332
	RIMSTWI	140	Core-Lokt* Pointed Soft Point	9½ M	3325		2818 25		4 2153		2458 20	77 1737 1441	0.0		ero -1.4	-3.9 -7.6	 	24 1.7	zero	-2.9		-28.8	0.390
7mm Mauser (7:67)	R7MSRt	140	Core-Lokt* Pointed Soft Point	91/2	2660	2435	2221 20	18 182	7 1648	2199 1843	1533 12	56 1037 844	0.0	zero ·	1.4 -4.4	-9.1 -15.8	2.2	1.9 zero	-3.6	-9.2	-27.4	-55.3	0.390
Jmm Remington	PR7SM1	140	Core-Lokt* Ultra Bonded **	91/2 M	3175	2934	2707 24	90 228	3 2085	3133 2676	2277 19	27 1620 1353	0.1	0.5	rero -1.6	-4.3 -8.4	1.3	.2 zero	-2.4	-6.0	-17.7	-36.0	0.409
SA Ulira Mag	PR7SM2	150	Core-Lokt* Pointed Soft Point	9 ½ M	3110	2831	2568 23	21 208	7 1867	3221 2669	2197 17	93 1450 1161	0.0	0.6	ero -1.7	-4.8 -9.3	2.5	2.9 2.1	ZE110	-3.6	-15.7	-35.9	0.346
	PR7SM4	160	Core-Lokt* Ultra Bonded **	91/2 M	2960	2733	2518 23	13 211	7 1931	3112 2654	2252 19	00 1592 1323	0.1	0.6	zero -1.9	-5.2 -9.9	2.7	3.1 2.2	zero	-3.7	-16.2	-36.5	0.414
7mm Ram Ultra Mag*	PR7UM1	140	Core-Lokt* Ultra Bonded**	91/2 M	3425		2929 27		5 2278		2667 22		-0.2		rero -1.3		ļ	2.2 1.6	ZESTO	-2.7		-26.4	0,409
POWER	PRSC7UM1	150	Swift Scirocco Bonded	91/2 M			2948 27		2 2438			58 2254 1979	-0.1	7-4-7	rero -1.3			22 1.6				-25.3	0.533
LEVEL (III					,		-										1	• • •					
	PR7UM5	175	Swift A-Frame PSP	. 91/2 M	3025		2645 24		6 2212	3555 -3114			0.0		zero -1.7		-	28 20	200			-32.2	0.493
POWER LEVEL II	PR7UM2-P2	160	Core-Lokt* Ultra Bonded**	91/2 M	2950	2724	2508 23	03 210	8 1922	3091 2635	2235 18	84 1578 1312	0.1	0.6	2010 -1.9	-5.2 -10.0	1.5	.4 zem	-2.8	-7.1	-20.8	-42.4	0.414
POWER LEVEL I	R7UM1-P1	140	Core-Lokt® Pointed Soft Point	91/2 M	3000	2768	2549 23	39 213	9 1950	2797 23882	2019 17	00 1422 1181	0.1	0.6	ero -1.8	-5.0 - 9 .6	2.6	3.0 2.2	zero	-3.6	-15.8	-35.6	0.409
30 Carbine	L30CR1	110	UMC Metal Case	61/2	1990	,:1567	1236 - 10	35 92	3 ÷ 842 5°	ु967 √600	:373 - 20	2, 208 173	0.6	ž ZE TO .	42 -129	27.2 48.6	. 28	go 🖫 7,3	20.4	403	105.6.	2118.	0.166
	R30CAR	110	Soft Point	61/2	1990	1567	1236 10	35 92	842	967 600	373 26	2 208 173	0.6	zero ·	42 -12.9	-27.2 -48.6	zero -	4.2 -129	-27.2	-48.6	-117.1	-225.5	0.156
30-30 Win, Accelerator ⁵	R3030A	55	Pointed Soft Point	91/2	3400	2693	2085 15	70 118	7 986	1412 886	531 30	1 172 119	0.0	0.6	ero -2.2	-6.2 -13.2	1.7	1.6 zero	-3.5	-9.9	-34,3	-83.3	0.139
30-30 Win.	3RL30301	125	Core-Loke Pointed Soft Point	-91/2	2175	erre har	1508 12	558 100	24.975	1313 - 919	631 74	7 325 264	- 5012	The Comme		€ 19 1 € 33.7 ×	J20-S/	en 252	21A)	778	ED 5.5	146 91	0.215
30 30 mil.	R30301	150	Core-Lokt* Soft Point	91/2	2390	70.000.34	1605 13	2444.4.2.V	P (X94 GP)	1902 1296	858 5	The same of the same of	02	A SHARE TAN	2.4 7.6	Carried San San	1 6 3 5 6 5	ero -4.3		A. Indiana	2000	133.2	0.193
				1	· -												1	_					
)	R30302	170	Core-Lakt* Soft Point	91/2	2200		1619 13		1 1061	1827 1355			0.3		-2.7 -8.3			ero -4.6				-125.3	0.254
	R30303	170	Core-Lokt* Hollory Point	91/2	2200		1619 13		1 1061	1827 1355			0.3	zero ·	-2.7 -8.3	-17.1 -29.9	1.8	ero -4.6	-12.6	-24.5	-62.6	125.3	0.254
30-40 Krag	R30402	180	Core-Lokt® Pointed Soft Point	91/2	2430	2213	2007 18	13 163	2 1468	2360 1957	1610 13	14 1064 861	0.1	ZETO ·	-1.8 -5.6	-11.6 -19.9	1.2	ero -3.2	-8.5	-16.2	-39.9	-76.7	0.383
30-06 Sprg. Accelerator *	R30069	55	Pointed Soft Point	91/2	4080	3484	2964 24	99 208	0 1706	2033 1482	1073 76	3 528 355	-0.4	0.2	zero -1.0	-3.0 -6.2	1.4	L.8 1.4	zero	-2.6	-12.2	-30.0	0.197
30-06 Springfield	R30061	125	Pointed Soft Point	91/2	3140	2780	2447 21	38 185	3 1595				0.7				1.5	L4 zero	-2.8	-7.4	-22.4	-47.6	0.268
1		1						30 103	3 1333	2736 2145	1662 12	69 953 706	0.0	0.6	zero -1.9	-5.2 -10.1] 1.3		2.0	.∈152°	n oc	171023	
	RL30062	125 -	S Core-Loke Pointed Soft Point (*	940	-32 18 1		2034 17		327 BY W	27.2		*****	0.0			-52 -10.1 -104 (-18.3		en 29	er kritis	25.4	7,530.5	78.0	0.267
	E-20. 2-1 July 2	125 -	Name of Property Add to the	914	÷2660	2335 }	2034 - 17	57. 150	9 1300	1964 , 1513	1148 8	6, \$632 57,469	00 2-01	2970	157, 49	-104 C183	(10)	46. ASP. 184	3 78	14.04.39			30,007
	L30062	125 150	UNIC* Metal Case	91h 91h	2660 2910	2335} 2617	2084 17 2342 20	57.2.150 84 184	9 1306 3 1627	2820 2281	1148 8 1827 14	6 637 - 469 46 1131 876	00 201	2870 i.). 2870	15 49 11 -36	₹-104 €183 -77 : -13.6	£1032 1.5	1.6 zero	3-78 - 32	-8.2	24.4,	-50.9	0.314
	L30062 PRSC3006C	125 g 150 150	UNIC* Metal Case Swift Scirocce* Bonded	91h 91h 91h	2660 2910 2910	2335) 2617 2696	2084 (17 2342 (20 2492 (22	57 150 84 184 98 211	9 1306 3 1627 1 1934 -	2820 2281 2820 2421	1148 85 1827 14 2069 17	6 4632 469 46 1131 876 58 1485 1246	00 201 02 01	zero () zero 0.7	15 49 1.1 -3.6 zero -2.0	710.4 £18.3 717 : -13.6 -5.3 : -10.2	1.0 1.6	1.6 zero 1.5 zero	3-78 - 32 29	-82 -73	24.4, <u>.</u> -21.1	-50.9 -42.3	0.314
	L30062 PRSC30060 PRA3006A	125 g 150 150 150	LIMC* Metal Case Swift Sciroco* Bonded Acculip Boat Tail	9/h 9/h 9/h 9/h	2660 2910 2910 2910	2335 2617 2696 2686	2034 - 17 2342 - 20 2492 - 22 2473 - 22	57 150 84 184 98 211 70 207	9 1306 3 1627 1 1934 7 ₄ 1893	2820 2281 2820 2421 2820 2421 2820 2403	1148 28 1827 14 2069 17 2037 17	6 637 469 46 1131 876 58 1485 1246 16 1436 1190	00 201 02 01	2010 - 2010 - 2010 - 2017 -	15 49 11 36 zero 20 zero 20	6 104 6 183 77 : -136 53 : 102 54 = 103	16 16 16 17,1	1.6 zero 1.5 zero 1.5 zero	3-78 -32 -29 -29	-82 -73 S-74	24.4, 21.1 21.5)	-50.9 -42.3 -43.7/÷	0.314 0.435 -0.415
	L30062 PRSC3006C PRA3006A R30062	125 150 150 150 150	LIMC Metal Case Swift Scirocco Bonded Accurity Boat Tail Core-Lokt* Pointed Soft Point	91/2 91/2 91/2 91/2	2910 2910 2910 2910 2910 2910	2335) 2617 2696 2686 2617	2034 17 2342 20 2492 22 2473 22 2342 20	57. 150 84 184 98 211 70 207 83 184	9 1306 3 1627 1 1934 7 1893 3 1622	2820 2281 2820 2421 2820 2421 2820 2403 2820 2281	1148 88 1827 14 2069 17 2037 17 1827 14	6 652 468 46 1131 876 58 1485 1246 16 1436 1193 45 1131 876	0.0 -0.1 -0.2 - 0.1 -0.1 -0.1	2870 2870 0.7 0.7 ≩ 0.7	15 4.9 -1.1 -3.5 zero -2.0 zero -2.2	-104 (-183 -77 : -13.6 -53 : -10.2 -54 (-10.3) -59 -11.4	1.6 1.6 1.7 1.7 1.8	1.6 zero 1.5 zero 1.5 zero 1.6 zero	3-78 - 32 - 29 - 29 - 32	-82 -73 -82	24.4, 21.1 21.5) 24.4	-50.9 -42.3 -43.7 ÷ -50.9	0.314 0.435 -0.415 0.314
	L30062 PRSC3006C PRA3006A R30062 R30063	125 g 150 150 150	LIMC* Metal Case Swift Sciroco* Bonded Acculip Boat Tail	91/2 91/2 91/2 91/2 91/2	2910 2910 2910 2910 2910 2910	2335) 2617 2696 2686 2617 2656	2034 17 2342 20 2492 22 2473 22 2342 20 2416 21	57. 150 84 184 98 211 70 207 81 184 89 197	9 1306 3 1627 1 1934 7 ₄ 1893	2820 2281 2820 2421 2820 2421 2820 2403 2820 2281 2820 2349	1148 1827 14 2069 17 2037 17 1827 14 1944 15	6 637 468 46 1131 876 58 1485 1246 16 1436 1193 45 1131 876 96 1298 1047	00 201 02 01	2870 270 0.7 0.7 0.7	15 49 -1.1 -3.6 zero -2.0 zero -2.2 zero -2.2	-104 £183 -77 : -13.6 -53 : 102 -54 : 103 -59 -11.4 -56 -10.8	1.6 1.6 1.7 1.7 1.8	1.6 zero 1.5 zero 1.5 zero	3-78 - 32 - 29 - 29 - 32	-8.7 -7.3 -8.7 -8.2 -7.1	24.4, 2 21.1 21.5) 24.4 22.7	-50.9 -42.3 -43.7 ÷ -50.9 -46.6	0.314 0.435 -0.415 0.314 0.365
	L30062 PRSC3006C PRA3006A R30062	125 150 150 150 150	LIMC Metal Case Swift Scirocco Bonded Accurity Boat Tail Core-Lokt* Pointed Soft Point	91/2 91/2 91/2 91/2	2910 2910 2910 2910 2910 2910	2335) 2617 2696 2686 2617 2656	2034 17 2342 20 2492 22 2473 22 2342 20	57. 150 84 184 98 211 70 207 81 184 89 197	9 1306 3 1627 1 1934 7 1893 3 1622	2820 2281 2820 2421 2820 2421 2820 2403 2820 2281	1148 1827 14 2069 17 2037 17 1827 14 1944 15	6 637 468 46 1131 876 58 1485 1246 16 1436 1193 45 1131 876 96 1298 1047	0.0 -0.1 -0.2 - 0.1 -0.1 -0.1	2870 2670 0.7 0.7 0.7	15 4.9 -1.1 -3.5 zero -2.0 zero -2.2	-104 £183 -77 : -13.6 -53 : 102 -54 : 103 -59 -11.4 -56 -10.8	1.5 1.6 1.7 1.8	1.6 zero 1.5 zero 1.5 zero 1.6 zero	- 32 - 29 - 29 - 32 - 30	-82 -73 -82	24.4, 2 21.1 21.5) 24.4 22.7	-50.9 -42.3 -43.7 ÷ -50.9	0.314 0.435 -0.415 0.314
	L30062 PRSC3006C PRA3006A R30062 R30063	125 g 150 150 150 150 150	UNC Metal Case Swift Scirocco Bonded Accurity Boat Tail Core-Lokt Pointed Soft Point Bronze Point	91/2 91/2 91/2 91/2 91/2	2910 2910 2910 2910 2910 2910 2910	2335; 2617. 2696 2686 2617 2656 2631	2034 17 2342 20 2492 22 2473 22 2342 20 2416 21	57. 150 84 184 98 211 70 207 83 184 89 197 21 188	9 1300 3 1622 1 1934 7 1893 3 1622 4 1773 9 1674	2820 2281 2820 2421 2820 2421 2820 2403 2820 2349 2820 2349 2820 2349	1148 18 1827 14 2069 17 2087 17 1827 14 1944 15 1868 14	6 637 468 46 1131 876 58 1485 1246 16 1436 1193 45 1131 876 96 1298 1047	00 2013 01 01 02 02 02	##0 0.7 0.7 0.7 0.7	15 49 -1.1 -3.6 zero -2.0 zero -2.2 zero -2.2 zero -2.1	-104 £183 -77 : -13.6 -53 : 102 -54 : 103 -59 -11.4 -56 -10.8	1.0 1.6 1.6 1.7 1.8 1.7	1.6 zero 1.5 zero 1.5 zero 1.6 zero 1.5 zero	3-78 -32 -29 -32 -30 -31	82 -73 -82 -7,1 -8,0	24.4, 2 21.1 21.5; 24.4 22.7 -23.8	-50.9 -42.3 -43.7 ÷ -50.9 -46.6	0.314 0.435 -0.415 0.314 0.365
	L30062 PRSC3006C PRA3006A R30062 R30063 PRC3006A	125 150 150 150 150 150	UNC* Metal Case Swift Scinoco* Bonded According Boart Fair Core-Loka* Pointed Soft Point Bronze Point* Core-Loka* Ultra Bonded**	9 1/2 9 1/2 9 1/2 9 1/2 9 1/2 9 1/2	2910 2910 2910 2910 2910 2910 2910 2900	2335 2617 2696 2686 2617 2656 2631 2597	2034 - 17 2342 - 20 2492 - 22 2473 - 22 2342 - 20 2416 - 21 2368 - 21	57. 150 84 184 98 211 70 207 83 184 89 197 21 188	9 1306 3 3 1622 1 1 1934 7 7 1893 3 3 1622 4 1773 9 1674 9 1876	2820 2281 2820 2421 2820 2421 2820 2433 2820 2349 2820 2349 2820 2305	1148 88 1827 14 2069 17 2037 17 1827 14 1944 15 1868 14 2115 18	6 632 469 46 1131 876 58 1485 1246 16 1436 1193 45 1131 876 96 1298 1047 98 1188 933	00 2013 01 01 02 02 02	2870 0.7 0.7 0.7 0.7 0.7 0.8	15 49 -1.1 -3.6 zero -2.0 zero -2.2 zero -2.2 zero -2.1	104 2183 -71 -136 -53 -102 -54 -103 -59 -114 -56 -108 -58 -112 -59 -111	1.6 1.6 1.7 1.8 1.7	1.6 zero 1.5 zero 1.5 zero 1.6 zero 1.5 zero 1.6 zero	3-78 - 32 - 29 - 32 - 30 - 31 - 32	-82 -73 -82 -7,1 -8,0	24.4, 2 21.1 21.5) 24.4 22.7 -23.8 22.8	-50.9 -42.3 -43.7 7 -50.9 -46.6 -49.3	0.314 0.435 -0.415 0.314 0.365 0.331
	L30062 PRSC3006C PRA3006A R30062 R30063 PRC3006A PRA3006B	125 150 150 150 150 150 150	UNC* Metal Case Swift Scincoo Bonded According Boat Tail Core-Lokt* Pointed Soft Point Brouze Point* Core-Lokt* Ultra Bonded ** FAccording Boat Tail According Boat Tail	9/h 9/h 9/h 9/h 9/h 9/h 9/h	2910 2910 2910 2910 2910 2910 2910 2800 2800	2335 2617 2696 2686 2617 2656 2631 2597 2534	2034 17 2342 20 2492 22 2493 22 2342 20 2416 21 2368 21 2403 22	57 150 84 184 98 211 70 207 83 184 89 197 21 188 17 203 47 182	9 1306 3 3 1622 1 1 1934 7 7 1893 3 3 1622 4 1773 9 1674 9 1876	2800 2281 2820 2421 2820 2421 2820 2431 2820 2349 2820 2305 2872 2470 2872 2470	1148 88 1827 14 2069 17 2037 17 1827 14 1944 15 1868 14 2115 18 1909 15	46 1131 876 88 1485 1246 16 1436 1131 87 131 876 96 1298 1047 98 1188 933 90 1523 1281 34 1220 963	00 201 202 01 02 02 02 02 03	2000 2000 0.7 0.7 0.7 0.7 0.7 0.8 0.8	15 49 1.1 -3.5 200 -2.0 200 -2.0 200 -2.0 200 -2.1	104 (183 117 -136 53 -102 54 -103 -59 -114 -56 -108 -58 -112 -59 -111 -63 -121	1.6 1.6 1.7 1.8 1.7	1.6 zero 1.5 zero 1.5 zero 1.6 zero 1.6 zero 1.6 zero 1.6 zero	3-78 -32 -29 -32 -30 -31 -32 -34	-8.2 -7.3 -8.2 -7.1 -8.0 -2.79 -8.7	21.1 21.5) -24.4 -22.7 -23.8 -22.8 -25.9	-50.9 -42.3 -43.7.7 -50.9 -46.6 -49.3 -46.2	0.314 0.435 -0.415 0.314 0.365 0.331 0.447
	L30062 PRSC30060 PRAS0063 R30063 PRC3006A PRAS006B PRC3006B	125 x 150 150 150 150 150 165 165 168	UNC* Metal Case Swift Scincoo® Bonded According Boat Tail Core-Lold* Pointed Soft Point Brouze Point* Core-Lold* Ultra Bonded "-According Boat Tail Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Core-Lold* Ultra Bonded "	91/2 91/2 91/2 91/2 91/2 91/2 91/2 91/2	2910 2910 2910 2910 2910 2910 2910 2900 2800 2800	2335] 2617. 2696 2686 2617 2656 2631 2597 2534 2546	2684 11 2342 20 2492 22 2473 22 2342 20 2416 21 2368 21 2403 22 2283 20 2306 20	57. 150 84 184 98 211 70 207 83 184 89 197 21 188 17 203 47 182	9 1306 3 3 1622 1 1934 4 7 1893 3 1622 4 1773 9 1674 9 1879 5 1621 6 1668	2820 2281 2820 2421 2820 2421 2820 2303 2820 2349 2820 2305 2872 2470 2872 2352 2924 2418	1148 88 1827 14 2069 17 2087 17 1827 14 1944 15 1868 14 2115 18 1909 15 1984 16	46 1131 876 8 1485 1246 16 1436 1131 876 15 1436 1131 876 15 1238 1047 15 1131 876 15 1238 1047 15 1238 1238 1338 1338 1220 963 13 1229 1037	00 201 201 02 02 02 02 02 02 03 03	2870 2870 2770 2770 2770 2780 28 08 08	15 49 1.1 3,6 2.0 2.0 2.0 2.0 2.0 2.0 2.0 2.0 2.0 2.0	104 183 -17 -136 -53 -102 -54 -103 -59 -114 -56 -108 -58 -112 -59 -111 -63 -121 -62 -119	1.6 1.6 1.6 1.7 1.8 1.7 1.8 2.0 1.9	1.6 zero 1.5 zero 1.5 zero 1.6 zero 1.6 zero 1.6 zero 1.6 zero 1.7 zero 1.7 zero	3.78 -3.2 -2.9 -3.2 -3.0 -3.1 -3.2 -3.4 -3.3	-82 -73 -82 -73 -80 -79 -87 -85	21.1 21.5 24.4 -22.7 -23.8 -22.8 -25.9 -25.1	-50.9 -42.3 -50.9 -46.6 -49.3 -46.2 -53.2 -51.7	0.314 0.435 -0.415 0.314 0.365 0.331 0.447 0.339 0.356
	L30062 PRSC3006C PRAS006A R30062 R30063 PRC3006A PRG3006B R3006B PRC3006B PRG3006B	125 150 150 150 150 165 165 168 180	UNC* Metal Case Swift Scincoo® Bonded According Boat Tail Core-Loka* Pointed Soft Point Brouze Point Core-Loka* Ultra Bonded "According Boat Tail Core-Loka* Pointed Soft Point Core-Loka* Pointed Soft Point According Boat Tail According Boat Tail According Boat Tail According Boat Tail	91/2 91/2 91/2 91/2 91/2 91/2 91/2 91/2	2910 2910 2910 2910 2910 2910 2910 2800 2800 2800 2725	2335 2617 2696 2686 2617 2656 2631 2597 2534 2546 2539	2034 11 2342 20 2492 22 2473 22 2342 21 2416 21 2403 22 2403 22 2283 20 2306 21 2360 21	57. 150 84 184 98 211 70 207 83 184 89 197 21 188 17 203 47 182 79 186 88 202	9 1306 3 3 1622 1 1934 7 1833 3 1622 4 1773 9 1674 9 1876 5 1621 6 1668 4 1861 1	200 228 220 228 220 242 2200 240 2200 240 2200 230 2300 230 2302 230 2302 235 2303 235 2304 2418 2305 2576 2576 2576	1148 88 1827 14 2069 17 2037 17 1827 14 1944 15 1868 14 2115 18 1909 15 1984 16 2226 19	6 632 469 46 1131 876 58 1485 1246 16 1436 1193 45 1131 876 96 1298 1047 98 1188 933 00 1523 1281 34 1220 963 13 1299 1037 14 1637 1333	00 2013 202 01 02 02 02 02 03 03 03	2870 20 20 20 20 20 20 20 20 20 20 20 20 20	15 49 1.1 36 200 -2.0 200 -2.0 200 -2.1 200 -2.1 200 -2.3 200 -2.3 200 -2.3	104 183 -71 135 -53 102 -54 103 -59 -114 -56 -108 -58 -112 -59 -111 -63 -121 -62 -119 -61 -116	1.6 1.6 1.6 1.7 1.8 1.7 1.8 2.0 1.9	1.6 2ero 1.5 2ero 1.5 2ero 1.6 2ero 1.6 2ero 1.6 2ero 1.7 2ero 1.7 2ero 1.7 2ero 2.0 2ero	-78 -32 -29 -32 -30 -31 -32 -34 -33 -33	-8.2 -7.3 -8.2 -7.1 -8.0 -2.9 -8.7 -8.5 -8.2	244, 2 21.1 21.5) 24.4 -22.7 -23.8 -22.8 -25.9 -25.1 -23.7	-50.9 -42.3 -43.7.7 -50.9 -46.6 -49.3 -46.2 -53.2 -51.7 -47.1	0.314 0.435 -0.415 0.314 0.365 0.331 0.447 0.339 0.356
	L30062 PRSC30060 PRSC30062 R30063 PRC3006A PRA3006B PRC3006B PRC3006B PRC3006B PRC3006B PRC3006C RS3006A	125 - 150 - 150 - 150 - 165 - 168 - 180 - 180	UNC* Metal Case Swift Scircoo Bonded Accorn Beat Tail Core-Lokt* Pointed Soft Point Brouze Point Core-Lokt* Ultra Bonded "Accorn Beat Teil Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Ultra Bonded "Accorn Boat Tail Swift A-Frame "PS"	91/2 91/2 91/2 91/2 91/2 91/2 91/2 91/2	2910 2910 2910 2910 2910 2910 2910 2800 2800 2800 2725 2700	2335; 2617. 2696. 2686. 2617. 2656. 2631. 2597. 2534. 2546. 2539. 2465.	2034 11 2342 20 2492 22 2473 22 2416 21 2403 22 2403 22 2283 20 2360 21 2243 20 2360 21	57. 150 84 184 98 211 70 207 83 184 89 197 21 188 17 203 47 182 79 186 88 202 32 183	9 1306 3 1622 1 1934 7 1893 3 1622 4 1773 9 1674 9 1876 5 1621 6 1668 4 1867 3 1648	1964 1513 2200 2281 2200 2281 2200 2281 2200 2305 2372 2470 2372 2470 2372 2576 2576 2573 2420 2420 2420 2576 2576 2575 2420 2420 2420 2576 2576 2575 2420	1148 88 1827 14 2069 17 2037 17 1827 14 1944 15 1868 14 2115 18 1909 15 1984 16 2226 19 2010 16	6 52 7693 46 1131 876 58 1485 1246 16 163 133 59 123 59 123 50 123 50 123 60 1	00 201 202 01 02 02 02 02 03 03 03 00 00 00	2870 207 0.7 0.7 0.7 0.8 0.8 0.8 2870 2870	15 49 1.1 35 200 200 200 200 200 22 200 20 200 21 200 21 200 23 200 23 200 23	77 136 53 102 54 103 55 103 59 114 56 108 58 112 63 121 62 119 61 116 89 154	1.5 1.6 1.7 1.8 1.7 1.8 2.0 1.9 0.9	1.6 2200 1.5 2200 1.5 2200 1.6 2200 1.6 2200 1.6 2200 1.7 2200 1.7 2200 1.8 2200 1.8 2200	378 -32' -29 -32 -30 -31 -32 -34 -33 -36	-13 -13 -82 -11 -80 -23 -81 -85 -82 -91	244, 211 215, 244 227 238 228, 259 251 237 266 .	-50.9 -42.3 -43.7 = -50.9 -46.6 -49.3 -46.2 -53.2 -51.7 -47.7 -54.4	0.314 0.435 -0.415 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377
	130662	125 150 150 150 150 150 165 165 168 180 180	UNC* Metal Case Swift Scincoo® Bonded According Boart Tail Core-Lock** Pointers Soft Point Bronze Point Core-Lock** Ultra Bonded ** *According Boart Teil Core-Lock** Pointed Soft Point Core-Lock** Ultra Bonded ** *According Boart Teil Swift A-France ** Core-Lock** Ultra Bonded ** ** Core-Lock** Ultra Bonded ** Core-Lock** Ultra Bonded ** Core-Lock** Ultra Bonded **	9 /2 9 /2 9 /2 9 /2 9 /2 9 /2 9 /2 9 /2	2910 2910 2910 2910 2910 2910 2910 2800 2800 2800 2705 2700	2335 2617. 2696 2686 2617 2686 2631 2597 2534 2546 2539 2465 2480	2034 117 2342 20 2492 22 2413 22 2342 20 2416 21 2368 21 2403 22 2283 20 2306 20 2270 20	57. 150 84 184 98 211 70 207 83 184 89 197 21 188 17 203 47 182 79 186 88 202 32 183 170 188	9; 1306 1, 1934 1, 1934 7, 1893 3, 1622 4, 1773 9, 1674 9, 1870 5, 1621 6, 1668 4, 1867 1, 1648 1, 1648 1, 1704	1964 1513 2200 2281 2200 2421 2200 2420 2420 2420 2420 2349 2352 2372 2470 2372 2374 2418 2967 2576 2313 2425 2313 2451	1148 88 18Z7 14 2069 17 2037 17 1827 14 1944 15 1868 14 2115 18 1999 15 1984 16 2225 19 2010 16 2069 17	6 632 4885 1246 6 1331 876 53 1485 1246 15 166 153 545 131 876 56 1298 1047 58 1188 933 58 1188 933 58 1290 1037 58 1290 1037 58 1637 1333 50 1343 1035 50 1343 1035 51 1615 51 1615	00 201 202 01 02 02 02 02 03 03 03 00 00 00	2870 27 27 27 27 27 27 27 27 27 28 28 28 28 28 28 28 28 28 28 28 28 28	15 49 11 35 200 20 20 20 200 22 200 22 200 21 200 21 200 23 200 23 200 23 200 23 200 23 200 23	717 -135 727 -135 553 -102 554 -103 559 -114 556 -108 58 -112 599 -111 63 -121 62 -119 -51 -116 89 -154 -87 -151	110 1.6 1.6 1.7 1.8 1.8 1.7 1.8 2.0 1.9 0.9 2.1	1.6 2200 1.5 2200 1.5 2200 1.6 2200 1.6 2200 1.7 2200 1.7 2200 1.7 2200 1.8 2200 1.8 2200	3.78 3.22 2.9 3.2 3.0 3.1 3.2 3.4 3.3 3.3 3.3 3.3 3.3	-8.2 -7.3 -8.2 -7.1 -8.0 -8.7 -8.5 -8.5 -8.2 -9.1 -8.9	244, 211 215, 244 227 238 228, 259 251 237 266 258	-50.9 42.3 43.7; -50.9 -46.6 -49.3 -46.2 -53.2 -51.7 -47.7 -54.4 -52.7	0.314 0.435 -0.415 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402
	TSUGGE PRICE PRI	125 150 150 150 150 165 165 180	UNC* Metal Case Swift Scircoco* Bonded Accordin Beart Tail Core-Loke* Pointed Soft Point Bronze Point Core-Loke* Ultra Bonded ** *Accordin Beart Tail Core-Loke* Ultra Bonded ** *Accordin Boat Tail Swift A-France* PSS* Core-Loke* Ultra Bonded ** Swift A-France* PSS* Core-Loke* Ultra Bonded ** Swift A-France* PSS* Core-Loke* Ultra Bonded ** Swift Scircoco*, Bonded	9/2 9/2 9/2 9/2 9/2 9/2 9/2 9/2 9/2 9/2	2910 2910 2910 2910 2910 2910 2910 2800 2800 2800 2700 2700 2700	2335] 2617. 2696 2686 2686 2631 25597 2534 2546 2539 2445 2480 2522	2034 17 2342 20 2492 22 2413 22 2416 21 2368 21 2403 22 2283 20 2306 21 2243 20 2270 20 2351 21	57 1505	9; 1306 3; 1622 1; 1934 7; 1833 3; 1622 4; 1773 9; 1870 5; 1621 6; 1668 4; 1867 3; 1648 2; 1704 8; 1878	1964 1513 2200 2281 2200 2421 2200 2421 2200 2305 2305 2307 2470 2572 2470 2572 2573 2573 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2547 2513 2513 2547 2513	1148 88 18Z7 14 2069 17 2037 17 1827 14 1944 15 1868 14 2115 18 1909 15 1984 16 2226 19 2010 16 2069 17 2208 19	6 632 4885 1246 1331 876 136 1485 1246 1485 1246 158 1485 131 876 158 1485 131 876 158 1485 131 129 133 141 141 141 141 141 141 141 141 141	00 201 201 201 202 02 02 02 03 03 03 200 200	##70	15 49 11 35 20 20 20 20 20 20 20 21 20 23 20 24	717 -135 727 -135 553 -102 554 -103 559 -114 55 -108 58 -112 59 -111 63 -121 62 -119 -51 -115 83 -154 87 -151	110 1.6 1.6 1.7 1.8 1.8 1.8 2.0 1.9 -0.9 2.1 2.1	16 200 15 200 15 200 15 200 16 200 16 200 17 200 17 200 18 200 18 200 17 200 18 200 17 200 17 200 18 200 17 200 17 200 18 200 17	32/8 32/29 32/30 31/32/34 33/33/33/33/33/33/33/33/33/33/33/33/33/	82 -73 -82 -7,1 -8,0 -2,3 -8,7 -8,5 -8,2 -9,1 -8,9 -8,3	244, 211 215, 244 -227 -238 -259 -251 -266, -258 -229	-50.9 -42.3 -43.7, -50.9 -46.6 -49.3 -46.2 -53.2 -51.7 -47.7 -54.4 -52.7 -47.9	0.314 0.435 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402
	130662	125 150 150 150 150 150 165 165 168 180 180	UNC* Metal Case Swift Scircoco* Bonded Accurrip Boat Tail Core-Lokt* Pointed Swift Point Bronze Point Core-Lokt* Ultra Bonded ** *Accurrip Boat Tail Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Ultra Bonded ** Swift A-Frame* PSP Core-Lokt* Ultra Bonded ** Swift Scircoco*, Bonded Core-Lokt* Stircoco*, Bonded Core-Lokt* Stircoco*, Bonded	9/2 9/2 9/2 9/2 9/2 9/2 9/2 9/2 9/2 9/2	2900 2910 2910 2910 2910 2910 2900 2800 2800 2700 2700 2700 2700 2700 27	2335 2517 2696 2686 2617 2656 2617 2656 2631 2534 2546 2539 2465 2480 2522 2348	2684 11 2342 20 2492 22 2473 22 2342 20 2416 21 2368 21 2403 22 2306 20 2360 21 243 20 2270 20 2351 21 2023 1	57 1506 58 184 184 185 18	9 300 3 3 1622 1 1934 7 1 1934 7 1 1934 7 3 1622 4 1773 9 1674 9 1879 5 1621 6 1668 4 1867 3 1648 2 1704 9 1878 6 1251	1964 1513 2200 2281 2200 2421 2200 2421 2200 2305 2305 2307 2470 2572 2470 2572 2573 2573 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2457 2513 2547 2513 2513 2547 2513	1148 88 18Z7 14 2069 17 2037 17 1827 14 1944 15 1868 14 2115 18 1909 15 1984 16 2226 19 2010 16 2069 17 2208 19	6 632 4885 1246 6 1331 876 53 1485 1246 15 166 153 545 131 876 56 1298 1047 58 1188 933 58 1188 933 58 1290 1037 58 1290 1037 58 1637 1333 50 1343 1035 50 1343 1035 51 1615 51 1615	00 201 202 01 02 02 02 02 03 03 03 00 00 00	2870 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	115 49 49 11. 36 200 20 20 20 20 21 20 20 21 20 23 200 23 200 23 200 23 42 13 42 13 40 15 49	### 154 183 192 193 19	110 1.6 1.6 1.7 1.8 1.8 1.8 2.0 1.9 -0.9 2.1 2.1	1.6 2200 1.5 2200 1.5 2200 1.6 2200 1.6 2200 1.7 2200 1.7 2200 1.7 2200 1.8 2200 1.8 2200	3.78 3.22 -29 3.2 -3.0 -3.1 -3.2 -3.4 -3.3 -3.5 -3.5 -3.5 -3.3 -3.5 -3.5	82 -73 -82 -71 -80 -79 -87 -85 -82 -91 -89 -89 -83 -110	244, 211 215, 244 -227 -238 -259 -251 -266, -258 -229	-50.9 42.3 43.7; -50.9 -46.6 -49.3 -46.2 -53.2 -51.7 -47.7 -54.4 -52.7	0.314 0.435 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248
	TSUGGE PRICE PRI	125 150 150 150 150 165 165 180	UNC* Metal Case Swift Scircoco* Bonded Accordin Beart Tail Core-Loke* Pointed Soft Point Bronze Point Core-Loke* Ultra Bonded ** *Accordin Beart Tail Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** *Accordin Boat Tail Swift A-Frame* PSP Core-Loke* Ultra Bonded ** Swift A-Frame* PSP Core-Loke* Ultra Bonded ** Swift A-Frame* PSP Core-Loke* Ultra Bonded ** Swift Scircoco* Bonded **	9/2 9/2 9/2 9/2 9/2 9/2 9/2 9/2 9/2 9/2	2900 2910 2910 2910 2910 2910 2900 2800 2800 2700 2700 2700 2700 2700 27	2335 2517 2696 2686 2617 2656 2617 2656 2631 2534 2546 2539 2465 2480 2522 2348	2034 17 2342 20 2492 22 2413 22 2416 21 2368 21 2403 22 2283 20 2306 21 2243 20 2270 20 2351 21	57 1506 58 184 184 185 18	9 300 3 3 1622 1 1934 7 1 1934 7 1 1934 7 3 1622 4 1773 9 1674 9 1879 5 1621 6 1668 4 1867 3 1648 2 1704 9 1878 6 1251	1964 1513 2200 2281 2200 2421 2200 2481 2200 2305	1148 88 1827 14 2069 17 2037 17 1827 14 1944 15 1868 14 2115 18 1909 15 1984 16 2225 19 2010 16 2069 17 2208 19 1635 11	6 632 4885 1246 1331 876 136 1485 1246 1485 1246 158 1485 131 876 158 1485 131 876 158 1485 131 129 133 141 141 141 141 141 141 141 141 141	00 201 01 02 02 02 02 03 03 03 00 00	2870 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	115 49 49 11. 36 200 20 20 20 20 21 20 20 21 20 23 200 23 200 23 200 23 42 13 42 13 40 15 49	717 -135 727 -135 553 -102 554 -103 559 -114 55 -108 58 -112 59 -111 63 -121 62 -119 -51 -115 83 -154 87 -151	110 115 116 117 118 117 118 120 19 09 21 21 20 21 21 22	16 200 15 200 15 200 15 200 16 200 16 200 17 200 17 200 18 200 18 200 17 200 18 200 17 200 17 200 18 200 17 200 17 200 18 200 17	3.78 3.22 -29 3.2 -3.0 -3.1 -3.2 -3.4 -3.3 -3.5 -3.5 -3.5 -3.3 -3.5 -3.5	82 -73 -82 -7,1 -8,0 -2,3 -8,7 -8,5 -8,2 -9,1 -8,9 -8,3	24.4, 2 21.1 21.5, 24.4 22.7 23.8 22.8 25.9 25.1 22.7 -26.6 25.8 23.9 -33.8	-50.9 -42.3 -43.7, -50.9 -46.6 -49.3 -46.2 -53.2 -51.7 -47.7 -54.4 -52.7 -47.9	0.314 0.435 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402
	13066 PRSC3006 PRSC3006 R30062 R30063 PRC3006A PRC3006 PRC3006 PRC3006 PRC3006 PRC3006 PRC3006 PRC3006 PRC3006	125 1 150 1 150 1 150 1 150 1 150 1 165 1 168 1 180 1 180 1 180 1	UNC* Metal Case Swift Scircoco* Bonded Accurrip Boat Tail Core-Lokt* Pointed Swift Point Bronze Point Core-Lokt* Ultra Bonded ** *Accurrip Boat Tail Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Ultra Bonded ** Swift A-Frame* PSP Core-Lokt* Ultra Bonded ** Swift Scircoco*, Bonded Core-Lokt* Stircoco*, Bonded Core-Lokt* Stircoco*, Bonded	9/h	2900 2910 2910 2910 2910 2910 2910 2900 290	2335 2517 2696 2686 2617 2656 26517 2554 2546 2539 2465 2480 2522 2348 2469	2394 12 2492 22 2493 22 2446 21 2568 21 2400 22 2302 22 2403 22 2404 22 2405 21 2406 21 2407 22 2407 22 2408 21 2408 2	57 1500 57 1500 584 1848 585 211 70 207 683 1848 591 197 684 207 685 207 686 207 686 207 686 207 686 207 686 207 686 207 686 207 686 207 687 688 207 688	9 300 3 3 1622 1 1934 7 1 1934 7 1 1934 7 3 1622 4 1773 9 1674 9 1879 5 1621 6 1668 4 1867 3 1648 2 1704 9 1878 6 1251	1964 1513 2200 2281 2200 2421 2200 2481 2200 2305	1148 88 1827 14 2069 17 2069 17 1207 14 1944 15 1868 14 2115 18 1909 15 1984 16 2225 19 2010 16 2208 19 1635 11 2023 16	6 632 4885 1246 1331 876 136 1485 1246 1466 1566 1598 1487 138 876 1298 1487 1290 1331 1299 1331 145 1661 1464 1405 129 129 129 129 129 129 129 129 129 129	00 201 202 02 02 02 02 03 03 00 00 00 00	200 200 200 200 200 200 200 200 200 200	115 49 49 11. 36 200 20 20 20 20 21 20 20 21 20 23 200 23 200 23 200 23 42 13 42 13 40 15 49	717 -135 727 -135 753 -102 754 -103 759 -114 756 -108 758 -112 759 -111 750 -121 750 -1	110 115 116 117 118 118 120 119 121 121 120 121 121 121 121 121 121 121	1.6 220 1.5 220 1.6 220 1.6 220 1.6 220 1.7 220 1.7 220 1.8 220 1.8 220 1.7 22	3 18 32 29 32 30 31 32 34 33 33 35 35 43 43	82 -73 -82 -71 -80 -79 -87 -85 -82 -91 -89 -89 -83 -110	244, 2 211 215, 244 227 238 228, 259 251 237 266, 258 239 338 263	50.9 42.3 43.7 50.9 45.6 49.3 46.2 45.7 51.7 47.7 52.7 47.9 47.9 47.9 47.9 47.9 47.9 47.9 47	0.314 0.435 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248
	TSUGGE PRICE PRI	125 1 150 1 150 1 150 1 150 1 165 1 165 1 180 1 180 1 180 1 180 1	UNC* Metal Case Swift Scircoco* Bonded According Boart Tail Core-Loke* Pointed Swift Point Bronze Point Core-Loke* Ultra Bonded ** *According Boart Tail Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** *According Boart Tail Swift A-Frame* PSP Core-Loke* Ultra Bonded ** Swift A-Frame* PSP Core-Loke* Ultra Bonded ** Swift Scircoco*, Bonded Core-Loke* Soft Point Core-Loke* Pointed Soft Point Core-Loke* Pointed Soft Point	9/h	2900 2910 2910 2910 2910 2910 2910 2900 290	2335 2517 2696 2686 2617 2656 2651 2534 2546 2539 2485 2480 2522 2348 2463	2034 17 2492 22 2493 22 2493 22 2416 21 2416 21 2508 2	57 1500 57	9 300 3 3 1622 1 1934 7 1 1934 7 1 1934 7 3 1622 4 1773 9 1674 9 1876 5 1621 6 1668 4 1867 3 1648 2 1778 8 1878 6 1251 6 1663	1964 1513 2200 2281 2200 2421 2200 2481 2200 2305	1148 88 18Z7 14 2069 17 2037 17 1827 14 15 1888 14 2115 1999 15 2010 16 2069 17 2208 19 1635 11 2023 16 2077 17	6 632 4885 1246 1331 876 136 1485 1246 136 136 137 876 138 138 138 138 138 138 132 133 145 165 136 136 136 136 136 136 136 136 136 136	00 201 202 02 02 02 02 03 03 00 00 00 00	07 07 07 08 08 08 08 280 280 280 280 280	15 49 11 35 200 20 20 20 20 20 21 20 21 20 23 20 20 20 20 20 20 20 20 20 20 20 20 20	### 154 154 ### 154 ### 155 ### 1	110 116 116 117 118 118 120 119 121 120 121 121 121 121 121 121 121 121	1.6 2200 1.5 2200 1.5 2200 1.6 2200 1.6 2200 1.6 2200 1.7 2200 1.7 2200 1.8 2200 1.7 2200 1.1 2200 1.1 2200 1.1 2200 1.1 2200 1.1 2200 1.1 2200 1.1 2200	328 29 32 30 31 34 33 -36 35 33 43 35	82 -13 - 82 -17 - 80 -17 - 80 -17 - 81 -17 - 81 -110 -90 -88	244, 2 21.15 24.4 22.7 23.8 22.8 25.9 25.1 23.7 26.6 25.8 23.9 33.8 26.3 25.5	509 423 423 433,7 509 466 493 462,1 532 517 471 471 479 728 540	0.314 0.435 -0.415 0.314 0.365 0.331 0.407 0.339 0.356 0.480 0.377 0.402 0.500 0.248 0.383
300 Savaore	13066	150 150 150 150 150 165 165 180 180 180 180 220	UNIO* Metal Case Swift Scircoco* Bonded Accurrip Boat Tail Core-Loka* Pointed Swift Point Bronze Point Core-Loka* Ultra Bonded ** *Accurrip Boat Tail Core-Loka* Pointed Soft Point Core-Loka* Ultra Bonded ** *Swift A-France* PSP Core-Loka* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loka* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loka* Pointed Soft Point Bronze Point Core-Loka* Pointed Soft Point Bronze Point Core-Loka* Soft Point	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2910 2910 2910 2910 2910 2910 2910 2900 2800 2800 2700 2700 2700 2700 2700 27	2335 2617 2696 2686 2696 2531 2534 2546 2522 2348 2469 2485 2130	2034 17 2492 22 2492 22 2493 22 2416 21 2416 21 2568 21 2403 22 263 22 263 22 270	551 - 1558 - 155	6' 1306' 3' 1622' 1 1 1934 1 1 1934 1 1 1 1934 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1964 1513 2200 2281 2200 2421 2200 2421 2200 2305 2305 2307 2470 2572 2470 2572 2572 2573 2457 2573	1148 88 141 1827 144 2069 17 2087 17 2087 17 2087 17 2087 17 2087 17 2087 18 27 24 25 26 26 26 26 26 26 26 26 26 26 26 26 26	6 632 4885 1246 1331 876 136 1485 1246 1495 1246 1398 1485 1246 1298 1486 1298 1486 1496 1496 1496 1496 1496 1496 1496 149	0.0	280 27 280 280 280 280 280 280 280 280 280 280	11 15 19 11 12 13 14 15 15 16 16 16 16 16 16	### 154 154 ### 154 ### 155	110 2 110 2 110 110 110 110 110 110 110	16 2000 2000 2000 2000 2000 2000 2000 20	318 229 322 30 311 322 34 33 35 35 33 43 43 43 45 45	82 -73 -82 -73 -80 -80 -87 -85 -82 -91 -90 -88 -88 -184	244 21 215 244 227 238 259 251 227 266 258 263 255 464	509 423 423 4537,7 509 466 493 462 532 517 477 477 479 479 728 540 520 916	0.314 0.435 -0.415 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 -0.500 0.248 0.333 0.412 0.294
300 Savage	13066	150 150 150 150 150 165 165 180 180 180 180 180 180 180 180 180 180	UNIO* Metal Case Swift Scircoco* Bonded Accurrip Boat Tail Core-Loke* Pointed Swift Point Bronze Point Core-Loke* Ultra Bonded ** *Accurrip Boat Tail Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** Swift A-Frame* PSP Core-Loke* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loke* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loke* Pointed Soft Point Bronze Point Core-Loke* Soft Point Core-Loke* Soft Point Core-Loke* Soft Point Core-Loke* Pointed Soft Point	9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 %	2910 2910 2910 2910 2910 2910 2910 2900 2800 2800 2700 2700 2700 2700 2700 2410 2530	23352 2617. 2696 2686. 2631 2534 2534 2536 2465 2480 2522 2348 2469 2485 2130 2354	2034 17 242 22 243 22 243 244 241 241 241 241 241 241 241 241 241	551 1558 1584 18484 18484 18484 18484 18484 18484 18484 18484 18484 18484 18553 16553 165553 16555	6, 1306, 1, 1934, 1,	1964 1513 2200 2281 2200 2421 2200 2421 2200 2305 2421 2200 2305 2421 2420 2352 2313 2423 2421 2313 2313	1488 88 1827 144 1827 14 1827 14 1827 14 1828	6 632 4885 1246 1331 876 136 1485 1246 1495 1246 1398 1485 1246 1298 1495 1246 1495 1496 1496 1496 1496 1496 1496 1496 1496	00 00 00 00 00 00 00 00 00 00 00 00 00	280 27 280 280 280 280 280 280 280 280 280 280	11 15 14 15 17 17 17 17 17 17 17	194 183 177 135 192 193 192 193 194 195	1102 115 118 118 120 120 120 120 120 120 120 120 120 120	16 200 200 200 200 200 200 200 200 200 20	- 32° - 29 - 32° - 32° - 33° - 31° - 32° - 34° - 33° - 35° - 33° - 43° - 35° - 43° - 45° - 41° - 41° - 42° -	82 -73 -82 -73 -80 -29 -87 -85 -82 -91 -89 -83 -110 -90 -88 -184 -104	244, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21	509 423 437/7 509 466 493 462 517 477 477 477 477 479 -728 520 -916 646	0.314 0.435 -0.415 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248 0.333 0.412 0.294 0.314
	13066	150 150 150 150 150 165 165 180	UNIO* Metal Case Swift Scircoco* Bonded Accurrip Boat Tail Core-Loke* Pointed Swift Point Bronze Point* Core-Loke* Ultra Bonded ** *Accurrip Boat Tail Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** *Swift A-Frame* PSP Core-Loke* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loke* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loke* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loke* Soft Point	9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 %	2900 2910 2910 2910 2910 2910 2900 2800 2800 2700 2700 2700 2700 2700 27	2335 2566 2686 2617 2656 2631 2534 2546 2485 2485 2130 2354 2025	2034 17 242 22 243 22 243 244 241 241 241 241 241 241 241 241 241	551- 1558 88 1848 88 1848 88 1848 88 1848 88 1848 88 1848 88 1848 88 1848 88 1858 88 1	6' 1306' 3' 1627 1 1934 7 1883 3 1622 4 1773 9 1674 9 1674 9 1674 16 1668 1704 1704 1704 1704 1704 1705 1704 1705 1705 1706 1707 1708 1709 1	1964 1513 2200 2281 2200 2421 2200 2421 2200 2305 2421 2200 2305 2421 2420 2305	1148 8 8 142 142 142 142 142 142 142 142 142 142	6 632 4885 6 1331 876 58 1485 1246 16 168 1936 1937 56 1298 1047 57 1298 1047 58 1188 933 58 1188 933 58 1299 1037 14 1207 1333 14 1507 1333 15 115 1161 10 1644 1007 10 1645 1007 10 1646 1007 10 16	00 00 02 002	280 0.7 0.7 0.7 0.7 0.7 0.8 0.8 220 220 220 220 220 220 220 220 220 22	11 15 14 15 17 17 17 17 17 17 17	### 1504 ### 1504	1102 16 16 17 18 18 17 18 20 19 20 21 21 21 21 13 24 15	16 200 200 200 200 200 200 200 200 200 20	32° -29 -32° -30° -31° -32° -34 -33° -35 -35 -35 -43 -45 -45 -41 -109	82 -73 -82 -73 -80 -87 -87 -87 -87 -91 -89 -88 -110 -90 -88 -184 -104 -213	244, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21	509 423 437/5 509 466 493 462 517 477 477 479 -728 520 916 646 -1103	0.314 0.435 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248 0.383 0.412 0.294 0.314 0.248
300 Savage 300 Win Mag.	13066	150 150 150 150 165 168 180 180 180 180 150	UNC* Metal Case Swift Scincoo® Bonded Accirlip Boat Tail Core-Loke* Pointed Swift Point Bronze Point Core-Loke* Ultra Bonded ** 'Accorting Boat Tail Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** Accorting Boat Tail Swift A-Fragine* PSP Core-Loke* Ultra Bonded ** Swift A-Fragine* PSP Core-Loke* Ultra Bonded ** Swift Scincoo® Bonded ** Core-Loke* Off Point Core-Loke* Soft Point Core-Loke* Pointed Soft Point	9 1/2 9 1/2	2900 2910 2910 2910 2910 2910 2900 2800 2800 2700 2700 2700 2700 2700 27	2335 25017 2696 2686 2617 2656 2631 2534 2546 2539 2485 2130 2354 2025 2550	2834 117 2342 22 2493 22 2413 22 2416 21 2568 21 2568 22 2693 22 2693 22 2693 22 2693 22 2693 22 270 22 2803 21 270 22 2803 17 2802 11 2802 12 2802 12 2803 12 2803 12 2803 12 2803 12 2803 12 2803 12 2803 12 2803 12 2804 12 2805 12 2806 12 2807 12 2807 12 2808 12	551 1558 1848	6' 1306' 3' 1627 . 1 1934	1964 1513 2200 2281 2200 2421 2200 2421 2200 2305 2421 2200 2305	1148 8 8 142 142 142 142 142 142 142 142 142 142	6 632 4885 1246 1331 876 136 1485 1246 136 1485 1246 136 128 136 128 138 128 138 129 133 1415 1616 136 136 136 136 136 136 136 136 13	0.0	280 0.7 0.7 0.7 0.7 0.7 0.8 0.8 220 220 220 220 220 220 0.5	11 15 14 15 14 15 15 15	### 1504 ### 1504	1102 115 118 117 118 120 120 121 121 121 121 121 121 121 121	16 200 200 200 200 200 200 200 200 200 20	32 29 32 30 31 32 33 33 35 35 35 43 35 41 95 41	82 -73 -82 -73 -80 -80 -81 -85 -82 -91 -89 -83 -110 -90 -88 -184 -104 -213 -63	244, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21	50.9 42.3 42.3 43.3,7 50.9 46.6 49.3 46.2 51.7 47.7 47.7 47.7 47.9 52.7 47.9 52.0 91.6 64.6 61.0 3.39.8	0.314 0.435 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248 0.383 0.412 0.294 0.314 0.248 0.294
	13066	150 150 150 150 150 165 165 180	UNIO* Metal Case Swift Scircoco* Bonded Accurrip Boat Tail Core-Loke* Pointed Swift Point Bronze Point* Core-Loke* Ultra Bonded ** *Accurrip Boat Tail Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** *Swift A-Frame* PSP Core-Loke* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loke* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loke* Ultra Bonded ** Swift Scircoco* Bonded ** Core-Loke* Soft Point	9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 %	2900 2910 2910 2910 2910 2910 2900 2800 2800 2700 2700 2700 2700 2700 27	2335 25017 2696 2686 2617 2656 2631 2534 2546 2539 2485 2130 2354 2025 2550	2034 17 242 22 243 22 243 244 241 241 241 241 241 241 241 241 241	551 1558 1848	6' 1306' 3' 1627 . 1 1934	1964 1513 2200 2281 2200 2421 2200 2421 2200 2305 2421 2200 2305	1488 88 1827 144 1827 14 1927 14 1924 15 1858 14 1925 1926 17	6 632 4885 1246 1331 876 86 1331 876 86 1485 1246 1358 1485 1246 1258 1485 1258 1485 1258 1258 1258 1258 1258 1258 1258 12	0.0	280 0.7 0.7 0.7 0.7 0.7 0.8 0.8 220 220 220 220 220 220 0.5	11 15 14 15 14 15 15 15	### 1504 ### 1504	1102 115 118 117 118 120 120 121 121 121 121 121 121 121 121	16 200 200 200 200 200 200 200 200 200 20	32 29 32 30 31 32 33 33 35 35 35 43 35 41 95 41	82 -73 -82 -73 -80 -80 -81 -85 -82 -91 -89 -83 -110 -90 -88 -184 -104 -213 -63	244, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21	50.9 42.3 42.3 43.3,7 50.9 46.6 49.3 46.2 51.7 47.7 47.7 47.7 47.9 52.7 47.9 52.0 91.6 64.6 61.0 3.39.8	0.314 0.435 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248 0.383 0.412 0.294 0.314 0.248
	13066	150 150 150 150 165 168 180 180 180 180 150	UNC* Metal Case Swift Scincoo® Bonded Accirlip Boat Tail Core-Loke* Pointed Swift Point Bronze Point Core-Loke* Ultra Bonded ** 'Accorting Boat Tail Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** Accorting Boat Tail Swift A-Fragine* PSP Core-Loke* Ultra Bonded ** Swift A-Fragine* PSP Core-Loke* Ultra Bonded ** Swift Scincoo® Bonded ** Core-Loke* Off Point Core-Loke* Soft Point Core-Loke* Pointed Soft Point	9 h 9 h 9 h 9 h 9 h 9 h 9 h 9 h 9 h 9 h	2560 2910 2910 2910 2910 2910 2900 2800 2800 2725 2700 2700 2700 2700 2410 2530 3290 32550	2335 2505 2505 2505 2505 2505 2505 2505	2834 117 2342 22 2493 22 2413 22 2416 21 2568 21 2568 22 2693 22 2693 22 2693 22 2693 22 2693 22 270 22 2803 21 270 22 2803 17 2802 11 2802 12 2802 12 2803 12 2803 12 2803 12 2803 12 2803 12 2803 12 2803 12 2803 12 2804 12 2805 12 2806 12 2807 12 2807 12 2808 12	571. 1558 84 1848 85 1	6' 1306' 3' 1627 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1934 1 1935 1 1936 1 1936 1 1936 1 1936 1 1937 1 1936 1 1936 1 1937 1 1936 1 1937 1 1938 1	1964 1513 2200 2281 2200 2421 2200 2421 2200 2305 2421 2200 2305	1488 88 1827 144 1827 14 1927 14 1924 15 1858 14 1925 1926 17	6 632 4885 1246 1331 876 136 1485 1246 136 1485 1246 136 128 136 128 138 128 138 129 133 1415 1616 136 136 136 136 136 136 136 136 13	0.0	280 280 280 280 280 280 280 280 280 280	11 15 14 17 17 17 17 17 17 17	### 1504 ### 1504	1102 15 18 17 18 18 19 19 19 19 19 19 19 19 19 19 19 19 19	16 200 200 200 200 200 200 200 200 200 20	32 29 32 30 31 32 33 33 33 33 43 35 43 43 43 43 43 43 43 43 43 43 43 43 43	82 -73 -82 -71 -80 -87 -85 -85 -87 -85 -89 -110 -90 -88 -184 -104 -213 -63	244, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21	50.9 42.3 42.3 43.3,7 50.9 46.6 49.3 46.2 51.7 47.7 47.7 47.7 47.9 52.7 47.9 52.0 91.6 64.6 61.0 3.39.8	0.314 0.435 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248 0.383 0.412 0.294 0.314 0.248 0.294
	13066	125 150 150 150 165 165 180 180 180 180 150 150 150 150 150 150 150 150 150 15	UNC* Metal Case Swift Scincoo® Bonded Accirlip Boat Tail Core-Loke* Pointed Swift Point Bronze Point* Core-Loke* Ultra Bonded ** 'Accorting Boat Tail Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** Accorting Boat Tail Swift A-France* PSP Core-Loke* Ultra Bonded ** Swift A-France* PSP Core-Loke* Ultra Bonded ** Swift Scincoo® Bonded ** Core-Loke* Off Point Core-Loke* Soft Point Core-Loke* Pointed Soft Point	9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 % 9 %	2560 2910 2910 2910 2910 2910 2900 2800 2800 2725 2700 2700 2700 2700 2410 2530 2350 3290 3290 3290 3290 3290 3290 3290 329	2335 2567 2534 2546 2522 2480 2554 2255 2534 2025 2550 2567 2567 2567 2567 2567 2567 2567 2567	2834 117 2342 22 2493 22 2493 22 2416 21 2568 21 2568 22 2693 22 2693 22 2693 22 2693 22 2693 22 2693 22 270 22 2893 21 270 22 270 20 27	571 - 1558 - 1588 - 188	6' 1300' 3 1622 1 1 1934 4 173 3 1622 4 1773 9 1674 9 1870 1 2 1704 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1964 1513 2200 2281 2200 2421 2200 2421 2200 2421 2200 2421 2200 2305	1428 38 142 1627 144 152 1627 144 152 1628 1628 1628 1628 1628 1628 1628 162	6 632 4885 1246 1331 876 86 1331 876 86 1485 1246 1358 1485 1246 1258 1485 1258 1485 1258 1258 1258 1258 1258 1258 1258 12	0.0	200 200 200 200 200 200 200 200 200 200	15	194 183 177 135 192 193 192 193 194 195	1102 115 118 118 117 118 129 129 129 129 129 129 129 129 129 129	16 200 200 200 200 200 200 200 200 200 20	32 29 32 30 31 32 34 33 35 35 43 35 41 109 24 24 24	82 -73 - 82 -73 - 82 -73 - 82 -73 - 83 -85 - 82 -81 - 82 -81 - 90 -88 - 88 -110 - 90 -88 - 184 -104 - 213 -63 - 63	244, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21	50.9 50.9 50.9 50.9 50.9 66.6 69.3 66.2 51.7 67.7 67.7 67.9 67.8 58.0 68.6 68.6 68.6 68.6 68.6 68.6 68.6 6	0.314 0.435 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248 0.383 0.412 0.294 0.314 0.248 0.248
		125 150 150 150 165 168 180 180 180 180 150 150 150 150 150 150 150 150 150 15	UNC* Metal Case Swift Scincoo® Bonded Accirlip Boat Tail Core-Loke* Pointed Swift Point Bronze Point* Core-Loke* Ultra Bonded ** 'Accirlip Boat Tail Core-Loke* Pointed Soft Point Core-Loke* Ultra Bonded ** Accur	9 1/2 9 1/2	2560 2910 2910 2910 2910 2910 2900 2800 2800 2725 2700 2700 2700 2700 2410 2530 2350 3290 3290 3290 3290 3290 3290 3290 329	2335/2617. 2696 2686: 2686: 2651 2534 2536 2538 2465 2480 2522 2348 2469 2485 2130 2554 2025 2500 2714	2884 11 2342 22 2432 2432 2432 2432 2432 24	571 558 184	6 1300 1 1300 1 1 1 1 1 1 1 1 1	1964 1513 2200 2281 2200 2421 2200 2421 2200 2421 2200 2421 2200 2349 2360 2362 2362 2362 2362 2362 2362 2462 2362 2462 2362 2462 2362	1428 38 142 2069 17 127 14 15 16 16 16 16 16 16 16 16 16 16 16 16 16	6 63 488 183 1246 131 876 13 146 1131 876 13 146 1131 876 15 146 1131 876 15 128 1047 13 120 953 13 120 953 13 120 953 13 120 133 1 145 1161 10 1444 1183 10 193 758 13 124 1157 13 13 145 1161 10 193 758 13 126 127 13 13 145 1161 10 13 14 1181 10 13 14 1181 10 13 14 1181 10 13 14 1181 10 13 14 1181 10 13 14 1181 10 14 1183 10 14 14 1183 10 14 14 1183 10 14 14 1183 10 14 14 1183 10 14 14 1183 10 14 14 1183 10 14 14 1183 10 14 14 1183 10 14 14 14 14 14 14 14 14 14 14 14 14 14	0.0	200 200 200 200 200 200 200 200 200 200	15	104 183 177 135 102 103 103 105	1102 115 118 118 120 120 120 120 121 121 13 121 121 125 125 125 125 125 125 125 125	16 200 15 200 16 200 16 200 16 200 16 200 16 200 16 200 17 200 200 201 201 201 201 201 201 201 201	32 29 32 30 31 32 34 33 35 35 41 41 -109 -24 -24 -24 -24	82 -73 - 82 -73 - 82 -73 - 82 -73 - 82 -73 - 83 -85 - 82 -91 - 91 -90 - 88 -184 - 104 -213 - 63 -61 - 67,	244, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21	50.9 42.3 43.7 50.9 46.6 49.3 46.2 53.2 53.2 51.7 47.9 47.9 54.4 52.7 47.9 54.0 52.0 91.6 64.6 64.6 110.3 39.8 70.33 38.5	0.314 0.435 -0.415 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.477 0.402 0.500 0.248 0.333 0.412 0.294 0.314 0.248 0.294 0.314 0.248 0.294 0.310
		125 150 150 150 150 165 168 180 180 180 150 150 150 150 150 150 150 150 150 180 180 150 150 180 180 180 150 150 150 180 180 180 150 150 180 180 180 180 180 180 180 180 180 18	UNIV* Metal Case Swift Scinocoo Bonded Accintip Boat Tail Core-Lokt* Pointed Soft Point Brouze Point Core-Lokt* Ultra Bonded "Accourts Boat Tail Core-Lokt* Ultra Bonded "Accourts Boat Tail Swift A-Frame PSP Core-Lokt* Ultra Bonded "Accourts Boat Tail Swift A-Frame PSP Core-Lokt* Ultra Bonded "Core-Lokt* Soft Point Core-Lokt* Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Ditta Bonded Core-Lokt* Ultra Bonded Core-Lokt* Ultra Bonded Core-Lokt* Ultra Bonded "Swift Scinocoo" Bonded Core-Lokt* Ultra Bonded "Core-Lokt* Ultra Bonded "Core-Lokt* Ultra Bonded "	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2000 2910 2910 2910 2910 2920 2920 2920	2335/2617. 2696 2686: 2686: 2651 2534 2546 2539 2465 2480 2522 2348 2469 2485 2130 2554 2025 2500 2774	2884 17 2342 22 243 22 243 22 2416 21 243 22 2416 21 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 22 243 24 24 24 24 24 24 24 24 24 24 24 24 24	184 184 185	6, 1300 1, 1934 1,	1964 1513 2200 2281 2200 2421 2200 2421 2200 2421 2200 2421 2200 2305	1428 38 38 38 38 38 38 38 38 38 38 38 38 38	6 63 485 1246 131 876 136 136 1246 145 136 145 136 145 136 145 136 145 145 145 145 145 145 145 145 145 145	0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	200 200 200 200 200 200 200 200 200 200	15	104 183 177 135 102 103 103 105	1102 115 118 118 117 118 120 119 120 120 121 13 12 12 12 12 12 12 12 12 12 12 12 12 12	16 200 15 200 16 200 16 200 16 200 16 200 16 200 17 200 18	328 329 329 329 329 329 329 329 329 329 329	-82 -73 - 82 -73 - 82 -71 -80 -81 -85 -85 -82 -91 -110 -90 -88 -184 -104 -213 -63 -61 -61, -38	244, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21	50.9 42.3 43.7 50.9 46.6 49.3 46.2 51.7 47.7 47.7 47.7 47.9 52.0 91.6 64.6 64.6 110.3 39.8 70.3 33.5 33.7	0.314 0.435 -0.415 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248 0.294 0.314 0.248 0.294 0.310 0.507 0.402
		125 150 150 150 150 168 180 180 180 150 150 150 150 150 150 150 150 150 15	UNIX* Metal Case Swill Scinocoo Bonded According Boat Tail Core-Loka* Pointed Soft Point Brouze Point Core-Loka* Pointed Soft Point Core-Loka* Pointed Soft Point Core-Loka* Pointed Soft Point According Boat Tail Core-Loka* Ultra Bonded ** Swift Scinocoo Bonded Core-Loka* Soft Point	9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½ 9 ½	2560 2910 2910 2910 2910 2910 2900 2800 2800 2700 2700 2700 2700 2700 27	2335j- 2617. 2686 2686 2631 2656 2631 2534 2546 2539 2485 2480 2522 2348 2463 2254 2272 2348 2025 250 2274 2774 2764	2884 11 2342 22 2432 2432 2432 2432 2432 24	571 553 554 1848	6, 1300 1, 1934 1,	1964 1513 2200 2281 2200 2421 2200 2421 2200 2421 2200 2305	1428 38 38 38 38 38 38 38 38 38 38 38 38 38	6 63 485 1246 131 876 136 1485 1246 145 145 145 145 145 145 145 145 145 145	0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	200 200 200 200 200 200 200 200 200 200	15	104 183 177 135 102 103 105	1102 116 116 118 118 119 120 139 149 150 131 141 151 151 151 151 151 151 15	16 200 15 200 16 200 16 200 16 200 16 200 16 200 16 200 17 200 200 201 201 201 201 201 201 201 201	328 329 329 329 329 329 329 329 329 329 329	-82 -73 - 82 -73 - 82 -71 - 80 -80 - 87 -87 - 85 -82 - 91 -110 - 90 -88 - 88 -184 - 104 -213 - 63 -61 - 63 -63 - 68	244, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21	50.9 42.3 43.7 50.9 46.6 49.3 46.2 53.2 53.2 51.7 47.9 47.9 54.0 55.0 64.6 64.6 110.3 39.8 70.3 33.8 53.7	0.314 0.435 -0.415 0.314 0.365 0.331 0.447 0.339 0.356 0.480 0.377 0.402 0.500 0.248 0.244 0.314 0.248 0.294 0.314 0.248 0.294 0.310 0.310 0.500

Note: These ballistics reflected a test barrel length of 24° except those for 30 Carbine and 44 Remington Magnum which are 20° barrets. Specifications are nominal. Ballistics figures established in test barrels. Individual rifles may vary from test barrel results. "tero" indicates yardage at which rifle was sigited in. * knches above or below fine of sight. Hold low for positive numbers, high for negative numbers. † 200 Remington and 7mm Express, Remington are interchangeable. † 6mm Remington and 244 Remington are interchangeable. † 8mm Remington and 244 Remington are linerchangeable. † 8mllet does not rise more than 1° above line of sight from muzzle to sighting-in range. 2 Bullet does not rise more than 3° above line of sight from muzzle to sighting-in range.

Managed-Recoil (pages 70-71)

Premier * Core-Lokt * Ultra Bonded (pages 62-63)

Premier AccuTip (pages 64-65)

Premier* Scirocco* Bonded (page 66)

Swift A-Frame PSP (page 67)

UMC® (page 74)

		5				50 (No. 1) (No. 1)			
CALIBER	HODOVEDI MULIBER	ा (gr)	BUILLET STYLE	PRIMER NUMBER	VELOC 100 20	TY (1ps) 0 300 400 500	MUZZE 100 200 300 400 500	50 100 150 700 250 300	100 150 200 250 300 400 500 CONTROLEM
300 Wirt Mag (cont.)	RM300W7	190	MatchKing® BTHP	91/2 M	2900 2725 255	7 2395 2239 2089	3547 3133 2758 2420 2115 1840	0.1 0.6 zero -1.9 -5.1 -9.8	1.6 1.4 zero -2.7 -6.9 -19.9 -39.8 0.533
	RS300WA	200 .	Swift A-Frame* PSP	9½M	2825 - 2595 * 237	Ť 2169; 1971 1786 ·	3544 2990 2508 2088 1725 1416	02 08 zero 22 -59 -112	1.8 1.6 Zero -32 - 80 -23.4 - 47.8 0.395-
300 WSM	R300WSM1	150	Core-Lokt* Pointed Soft Point	9 ½ M	3320 2977 266	0 2364 2087 1830	3671 2952 2356 1861 1451 1116	-0.1 0.4 zero -1.5 -4.3 -8.5	1.2 1.2 zero -2.4 -6.2 -18.6 -39.0 0.294
	PRADOVSNB A	180	Acculip Boat lea	91/6 ME	3010 28124-26	2 2440 2265 2097	[3621 3159 2746 2378 2050 1757 E	013 06 2 200 18 48 91	25 29 21 7m 34 148 329 (480 9
	PRSC300WSMB	180	Swift Scirocco Bonded	.9½M	2980 - 2793 26	4 2442 2276 2116	. 3549 3118 + 2730 2382 2070 1790	.0.1 06 zero 18 48 92	. 1.5 - 1.3 - zero - 2.6 - 6.6 - 19.0 - 38.1 0.507-]
308 Win.	RL306WI		Core Lake Painted Soft Points	9.6	2660 3 2382 21	1221878 (1533) 1453	1964 (575 1249 978 750 158	and as an ar an	10 c 20 40 410 53 536 (191)
	L308W4 18	150	UNIC* Metal Case	¥ 9 ½ ≈	2820 ~ 2533 - 220	3 - 2010 ; 1775 <u>;</u> 1561 ;	72648 (2137 , 1705 : 1345 : 1049 / : 811 -	-0.1. zero -1.2 -3.9 -8.4 -14.7	20: 17 mm 34 88 262 548 0314
	PRSC308WA	150.	Swift Scirocca Borided 1	91/2	- 2820 - 2611 - 241	0 2219 2037 1863	2648 2269 1935 1640 1381 1156	0.0 a . zero1:12 * 3.6 * -7.6 -13.2 >	18 16 mm 31 7.8 227 460 0.435
	PRC308WA	150	Core-Lokt* Ultra Bonded**	91/2	2820 - 2546 228	8 2046 1819 1611	2648 2159 1744 1394 1102 864	0.2 Zett -1.2 -3.9 -8.2 -14.4.	-1.9 1.7 zero -3.4 -8.6 -25.5 -53.1 0.331
	R308W1	150	Care-Lald* Pointed Soft Point	91/2	2820 2533 226	3 2009 1774 1560	2648 2137 1705 1344 1048 810	0.0 zero -1.2 -3.9 -8.4 -14.7	2.0 1.7 zero -3.4 -8.8 -26.2 -54.8 0.314
•	PRSC308WB	165	Swift Scirocca Bonded	91/2	€ 2700 ÷ 2513 ± 23	3 - 2161 - 1996, 1839 -	2670 2313 1994 1711 1459 1239	0.0 zero -1.37 40 84 144	20 /17 zero - 33 -84 -243 -489 - 0475
	PRAJOSWB	165	Acculto Boat Tall	3942	2700 2501; 23	18-21295-1956 (1792)	2670 2292 1957 1661 1401 1176	-0.1 zen 2 13 (41 85 147	20 18 200 34 86 248 501 04474
į	RM308W7	168	MatchKing® BTHP	91/2	2680 2493 231	4 2143 1979 1823	2678 2318 1998 1713 1460 1239	0.0 zero -1.3 -4.1 -8.5 -14.7	2.1 1.8 zero -3.4 -8.6 -24.7 -49.9 0.475
	RM308W8	175	MatchKing* BTHP	91/2	2609 2433 226	4 2102 1946 1798	2644 2300 1992 1716 1472 1256	0.4 0.9 zero -2.5 -6.7 -12.8	2.2 1.9 zero -3.6 -9.0 -25.9 -51.9 0.496
	PRC308WC	180	Core-Lokt* Ulba Bonded**	91/2	2620 . 2404 . 219	8 2002 1818 1644 .	2743 2309 1930 1601 1320 1080	0.0 zero -1.4 -4.5 -9.4 -16.3	23 2 zero -3.8 -9.5 -27.7 -56.4 0.402.
	R308W2	180	Core-Lokt* Soft Point	91/2	2620 2274 195	5 1666 1414 1212	2743 2066 1527 1109 799 587	0.0 zero -1.7 -5.3 -11.2 -19.7	2.6 2.3 zero -4.6 -11.8 -36.3 -78.2 0.248
· ·	R308W3	180	Core-Lokt® Pointed Soft Point	91/2	2620 2393 217	8 1974 1782 1604	2743 2288 1896 1557 1269 1028	0.0 zero -1.5 -4.6 -9.5 -16.5	23 2.0 zero -3.8 -9.7 -28.3 -57.8 0.383
300 Wby. Mag.	R300WB1	180	Core-Lokt* Pointed Soft Point	91/2 M	3120 2866 262	6 2398 2181 1976	3890 3282 2755 2298 1902 1561	0.0 0.5 zero -1.7 -4.6 -9.0	1.4 1.3 zero -2.5 -6.4 -18.9 -38.7 0383
303 British	(13038) .5 K	1742	UMC* Metal Case	791/2€	2475 \$2209 × 196	0 / 1729 / 1520 / 1338	€2366 1885 - 1484 1155 893 €692 €	0.1° - zero 1955-59 - 122 - 214	28 24 nm 47 119 356 743 0315
	R303B1	180	Core-Lokt® Soft Point	91/2	2460 2124 181	7 1542 1311 1137	2418 1803 1319 950 687 517	0.1 zero -2.0 -6.3 -13.2 -23.1	1.3 zero -3.6 -9.8 -19.1 -49.4 -99.9 0247
7.62x39mm	£U62391€ .st	123	LIMC* Metal Case	7/1/2	2365 7*2060 ¥178	01, 1529, 1315, 1150	- 1527 - 1159 \ 865 \ 638 - 472 _ 361 \	-0.1 - zen2.2 - 6.8 - 14.1 - 24.5 -	315 200 (38 ₹ 104 ≥ 202) 515 ± 1030
<u> </u>	R762391	125	Pointed Soft Point	71/2	2365 2062 178	3 1533 1320 1154	1552 1180 882 652 483 370	0.1 zero -2.2 -6.7 -14.0 -24.5	1.5 zero -3.8 -10.4 -20.1 -51.3 -102.5 0.267
300 Remington	PR300SM1	150	Core-Lokt® Ultra Bonded**	· 91/2 M	3200 2901 262	2 2359 2112 1880	3410 2803 2290 1854 1485 1177	0.1 0.5 zero -1.6 -4.6 -8.9	1.3 1.2 zero -2.5 -6.4 -19.1 -39.6 0.330
Short Action Ultra Mag	PR300SM2	165	Core-Lakt* Poined Soft Point	9 ¹ / ₂ M	3075 2792 252	7 2276 2040 1819	3464 2856 2339 1898 1525 1213	0.1 0.6 zero -1.8 -5.0 -9.7	1.5 1.4 zero -2.7 -7.0 -20.7 -42.1 0.339
	PR300SM4	180	Core Lokt* Ultra Bonded™	9½M	2960 2727 250	6 2295 2094 1904	3501 2972 2509 2105 1753 1449	0.1 0.6 zero -1.9 -5.2 -10.0	1.6 1.4 zero -2.8 -7.1 -20.9 -42.6 0.403
	RM300SM7	190	MatchKing* BTHP	9 ½ M	2900 2725 255	7 2395 2239 2089	3547 3133 2758 2420 2115 1840	0.1 0.6 zero -1.9 -5.1 -9.8	1.6 1.4 zero -2.7 -6.9 -19.9 -39.8 0.533
300 Remington Ultra Mag	PR300UM5	150	- Swift Sciracco Bonded 🛴 🕹	91/2 M	3450 3208 29	0 : 2762 : 2556 : 2358 :	3964 3427 2956 2541 2175 1852	00: 03 zeo [-12:-34:-6.7]	1.j 21 15 zero 26 112 25.3 0.435
OW a mag	PR300UM3	180	Swift Sciracco Bonded	9 1/2 M	3250 3048 285	6 ≥ 2672 ± 7495 ° 2325.	4221 3714 3260 2853 2487 2160	0.0 0.4 zero 14 39 7.5;	20 231 17 200 28 123 273 0500 s
LEVEL III	PR300UM4	180	Core-Lokt* Ultra Bonded**	91/2 M	3250 2988 27	2 2508 2287 2076	4221 3568 3003 2513 2088 1721	0.0 0.4 zero -1.5 -4.2 -8.1	21 2.5 1.8 zero -3.1 -13.6 -30.7 · 0.382
	RS300LM2	200	Swift A Frame PSP	91/2 M	3032 2791 256	2: 2345 2138 1942	4083 3459 2916 2442 2030 1675	. 0.1 0.6 zero -1.8 4.9 -9.5	1.5 -1.4 zen -2.7 -6.8 -19.9 40.7 - 0.395
POWER	PR300UM2-P2	180.	Core-Lokt* Ultra Bonded**	91/2 M	2980 2742 251	5 2300 2096 1902	3549 3004 2528 2114 1755 1445	0.1 0.6 zero -1.9 -5.1 -9.9	1.6 1.4 zero -2.8 -7.1: 20.7: -42.4 0.395
LEVEL II	PR300UM3-P2	180	Swift Scirocco Bonded	91/2 M	2980 2793 261	4 s 2442 - 2276 2116 ;	3549 3118 2730 2382 2070 1790	01 06 zero 18 48 92	15 13 zero 26 66 190 381 0.507
POWER	PRAGODUM! PI	1507	Accutin Boat Tail	942M	2910 2686 247	3 - 2270 - 2077 - 1893	2820 2403 2037 1716 1436 1193	01 07 zero 20 54 103	17 15 zen 29 74 215 437 50415
LEVELI	R300UM1-P1	150	Core-Lokt® Pointed Soft Point	91/2 M	2910 2617 234	2 2083 1843 1622	2820 2281 1827 1445 1131 876	0.2 0.7 zero -2.2 -5.9 -11.4	1.8 1.6 zero -3.2 -8.2 -24.4 -50.9 0.314
	RL300UM19	1500	Core Lokt Pointed Soft Point	3.94	Company of the Con-	8 2005 1770 1556	* 2639 * 2127. 1698 * 1339 ; 1043 * 806	03 08 zero 23 64 121.	2.0 1.8 zero 3.5 8.8 26.4 55.1 0314 N
32-20 Win.	R32201	100	Lead	61/2	1210 1021 91	3 834 769 712	325 231 185 154 131 113	zero -5.7 -19.7 -43.1 -76.9 -122.2	7ero -11.2 -31.7 -62.7 -105.2 -228.5 -410.8 0.166
32 Win. Special	R32WS2	170	Core-Lokt® Soft Point	91/2	2250 1921 162		1911 1393 998 710 521 411	0.3 zero -26 -8.0 -16.7 -29.3	1.7 zero -4.5 -12.4 -24.1 -62.1 -125.3 0.239
&mm Rem. Magnum	RS8MMRA	200	Swift A-Frame PSP	9½M		1' 2115 1885 1672	3734 , 3054 , 2476 1987 1577 1241 (0.2 0.7 zero -2.1, -5.8 -11.2	. 1.8 1.6 zero 3.1 80 -23.9 49.6 0.332
8mm Mauser	R8MSR	170	Core-Lokt* Soft Point	91/2	2360 1969 162		2102 1463 993 671 476 375	0.2 zero -2.4 -7.6 -16.1 -28.6	1.6 zero -4.4 -12.0 -23.7 -62.8 -128.9 0.205
338 Win. Mag.	- RS338WA	225	Swift A Frame PSP	9 /z M	2785 2517 226		3871 3165 2565 2057 1633 1286	0.0 zero -12 -4.0 -85 -14.8	2.0 1.8 280 3.5 -8.8 -26.1 -54.1 0.337
	R338WI	225	Core-Lokt* Pointed Soft Point	91/2 M	2780 2572 237		3860 3305 2815 2383 2004 1676	0.0 0.8 zero -2.2 -5.9 -11.4	1.9 1.7 zero -3.2 -8.1 -23.4 -47.5 0.435
	PRC338WA	225	Core-Lokt* Ultra Bonded**	9½M	2780 2582 239	_ _	3860 3329 2858 2440 2071 1748	0.2 0.8 zero -2.2 -5.9 -11.2	1.9 1.6 zero -3.2 -7.9 -23.0 -46.5 0.456
220 D	R338W2	250	Core-Lokt® Pointed Soft Point	91/2 M	2660 2456 228		3927 3348 2837 2389 1999 1663	0.0 zero -1.4 -4.3 -8.9 -15.4	2.1 1.9 zero -3.5 -8.9 -26.0 -52.7 0.431
338 Remington Ultra Mag	PR338UM2	250	Core-Lokt* Pointed Soft Point Swift A-Frame PSP.	91/2M	2860 2647 244		4540 3888 3314 2807 2363 1977	0.2 0.7 zero -2.1 -5.6 -10.6 0.2 0.7 zero -2.0 -5.6 -10.7	1.7 1.5 zero -3.0 -7.6 -22.0 -44.7 0.431 1.7 1.5 zero -3.0 -7.6 -22.1 -44.9 0.427
2201	PR338UM1	250		9 1/2 M		0 2244 2057 1879	4540 3882 3303 2794 2347 1960		
338 Lapua Magnum 35 Remington	RM338LMR1 R35R1	250 150	Scenar Core-Lokt* Pointed Soft Point	9½M 9½	2960 2820 260 2300 1874 150		4863 4412 3996 3613 3259 2932 1762 1169 755 494 359 291	0.1 0.5 zero -1.7 -4.7 -8.9 0.3 zero -2.7 -8.6 18.2 -32.6	1.4 1.3 zero -2.5 -6.3 -17.9 -35.4 0.575
23 verunikmi	R35R2			91/2					
35 Whelen	R35WH1	200 200	Care-Lokt* Soft Point Care-Lokt* Pointed Soft Point	91/2 M	2080 1698 133 2675 2378 210		1921 1280 841 577 445 369 3177 2510 1958 1506 1145 869	0.5 zero -3.5 -10.7 -22.6 -40.1 0.0 zero -1.5 -4.7 -9.9 -17.3	2.3 zero -6.1 -16.7 -33.0 -86.6 -174.8 0.192 2.3 2.0 zero -16.8 -33.1 -86.9 -175.4 0.294
Sa filiadi	R35WH3	250	Painted Soft Point	91/2 M	2400 2197 200		3197 2680 2230 1844 1515 1242	0.0 280 -1.3 -4.7 -9.9 -17.3 0.1 280 -1.9 -5.7 -11.8 -20.4	1.3 zero -3.2 -8.6 -16.6 -40.0 -76.3 0.409
350 Remington Mag	R350M1	200	Care-Lakt* Pointed Soft Point	91/2 M	2775 2471 218		3419 2711 2122 1639 1250 947	-0.1 zero -1.3 -4.2 -9.0 -15.8	2.1 1.8 zero -3.6 -9.4 -28.3 -59.7 0.295
375 H&H Mag	R375M1	270	Soft Point	91/2 M	2690 2363 200		4338 3347 2543 1900 1403 1039	0.4 1.0 zero -2.8 -7.6 -14.8	2.4 2.1 zero - 4.1 -10.6 -32.3 -69.0 0.267
	RS375MA	300	Swift A-Frame* PSP	91/2M	2522 2280 205		4238 3462 2802 2245 1786 1415	0.0 zero -1.7 -5.2 -10.8 -18.7	26 - 22 zero -4.3 -10.9 -32.2 -66.5 0.350
375 Remington	PR375UM2	270	Soft Point	91/2 M	2900 2558 224		5041 3922 3010 2272 1689 1246	0.0 0.8 zero -2.3 -6.3 -12.3	1.9 1.7 zero -3.5 -8.9 -27.0 -57.6 0.267
Ultra Mag	PR375UN3	300	Swift A-Frame* PSP	91/2 M	2760 2505 225		5073 4178 3412 2759 2210 1757	0.3 08 zero -24 -6.4 -12.4	20 18 zero -3588: -261: -53.9 0.350
416 Rem. Magnum	RS416RA	400	Swift A-Frame PSP	91/2 M	2400 2175 196		5115 4201 3419 2760 2214 1775	0.1 zero -1.9 -5.9 -12.1 -20.8	1.3 zero -3.3 -8.9 -17.0 -41.9 -80.8 0.367
44-40 Win.	R4440W	200	Soft Point	21/2	1190 1006 90		629 449 360 300 254 217	zero -5.9 -20.3 -44.5 -79.3 -125.9	zero -11.5 -32.7 -64.5 -108.2 -235.3 -423.0 0.161
44 Rem. Magnum	R44MG2	240	Soft Point	21/2	1750 1380 111		1650 1015 661 501 411 346	zero -2.1 -8.7 -21.2 -40.5 -68.2	Tero -5.6 -17.0 -35.4 -61.9 -143.8 -270.9 0.166
	R44MG3	240	Semi-Jacketed Hollow Point	21/2	1760 1380 111		1650 1015 661 501 411 345	zero -2.1 -8.7 -21.2 -40.6 -68.2	750 -56 -17.0 -35.4 -61.9 -143.8 -270.9 0.166
	RH44MGA	275	Core-Lokt* JHP	21/2	1580 1293 109		1524 1020 730 582 490 422	1.4 zeso -6.6 -19.4 -39.6 -67.9	ZETO -6.6 -19.4 -39.6 -67.9 -152.8 -281.1 0.199
444 Mai.	R444M	240	Soft Point	91/2	2350 1815 137		2942 1755 1010 630 472 381	0.3 zero -29 -93 -20.4 -37.4	1.9 zero -5.4 -15.5 -31.5 -86.8 -181.5 0.146
45-70 Government	R4570L	300	Semi-Jacketed Hollow Point	91/2	1810 1497 124		2182 1492 1031 767 625 533	zero -1.7 -7.3 -17.6 -33.5 -56.0	ZEID -47 -142 -292 -509 -117.6 -221.3 0.213
	R4570G	405	Soft Point	91/2	1330 1168 103		1590 1227 1001 858 758 679	reso -4.1 -14.6 -32.2 -57.6 -91.4	zero -8.4 -24.0 -47.3 -79.0 -170.4 -303.0 0.281
							,	· · · · · · · · · · · · · · · · · · ·	1

Note: These ballistics reflected a test barrel length of 24" except those for 30 Carbine and 44 Remington Note: these ballistics reflected a test barrel length of 24° except those to 30 Castine and 44 fiermington Magnum which are 20° barrels. Specifications are nominal. Ballistics figures established in test barrels. Individual tilles may vary from test barrel results. "Zero" indicates pardage at which tille was sighted in. Indices above or below line of sight. Hold law for positive numbers, high for negative numbers. 1 280 Reminigion and 24 Hermington are interchangeable. 1 Butllet does not rise more than 1° above line of sight from muzzle to sighting-in range. 2 Butllet does not rise more than 3° above line of sight from muzzle is sighting-in range.

	Managed-Recoil [™] (pages 70-71)	Premier [®] Scirocco Bonded (page 66)
	Premier © Core-Lokt © Ultra Bonded (pages 62-63)	Swift A-Frame" PSP (page 67)
E (Premier & AccuTip (pages 64-65)	UMC ² (page 74)

SHOTGUN SPECIFICATIONS

MODEL 105 CTI	SHOTGUN DIN	MENSIONS//AV	ERAGE WEIG	HISTOR									
2400EL	GAUGE	MAG. CAPACITY	BBL LENGTH/ ORDER NO.	. BARREL TYPE ²	SIGHTS	RECEIVER FINISH	OVERALL LENGTH	CENGTH OF PULL	DROP (CONS)	OROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
105 CTi	12	4	26"/ 29523 28"/ 29521	Vent Rib. ProBore * Chake 1	Twin Bead	Black TriNyte*	46 1/1" 48 1/1"	14 V:*	11/2*	51/5	American Walnut	Satin	61/4 7

MODEL 1	100 G3 SH	OTGUN DIM	ENSIONS / A	verage weights				4					
MODEL	GAUGE	HAS. CAPACITY	BBL LENGTH/ Order No.	BARREL TYPE ²	SICHTS	RECEIVER FINISH	OFERALL LENGTH	LENGTH of Pull	OROP (COMB)	OROP (HEEL)	STOCK Material	STOCK FINISH	AVG. WT. (LBS.)
1100 G3	12	4	26°/ 26415 28°/ 26418 28°/ 82901 (L)	Vent Rub, ProBore® Choke ¹	Twin Bead	Flated	46 '//" 48 '//" 48 '//"	14 1/4*	1 W.	2 ½*	Realwood* Semi-Fancy Carbon Fiber Walnut Laminate	Hi-Gloss	8 1/4 8 1/4
1100 G3	20	4	26*/ 27449 28*/ 2745l	Vent Rib, Rem Choke ¹	Twin Bead	Plated	46 :/s* 48 :/s*	14 5/1*	11/2*	2 ½*	Realwood* Semi-Fancy Carbon Fiber Walnut Laminate	Hi-Gloss	7¥1 7½
1 Improved Cylinder	er, Modified and Full Cho	ake Tubes. 2 Model 110		chambers and will handle 21,1 and	3° shotshells. (L)	Left-hand model.	48 74				Maint Pairings		

MODEL	GAUGE	BBL LENGTH/ ORDER NO.	BARREL TYPE	ZHCHTS	BARREL FINISH	RECEIVER FINISH	OVERALL Length	LENGTH Of Pull	DROP (COMB)	DROP (HEEL)	STOCK Material	STOCK Finish	AVG. WT. (LBS.)
Premier Ruffed Grouse	20	26*/ 89715	7mm Vent Rib, ProBore* Choke	Ivory Bead Front, Steel Middle	Polished Blue	Deep Blued	431/8"	143/4"	11/2"	23/3"	Walnut	Oil	63/4
Premier Competition STS	12	28"/ 89591 30"/ 89590 32"/ 89592	10mm Vent Rib ProBore® Choke?	lvory Bead Front, Steel Middle	Polished Blue	Nickel	45 ¼" 47 ¼" 49 ¼"	143/7	1 ½2*	23%*	Walnut	Satin	7½ 7¾ 8
Premier Competition STS with Adjustable Comb	12	30"/ 89594 32"/ 89593	10mm Vent Rib, ProBore® Choke ⁷	lvory Bead Front, Steel Middle	Polished Blue	Nickel	47 ¼* 49 ¼*	143/4"	1 1/2"	2 3/3"	Walnut	Satin	73/4
Premier Field Grade	12 12 20 20 28 28	26*/89582 28*/89581 26*/89709 28*/89708 26*/89751 28*/89750	7анн Vent Rib, ProBore® Choke ⁷	lvory Bead Front, Steel Middle	Polished Blue	Nickel	43 1/s" 45 1/s" 43 1/s" 45 1/s" 43 1/s	141/8	1 1/2*	23/5"	Walnut .	Satin	7 .7½ 6½ 6¾ 6½ 6¼
Premier Upland	12 12 20 20 28	26"/89586 28"/89585 26"/89712 28"/89711 26"/89755 28"/89754	7mm Vent Rib. ProBore® Choke ⁷	lvory Bead Front, Steel Middle	Polished Blue	Case-Colored	43 1/6" 45 1/6" 43 1/6" 45 1/6" 43 1/6"	14 1/4"	11/2"	2 3/3"	Walnut	Oif	7 7½ 6½ 6½ 6½

MODEL	GAUGE/BORE	MAG. Capacity	BBL LENGTH/ ORDER NO.	BARREL TYPE ⁵	SIGHTS	RECEIVER FINISH	CVERALL	LENGTH OF PULL	(COMB)	DROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LBS.)
1100° Competition	12 1	4	30"/ 26919	Vent Rib PraBore® Choke	Twin Bead	Nickel	50 W	141/4"	11/2"	21/4"	Semi-Fancy Amer Walnut	Hi-Gloss	. 81/8
1100 ⁻ Competition (w/Adjustable Comb Steck)	12	. 4	30"/ 26923	Vent Rib PraBore® Choke	Twin Bead	Nickel	50 1/4	141/4"	Adj.	Z 1/4*	Semi-Fancy Amer, Walnut	Hi-Gloss	8.14
870" Wingmaster* Classic Trap	12.	4	30"/ 24857	Lt. Contour Vent Rib Rem Choke 1	Twin Bead	High Polish Blued	50 1/2	14 1/2"	1 ½15°	2*	Semi-Fancy Amer. Walnut	Hi-Gloss	814 3
1100° Classic Trap	12	4	30"/ 25333	Lt. Contour Vent Rib Rem® Choke 1	Twin Bead	High Palish Blued	50 1/2	14 1/2"	1 1/16"	2"	Semi-Fancy Amer. Walnut	Hi-Gloss	814
1100 Tournament Skeet	. 12 20	4	26"/ 25241 26"/ 29595	Lt. Contour Vent Rib Rem® Choke ⁴	Twin Bead	High Polish Blued	46 %	14"	1 ½T	21/4"	Semi-Fancy Amer. Walnut	Hi-Gloss	8 7
1100 * Premier Sporting 12	12	4	28"/ 82842	Lt. Contour Vent Rib Rem Choke 2	Twin Bead	High Polish Blued	49	143/26"	11/2	21/4"	Semi-Fancy Amer. Walnut	Hi-Gloss	. 8
1100 Premier Sporting 20	∴ 20	4	28"/ 82846	Lt. Contour Vent Rib Rem * Choke 2	Twin Bead	High Polish Blued	(1 49]	14"	11/2	21/2*	Semi-Fancy Amer. Walnut	Hi-Gloss	7.7.
1100 Premier Sporting 28	28	4	27,1/ 82854	Vent Rib Rem - Choke 2	Twin Bead	High Polish Blued	47 1/4	14"	11/7	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	* 6 1/2
1100" Premier Sporting 410	410 bore -	4	27*/ 82858	· Vent Rib Rem Choke 2,6	. Twin Bead 4	High Polish Blued	47 14	14"	11/7	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	61/2
1100 Sporting 12	7-12	4	28"/ 25315	Lt. Contour Vent Rib Rem® Choke ²	Twin Bead	High Polish Blued	49	14 ₹15"	11/7	21/4"	Semi-Fancy Amer. Walnut	Hi-Gloss	
1100 Sporting 20 (LT)	20	4	28 / 25399	Lt. Contour Vent Rib Rem Choke 2	5. Twin Bead	High Polish Blued	49	14"	1 1/2"	21/2	Semi-Fancy Amer. Walnut	Hi-Gloss	., 7.
1100 - Sporting 28	28	4	27"/ 29583	Vent Rib Rem Choke 2	Twin Bead	High Polish Blued	47 74	14"	11/2"	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	.61/2
1100 Sporting 410	410 bore	4	~ 27"/ 29549 353	Vent Rib Rem" Choke 2,6	Twin Bead	High Polish Blued	47 14: 3	14"	147	21/2	Semi-Fancy Amer. Walnut	Hi-Gloss	61/2

⁴ Supplied with extended Brilley Rem* Choke tubes (Improved Cylinder and Skeet.) 5 Model 1100* shotguns have 3* chambers and will cycle 2*1, and 3* shotshells.

MODEL SI	R453 SHOTO	SUN DIMEN	SIONS / AV	/ERAGE WEIGHT	S	\$ 13 m 5 m.	18.00	1					
MODEL		GAUGE	MAG. CAPACITY	BRE LENGTH C	CHOKE	RIB	METAL FINISH		ENGTH DROI F PULL (COM		STOCK TO	STOCK FINISH	AVG. WT.
 SPR 453~	16 fra	122	4	28"/ 89460 26"/ 89462 24"/ 89440	SC-4	Y .	Matte Black	49 1/4 47 1/4 245 1/2	141/2" 11/2	21/2	Synthetic +	Matte Black	8¼ 8¼ 8

											•		
MODEL SP-10	MAGNU	M AUTOI	OADING SHO	OTGUN DIMENSI	IONS / AVER	AGE WEIGHTS							
MODEL	CAUGE	MAG. CAPACITY	BEX, LENGTH/ ORDER NO.	BARREL TYPE	SIGNIS	RETAL FIXESH	OVERALL	LENGTH OF PULL	OROF (COME)	DROP (HEEL)	STOCK STOCK	STOCK FIXISH	AVG. WT. (LBS.)
SP-10 ⁻ Magnum ²	10.	2	£ 30°/ 24808	Vent Rib Rem Choke ¹	Twin Bead	Matte Black Non Reflect.	51 /	14"	1 1/2	2 1/2*	Satin American Walnut	Satin	比加亞
SP-10 Thumbhole Camo ²		2	23 / 81000	Rifle Sight Rem - Choke 4	FireSights	Mossy Oak® Obsession®	344 W	14 1/2"	1 1/8"	1 1/4	Laminate -	Mossy Dak® Obsession®	, 11,
SP-10" Waterfowl Camo ²	10	2	e 26/81001	Vent Rib Rem - Choke 3	HIVIZ*	Mossy Oak® Duck Blind "	47 1/2	14"	1 1/1	. 21/2"	Synthetic	Mossy Oak [®] Duck Blind ™	10%
SP-10" Camo RC/VT2	10	2	267 24828	Vent Rib Rem * Choke 1	Twin Bead	Mossy Oak® Obsession®	47 Yr	14"	11/2	21/2	Face Synthetic	Mossy Oak® Obsession®	10%

¹ Model SP-10" shotgams supplied with Full and Mod Rem" Choke tubes. 2 IMPORTANT NOTE: Critical components —including the barrel, bolt assembly and trigger plate assembly of the Reminigton Model SP-10" and other manufacturers' 10-gauge shotguns — are not interchangeable 3 MOTE: Supplied with 37 littley Rem" choke waterlowl tubes — decaying, intermediate and pass shooting (ported) non-tubic approved. 4 NOTE: Supplied with Briley Staright Rilled Turkey Tube.

SHOTGUN SPECIFICATIONS

1	MODEL	GAUGE	MAG. Capacity	ORDER NO.	BARREL TYPE 3	SIGHIS	METAL FIXISH	OVERALL STATE	OF PULL:	(COME)	DROP (HEEL)	STOCA CARACTERIAL STOCAL	STOCK FURSH	AVG. WT.
	11-87" Sportsman" Synthetic	12 12 20 20	4	28 / 298/9 26 / 29881 28 / 29825 26 / 29827	Vent Rib Rem Choke Mod ²	Single Bead	Matte Black, Non-Reflective	48° 45° 48° 46°	14*	11/2*	2 1/2"	Synthetic	Matte Black	8 14 8 16 7 14 7 18
	11-87" Sportsman" Camo	12 20	4	28 / 29895 26 / 29917	Vent Rib Rem Choke Mod ²	Single Bead	Mossy Oak* New-Breakup*	, 46°	14"	11/7"	1%	⇒ Synthetic	Mossy Oak* New-Breakup*	- 8¼ -7¼-
7	11-87" Sportsman" Super Mag	12.4	4	28*/83604	Rem ⁻ Chake Mod	Twin Bead	Matte Black, NR	48" 1"	14*	11/4.	1 1/8"	Synthetic	Matte Black	81/4
v	11-87" Sportsman" Super Mag Waterfowl	127	4	28"/ 83603	Vent Rib Rem ⁻ Choke ⁴	HiViz* Single Bead	Mossy Oak* Ouck Blind*	47.44	13¾"	11//2*	1%	Synthetic	Mossy Oak* Duck Blind	81/8
<u>-</u> [11-87" Sportsman" Super Mag w/ShurShot" Stock (Turkey)	12 5	4	23 / 83601	Rifle Sights	TruGlo® Rifte Sights	Realtree* APG~ HD~	8	13 %	11/2"	2*	Synthetic	Realtree* APG" HD"	1.7%
,	11-87" Sportsman" Synthetic w/ShurShot" Stock	12.3	4	23 / 83602	Fully Rifled	Cantilever Scope Mount	Realtree* Hardwoods* HD*	43	13¾"	11/2"	2-	Synthetic	Realtree* Hardwoods" HD"	f 8
ĺ	11-87" Sportsman" Synthetic Deer	12 20	4	21°/ 2985813. 21°/ 298771	Fully Rifled	Cantilever Scope Mount	Matte Black, Non-Reflective	41-	14"	11/2"	1 1/2-	Synthetic	Matte Black	8 ½ 7 ½
	11-B7~ Sportsman~ Youth Synthetic	20	4	21 / 29891	Vent Rib Rem Choke Mod ²	Single Bead	Matte Black, Non-Reflective	401/4	13"	11/7*	2 1/2"	Synthetic:	Matte Black	± 6 1⁄2
ŀ	11-87" Sportsman" Youth Camo	20	4	21 / 29899	Vent Rib Rem Choke Mod ²	Single Bead	Mossy Oak® New Break-Up®	4014	13"	11/2"	2 1/2	Synthetic	Mossy Oake New Break-Upe	61/2

1 Model 11-87 Deer barrels are not equipped with a pressure-compensating gas system, and will not function with target or light field bads. 2 NOTE: All Model 11-87 Sportsman* shotguns with a Rem" Choke barrel come equipped with Modified Rem" Choke tubes.

3 Model 11-87 Sportsman* shotguns have 3' chambers and will cycle 2'/," and 3' shotshells.

4 Supplied with Specialized Rem" Choke Waterlovel choke tubes.

	MICH-FILES/E/S	43.4/4		SE SHUTGUN:	DIMENSIONS	/ AVERAGE WI	படிராகு,	OVERALL	LLMGTH	DROP	DROP	STOCK		AVG. WT.
	MODEL.	CAUGE	MAG. CAPACITY	ORDER HO.	BARREL TYPE	STREDIZ	METAL FINISH	LEMETER	OF PULL	(COMB)	(HEEL)	MATERIAL C	STOCK FINISH	E (LBS.)
Ð	11-87" XCS Super Magnum SF 1 Stock	12 (3 ½)	3 (3½*)	28"/ 83680	Rem Chake 3	- Twin Bead .	Grey TriNyte® (PVD)	43	131/4"	11/2"	21/2*	Synthetic	Matte Black	8
Ð	11-B7~ XCS Super Magnum Waterfowl SF 1 Stock	12 (3 ½)	3 (31/2")	28 / 83682	Rem ⁻ Chake ³	Twin Bead 4	Brown TriNyte® (PVD)	43	13¾"	11//2"	21/2*	Mossy Oak® Duck Blind®	Mossy Oak* Duck Blind*	8
	3 NOTE: All 11-87" Super Magnum:		hambers except L	Deer barrel which has 3" cha	mber. Super Magnums can s	shoot 2 1/2", 3" and 3 1/2" shell	s interchangeably.							

	MODEL 87	0 WINGMAST	ER SI	OTGUN DIMEN	SIONS / AVERAGE	WEIGHTS		OVERALL	LENGTH	DROP	DROP	STOCK	210CX	AVG. WT.
	MODEL	GAUGE/BORE ²	CAPACITY	ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	LENGTH	OF PULL	(COMB)	(HEEL)	MATERIAL	FINISH	(LBS.)
NEW	Wingmaster* 100th Anniversary	212	4	28 / 82087	Light Contour Vent Rib Rem- Choke ¹	Twin Bead	High Polish Blued	48 1/2	14 1/4*	1 1/2"	2 1/2*	American Walnut	Hi-Gloss	127
Ð	Wingmaster* Claro Walnut	12 20	4	28 / 82000 26 / 82001	Light Contour Vent Rib Rem- Choke ¹	Twin Bead	High Polish Blued	48 ½ 46 ½	14"	1 1/2*	2 1/2"	Semi-Fancy Clare Walnut	Hi-Gloss	614 614
	Wingmaster	12	4	28"/ 26927 26"/ 26929	Light Contour Vent Rib Rem- Chake ¹	Twin Bead	High Polish Blued	48 ½ 46 ½	14 1/4"	1 1/4	2 1/2"	American Walnut	Hi-Gloss	7 634
•	Wingmaster*	20	4	-28"/ 26947 26"/ 26949	Vent Rib Rem" Choke ¹	Twin Bead	High Polish Blued	48 ½ 46 ½	14"	1 1/2*	2 1/2"	American Walnut	Satin (28") Hi-Gloss (26")	61/8 61/4
	Wingmaster*	28 (2 1/1)	4	25*/ 24983	Vent Rib Rem Choke 1	Twin Bead	High Polish Blued	45 1/2"	14*	1 1/2"	2 1/2"	American Walnut	Satin	6 ,
	Wingmaster*	410 Bore (3")	4	25 / 24991	Vent Rib Modified	Twin Bead	High Polish Blued	45 1∕2	14"	1 1/2"	2 1/7"	American Walnut	Satin	6,

1 NOTE: All Model BTO 'Wingmaster' and Model BTO 'Wingmaster' Super Magnum' shotguns with a Rem' Chake barrel come equipped with Improved Cylinder, Modfied and Full Rem' Choke tubes.
2 Model BTO 'Wingmaster' shotguns have 3' chambers, unless otherwise noted, and will cycle 2'/," and 3' shotshells. 410 bore will cycle both 2'/," and 3' shotshells.

MODEL.	GAUGE ¹	MAG. EAPACITY	BBL LENGTH/ORDER NO.	BARREL TYPE	2TH312	METAL FIXISH	OVERALL LENGTH	OF PULL	OROP (COMB)	DROP (HEEL)	STOCK Material	STOCK . FINISH	AVG. WT. (LBS.)
870" Expresse Turkey-Deer Combo	12 (3°)	4 (2 ³ /4" & 3")	21"(Vent Rib)/25663 23"(Fully Rifled Deer)/25663	Vent Rib Rem" Choke (Turkey Extra Full) Fully Rifled Deer	Twin Bead (Vent Rib) Cantilever Scope Mount (Deer BBL)	Matte Black Non-Reflect	42 1/2" (Vent Rib) 43 1/4" (Deer BBL)	14"	11/7	2 1/2"	Synthetic	Mossy Oak* Break-Up*	7 1/4 (Vent Rib) 8 (Deer BBL)
870" Express* Combo	12	4	28"(Vent Rib)/23" (Fully Rifled)/81280	Vent Rib Rem* Choke (Mod.) Fully Rifled Deer Cantilever	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	43 1/4" (Deer BBL)	14"	11/1	2 1/7"	Synthetic	Black	7 1/4 (Deer BBL
870° Express* Combo	12	4	26"(Vent Rib)/20" (Fully Rifled Deer)/25578	Vent Rib Rem Choke (Mod.) I.C. Deer or Fully Rifled Deer	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	48 1/4" (Vent Rib)	14"	11/1	21/1	Laminate	Satin	7 1/4 (Deer BBL
870" Express* Combo	20	4	26"(Vent Rib)/20" (Fully Rifled Deer)/25597	Vent Rib Rem* Choke (Mod.) I.C. Deer or Fully Rifled Deer	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	46 1/2" (Vent Rib)	14"	11/2	21/2	Laminate	Satin	6 1/2 (Deer BBL
870" Express* Syn. Youth Combo	20	4	21"(Vent Rib)/25659 20"(Fully Rifled)/25659	Vent Rib Rem* Choke (Mod.) Fully Rifled	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	40 1/2" (Vent Rib) 39 1/2" (Deer BBL)	13"	1 ½'	2 ½*	Synthetic	Matte Black	6 (Vent Rib) 6 (Deer BBL)

MODEL 870 SPEC	IAL PURP	OSE MAI	RÎNE,MAGNI	UM" SHOTGUN	I DIMENSIONS	/ AVERAGE WEIGHT	Ś		* 100				
MODEL	GAUGE	MAG. CAPACITY	BBL LENGTH/ ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	OROP (HEEL)	STOCK Material	STOCK FINISH	AYEMT. (LBS.)
870" Marine Magnum ^{e 2}	121	6	187/25012	Cylinder Choke	Single Bead	Electroless Nickel-Plated	38 1/2"	14"	1 1/2"	21/;*	Synthetic	Matte Black	71/2
1 Model 870" Marine Magrium* shote	uns have 3" chambe	ers and will cycle 2	?'V;' and 3" shotshells o	nly. 2 Will not accept law	enforcement accessories.		*.***						

MODEL 870 XCS N	ARINE N	1AGNUM	SHOTGUN	DIMENSIONS	AVERAGE WE	IGHTS							
WODET	CARRE	MAG. CAPACITY	BBL LENGTH/ ORDER HO.	BARREL TYPE	SIGHTS	METAL FINISH	OVERALL LENGTH	LENGTH OF PULL	DROP (COME)	DROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AYGUT. (LES.)
870" XCS Marine Magnum*	12 ¹	6	18"/ 81308	Cylinder Choke	Single Bead	Black TriNyte	38 1/1"	133/4*	1 1/2"	21/2*	Synthetic	Matte Black	71/2
1 Model 870° XCS Marine Magnum* si	hotguns have 3° ch.	ambers and will cy	rcle 21/1" and 3" snotshe	lls only.									

MODEL-8AO EYAL		MAG.	BEL LENGTH/	วะเร/ (VERAGE WELC	**************************************		OVERALL	LENGTH	DROP	DROP	STOCK		AVG. WT.
30EL	EYNGE _J	CAPACITY	ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	LENGTH	OF PULL	(COMB)	(HEEL)	MATERIAL	STOCK FINISH	(LBS.)
370 Express*	12	4	28*/ 25568 26*/ 25569	Vent Rib Rem * Choke (Mod)	Single Bead	Matte Black Non-Reflect	48 1/2 46 1/2	į4*	11//	21/2	Laminate	Satin	7 ½ 7 ¼
370° Express* Magnum w/ShurShot°	12 (3")	4 (2³/3° & 3°)	21781114	Vent Rib Rem * Choke (Turkey Extra Full)	Twin Bead	Mossy Oak* Obsession*	42 1/2"	13 3/4*	r _N s.	2*	Synthetic	Mossy Oak * Obsession s	7 ³/s
870 Express Magnum y/ShurShot	12	4	237 81118	Vent Rib Rem* Chake (Mod)	Single Bead	Matte Black Non-Reflect	44 1/2	13 3/14	11/1	2"	Synthetic	Matte Black	73/4
870 Express*	20	4	28 / 25583 26 / 25582	Vent Rib Rem * Chake (Mod)	Single Bead	Maite Black Non-Reflect	48 1/2 46 1/2	11.	11/5	2 1/2	Laminate	Satin	6 ½ 6 ¼
370 Express Youth	20	4	217 25561	Vent Rib Rem Chake (Mod)	Single Bead	Matte Black Non-Reflect	40 1/2	13*	11/2	2 1/4"	Laminate	Satin	6 V2
370° Express* Synthetic	12	4	28°/ 25587 26°/ 25589	Vent Rib Rem* Chake (Mod)	Single Bead	Matte Black Non-Reflect	48 1/2" 46 1/2"	14"	11/7	21/2	Synthetic	Matte Black	7 V2 7 V4
B70° Express° Turkey Camo	12	4	217/25152	Yent Rib Rem Choke Turkey (Extra Full)	Twin Bead	Matte Black Non-Reflect	42 1/2	14"	11/2	2 1/2"	Synthetic	Mossy Oak* Break-Up*	7 1/4
370 * Express* Jr. Jakes Gun	20	4	18 1/4"/ 26443	Vent Rib Rem * Choke (Full)	Single Bead	Matte Black Non-Reflect	37 1/1"	12"	11/2"	2"	Laminate	Mossy Oak* Break-Up*	6
70° Express* Turkey	12	4	21*/ 25573	Vent Rib Rem : Choke (Extra Full)	Twin Bead	Matte Black Non-Reflect	42 V2°	14"	1 N.	2 1/2"	Laminate	Satin	7 Y 1
70° Express* Turkey Youth	20	4	217 25157	Vent Rib Rem Choke (Full)	Twin Bead	Matte Black Non-Reflect	40 V2"	13*	1 1/2"	2 1/1"	Synthetic	Mossy Oak* Break-Up*	6
370° Express® Synthetic Fully Rifled Deer	- 12	4	201/ 25097	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	40 1/2"	14"	11/2	1 7/3	Monte Carlo Synthetic	Matte Black	7
870° Express° Deer	12	4	201/ 25565	Fixed Imp. Cyt. Choke	Rifle Sights	Matte Black Non-Reflect	40 1/2"	14"	1 1/2"	1 7/8"	Monte Carlo Laminate	Satin	7 1/4
370 Express* Deer Youth	20	. 4	201/ 25555	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	39 1/2"	13"	1 1/2*	2 1/4"	Laminate	Satin	6
70° Express * Fully Rifled Deer	12	4	207/ 25575	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	40 1/2	14"	1 1/2"	1 1/8	Monte Carlo Laminate	Satin	7 1/4
870 Express® Synthetic Fully Rifled Cantilever	12 20	4	23"/ 25090 18"/"/ 25183	Fully Rifled Heavy Contour Fully Rifled	Cantilever Scope Mount	Matte Black Non-Reflect	43 ¼* 38 ¾*	14"	11/2	1 7/5"	Monte Carlo Synthetic	Matte Black	8 7 1/4
370" Express* Left Hand	12	4	28*/ 25577	Vent Rib Rem * Chake (Mod)	Single Bead	Matte Black Non-Reflect	48 Vz"	14"	1 1/2"	2 1/2"	Laminate .	Satin	7 Y2
370" Express* Synthetic 18"	12	. 4	187/25549	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	38 1/2"	14"	1 ¥z"	2 1/2"	Synthetic	Matte Black	71/4
70° Express ? 2-Shat Extension Pistol Grip Stock & Fore-end	12	6	187/24823	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	. 29"	_	_	_	Synthetic	. Matte Black	1
170° Express? Folding Stock vith/7-Round Capacity ²	. 12	6	18*/81190	Bead Sight Rem Choke ³	Single Bead	Matte Black Non-Reflect	Adj.	. Adj.	11/2	2 1/2"	Synthetic	Matte Black	714
370 Express Synthetic 2-Shot w/Knoxx SpecOps Stock	20	6	187/81180	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	Adj.	. Adj.	1 1/2"	2 1/2"	Synthetic	Matte Black	1 1/2
70 Express* Synthetic with 7-Round Capacity ²	12 20	: 6	18"/ 25077 18"/ 81100	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	38 1/2"	14"	1 1/2"	2 1/2"	Synthetic	Matte Black	7 ½ 6 3/4

MODEL.	CAUSE ²	MAG. CAPACITY	BBL LENGTH/ ORDER MIL	BARREL TYPE	SIGHTS	METAL FIKISH	LENGTH	LENGTH OF PULL	OROP (COMB)	OROP (HEEL)	STDCK Material	EXIZH STOCK	AVG.W7. (LBS.)
870 Express* Super Mag Turkey Camo	12 (3 ½*)	3 (3 ½") 4 (2 ¾° & 3")	23 / 25131	Vent Rib Rem * Choke (Turkey Extra Full)	Twin Bead	Mossy Oak* Break-Up*	44 1/2	14"	1 1/2"	2 1/2"	Synthetic	Mossy Oak* Break-Up*	71/4
170° Express [»] iuper Mag Waterfowl Camo ³	12 (3 1/2)	3 (3 ½") 4 (2 ½" & 3")	28"/81111	Vent Rib Rem * Choke*	HiViz®	Mossy Qak* Duck Blind	48"	14"	11/2"	2 1/2"	Synthetic	Mossy Oak * Duck Blind	11/h
170" Express" Super Mag Camo	12 (3 ½)	3 (3 ½°) 4 (2 ½° & 3°)	26*/ 25154	Vent Rib Rem Choke ⁵	HiViz*	Mossy Oak* Break-Up*	46	14"	1 1/2"	2 1/2"	Synthetic	Mossy Oak* Break-Up*	71/2
70° Express* Super Mag	12 (3 ½") ;	3 (3 ½") 4 (2 ¾" & 3")	28"/ 25100	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	48"	14"	1 1/2"	2 1/2"	Laminate	Satin	7 1/2
170° Express* Super Mag Synthetic	12 (3 1/2")	3 (3 ½") 4 (2 ½" & 3")	26"/ 25102 28"/ 25103	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	46" 48"	14*	1 1/2"	2 1/2"	Synthetic	Matte Black	71/4
170° Express* Tuper Mag Combo	12 (3 ½")1	3 (3 ½*) 4 (2 ½* & 3*)	26°/25114 20°/	Vent Rib Rem Choke (Mod) Fully Rifled (Deer)	Single Bead (Vent Rib)	Matte Black Non-Reflect	46" (VR) 40 1/2" (Deer)	14"	11/2"	2 1/2"	Laminate	Satin	7 1/4

MODEL.	GAUCE	MAG. CAPACITY	BRL LENGTH/ ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	OVERALL	LENGTH OF PULL	(00MB)	OROP (HEEL)	STOCK MATERIAL	STOCK FURSH	AVG. WT.
870" SP-T" Super Mag Thumbhole ³	12 (3 1/2) 1	3(31/2"), 4(23/1" & 3")	23"/ 25189	Rifle Sight Rem® Choke 2	TruGlo®	Mossy Oak* Obsession*	44 1/2	14 1/2"	1 5%"	2%*	Laminate	Mossy Oak* Obsession*	8/4
870° SPS" Super Mag Turkey w/ShurShot" Stock	12 (3 1/1")1	4(2¾*&3*)	23 / 81061	Wingmaster HD Extended Rem Choke	, TruGlo®	Realtree* APG HD	44 1/2	13 %	11/4"	2*	Synthetic	Realtree* APG* HD*	11/4
870 SPS Cantilever Synthetic w/ShurShot Stock	12 (3.)1	4 (2 3/4" & 3")	23*/82100	Fully Rifled Cantilever	Cantilever Scope Mount	Realtree* Hardwoods* HD*	44 1/2	13 1/4"	i ½	2*	Synthetic	Realtree* Hardwoods* HD*	134.
870 ⁻ SPS Super Mag Camo ³ MAX Gobbler ⁻	12 (3 1/2)1	3(3 1/2), 4(2 1/2 & 3")	23"/81060	Rifle Sight Rem ⁻ Chake ²	Fire Sights	Realtree* APG HD	V=44 //	Adj.	11/	21/2	Synthetic	Realtree* APG HD	714
870 SPS-T Super Mag Camo ³	12 (3 14)	3(31/2"), 4(21/1" & 3")	23"/ 25007.	Vent Rib Rem Choke 2	Twin Bead	Mossy Oak* Obsession*	244 //	14"	1 1/4"	21/2	Synthetic	Mossy Oak* Obsession*	714
870 XCS (Xtreme Conditions)	12 (3 1/41)	3(31/2), 4(21/1837)	28"/81309	Vent Rib Rens Choke 4	Twin Bead	Matte Black	48 1/1	13¾*	11/2*	21/2	Synthetic	Matte Black	7%
870 ⁻ XCS (Xtreme Conditions) Waterfowl	12 (3 1/2)	3(3 1/2"), 4(21/4" & 3")	287,81310	Vent Rib Rem Choke 4	Twin Bead TruGla	Mossy Oak* Ouck Blind*	\$48 M	13%"	1 1/2*	21/2	Synthetic	Mossy Oak? Duck Blind?	77%

¹ All 3" and 3"/s chambers also handle 2"/s shells. 2 Note: Supplied with Turkey Super Full choke tube. 3 Note: All Model 870" Super Magnums have 3"/s chambers except Over barrel which has 3" chamber. Super Magnums can shoot 2"/s", 3" and 3 "/s" shells interchangeable 4 Note: Super Magnums have 3"/s", chambers except Over barrel which has 3" chamber. Super Magnums can shoot 2"/s", 3" and 3 "/s" shells interchangeable 4 Note: Super Magnums have 3"/s", chambers except Over barrel which has 3" chamber. Super Magnums can shoot 2"/s", 3" and 3 "/s" shells interchangeable 4 Note: Super Magnums have 3"/s", chambers except Over barrel which has 3" chamber. Super Magnums can shoot 2"/s", 3" and 3 "/s" shells interchangeable 4 Note: Super Magnums have 3"/s", chambers except Over barrel which has 3" chamber. Super Magnums can shoot 2"/s", 3" and 3 "/s" shells interchangeable 4 Note: Super Magnums have 3"/s", chambers except Over barrel which has 3" chamber. Super Magnums can shoot 2"/s", 3" and 3 "/s" shells interchangeable 4 Note: Super Magnums have 3"/s", chambers except Over barrel which has 3" chamber. Super Magnums can shoot 2"/s", 3" and 3 "/s" shells interchangeable 4 Note: Super Magnums have 3"/s", shells interchangeable 4 Note: Su

SHOPEUN SPACIFICATIONS

MODEL	ORDER NO.	CAUGE	CHAMBER S	BBL Length	TRICGER	EJECTOR EXTRACTOR	RECEIVER	RIB	STOCK SE	8077	CHOSE	OA LENGTR	Lor	DC		WT (LBS.
	89566	12		26*	16/1861		Nickel 2				5C-4	43 1/2"	1		2000	7 1/2
	89560	12		28"			Blue				SC-4	45 1/2"			100 700	7 %
	89576	12		28"			Nickel				SC-4	45 1/2"			1. 150 887	7 1/2
SPR310	89700	20		26"	IZZ	ASE	Blue	VT	Walnut	Pad	SC-4	43 1/2"	14 1/2	11/6	216	7 1/2
11010	89716	20 -	7 7	26°			Nickel	••	132		SC-4	43 1/2"	1.	. 11		7 1/2
	89704	20	[2] [2]	28"	11 11 11 11 11		Nickel				SC-4	45 1/2"	15.0%		1.803	7 1/2
	89744	28	24.	26"	1. 3.44		Blue 🗼				IC/MD	43 1/2"	17.70		1979代以	7 %
	89784	410	3 3 3	26"	12 2 3		Blue		A STATE OF		IM/FL	43 1/2"	1 3		1525	7 1/4
SPR310S	89570	12	(S - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 -	29 // Ported	Tizz	ASE	Nickel	Vī	Walnut	Pad	SC-4	47"	14%	1 1/2	2.16	7 1/
* *******	89702	20	4.7	28 1/2" Ported	331	nuL	110ACI	• 1	renning.	, au	-0-4	A6°	1 77	A /1	1 -11	, ,

SST = Single Selective Trigger VT = Vent Rib. SC-4 = CN1, IC, MID, PL (CN1. and IC are approved for steed) IC = Improved Opticider MD = Modified IM = Improved Modified PL = Full ASE = Automatic Selective Ejector ICNT = Editactor 310S = Sparting Model with Ported Barrels, Right-Hand Patts Swell, Target Fore-end, Wide Rib

MODEL SPR	210 /220	SIDE	BY-SIDE SH		DIMENSIO			HTS.						\$ 100		(E. 200 C)
MODEL	ORDER NO.	GAUGE	CHAMBER	BBL Length	TRIGGER	EXECTOR Extractor	RECEIVER	RtB	FORE-END	BUIT	CHOKE	QA LENGTH	LOP -	DC	DN	WT (LBS.)
SINGLE TRIGGER	1		141.00		14.559.1		. N. 31		Property of		h Ŷ	1	()		E. Cuc	
SPR210 DOUBLE TRIGGER	89524 89522 89520 89682 89680 89724 89774	12 12 12 20 20 28 410	3 3 3 3 3 2 2 1/4 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	26" 28" 26" 26" 26" 26"	SSI	ASE	Nickel Nickel Nickel Nickel Nickel Nickel	SR	Walnut	Pad	SC-4 SC-4 SC-4 SC-4 SC-4 IC/MD IM/FL	41 %" 43 %" 43 %" 41 %" 41 %" 41 %"	14	1 1/2"	24	61/4 7 61/4 61/4 61/4
SPR220	89548 89546 89540 89552 89694 89690	12 12 12 12 20 20	2 '/' - 2 '/' - 3" - 3" - 3" -	20" 20" 28" 20" 20" 20"	DT DT/FH DT DT DT DT	FXT	Blue Blue Blue Nickel Nickel	SR	Hardwood Walnut Hardwood Walnut Walnut Walnut	Plate Steel Plate Pad Pad Pad	CYI/CYI SC-4 CYI/CYI SC-4 SC-4 SC-4	35 %* 35 %* 43 %* 35 %* 35 %* 41 %*	13 %	1 1/2"	21/6	6 1/s 6 1/s 7 6 1/s 6 1/s 6 1/s
SST = Single Selective)		Trigger	FH = Functional Hammer	s SR = Solid I		ID, FL (CYL and IC a		:= Improve					lutomatic Selective Eje	ctor EXT =	Extractor	

MODEL SPRIOO SINGLE-SHOT SHOTGUN DIMENSIONS / AVERAGE WEIGHTS STOCK/ FORE-END BBL LENGTH TRIGGER RECEIVER WT (LBS.) 89504 12 29 1/2" Nickel ٧T Walnut Pad SC-4 44 1/:" 6 1/2 3" MD MD BS 44 1/:" SPR100 89500 12 28" US st Blue Hardwood. Plate 1% 6 1/2 EJC/EXT 43 1/:" \$ 89670 20 26* 8\$ Plate 6 1/2 Blue -. Hardwood 43 1/2" 89790 410 26* Blue BS Hardwood Pad IM-6 1/2 3" SPR100 (Youth) 2 89760 24" ST 43 1/: EJC/EXT BS 13" 410 Blue Hardwood ST = Single Trigger | LIC/EXT = Selective Ejector/Extractor | VT = Vent Rib | BS = Bead Sight | SC-4 = CM, KC, MD, FL, (CM, and KC erc approved for steel) | KC = Improved Optindor MD = Modified IM = Improved Modified R = Full * Youth model fitted w/rubber recoil pad.

MODEL	ORDER NO.	GAUGE / CALIBER	CHAMBER	BBL LENGTH	TRICGER	EJECTOR EXTRACTOR	RECEIVER	STOCK/ FORE-END	BUTT	CHOXE	OA LENGTH	LOP	DC	DH	WT (LBS.)
	89392	410 / 22 LR			SST						•				71/2
SPR94	89394	410 / 22 WMR	3,"	24"	, 221	. EXT	Blue	Walnut	- Pad	SC-3	40 1/1	14 1/2"	11//	2 1/:"	71/6
	89330	12 / 223 Remington			DI		1								. 8 .
	89942	223 Remington													
	89944	243 Win													
SPR18N	89946	270 Win	•	23 1/1*	ST	EXT	Nickel	Walnut	Pad		39 3/4	14"	1 1/2	2 1/-	61/4
3LK10H	89948	30-06 Sprg		23 77	31	LAI	HICKEI	Maistut	r au	_	33 -74	14	1 /1	L /1	0.74
	89950	308 Win													
	89952	7.62x39mm													
	89930	223 Remington													
	89932	243 Win			• '										
SPR18	89918	270 Win	_	23.1/*	ST	EXT	Makal	Walnut	Pad		39 *//*	14"	1 1//:	21/-	61/4
Blued	89922	30-06 Sprg		23 1/2*	31	CAI	Nickel	wand	rao		39.//	14	17)	274	0.74
	89934	308 Win													
	89928	7.62x39mm													

Ι,	MODEL	GAUGE	MAG. CAPACITY	BEL LENGTH/ ORDER NO.	BARREL TYPE	SIGHTS	METAL Finish	OVERALL LENGTH	LENGTH OF PULL	DROP (COME)	DROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
EW 1	870 Desert RECON Speedleed? 1*	12	7	187/81420	Rem™ Choke ¹	Single Bead	OD Green Powder Coat	38"	13 %*	1 19	2 17	Synthetic	Desert Digital	71/1
ew 8	870" Desert RECON Speedfeed? IV*	12	8	207/81421	Rem™ Choke ¹	Single Bead	OD Green Powder Coat	40*	13 3/4*	1 19	2 1:	Synthetic .	Desert Digital	7 1/8
Ţ	870" TAC-2 SpecOps" Stock	12	6	18"/81400	Fixed Cylinder	Single Bead	Blasted Black Oxide	Adj.	Adj.	1 1/2	2 1/7	Synthetic	Matte Black	7
1	870" TAC-3 SFIV Stock	12	7	207/81401	Fixed Cylinder	Single Bead	Blasted Black Oxide	38 1/2	14*	11%	21/	Synthetic	Matte Black	71/2
T	870" TAC-2 Folding Stock	12	6	187/81402	Fixed Cylinder	Single Bead	Blasted Black Oxide	Adj.	Adj.			Synthetic	Matte Black	61/4
[8	870" TAC-3 Folding Stock	12	7	207/81403	Fixed Cylinder	Single Bead	Blasted Black Oxide	Adj.	Adj.	_		Synthetic	Matte Black	7
- [1100° TAC-2 SFIV Stock	12	6	187/82800	Fixed Imp. Cylinder	Single Bead	Blasted Black Oxide	38 1/7	14"	1 1/2*	2 1/2	Synthetic	Matte Black	71/2
Ţ	1100 TAC-4	12	8	22*/82801	Rem™ Choke ¹	Single Bead	Blasted Black Oxide	42 ¥7	14"	1 1/2	2 1/2	Synthetic	Matte Black	7¾

qź

RIFLE SERFECTIONS

MODE	-700 BDL												
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turbin	OVERALL LENGTH	LENGTH OF PULL	OROP (COMB)	DROP (KEEL)	BARREL Material	BARREL Funish	STOCK MATERIAL	STOCK FINISH	NYG. WT. (LES.)
25787	243 Win	4	22"	9 1/1	41 %*	13 15"	1.	1594	Carbon Steel	Polished Blue	American Walnut	Gloss	7%
25791	270 Win	4	22*	10"	42 1/2"	13 34*	l*	I 53"	Carbon Steet	Polished Blue	American Walnut	Gloss	71/3
25803	7mm Remington Mag	3	24"	9 Vi'	44 1/2"	13 ½°	i.	I ¥4"	Carbon Steel	Polished Blue	American Walnut	Gloss	7 Vz
25793	30-06 Springfield	4	22"	10'	42 1/2*	13 15*	1.	1 1/1"	Carbon Steel	Polished Blue	American Walnut	Gloss	71/8
26410	300 Remington Ultra Mag**	3	26*	10*	46 1/2"	13 1/4"	i*	1 1/3"	Carbon Steel	Polished Blue	American Walnut	Gloss	7 %

MODEL	700 CDL 3		گ رف. ق ک									1 (X) ((()) () () () () () ()	
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALI. Length	LEXIGTH OF PULL	DROP (COM8)	OROP (HEEL)	BARREL Material	BARREL FINISH	. STOCK MATERIAL	STOCK FIRISH	ANG. WT.
27101 (L)	223 Remington	5	24"	12*	43 ¥4*	13 ½*	1 1/4"	1 1/4"	Carbon Steel	Satin Blue	American Walnut	Satin	7¥1
27007	243 Win	4	24"	9 1/3"	43 1/4*	13 1/2*	1 1/3*	1 1/3*	Carbon Steet	Satin Blue	American Walnut	Satin	71/4
27103 (L)	243 Win	4	24"	91/	43 1/3"	13 1/2"	1 1/3"	1 1/3"	Carbon Steel	Satin Blue	American Walnut	Satin	71/1
27009	25-06 Remington	4	24.	10*	44 1/2"	13 52*	1 1/3"	1 34"	Carbon Steel	. Satin Blue	American Walnut	Satin	71/2
84080	270 Win	4	24"	10*	44 1/2"	13 1/2"	1 1/3"	11/6*	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
27011	270 Win	4	24"	10"	44 1/2"	13 1/2*	1 1/3"	1 1/3"	Carbon Steel	Satin Blue	American Walnut	Satin	7 Vr
27105 (L)	270 Win	4	24*	10*	44 1/2"	13 1/2*	1 1/3"	1 1/3"	Carbon Steel	Satin Blue	American Walnut	Satin	71/1
27015	7mm-08 Remington	4	24*	9 1/4"	43 1/6"	13 1/2"	11/3*	1 1/5"	Carbon Steel	Satin Blue	American Walnut	Satin	71/2
84082	7mm Remington Mag	3	26"	9 1/1"	46 1/2"	13 1/2"	1 1/4*	11/4"	Carbon Steel	Polished Blue	American Walnut	Satin	7%
27047	7mm Remington Mag	3	26"	9 1/1"	46 ½*	13 1/2"	1 1/5"	1 3/8"	Carbon Steel	Satin Blue	American Walnut	Satin	71/1
27109 (L)	7mm Remington Mag	3	Z6°	9 1/1"	46 V/*	13 1/2"	11/1	1 1/8"	Carbon Steel	Satin Blue	American Walnut	Satin	71/1
27051	7mm Remington Ultra Mag*	3	26"	9 1/2"	46 ½"	13 1/2"	11/3"	1 3/3"	Carbon Steel	Satin Blue	American Walnut	Satin	75%
27017	30-06 Springfield	4	24*	10*	44 1/2"	13 1/2"	114	114"	Carbon Steel	Satin Blue	American Walnut	Satin	71/2
84081	30-06 Springfield	4	24"	10*	44 1/2"	13 1/2"	11/8"	1 1/4	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
27107 (L)	30-06 Springfield	4	24*	10"	44 1/2"	13 1/2"	1 1/4"	1 3/8*	Carbon Steel	Satin Blue	American Walnut	Satin	7 1/2
27049	300 Win Mag	. 3	26°	10"	46 1/2"	13 1/2"	11/5"	1 1/1	Carbon Steel	Satin Blue	American Walnut	, Satin	7 1/8
27053	300 Remington Ultra Mag**	3	26"	10"	46 1/2"	13 1/2"	1 1/8"	1 1/8"	Carbon Steel	Satin Blue	American Walnut	Satin	7 1/8
27111 (L)	300 Remington Ultra Mag™	3	26*	10*	46 1/2	13 1/2"	11/4"	1 1/4"	Carbon Steel	Satin Blue	American Walnut	Satin	75%
(L) Left-hand m	odel.												

ORDER NO.	CALIBER		NAG. Upacity	BARREL LENGTH	TWIST — R-H 1 TURN IN	OVERALL LENGTH	LENGTH OF PULL	OROP (CDMB)	OROP (HEEL)		BARREL Material	RARREL FINISH		STOCK MATERIAL		STOCK FIMSH	AVG. WT. (LBS.)
84019	257 Weatherby Mag		4	26"	10"	46 1/2"	13 1/2°	1 1/1"	11%		116 Stainless	Satin Stainless	- 1	American Walnut		Satin	71/1
84018*	260 Remington		4	24"	10"	45 1/2"	13 V:	1 1/8"	1 1/s"		116 Stainless	Satin Stainless	7.1	American Walnut		Satin	71/2
84014	270 Win	i	4	- 24"	10"	45 1/2"	13 1/2"	1 1/1"	1 3/5"		116 Stainless	Satin Stainless		American Walnut		Satin	71/2
84013	270 WSM		3	24"	10*	43 56*	13 1/2"	1 1/1	l ¾*	-	116 Stainless	Satin Stainless	•	American Walnut		Satin	, 73/8
84012	7mm-08 Remington	:	4	24*	9 1/4*	43 5%	13 1/2*	11/1	1 3/3"		116 Stainless	Satin Stainless		- American Walnut	. [Satin	71/8
84016	7mm Remington Mag		3	26*	9 1/4*	46 1/2"	13 1/2"	1 1/5"	1 1/5"		116 Stainless	Satin Staintess	- 3	American Walnut		Satin	. 71/8
84015	30-06 Springfield	1	4	24"	10"	44 1/2	13 1/2"	1 1/8"	1 1/8"		116 Stainless	Satin Stainless		American Walnut		Satin	, 71/2
84017	300 WSM	1:	3	24"	10"	43 5%	13 1/2"	11/4"	1 3/1"	17.1	116 Stainless	Satin Stainless	100	American Walnut	- 4	Satin	73/8

MODE	L 700 LSS									1-30
ORDER NO.	CALIBER	MAG. BARI CAPACITY LEN		OTERALL LEXITH	CF PULL	DROP DROP (COMB) (HFFL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK ANG. WT. FINISH (LBS.)
84099	257 Weatherty Mag	5 26	10"	461/2"	13 1/2"	114" 216"	416 Stainless	Satin Stainless	Black Laminate	Semi-Gloss 7 1/8

ORDER NO.	CALIBER	MAG. CAPACITY	BARREI, LENGTH	TWIST - R-H 1 TURN IN	OVERALL	LENCTH OF PULL	(COMB)	DROP (HEEL)	BARREL	BARREL FINISH	STOCK MATERIAL	STOCK FDOSH	AVG. WT.
84261	25-06 Remington	4	24*	10"	44 1/2"	13 3/4"	1 1/8"	1 1/1	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	614
84262	270 Win	4	24"	10"	44 1/7	13 1/8"	1 1/4"	1 1/4"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	6 1/4
34267	270 WSM	3	24*	10	43 %	13 3/4"	1 1/4"	1 1/8	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	, 6
4263	280 Remington	4	24"	10"	44 W	13 1/8"	1 1/5"	1 1/6"	7416 Stainless 1	Satin Stainless	Aramid Fiber Synthetic	Matte	6 14
4260	7mm-08 Remington	4	24"	9 1/4"	43 97	13 3/6"	11/	1 34"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte) · · · · 6 ·
4265	7mm Remington Mag	3	24*	9 14"	44 Vr	13 1/8"	1 1/1"	1 1/5"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	6 1/4
4264	30-06 Springfield	4	24"	10"	44 17	133%	1 1/1"	1 1/6"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	6 1/4
4266	300 Win Mag	3	24"	10"	44 W	13 1/4"	1 1/4*	1 1/6"	416 Stainless 142	Satin Stainless	Aramid Fiber Synthetic	Matte	6 14
84268	300 WSM	3	24"	10	43 %	13 1/1"	1 1/8"	1 34"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	66

MODEL	700 SPS BUCKM	ASTERS®	EDITIO	N									7
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 TURN SI	OVERUL **	LENGTH OF PULL	(COME)	DROP (HEEL)	WATERING TO A STATE OF THE STAT	BARREL FINISH	CASTOCK MATERIAL	STOCK FIXESH	AVG. WT.
84170	243 Win	4	24*	91/8"	43 14	13 1/4"	1 1/4"	1 1/9"	Carbon Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD"	→ 7M
84176 Youth	243 Win	4	20"	9 1/8"	39 W.	12 3/8"	1 1/6"	1 1/6"	Carbon Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD®	i ;i
84172	270 Wm 27 48 48 3	4	24*	10"	44 W 3	131/1"	1 1/4"	1 1/8"	Carbon Steel	Matte Blue	Synthetic 4	Realtree® Hardwoods® HD™	2. TVI W
8417[7mm-08 Remington		24"	9 1/4"	43米 通	13 34"	1 1/6"	1 1/4"	Carbon Steel	Matte Blue	Synthetic 💉 🗸	Realtree® Hardwoods® HD™	×371/2
84174	7mm Remington Mag	4	26*	9 1/4"	46 W	13 1/1"	1 1/8"	1 14"	Carbon Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD™	7%
84173	30-06 Springfield	4	24"	10"	* 144 W 3 M	13 1/4"	1 1/4"	1 14"	Carbon Steel	Matte Blue	Synthetic so	Realtree® Hardwoods® HD™	湯斯斯藏
84175	300 Win Mag	- 3	26"	10"	46 W	13 3%*	1 14	1 1/4"	Carbon Steel	Matte Blue	Synthetic (A. V.)	Realtree® Hardwoods® HD™	TEIN ET

Premier Dealer offerings

BARBER - R 0003132 RIFLE SPECIFICATIONS

	MODEL	700 SPS							13.50					
	ORDER NO.	CLEBR W. S. S. S.	MAS. Capacity	BATREL LENGTH	TWIST — R-H 1 Turn In	LENGTS .	LENCTH Of Pull	DROP (COMB)	DROP (HEEL)	MATERIAL STATE	BARREL FINISH	STOCK MATERIAL	STOCK FINESH	ARE, MILY
	84200	17 Remington Fireball	5	24"	9•	4356	13 3/8"	1 1/4"	1 34"	Carbon Steel	Matte Blue	Black Synthetic	Matte	SA 77/83
	27351	223 Remington	5	20°	9 1/2"	39 W 1	12 3/8"	1 1/5"	1 34*	Carbon Steel	Matte Blue	Black Synthetic	Matte	1000
	27475 (Y)	243 Win	4	20"	9 1/4"	2F239 W	12 34	1 1/8"	1 3/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	s-1.57
NEW	84150 (Y) (L)	243 Wing 19	4	20°	9 1/4"	39.47	12 1/8"	1 1/6"	1 1/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	1/20
	27355	243 Win	4	24"	9 1/4"	43.74	13 3/8"	1 1/1"	1 3/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	5-C7X
	27361	270 Win 1 4 2 3 7 3 5	4	24"	10"	44 1/1	13 3/8"	1 1/1"	1 3/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	776
	27331	270.WSMX	3	24"	10"	43 14	13 3/8"	1 1/2"	1 3/4*	Carbon Steel	Matte Blue	Black Synthetic	Matte	港 . 736元
	27391 (Y)	7mm-08 Remington	4	20°	9 1/4"	39 V	12 34"	1 1/5"	1 3/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7.54
NEW	84151 (Y) (L)		4	20*	9 1/4"	39 14 3	12 34*	1 7/8"	1 3/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	13.17.13
	27357	7mm-08 Remington	4	24"	9 1/4"	43 M	13 1/1	1 1/8"	1 34*	Carbon Steel	Matte Blue	Black Synthetics	Matte	14 7W (2)
	27385	7mm Remington Mag	3	26*	9 1/4"	* 46 V/	13 3/8"	1 1/1	1 3/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	3.07.96
NEW	84152	7mm Remington Ultra Mag	3	26⁴	9 1/1	46 1/2	133/8*	1 1/6"	1 3/8"	€ Carbon Steel	Matte Blue	Black Synthetic 🥻 👸 😪	Matte	等·796条。
	27363	30-06 Springfield	4.	24"	10"	44 V2 44	13 3/8"	1 1/4"	1 3/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	产7%
	27333	300 WSM	3	24"	10*	43 1/8-201	13 34*	1 1/8"	1 1/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	79
	27387	300 Win Mag	3	26*	10"	46 1/2	13 3/6"	1 1/6"	1 36"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
	27359	308 Win	4	24"	10*	3 43 56	13 3/8"	1 1/2"	1 3/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	74
	27389	300 Remington Ultra Mag	3	26*	10"	46 1/2	13 34"	1 1/1"	I 3/8*	Carbon Steel	Matte Blue	Black Synthetic	Matte	790
	(Y) Youth. (I	L) Left-hand model.												

MODE	L 700 SPS STAINLE	SS											
ORDER NO.	CALBUR	MAG. CAPACITY	BARREL LENGTH	TWIST B-H 1 TURN IN	OVERALL ()	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BATREL	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVG. WT.
27131	204 Ruger	5	24"	12"	43 %	13 3/4"	1 1/4"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/
27133	223 Remington	5	24'	12*	43 1/8	13 34*	1 1/4"	1 3/2"	416 Stainless	Matte Stainless	Black Synthetic	Matte	774
27135	22-250 Remington	4	24"	14"	43 1/8" - 5	13 3/8"	1 1/2"	1 ¾s"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7,4
27263	243 Win	4	24"	9 1/8"	43 1/8	13 3/8"] ½°	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	15 37 No. 1
27251	25-06 Remington	4	24*	10"	44 1/2	13 3/8*	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7.3%
27267	270 Win	4	24"	10"	44 1/5	13 3/8*	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7.36
27253	270 WSM	3	24"	10"	44 1/2"	13 3/8"	1 1/2"	1 34"	416 Stainless	Matte Stainless	Black Synthetic	Matte	734
27265	7mm-08 Remington	4	24"	9 1/4"	43 1/8"	13 3/1"	1 1/6"	1 1/8"	416 Stainless	Matte Stainless	Black Synthetic	Malte	14.3
27271	7mm Remington Mag	3	26*	9 1/4"	46 1/2	13 1/1	1 1/8"	1 3/1"	416 Stäinless	Matte Stainless	Black Synthetic	Matte	7.56
84300	7mm Remington Ultra Mag	3	26*	9 1/4*	÷ 46 1/2° . ∵	13 3/2"	1 1/8"	1 3⁄8*	416 Stainless	Matte Stainless	Black Synthetic	Matte	7%~-
27269	30-06 Springfield	4	24"	10"	44 1/2	13 3/8"	1 ½"	1 1/2*	416 Stainless	Matte Stainless	Black Synthetic	Matte	7%
27255	300 WSM 14 - 5 15 15 15 15 15 15 15 15 15 15 15 15 1	3	24"	10°	44 1/2"	13 1/8"	1 1/6*	1 1/€"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7.1%
27273	300 Win Mag	3	26'	10*	46 1/2	13 ¾*	1 1/8"	1 1/8	416 Stainless	Matte Stainless	Black Synthetic	Matte	75/8:
27136	308 Win 💉 🔆 💥	4	24"	10"	43 1/8"	13 3/2"	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	774
27140	300 Remington Ultra Mag." -	3	26"	10"	46 1/2".	13 1/2"	1 1/8"	1 1/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/4

MODE	L 700 SPS DM												
ORDER NO.	CALIBER	MAG. Capacity	BARREL LENGTH	TWIST — R-H 1 Turn o	OVERALL LEHETH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL MATERIAL	BARREL FINISH	STOCK MATERIAL	STOCK FINISH	AVG. WT. (.28.)
27338	243 Win	4	24*	9 1/8*	43 1/8"	13 3/8"	1 1/6*	1 3/5"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/
27335	270 Win	4	24"	10*	44 1/2"	13 3/8"	1 1/8"	1 3/8"	Carbon Steel	Matte Blue	- Black Synthetic	Matte	73%
27341	7mm-08 Remington C	4	24*	9 1/4"	43 ₩	13 1/2"	1 1/8"	1 ¾ε*	Carbon Steel -	Matte Blue	Black Synthetic	Matte	7,1/4
27343	-7mm Remington Mag	3	26*	9 1/4"	46 1/2"	13 ¾"	1 1/4"	1 1/8"	, Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
27337	30-06 Springfield	4	24"	10"	44 1/2"	13 3/1"	1 1/1	1 1/8*	Carbon Steel	Matte Blue	Black Synthetic	Matte	7 %
27339	300 Win Mag	3	26"	10*	46 V/*	13 3/1"	1 1/2"	1 3/8"	· Carbon Steel -	Matte Blue	Black Synthetic	Matte	71/1

	MODEL	700 SPS VAR	MINT						100					
	ORDER NO.	CALIBER	MAG. Capaci	BARREL	TWIST — R-H 1 Turn di	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVE. WT. (LBS.)
	84213	-17 Remington Fireball	. 5	26"	9-	46 V:"	13 3/4"	1 1/4"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
NEW	84225 (L)	17 Remington Fireball	5	26*	9"	46 1/2"	13 1/2"	1 1/8*	1 %*	Carbon Steet	Matte Blue	Black Synthetic	Matte	81/2
	84214	204 Ruger	. 5	26*	12"	46 1/2"	13 1/4"	1 1/4"	1 1/4*	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	84216	22-250 Remington	4	26*	[4"	46 1/2"	13 ⅓*	1 1/2"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	8 1/2
NEW	84226 (L)	22-250 Remington	. 4	26	14"	46 1/2"	13 1/2"	1 1/6"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	84215	223 Remington	5	26°	12"	46 1/2"	13 1/2"	1 1/2"	1 1/€*	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
NEW	84227 (L)	223 Remington	. 5	26*	12*	46 1/2"	13 1/4"	I 1/4*	1 1/€"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	84217	243 Win	. 4	26°	9 1/8"	46 1/7	13 1/4"	1 1/4"	1 1/2"	Carbon Steet	Matte Blue	Black Synthetic	Matte	81/2
NEW	84228 (L)	243 Win	4	26	9 1/4"	46 1/2"	13 ¾€"	1 1/4"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	84218	308 Win	. 4	264	12*	46 1/2*	13 ₹€*	1 1/1	1 1⁄4°	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
NEW	84229 (L)	308 Win	4	26*	12"	46 1/7	13 %*	1 1/2*	1 %*	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	(1) Leit-hand mo	odel.												

MODE	700 VLSS THUI	MBHOLE											
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H I TURN IN	CYERALL LENGTH	LENGTH OF PULL	OROP (COMB)	OROP (HEEL)	BARREL MATERIAL	BARREL Flatsh	STOCK MATERIAL	STOCK FIXISH	AYG. WT. (LBS.)
27443	204 Ruger	5	26*	12*	45 ¾*	13 1/5"	1 1/4*	2 1/4"	416 Stainless	Polished Stainless	Brown Laminated	Satin	91/2
27447	22-250 Remington	4	26°	14*	45 1/4*	13 1/2"	1 1/4*	2 ₩*	416 Stainless	Polished Stainless	. Brown Laminated	Satin	91/2
27445	223 Remington	5	26*	12'	45 ¾*	13 16*	1 1/4"	2 1/2"	416 Stainless	Folished Stainless	Brown Laminated	Satin	91/2

	700 MOU 7.VIVE	Mac	BARREL	TWIST - R-H	OVERALL	LENGTH	DROP	DROP	BARREL	BARREL		STOCE	AVG. Y
R NO.	CALIBER	CAPACITY	LENSTH	1 TURN IN	LENGIH	OF PULL	(coxa)	(HEEL)	MATERIAL	FINISH	STOCK MATERIAL	FINISH	(185.
81	270 Win	4	22*	10*	42 1/2"	13 3/5"	1 1/3"	1 14*	416 Stainless	Satin Stainless	Brown Laminated	Satin	69
70	280 Remington	4	22.	9 N.	42 1/2"	13 1/3"	1 1/3"	1 1/1	416 Stainless	Satin Stainless	Brown Laminated	Sation Sation	614
85	7mm-08 Remington 30-06 Springfield	4	22*	10,	42 1/2"	13 1/3"	1 1/5"	L W	416 Stainless 416 Stainless	Satin Stainless Satin Stainless	Brown Laminated Brown Laminated	Satin	69
	.700 VLS (LAMINA					<u> </u>		7 ()					
JDE	. 700: VLS (LAMINA	HED SU	BARREL	TWIST — R-H	OVERALL.	LEXCIII	OROP	DROP	BARREL	BARREL		STOCK	AVG. W
R XO.	CALISER	CAPACITY	UENGTH 75°	i TURK IN	LENGTH 45 34*	OF PUIL	(cons)	(HEEL)	MATERIAL Control Street	HZIMR	STOCK MATERIAL	FINISH	(LBS.
91	204 Ruger	5	26*	12"	45 ¥1°	13 1/1	1*	1 1/3"	Carbon Steel Carbon Steel	Satin Blue Satin Blue	Brown Laminated Brown Laminated	Satin Satin	914
189	223 Remington 22-250 Remington	4	26*	14*	45 1/4*	13 1/2*	<u>.</u>	1 33	Carbon Steel	Satin Blue	Brown Laminated	Satin	9 1/1
195	243 Win	4	26"	3 74.	45 ¾*	13 ½"	1.	1 1/3"	Carbon Stael	Satin Blue	Brown Laminated	Satin	9 1/
199	308 Win	4	26*	12*	45 ¥1*	13 V/°	i•	1 1/5	Carbon Steel	Satin Blue	Brown Laminated	Satin	9 14
ÖDEL	700 VS SF II						V 7.					i grafi	
E NO.	CAUBER	MAG. CAPACITY	BARREL LENGTH	TWIST - R-H 1 TURN IN	OVERALL LENGTH	LEXCTII Of Pull	DROP (COMB)	OROP (HEEL)	BARREL MATERIAL	BAUREL FINISH	STOCK MATERIAL	STOCK FINISH	AVG. F
52	17 Remington Fireball	5	26*	12*	45 1/4*	13 1/2*	1 1/1*	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	814
33	204 Ruger	5	26"	12*	45 1/4"	13 ½°	1 W*	1 1/5*	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	87
39	220 Swift	4	26"	14*	45 ¾*	13 1/2*	1 1/4*	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	84
37	223 Remington	5	26"	12*	45 ¾*	13 1/2*	1 1/4	l <i>V</i> /r*	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reint.	Matte	87
35	22-250 Remington	4	26*	14*	45 ¾*	13 1/2"	1 1/1	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	8 9
ODEL	700" SENDERO SF	JI.											
Y	414 10 14 15 15 15 15 15 15 15 15 15 15 15 15 15	MUG.	BARREL	TWIST — R-H	OVERALL	LENGTH OF PUT	BROP (COMB)	DROP (HEEL)	BARREL	BARREL	COMPANY AND THE SECOND	STOCK	AVG. (
07	CALIBER 264 Win Mag.	CAPACITY 3	Z6°	1 TURN IN	45 3/4"	OF PULL 13 1/3*	(COMB)	1 1/2"	MATERIAL 416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	FINISH	81
11	7mm Remington Mag	3	26*	9 1/1*	45 3/4"	13 35"	1 1/4"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	81
15	7mm Rem Ultra Mag**	3	26"	9 ½	45 1/4"	13 1/4"	1 1/1	11/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amand Fiber Reinf.	Matte	84
313	300 Win Mag	3.	26"	10*	45 34"	13 3/4"	1 1/4"	11/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	81
18	300 Rem Ultra Mag ***	3	26"	10*	45 1/4	13 1/5"	1 1/4"	1 1/2*	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	84
ODEL	700 XCR	3.5										(\$ 14.	. 5
		NAG.	BARREL	TWIST — R-H	OVERALL	LEKGTH	DROP	DROP	BARREL.	BARREL		STOCK	AVC.
ER NO. 140	CALIBER 25-06 Remington	CAPACITY 4	LENGTH 24"	1 TURN IN 10"	44 ½	0F PULL 13 3/3"	(come)	(HEEL)	Stainless w/TriNyte*	Frinsi TriNyte® Satin	STOCK MATERIAL Black Synthetic w/Overmold	FINISH Matte	7.¥
165	270 Win	4	24*	10"	44 1/2	13 34"	1 1/1"	11/3"	Stainless w/TriVyte*	TriNyte* Satin	Black Synthetic w/Overnodd	Matte	73
02 (L)	.270 Win.	4	24*	10"	44 1/2	13 1/8"	1 1/8"	1 3/5"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	73
73	270 WSM	3	24"	10"	44 1/2	13 ¾*	1 1/4"	1 1/4"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	. 73
141	7mm-08 Remington ;	4	24*	9 1/1*	43 56	13 ⅔*	1 1/8"	1 3/5"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	71
169	7mm Remington Mag	3	26*	9 1/1"	46 1/2	13 1/4"	1 1/4"	11/1	Stainless w/TriNytes	TriNyte* Satin	Black Synthetic w/Overmold	Matte	.79
504 (L)	7mm Remington Mag	3	26*	9 1/4"	46 1/2	13 %"	1 1/8"	1 1/8"	Stainless w/TnNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	75
.79 148 (C)	7mm Remington Ultra Mag *** 7mm Remington Ultra Mag ***	3	26°	9 1/2"	46 1/2"	13 1/8"	1 1/8"	1 1/3"	Stainless w/TriNyte*	TriNyte® Satin TriNyte® Satin	Black Synthetic w/Overmold Rea	Matte tree * AP** HD *	7.5
67	30-06 Springfield	4	24*	10"	44 1/2	13 1/4"	1 1/3"	1 3/1*	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	73
03 (L)	- 30-06 Springfield	4	24"	10"	44 1/2"	13 3/8"	1 1/3"	1 1/4"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	73
75	300 WSM	3	24*	10"	44 1/2"	13 1/5"	1 1/8"	1 1/3"	Stainless w/TriNyte*	TriNyte® Satin	Black Synthetic w/Overmold	Matte	73
71	300 Win Mag	3	26*	10"	46 1/2	13 1/8"	1 1/1"	1 3/1"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	. 75
81	300 Remington Ultra Mag™	3	26"	10"	46 1/2"	13 1/4"	1 1/5"	1 1/1	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	75
509 (L)	300 Remington Ultra Mag™	3	26*	10"	46 ½*	13 3/8"	1 1/8"	1 1/4	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	79
83 77	338 Remington Ultra Mag** 338 Win Mag	3	26* 26*	10"	46 1/2"	13 1/4"	1 1/1	1 1/3"	Stainless w/TriNyte*	TriNyte* Satin TriNyte* Satin	Black Synthetic w/Overmold Black Synthetic w/Overmold	Matte Matte	79
191 †	375 H&H	3	24*	12*	46 1/2	13 76	1 1/9"	1 1/8"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	75
93 †	375 Remington Ultra Mag	3	24*	12*	46 1/2"	13 1/4"	1 1/8"	1 1/1"	Stainless w/TriNyte* ,	TriNyte* Satin	Black Synthetic w/Overmold	Matte	79
uipped wi	th Iron Sights. (C) Came – RMEF Rock	y Mountain Elk	Foundation (i	L) Left-hand model									
ODE	700 VTR (VARMIN	TARG	ET RIE	E)									
		MAG.	BARREL	TWIST — R-H	OVERALL LENGTH	LENGTH	OKOP (COMP)	DROP (vert)	BARREL 4	BARREL	17-12-13-13-13-13-13-13-13-13-13-13-13-13-13-	STOCK	AVC.
er #0.	CAUBER:	CAPACITY 5	LENGTH 22°	1 TURN IN	LENGTH 1	OF PULL	(COMB)	(HEEL)	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	(LES
70	223 Remington	5	22"	9.	41 1/8"	13 1/4"	1 1/8"	1 1/8"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	·	71
173	22-250 Remington	4	22*	14"	, 41 1/4"	13 1/1	1 1/2"	1 %°	Carbon Steet	Matte Blue	OD Green Synthetic W/Overmold	Matte	71
71	308 Win	4	22	12*	41 98	13 1/2"	1 1/8"	1 1/6"	Carbon Steel	Matte Blue	1 5 COD Green Synthetic w/Overmold	Matte	; 79
OĎEL	700 CDL "BOONE	AND C	ROCKET	T" SERIE	s		3,2						
	· · · · · · · · · · · · · · · · · · ·	NAG. CAPACITY	BARREL	TWIST — R-H 1 Turn (n	OVERALL >	LENGTH	DROP	DRGP (HEEL)	BARREL	BARREL	STOCK MATERIAL	STOCK	. AVG.
9 #0. 50	CALIBER 243 Win		LENGTH 24"		LENGTH	OF POLL	(cons)		Carbon Steel	FINISH		FORTSH	
50 51	7mm-08 Remington	4	24"	9 1/4"	44 97	13 1/2"	1 1/6"	1 1/4"	Carbon Steel	Blued	Brown Laminate	Satin Satin	i 3 - 73 1 - ≥ 73
52	270 Win	4	24	10"	44 1/2	13 1/2"	1 1/4"	1 1/4	Carbon Steel	Blued	Brown Laminate	Satin	71
153	30-06 Springfield	4	24*	10"	44 1/1	13 1/2	1 1/8"	1 1/2	Carbon Steel	Blued	Brown Laminate	Satin	71
)54	7mm Remington Mag	4	26*	9 1/4"	46 1/2	13 1/2	1 1/1"	1 1/4"	P.C. Carbon Steel	Blued	Brown Laminate	Satin	75
)55	- 300 Win Mag	4	26*	10"	46 Vt. Fag.	13 1/2	1 1/8"	1 1/4"	Carbon Steel	Blued	Rrown Laminate	Satin	- 75
156	270 WSM	4	24"	10"	44 // sup	13 1/2"	1 1/4"	1 34	Carbon Steel	Blued	Brown Laminate	Satin	F 79
	300 WSM 3 2 4 3 4 4 5 5 5	4	24"	10"	44 14	13 W	1 1/6"	1 34"	Carbon Steel	Blued	Brown Laminate	Satin	75

BARBER - R 0003134 RIFLE SPECIFICATIONS

	MODEL	700" XCR" COM	PACT TACT	TICAL R	IFLE									
	ORDER NO.	CALIFFR STATE OF THE STATE OF T	URS. CAPACITY	KARREL Length	TWIST — R-B I TURN IN	OVERALL SALE	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	MATERIAL	BARREL Fixish	STOCK MATERIAL CASE AND ASSESSMENT	STOCK FDESH	(LEC.) SE
NEW		223 Remington		20*	9"	39 1/4	13 3/8"	1 1/4	11/1	Stainless w/InNyte	Black TriNyte*	Amand Fiber Reini	OD Green	R\$1936
NEW	84467	308 Win 34	3 4	20"	12"	39 V	13 ¾•	1 1/4"	1 1/7	Stainless w/InNyte	Black TriNyte*	Amand Fiber Reint	OD Green	177

MODE	L 700" XCR		L LONG	RANG	E RIFLE			17.						<u> </u>	
ORDER MO.	CULTER	******	NAG. Capacity	BARREL LENGTH	TWIST — R-# 1 TURN IN	OVERALL	OF PULL	DROP (COMB)	DROP (HEEL)	MARREL MATERIAL SALES	BARREL Finish	ta.	STOCK MATERIAL	STOCK FURSIA	(LEC.)
84460	223 Remington	Section 1	5	26*	9-	45 1/2	13 1/1	1 1/4"	1 1/2"	Stainless w/Inityte: 2	Black TriNyte®	1	Amand Fiber Reint	OD Green	812. G
84461	308 Win 💸	12.73	4	26"	12*	45 W	13 🖖	1 1/4"	1 1/2	Stainless w/TriNyte	Black TriNyte*	1.5	Amarid Fiber Reint	OD Green	81/2
84462	300 Win Mag	(三)	3	26*	10"	45 1/2	13 11	1 1/4*	1 1/1	Stainless w/TriNyte	Black TriNyte*	1-50	Amarid Fiber Reint	OD Green	814

	MODE	L 715" SPORTSMAN ((No Scop	e)			, ex							
	ORDER NO.	CAUSED	MAG. CAPACITY	BARREL Length	TWIST — B-H 1 Turn in	LENGTH	LENGTH OF PULL	DROP. (COME)	DROP (HEEL)	BARREL SW	BARREL FINISH	STOCK MATERIAL	STOCK FIXISH	AVE. WT.
Ð	85800	243 Win	4	22"	9 1/1	42 /t	13 1/1"	1 1/4"	1 1/2	Carbon Steel	Matte	Black Synthetic	Matte	7.1/2
O	85801	7mm-08 Remington	4	22*	9 1/4	42 1/2	13 1/2"	11/5	1 1/1"	Carbon Steel	Matte	Black Synthetic	Matte	jų.
O	85802	270 Win	4	22"	10*	42 1/2"	13 1/5"	1 1/2"	1 36*	Carbon Steel	Matte	- Black Synthetic	Matte	71/2
Ð	85803	30-06 Springfield	4	22*	10"	42 1/2",	13 1/1"	1 1/4"	1 34*	Carton Steel	Matte	Black Synthetic	Matte	71/2
0	85805	7mm Remington Mag	4	24"	9 1/4	44 1/2"	13 1/2"	1 1/4"	1 1/2"	Carbon Steel	Matte	Black Synthetic	Matte	71/2
Ð	85806	300 Win Mag	4	24"	10*	44 1/2	13 1/1"	1 1/4"	1 3/1"	Carbon Steel	Matte	Black Synthetic	Matte	71/2
Ð	85807*	243 Win Youth	4	22*	9 1/4°	41 1/2	12 1/8"	1 1/8*	1 3/1"	Carbon Steel	Matte	Black Synthetic	Matte	71/1

Ĩ	MODEL 798 /799	BOLT ACT	ION RIFLE									3 6			100
[m	ODEL	ORDER NO.	CALIBER	KAG. CAPACI		BARREL LENGTH	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL MATERIAL	BARREL Finish	STOCK MATERIAL	STOCA FINISH	AVO. WT. (LBS.)
NEW 7	98° Safari	89846	375 H&H Mag	i. 3		22"	42 1/1	13 ¾	l W	1 1/1"	Carbon Steel	Blued	Realwood ** Laminate	Satin	814
NEW 7	98" Safari	. 89848	458 Win Mag	į - 3		22"	42 1/1	13 1/8"	1 1/8"	1 1/2"	Carbon Steel	Blued	Realwood™ Laminate	Satin	- 814
NEW 7	98" SPS"	89804	243 Win	4	-	22*	42 W	13 1/1	l 1/2"	1 3/8"	. Carbon Steel	Blued	Synthetic	Matte	7.74
NEW 7	98" SPS"	89805	270 Win	1 4	i	22*	42 1/1	13 ¾°	1 1/4"	1 1/2"	Carbon Steel	Blued	Synthetic	Matte	7 1/4
NEW 7	98" SPS	89807 -	30-06 Springfield	4	3-12	22"	42 1/1	13 3/8"	1 1/8"	1 3/4"	Carbon Steel	Blued	Synthetic -	Matte	7.74
NEW 7	98" SPS"	89808	7mm Remington Mag	3	* :	24"	44"	13 1/8"	1 1/6"	1 1/8"	Carbon Steel	Blued	Synthetic	Matte	7.34
NEW 7	98" SPS"	89809	300 Win Mag	3		24"	44"	13 1/6"	1 1/6"	1 1/4"	Carbon Steel	Blued	Synthetic	Matte	7 1/4
NEW 7	98" SPS"	. 89806	308 Win	. 4		22*	42 1/4	13 %"	1 1/8"	1 3/2"	Carbon Steel	Blued	Synthetic	Matte	7 3/4
NEW 7	98" Walnut	89838	243 Win	4		22*	42 1/4"	13 1/2"	1 ½°	1 3/1"	Carbon Steel	Blued	Walnut .	Satin	7 ¾
NEW 7	98" Walnut	89839	270 Win	4	100	22"	42 1/8"	13 1/2"	1 1/2"	1 3/2"	Carbon Steel	Blued	Walnut	Satin	7.34
NEW 7	98" Walnut	89842	30-06 Springfield	. 4		22*	42 1/4"	13 1/8"	1 1/8"	1 1/1"	Carbon Steel	Blued	Walnut	Satin	· 7¾
NEW 7	98 ⁻ Walnut	B9843 .	308 Win	. 4		22"	42 1/4"	13 %*	1 1/6°	1 3/2"	Carbon Steel	Blued	Walnut	Satin	7 1/4
NEW 7	98° Walnut	89844	7mm Remington Mag	. 3		22"	42 1/4"	13 1/6"	1 1⁄€"	1 3/2"	Carbon Steel	Blued	Walnut	Satin	7¾
NEW 7	98" Wainut	89845	300 Win Mag	3		22"	42 <i>Ve</i> *	13 %*	1 1/4"	1 3/5"	Carbon Steel	Blued	Walnut	Satin	7 1/4
7:	98" Walnut	89847	375 H&H Mag	3		26"	46 1/4"	13 ¾*	1 1/5"	1 3/2"	Carbon Steel	Blued	Walnut .	Satin	81/2
7:	98" Walnut	89849	458 Win Mag	, 3		26*	46 1/4"	13 ½"	1 1/2"	1 3/2"	Carbon Steel	Blued	Walnut	Satin	81/2
1	99" Short Action	89852	22 Hornet	5	*	20*	39 1/2"	13 1/2"	1 1/8"	1 3/1*	Carbon Steel	Blued	Brown Larninate	Satin	6 1/2
7	99" Short Action	89851	222 Remington	5		20*	39 1/2	13 ¾"	1 1/t"	I ¾•	Carbon Steel	Blued	Brown Laminate	Satin	6 1/2
7:	99" Short Action	89854	22-250 Remington	4		20°	39 1/2	13 1/8	11/1*	1 1/2"	Carbon Steel	Blued	Brown Laminate	Satin	6 1/2
7	99" Short Action	89850	223 Remington	5		20	39 1/7	13 3/2"	1 1/1"	1 3/1"	Carbon Steel	Blued	Brown Larninate	Satin	6 1/2
7:	99" Short Action	89853	7.62x39mm	4		20"	39 1/2"	13 1⁄2"	1 1/2*	1 3/2"	Carbon Steel	Blued	Brown Laminate	Satin	6 1/2
17	Fauinoed with iron sights														

ORDER NO.	CALIBER	MAG. CAPACITY	BARREL Length	TWIST - R-H 1 TURN IN	OVERALL LENGTH	LENGTH OF PULL	(COMB)	DROP (HEEL)	BARREL Material	BARREL FINISH	STOCK MATERIAL	STOCK FINISH	AVG. WT.
85900	17 Remington Fireball	5	20*	9*	39 1/4"	13 ∜ℓ*	1 1/4"	1 1/2"	Carbon Steel	Satin	Walnut	Satin	6 1/2
26417	243 Win	4	20	9 1/1*	39 1/4"	13 1/4*	11/4	1 1/2"	Carbon Steel	Satin	Walnut	Satin	61/2
26419	260 Remington	4	20°	9"	39 1/4"	13 1/1*	11/2	1 ½*	Carbon Steel	Satin	Walnut	Satin	6 1/2
26361	270 WSM	3	22°	10	39 1/4"	13 1/4°	1 1/4*	1 1/2*	Carbon Steel	Satio	Walnut	Satin	6 1/2
85901*	7mm-08 Remington	4	22*	9 1/4"	39 14*	13 ₹i*	1 1/4*	11/4	Carbon Steet	Blued	Walnut	Semi-Glass	61/2
26421	7mm-D8 Remington	4	20°	91/8	39 1/4"	13 1/2	11//	11/2	Carbon Steel	Satin	Walnut	Satin	61/2
26367	300 WSM	3	22*	10"	39 1/4"	13 1/4"	15/4"	1 14"	Carbon Steel	Satin	Walnut	Satin	61/2
26423	308 Win	4	20*	10"	39 1/4"	13 3/4"	1 1/2	1 1/2"	Carbon Steel	Satin	Walnut	Satin	61/2
26369	350 Remington Magnum [†]	4	20*	16'	41 1/4"	13 1/2"	1 1/4*	1 1/2*	Carbon Steel	Satin	Walnut	Satin	73%

	MÓDEL	SEVEN PREDATOF												
	ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL LENGTH	OF PULL	ORGP (COMB)	DROP (HEEL)	BARREL MATERIAL	BARREL FINISH	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LBS.)
NEW	85950	17 Remington Fireball	5	20	9 1/1*	39"	13 1/4"	1 3/4"	1 1/2*	Carbon Steel	Mossy Oak* Brush*	Synthetic	Mossy Oak* Brush*	7
NEW	85951	204 Ruger	5	20"	9 1/1"	39"	13 14"	1 1/4"	1 1/2"	Carbon Steel	Mossy Oak* Brush*	Synthetic	Mossy Oake Brush	7 .
NEW	85952	223 Remington	5	20°	9 %°	39"	13 1/4*	130	11/7	Carbon Steel	Mossy Oak* Brush*	Synthetic	Mossy Oak* Brush*	7
NEW	85953	22-250 Remington	4	20"	9 1/1*	39"	13 %*	1 19	1 1/2"	Carbon Steel	Mossy Oak: Brush	Synthetic	Mossy Oak* Brush*	7
NEW	85954	243 Win	4	20	9 1/1"	39"	13 %*	1 %*	1 1/2"	Carbon Steel	Mossy Oak' Brush'	Synthetic	Mossy Oak* Brush*	7 '

Premier Dealer offerings

* Youth Model

MODEL	700" SPS"	rachical											
ORDER NO.	CALIBER	MAG. Capacity	BARREL LENGTH	TWIST — R-H ! TURN IN	OVERALL Length	LENGTH OF PULL	DROP (CGMB)	OROP (HEEL)	BARREL Material	BARREL Fixish	STOCK MATERIAL	STOCK FINISH	AVG. WT.
84206	223 Remington	5	20°	9•	39 1/3"	13 kg	136	11/2"	Carbon Steel	Matte Blue	Black Overmold	Matte Black	71/2
84207	308 Win	4	20-	12"	39 1/5"	13 1 3*	1 W*	1 1/2"	Carbon Steel	Matta Blue	Black Overmold	Matte Black	7 Yr.

MODEL 750 AUTO	LOADING	CENTERFIRE	RIFLE			*				4. 4. 4.	1 4 4 1 L		
MODEL	ORDER NO.	CALISER	TWIŞT — R-H 1 TURN DI	BARREL LENGTH	OVERALL LENGTH	LENGTH OF PULL	DROP (COME)	DROP (HEEL)	BARREL MATERIAL	BARREL FIXISH	STOCK MATERIAL	STOCK FINISH	AVG. WT. (LRS.)
750 Woodsmaster	27055	243 Win	9 1/5"	22"	42 ¥5"	13 1/2"	1 1/3"	2 1/2*	Carbon Steel	Polished Blue	Walnut	Satin	71/2
750 Woodsmaster	27059	270 Win	9 1/3"	22*	42 1/3"	13 15	1 93*	2 ½*	Carbon Steel	Polished Blue	Walnut	Satin	71%
750° Woodsmaster	27061	30-06 Springfield	9 1/4"	22*	42 1/4"	13 1/2"	1 5/4"	2 1/2*	Carbon Steel	Polished Blue	Walnut	Satin	71/2
750 Woodsmaster	27057	308 Win	10"	22*	42 3/8"	13 1/2*	1 1/3*	2 1/2"	Carbon Steel	Polished Blue	Walnut	Satin	71/2
750 Woodsmaster	27063	35 Whelen	16*	22*	42 % *	13 1/2*	1 1/2	2 1/2"	Carbon Steel	Polished Blue	Walnut	Satin	7 1/2
750" Woodsmaster" Cartine	27077	30-06 Springfield	10*	181/2"	39 ₩°	13 V:	1 73*	2 1/2*	Carbon Steel	Polished Blue	Walnut	Satin	7 Yı
750 Woodsmaster Cartine	27075	308 Win	10°	181/:"	39 Vs"	13 1/2	1 73*	2 V:	Carton Steel	Polished Blue	Walnut	Satin	7 <i>Y</i> :
750° Woodsmaster' Carbine	27079	35 Whelen	16"	18 1/2"	39 1/4*	13 1/2"	1 1/3"	2 1/2"	Carbon Steel	Polished Blue	Walnut	Satin	7 1/4
750" Synthetic	85682	243 Win	9 1/6"	22*	42 56*	13 Vi	1 1/3	2 Vt*	Carbon Steel	Matte Blue	Synthetic	Matte Black	71/2
750° Synthetic	85685	270 Win	9 1/4"	22"	42 % *	13 15"	1 1/1"	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	71/2
750 Synthetic	85686	30-06 Springfield	9 1/4"	22"	42 1/8"	13 1/2*	1 55"	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/2
750" Synthetic Carbine	85687	30-06 Springfield	10"	18 1/2"	39 1/4"	13 V:*	1 1/4"	2 ¼*	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/4
750° Synthetic	85683	308 Win	10"	22*	42 16°	13 1/2"	i h	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 ½
750" Synthetic Carbine	85684	308 Win	10"	181/2"	39 1/8"	13 1/2"	1 3/8"	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 <i>Y</i> 4

MODEL R-15 V	TR MODULAR	REPEATING	RIFLE								17 1 A B		
MODEL	ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL . Material	BARREL FINGSH	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LBS.)
Predator Rifle	60000	204 Ruger	5,	22*	40 V/	13 1/2	1 1/8"	1 1/2	Carbon Steel	Matte	Synthetic	Advantage* MAX-1 HD™	7,1/4
Predator Rifle	60001	223 Remington	5	22*	40 14*	13 1/3"	1 1/4"	1 1/4"	Carbon Steel	Matte	Synthetic	Advantage * MAX-1 HD ~	7 ¾
Predator Carbine	60002	204 Ruger	5	18"	36 1/4"	13 3/3"	1 1/3*	I ¾.	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	6 1/4
Predator Carbine	60003	223 Remington	5	18"	36 1/4"	13 1/3"	1 1/8"	116	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	6 ¾
Predator Carbine - CS	60004	204 Ruger	5	18*	33 ¼" - 36 ¼"	11 36" - 14 36"	1 1/8"	1 1/8°	Carton Steel	, Matte	Synthetic	Advantage® MAX-1 HD"	6¾
Predator Carbine - CS	60005	223 Remington	5	18*	33 ¼ - 36 ¼	11 1/6" - 14 1/6"	11/4"	1 1/4	Carton Steel	Matte	Synthetic	Advantage® MAX-1 HD™	6 1/4

MODE	770 STAINLESS BOL		TION RII	LE.		e								
DROER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL LENGTH		ENGTH DR		BARREL Material	;	BARREL FINISH	STOCK MATERIAL	STOCK Finish	AVG. WT. (LBS.)†
85655	270 Win	4	22°	10"	42 1/2"	į :	13 1/3" 1	/s" 1 3/s"	416 Stainless Steel	1	Matte	- Synthetic !	Realtree® AP™ HD™	81/2
85657	7mm Remington Mag	3	24"	9 1/1	44 1/2		1316 1	/3" 1 1/3"	416 Stainless Steel		Matte	Synthetic	Realtree® AP™ HD™	81/2
85656	30-06 Springfield	4	22*	10"	42 1/2"	; i	13 3/3" 1	/s" 1 3/8"	416 Stainless Steel	1	Matte	Synthetic	Realtree® AP " HD"	81/1
85658	300 Win Mag	3	24"	10*	44 1/2		13 3/8" 1	/8" 1 ¥8"	416 Stainless Steel	1	Matte	Synthetic	Realtree® AP™ HD™	81/2
† Average we	ight includes scape.													

MODEL	770 BOLT ACT	ION F	RIFLE	74.		,		3				Ŷ.,				2	
GROER NO.	CALIBER		MAG. CAPACITY	BARREL LENGTH	TWIST R-H 1 TURN IN	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	1	BARREL FINISH		STOCK MATERIAL	- 1	STOCK FINISH	AVC. WT. (LBS.)†
85630	243 Win	10.	4	22*	9 1/3"	42 1/2"	13 1/4*	1 1/4"	1 1/4"	Carbon Steel	- 1	Matte		Black Synthetic	1	Matte	81/1
85637 Youth	-243 Win		4	20"	9 1/5"	39 1/2"	12 3/3"	11/4*	1 3/8"	Carbon Steel	4	Matte	• :	Black Synthetic	:	Matte	81/4
85632	270 Win	- '	4	22*	10°	42 1/2"	13 1/4"	1 1/8"	1 1/2°	Carbon Steel		Matte		Black Synthetic		Matte	81/2
85631	7mm-08 Remington		4	22"	9 1/1*	42 1/2"	13 ⅓*	1 1/8"	1 3/5"	Carbon Steel	1	Matte		Black Synthetic		Matte	81/2
85635	7mm Remington Mag		3	24"	9 1/8	44 1/2"	13 1/6"	1 1/6"	1 3/3"	Carbon Steel	- 1	Matte	1.	Black Synthetic	. 1	Matte	8%
85633	30-06 Springfield	1 ۽ حب	4	22*	10*	42 1/2	13 1/1	1 1/8"	1 3/1"	Carbon Steel	-A	Matte		Black Synthetic	1,1	Matte	81/2
85636	300 Win Mag		3	24*	10"	44 1/2"	13 1/8"	1 1/8"	1 34*	Carbon Steel		Matte		Black Synthetic	1	Matte	81/1
85634	, 308 Win	:	4	22*	10*	42 5/2"	13 1/4"	1 1/8"	1 3/3"	Carbon Steel	- 1	Matte	100	Black Synthetic		Matte	81/2
† Average weigh	nt includes scope.																

MODEL 7615	7600 PUI	MP ACTION	RIFLE				1					
MODEL	ORDER NO.	CALIBER	MAG. BARRS CAPACITY LENGT		CVERALL LENGTH	LENGTH DF PULL	DROP DROP (COME) (HEEL)	BARREL MATERIAL	BARREL Funish	STOCK MATERIAL	STOCK FINISH	AVG. WT.
7615 Tactical	86400	223 Remington	.10 16 W	9	36 1/2	13 1/2	1 ½ 2 ½ ·	Carbon Steel	Parkerized	Black Synthetic	Matte	61/4
7615" Ranch Carbine	86401	223 Remington	10 18 4	9	38 1/2"	13 1/2	1 1/16 2 1/4".	Carbon Steel	Parkerized (American Walnut	-Satin	7
7615" Camo Hunter†	86402	223 Remington	10 22	. 9	42"	13 1/2	1 1/16 2 1/4"	Carbon Steel	Mossy Oak® Brush Camo	Synthetic	Mossy Oak® Brush Camo	71/8
7615" SPS"	86410	223 Remington	10 16 %	9 1	36 1/2"	13 1/2"	1 1/15 2 1/4"	Carbon Steel	Parkerized	Black Synthetic	Malte	71/3
7600	24653	243 Win	4 22	91%	42 5%	13 1/2	1 1/15 2 1/1	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600-	24655	270 Win	4 22	10"	42 95"	13 1/2"	INC 214	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600~	24667	270 Win	4 22	LO"	42 5%*	13 1/2	1 3/15" 2 1/4"	Carbon Steel	Polished Blue	American Walnut	. High Gloss	71/2
7600 Cartine	24661	30-06 Springfield	4 18 W	10	39 1/8"	13 1/2"	1 Me 2 M	Carbon Steel	Polished Blue	American Walnut	Satin	71/4
7600"	24657	30-06 Springfield	4 22	10"	42 1/1"	13 1/2	1 1/16 2 1/1	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600-	24671	30-06 Springfield	.4 * 22	10"	42 58	13 1/2	1 Ms 2 M.	Carbon Steel	Polished Blue	American Walnut	High Gloss	71/2
7600-	24659	308 Win	4 . 22	. 10	42 5%	13 Vr -	1 1/16 2 1/1	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600 Synthetic	25143	243 Win	4 22	9 1/8	42 1/1	13 1/2	1 Vis 2 Vi	Carbon Steel	Matte Blue	Black Synthetic	Matte	7 1/2
7600" Synthetic	25145	270 Win	4 , 22	10"	42 5/6	13 W	1 Hr 2 W	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600" Synthetic	25149	30-06 Springfield	4 - 22	10"	42 5/8"	13 1/2	1 Nr 2 W.	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600 Synthetic	25151	308 Win	>4 ≥ 4. 22°	** 5 10° 13 .	42 5/2"	- 13 14	1 1/15" 2.14"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600" Synthetic Carbine	>> 25153 ·	30-06 Springfield	44 PF 18 V		39 1/8"		1 1/16 21/4		Matte Blue	Black Synthetic	Matte	71/4
† Equipped with iron sights.									<u></u>			

Premier Dealer offerings

BARBER - R 0003136 RIFLE SPECIFICATIONS

	MODEL 597							1 3 ye a						
	MODEL.	ORDER NO.	ACTION TYPE (CALIBER)	CAPACITY	BARREL LENGTH	OVERALL **	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL	BARREL FINISH	STOCK MATERIAL	STOCK FIXISH	(Inc.)
NEW	597 "Yellow Jacket"	80850	Auto (22 LR)	* 10	20°	40-32	14°	1 1/2"	2 1/1"	Stainless Steel	Matte	Yellow/Gray Laminate	Satin	512
	597" TVP	80852	Auto (22 LR)	10	20°	40,40	14"	I 1/2*	2 1/4"	Stainless Steel	Matte	Shady Camo Lammate	Satin	51/2
NEW	597 Blaze Camo	80853	Auto (22 LR)	10	20°	40	14"	11/2*	2 1/4	Carbon Steel	Matte	Mossy Oak Blaze Carne	Matte	51/2
NEW	597" Pink Camo	80854	Auto (22 LR)	10	20"	40.	14*	1 1/2"	2 1/1"	Carbon Steel	Matte	Mossy Oak Pink Carne	Matte	5 1/2
	597-	£ 26550,£	Auto (22 LR)	10家館	20"	40	14"	1 1/2*	2 1/1*	Carbon Steel	Matte	Gray Synthetic	Matte	5 /2
	597 Scope Combo	26513	Auto (22 LR)	10	20"	40	14*	11/2"	2 1/1"	As Carbon Steel 3.4	Matte	Cray Synthetic	Matte	34 E 5 W
NEW	597 Magnum	26560	Auto (22 WMR)	8	20"	40.	14°	1 1/7	2 W	Carbon Steel 3	Matte	Black Synthetic	Matte	5 Mg 5 Mg
	597" HB LS Magnum	26581	Auto (22 WMR)	8	20"	40"	14"	1 1/2*	2 1/4"	Carbon Steel	Matte	Brown Laminate	Satin	6
l .				-										

	MODEL	FIVÊ	1.73										3.	After 5
	ORDER NO.	CALIBER	CAPACITY	RARREI LENGTH	TWIST — R-H 1 TURN IN	OVERULL SEE SE	LENGTH OF PULL	(COMB)	DECLP (HEEL)	BARREI MATERIAL	BAIRFI. FIXISH	STOCK MITERAL	STOCK FIXISH	(TEC) THE COLUMN TO THE COLUMN
NEW	89915	17 HMR	1 5	22°	16"	40 %	13 1/1°	1 1/8"	1 3/8"	Carbon Steel	Palished Blue	Brown Laminate	Satin	6 40
	89913	22 LR	. 5	22*	16"	40 1/4	13 1/4"	1 1/6"	1 3/6"	Carbon Steel	Palished Blue	Brown Laminate	Satin	6483
NEW	89916 Youth	221R	5	16 1/5"	16*	35 14	12 3/1°	1 1/4*	1 1/4"	Carbon Steel	Polished Blue	Hardwood .	Satin	5 1/2
	89914	22 WMR	5	22"	16*	40 34*	13 1/1	I 1/4"	1 ¾°	Carbon Steel.	Palished Blue	Brown Laminate	Satin	6 34

MODEL: 552 /572												1	
MODEL	ORDER NO.	ACTION TYPE (CALIBER)	CAPACITY	BARREL LENGTH	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVE. WI.
552" BDL Deluxe Speedmaster*	25594	Auto (22, S, L, LR)	I 5 *	21°	40	13 1/4"	1 34	2 1/8"	Carbon Steel	Polished Blue	American Walnut	Gloss	534
572 BDL Deluxe Fieldmaster*	25624	Pump (22, S, L, LR)	; IŠ* ;	21*	40*	13 1/2"	1 1/2"	2 3/1"	Carbon Steel	Polished Blue	American Walnut	Gloss	E. (534
572" BDL Smoothbore	29829	Pump (22, S, L, LR)	15***	21"	40	13 1/2"	1 1/4"	2 1/8"	Carbon Steel	Polished Blue) 📝 American Walnut	Gloss	534.
* Capacity is 15 on 22 Long Rifle, 17	on 22 Long, and 20 on	22 Short.											

Premier Dealer offerings

MUZZLELOADER SPECIFICATIONS

MODEL	BARREL LENGTH	OVERALL LENGTH	ORDER NO.	STOCK Material	STOCK FINESH	BARREL Material	BARREL Finish	AYG WT. (LBS.)
Genesis ML	28"	43"	89294	Black Synthetic	Black	Carbon Blue	Matte	7¾
Genesis MLS Overmold	28"	43"	89297	Overmold Synthetic	Black Overmold	Stainless	Satin	7%
Genesis ML Camo	28"	43"	89295	Mossy Oak* New Break-Up*	Camo	Carbon Blue	Carno	774
Genesis ML Camo	28"	43*	89276	Mossy Oak* New Break-Up*	Camo	Carbon Blue	Carno	734
Genesis ML SF Synthetic Thumbhole	28*	43*	89286	Black Synthetic	Black	Stainless	Satin	7 1/2
Genesis ML SF Came Thumbhole	28"	43*	. 89299	Mossy Oak® New Break-Up®	Сато	Stainless	- Satin	7 1/2
Genesis ML SF Buckmasters*	28"	43*	89277	Realtree* Hardwoods* HD**	Camo	Stainless	Satin	734
Genesis ML SF Laminate Thumbhole	28*	43"	89285	Grey Laminate	Grey Laminate	Stainless	Satin	8

INTERCHANGEABILITY CHART. Cartridges within groups shown are interchangeable. Other substitutions should not be made

without specific recommendation of the firearms manufacturer since improper combinations could result in firearm damage or personal injury.

RIMFIRE	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)
22 W.R.F.	6.35mm Browning	32 Short Colt in 32 Long Cott but not conversely	38 Colt Special	38 Automatic in 38 Super +P - but not conversely
22 Remington Special	7mm Express, Remington	(SEE MOTE C)	38 S&W Special	380 Automatic
22 Win. Model 1890 in a 22 Win. Mag. Rimfire	280 Remington	32 S&W in 32 S&W Long but not conversely	38 Special Targetmaster*	9mm Browning Short (Corto Kurz)
- but not conversely	30-30 Sav.	32 S&W Long	38 S&W Special Mid-Range (SEE NOTE D)	9mm Luger (SEE NOTE E)
CENTERFIRE	30-30 Win.	32 Colt New Police	38 Special +P (SEE NOTE 8)	9mm Parabellum
25-20 Remington	30-30 Win. Accelerator* (SEE NOTE A)	32 Colt Police Positive	38-44 Special +P (SEE NOTE B)	44 S&W Special (SEE NOTE F)
25-20 W.C.F.	30-30 Marlin	32 W.C.F. (SEE NOTE A)	38 Special	44 Martin
25-20 Win.	30-30 Win. High Speed	32 Win. (SEE NOTE A)	38 Special Flat Point	44 Win.
25-20 Win. High Speed	30 W.C.F.	32-20 Win. High Speed (SEE NOTE A)	38 Short Colt in 38 Long Ceft but not conversely.	44 Remington
25-20 Martin	32 Colt Automatic	32-20 Coft 1.M.R	Both can be used in 38 Special	44-40 Win.
25 W.C.F.	32 Auto. Colt Pistol (ACP)	32-20 W.C.F (SEE NOTE C)	38 Marlin	44 W.C.F.
6mm Reminator	32 (7.65mm) Automatic	32-20 Win.	38 Win, (SEE NOTE A)	45-70 Government
244 Remington	7.65mm Automatic Pistol	32-20 Martin	38 Remington (SEE NOTE A)	45-70 Martin
25 Automatic	7.65mm Browning (not interchangeable	38 S&W	38-40 Win.	45-70 Win.
25 Auto. Calt Pistol (ACP)	with 7.65mm Luger)	38 Colt New Police	38 W.C.F. (SEE NOTE A)	45-70-405
25 (6.35mm) Automatic		380 Webley		

NOTE A: High-speed cartridges must not be used in revolvers. They should be used only in rilles made especially for them.

NOTE B: Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in finearms designated for this cartridge and so recommended by the gun manufacturer. NOTE C: Not for use in revolvers chambered for 32 S&V/ or 32 S&W Long.

NOTE D: All 38 Special cartridges can be used in 357 Magrium revolvers but not conversely.

NOTE E: 9mm sub machine gun cartridges should not be used in handguns.

NOTE F: 44 Russian and 44 S&W Special can be used in 44 Remington Magnum revolvers but not conversely.

NOTE 6: Not to be used in Vfin. M-66 and M-73.

BARREIBARRICKFJGATIONS

LENGTH & CHOICE	12- cs .	16-ca	20-ga.*
Field Grade, Vent Rib, Wingmaster*			
30" Rem" Choke, Light Contour	26215		
30* Rem* Choke	24576		
28" Rem Choke, Light Contour 3	26217		
23" Rem ' Choke	24580	_	24606
26° Rem * Choke, Light Contour	26219		
26" Rem Choke	24582	_	24608
Deer Barrel, Super Slug Cantilever Scope Mount, New Conto	ur		
23° Fully Rifled	24551		
Deer Barrel, Cantilever Scope Mount, Wingmaster*			
20" Fully Rifled	24557		
Deer Barrel, Rifle Sights			
20" Rem " Choke	24545 ²	24495*	
20° Fully Rifled	24558		. –
20° lmp. Cyl.		_	24578
SP* Deer Barrel, Cantilever Scope Mount			
20" Fully Rifled	26229		
20" Fully Rifled Camo	26203†		- : -
20" Rem * Chake	262271		
SP` Deer, Rifle Sights			100
20" Rem * Choke	24549 ²		· , —
Express* Bead Sights	24620		
Express* Vent Rib	24589		
Express* Deer, Rifle Sights (20*), Imp. Cyl.	24622		10 mg (- 10 g)
Express® Deer, Fully Rifled, Rifle Sights (20")	246113		246093
SP , Vent Rib	2 5 8 45 7 7		11 Sa W. + 30.
30" Rem - Choke	24590		
28" Rem Choke	- Z6225		71 1 4 F 14 F
26" Rem" Chake	24592		毛 製 岩头乡

Noded 870 'earla barrels with 3' chambers used os Super Magnum' and Magnum receivers with handle both 2 ½' and 3' shells only. Use only 2½' shells when these barrels are used on non-Magnum neceivers. "Du gauge 80' Lightweigh barrels will not 18' Departs supplied with myround Children and Extended Rilled Choke tubes. 2 Rife-sighted Rem" Choke Deer barrels supplied with Rifles and Improved Children and Extended Rilled Choke tubes. 2 Rife-sighted Rem" Choke tubes. 3 Express 20'-ga. Fully Rifled Deer barrel has 2 ½' chamber. Model 870' entra barrels with 2½' chambers will fit both Magnum and 2½' neceivers. Use only 2½' shells in these barrels. 4 Rifle-sighted Rem" Choke Deer barrels supplied with Improved Cylinder Choke tube. 1 Carno Mossy Dak" Break-Up: Pattern.

MODEL 11-87; EXTRA BARRELS /	3" CHAMBERS	
LENGTH & CHOKE	12-cu	20-ga.*
Deer Barrel, Cantilever Scope Mount**	18 4 2 26 3 3	
21" Fully Rifled	29615	
Deer Barrel. Rifle Sights		
21" Fully Rifled	29606	295633
21" Rem" Choke ²	29623	
SP* Deer Barrel, Cantilever Scope Mount**	1.5 PR: 25 1914	
21" Fully Rifled	24645	
21" Fully Rifled Camo*	29537	
21" Rem Choke ¹	24647	-
SP* Deer Barrel, Rifle Sights**	A series grade	
21" Rem * Choke²	29627	
21" Fully Rifled	29609	
SP ⁻ Magnum, Vent Rib	1.10 12 13 13 12 12 13	
30" Rem" Choke4	24638	
28" Rem Choke4	29611	
26" Rem " Choke ⁴	24640	
Premier* Vent Rib	医性外皮肤 医直线精	
30" Rem Choke, Light Contour	29600 (F) (F)	
28" Rem Choke, Light Contour	29602	_
28" Rem * Choke	24644	
26" Rem Choke, Light Contour	29604	
MODEL 11-	87" SUPER MAGNUM	
SP* Super Magnum Deer Barrel, Rifle Sights	12 2 10 10 10 10 10 10 10 10 10 10 10 10 10	
23" Fully Rifled w/Rifle Sights (3" chamber)	24629 35 321	
SP * Super Magnum Deer Barrel, Cantilever Scope Mount	Plana Victoria de 1881	
23" Fully Rifled (3" chamber)	80500	_

Cardilever Rein* Choke Deer barrets supplied with Improved Cylinder and Extended Rilled Choke tubes.
 2 Rille- Barrets Stated and Improved Cylinder Choke tubes.
 3 2 Vr chamber.
 4 3 Vr chamber.
 4 Carno Mossy Oak* Break-Up* Pattern.

MODEL SP-10" MAGNUM EXTRA BARREL	S/3 / CHAMBERS
LENGTH & CHOICE	10 TV 20 TV
SP- Magnum, Vent Rib	
30" Rem Choke	27594
26 Rem Choke	27598
Linesterland	and the second s

the state of the s	2-/ CHAMBERS	2. 14.50 - \$ 49.52 2.5 - 8 - 8 - 8 - 5 - 5
LENGTH & CHOKE	12-ca.	20-ca, LT-20 ¹
Field Grade Deer, Cantilever Scope Mount		
21° Fully Rilled	. 26595	
Field Grade Deer, Rifle Sights		
21" Fully Rifled	29570	
21° Rem - Choke ¹	29565	
21* Imp. Cyl.		24438
SP* Deer, Rifle Sights		
21" Rem * Choke²	29571	
Steel Shot Barrel, Vent Rib ³ (See ammunition note below)		
30" Rem * Choke	29505	
26* Rem * Chake	29509	
Field Grade, Vent Rib		
30" Rem * Chake	Z4488	
28* Rem * Chake	24464	24484
26" Rem * Choke	24466	24486
Skeet, Vent Rib		
26" Rem * Choke	24490	
1 NOTE: 1-12. 20-gauge Ligns-eight barnels (400 Senies) will not the sincluss. (Refer to parts list for per-1977 benels.) 2 Rithe-sighted Rest 3 Supplied with full Choke only. Please note the fullowing ammunition recommendations for use with When used with Model 1100. Magnum storigums. Use 2 Vr magnum or 3 magnum lead shotchells. When used with Model 1100. non-Magnum shotgans: Use 2 Vr magnum or 3 magnum lead shotchells.	m* Choke Deer barrets supplied with Rifled and In	

FOR MORE INFO, VISIT www.REMINGTON.com

OR CALL 1-800-243-9700

300, ADL, Accelerator, BDL, Bandit, BriteBore, Bronze Point, BuckHammer, Bullet, Bullet Design, CBEE 22, CDL, Classic, Conquest, Copper-Lokt, Copper Solid, Care-Lokt, Custom Carry, Cyclone, D-Series, Deer Hunter, Desert Recon, Disintegrator, DriLube, Driving Band, Drop Dead Better, Duplex, Echo, Elite Hunter, Elite Skinner, Elsag, E.R. Remington & Sons, Escape, ETA, EtronX, Excursion, Express, Express-Steel, EZ, F.A.S.T., Fast Action Soft Touch, Fieldmaster, Figure 8, Fireball, Flexitab, G3, Gamemaster, Genesis, Green Color, Golden, Golden Saber, Grizzly, Gun Club, Hi-Speed, Ideal, Insignia Edition, Kleanbore, Lead-Lokt, LV SF, M24, M24A2, M24A3, MAX Gobbler, M-Series, Managed-Recoil, Marine Magnum, MCS Picatinny, Model Five, Model Seven, Model 105 CTi. Model 11-87, Model 11-87P, Model 32, Model 332, Model 365, Model 40-X, Model 40-XB, Model 40-XBBR, Model 40-XC, Model 40-XR, Model 40-XRBR, Model 40-XS, Model 412, Model 504, Model 504-T, Model 552, Model 572, Model 597, Model 673, Model 700, Model 700P, Model 700P USR, Model 710, Model 750, Model 3 770. Model 798. Model 799. Model 830. Model 870. Model 870 MCS. Model 870P. Model 870P MAX. Model 1100, Model 7400, Model 7600, Model 7600P, Model 7615, Model 7615P, Model SP-10, MoistureGuard, Nitro 27, Nitro CLP, Nitro Mag, Nitro Turkey, Nitro-Steel, Parker, Peters, Pheasant, Power-Lokt, Power Piston, Predator, Premier, ProBore, Quick Look, R, R-15, R-P, Rangemaster, Ready, Realwood, Rem, Rem Dri 35, Rem DriLube, RemCloth, RemGrip, Rem-Line, Rem-Lite, Rem-Tech, Remington, Remington Fieldmaster, Remington Law Enforcement, Remington Leadless, Remington Racing, Remington Shooting School and Remington Shooting School logo, Remington Targetmaster, Remington Ultra, Rescue, Rustless, S.A.S.S., Sendero, Shoot Like A Girl ... If You Can!, ShurShot, Slugger, SP, SPR, SPR18, SPR100, SPR210, SPR22, SPR220, SPR310, SPR310S, SPR453, SPR94, SPS, SP-T, SPS-T, Speedmaster, Sportsman, STS, Subsonic, SuperCell, Super Magnum, SWIFT-LOKT, TAC 8, Tango, Targetmaster, Thunderbolt, TorchCam, TriNyte, TVP, Ultra Bonded, Ultra Mag, UMC, Unibody, Viper, VLS, Vortex and Vortex logo, VS, VSF, VS SF, VTR, Weathermaster, Wetproof, Wingmaster, Wingmaster HD, Woodsmaster, XCR Extreme, X-Mark Pro, XR-100, Yellow Jacket and Zulu are trademarks of RA Brands, L.L.C., Madison, NC 27025. Palusol is a trademark of BASF. Briley is a trademark of Briley Manufacturing. Bushnell and Sharpshooter are trademarks of Bushnell. Delrin, Kevlar, Tellon and Tyvek are trademarks of DuPont. Match King is a trademark of Sierra Bullet Co., LLC. Swift, A-Frame and Scirocco are trademarks of Swift Bullet Co. Break-Up, Brush, Duck Blind, Mossy Oak, New Break-Up and Obsession are trademarks of Haas Outdoors, Inc. V-Max is a trademark of Hornady Manufacturing Company, Hogue is a trademark of Hogue Inc. Advantage Advantage Max-4, Advantage Timber, AP, APG, HD and Realtree are trademarks of Jordan Outdoor Enterprises. Ltd. SpecOps is a trademark of Knoxx Industries, LLC., HiViz is a trademark of North Pass, Ltd. Kraton is a trademark of Shell. Sako is a trademark of Sako, Ltd., Shilen is a trademark of Shilen, Inc., Speedfeed is a trademark of Armory Accessories, Inc. LimbSaver is a trademark of Steven Sims, Inc. Digital Tiger is a trademark of Tiger Stripe Products. TRUGLO is a trademark of Truglo, Inc. Skyline, Excel and Fall Flight are trademarks of Skyline Cover, LLC. Weaver is a trademark of Weaver Outdoor Optics. Williams and Fire Sights are trademarks of Williams Gun Sight Co.

Weights, stock dimensions, checkering pattern and wood grain may vary according to the individual firearm. Remington reserves the right to change or modify its products without notice. Pricing may vary by model, specification, color, size and availability. Follow the safety rules printed in firearms instruction books and on ammunition boxes. If you do not have an instruction book for your Remington firearm, write to Remington Arms Company, Inc., 870 Remington Drive, PO Box 700, Madison, NC 27025, for a free copy or visit our website at www.remington.com/manuals. Please specify the model and serial number. The firearms herein have been photographed with their actions closed to properly showcase their features. In actual practice, any firearm not in use must be left with ammunition removed, action open and safety on. Consumer Information, Arms Service, Parts and Repairs and Custom Shop: (800) 243-9700. Visit us on the web at: www.remington.com.

