



Kemingion.


PRIMITER SOURCE

FOR FIRMANIES AND AVINDALLION.


For 194 years, Contingion and the American sportsman baye seen it all together And because no one has been a part of the great builting and shooting tradition in this country longer, no one works harder to entiripate your needs and provide the timovation you demand; in the year's crop of new products is testament to this, Statuless stell great black on our new Model 700° Xerain testament for patenced with the conceilor continued system your cantiles and thomes are sater with the advant of unimed thome Detense amount the and the third sylentymore, bushmaster comes to our law call the failed with the first sate from the pages to come; one that it is the page of new call the training and configurations, as well as additions to the atmost plated Model 637° Without all the other with a standard the seed in the pages to come, one thing is caractured in the ratio and the advancing our provide the lifts in calling on.


efacilia do elica

The state of the s	and the second
	IH) .
	. 100-100
	30 - 51
	, 52 1 0
CILIA po objecto co	. 70 OT
	.
	-90-93
وووقوه ووووقي الكالكالكالكالكالكالكالكالكالكالكالكالكا	. 99-93
	. 99-99
802411671008	സ്ഥ

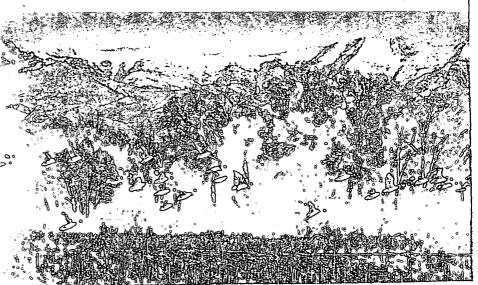





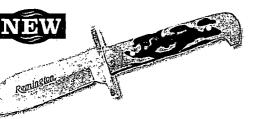

HERITAGE SERIES KNIFES.

Available in a Delrin Stag handle for 2010, this knife boasts the Remington Arms Crest Shield, found on the front bolster of each Heritage Series Knife. A tradition dating back to the 1800s. (Page 84)



wrench/plier

2010 COPPERHEAD BULLET® KNIFE "DOUBLE STRIKE."

The tradition of the Bullet Knife continues with a R2253 Copperhead pattern and a mahogany jigged bone with bullet shield. Also available in a Damascus Blade (limited offering). (Page 79)



PREMIER® TACTICAL SHEATHS. Designed to fit fixed-blade knives of many different sizes, these sheaths are made of the best quality Cordura® material to withstand rigorous use. Available in Black, Tan and OD Green. (Page 81)




FIREARM ACCESSORIES



GUN SOCK. Excellent for long term storages; 52" long to fit most all long guns and the scope; silicon treated polyester fabric protects from dust and scratches and rust. (Page 90)









in Black. (Page 93)




BARBER - R 0003247

HD ULTIMATE HOME DEFENSE

DON'T TRUST YOUR FAMILY'S SAFETY TO ANYTHING ELSE.



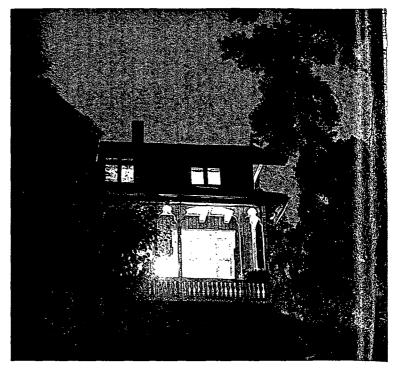

PISTOL & REVOLVER. Based on the same platform trusted by law-enforcement professionals to protect the American way of life is now available to defend your family and home. Loaded with our high-performance Brass Jacket Hollow Point (BJHP), these new rounds deliver massive expansion and deep penetration for ultimate stopping power. Premium nickel-plated cases resist corrosion and cycle dependably through extended storage. Available in the most popular pistol and revolver calibers.



		11.22		5,00				***	ر المسلمة ال	100	CHILL.	CALL STATE	44			
	·				HD UL	TIMATE	HOME	DEFENS	E PISTOL	& REV	DLVER					
9mm Luger	HD9MMB .	· 1½	124	BJHP	1125	1074	1031	963	349	317 -	293	255	0.2	1.0"	4.0"	4"
380 Auto	HD308B	1 1/2	102	BJHP	940	920	901	866	200	192	184	170	0.3	1.2"	5.1"	4"
38 Special (+P)*.	HD38SB	.1 1/2	125	BJHP	975	950	929	885	264	250	238	218	0.3	1.0	5.2	. 4" -
40 S&W	HD40SWA	5 ½	165	BJHP	1150	1089	1040	964	485	435	396	340	0.2	1.0"	4.0"	4"
45 Auto	HD45APB	2 1/2	230	BJHP ·	875	853	833	795	391	372	355	323	0.4	1.5"	6.1*	5*

‡Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer. *Test Barrel Length BIHP = Brass Jacketed Hollow Point

SHOTGUN. Featuring Remington Heavy Density (HD)
Tungsten-Bronze-Iron pellets that are heavier than standard
lead, these new rounds deliver dense, devastating patterns and
massive terminal knockdown when the stakes are at their highest.
Short-range patterns in smoothbore barrels are tight and extremely
devastating for one-shot confidence. Choose from two hard-hitting
12-gauge loads — BB for highest energy and Duplex for most pellets

on target. Our 410 load packs four lead 00 buckshot pellets to maximize effectiveness of the Taurus® Judge® handgun.

Three devastating shots at 15 feet with our new 2 ½ 410 HD Ultimate Home Defense shotshell featuring four 00 buckshot pellets each. Test fired through Taurus * Judge* revolver.



a 06,	· ema				
HD UL	TIMATE HOME	DEFENSE S	HOTSHELL LOADS	- LEAD BUC	KSHOT
410B00HD	410	21/2	1300	". '4 pel_ :	00BK
HD ULTIMA	TE HOME DE	FENSE SHOT	SHELL LOADS - TI	JNGSTEN-BR	ONZE-IRON :
FRW12SHDB	. 12	21/4	≥ 1250 -	1%	88
RW12SHD24	12	2 1/1	1250	1%	2x4

BARBER - R 0003248

DISINTEGRATOR CTF

PISTOL & REVOLVER



PULVERIZING ALL PREVIOUS STANDARDS FOR EXCELLENCE IN FRANGIBLE TRAINING AMMUNITION.

Truly the ultimate choice for all lead-free training scenarios. Utilizing jacketless, copper tin frangible

bullets, Disintegrator® CTF™ delivers complete breakup at distances as close as 5 ft. with no splashback, no jacket fragments and absolutely no lead residue. Disintegrator CTF bullets are formed from powder using a

compaction and sintering process that eliminates the need for a jacket to house the bullet core. When these completely frangible bullets strike a barrier, they're instantly reduced to dust-sized particles, dramatically reducing hazard to bystanders. Highly frangible design prolongs the life of target traps and backstops, and our Heavy Metal Free (HMF) primer offers the best shelf life available with a non-toxic primer.

						DICIN	TEGRATOR	A CTET					
						DISIN	TEGRATOR	CIF					
9mm (+P)	CTF9MMB	1 1/2	100	CTSF	1300	1213	1141	375	327	289	- 02	0.7	4".
38 Special (+P)*	CTF38SPLA	5 ½	101	CTSF	800	783	766	156	150	143	0.2	0.7	4"
40 S&W -	CTF40SWA	5 1/2	125	CTSF	1300	1194	1110	469	396	342	0.2	0.8	4"

†Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer. *lest Barrel Lengt CTSF = Cooper/Tio Sintered Francible

PREMIER® ACCUTIP


450 BUSHMASTER -

BREAK-UP INSTANTLY
AND COMPLETELY
No splashback
No Jacket fragments
No Lead residue

THE "BIG THUMPER" GETS A BIG DOSE OF AERODYNAMICS AND DEVASTATING EXPANSION. In honor of the 450 Bushmaster's debut on our supremely accurate R-15 platform, we're loading it with perhaps the most accurate .45-caliber bullet ever devised. Featuring our Power Port™ tip, this 260-grain AccuTip bonded projectile delivers exceptional flight characteristics for ultimate downrange precision and sustained energy. Its bonded construction, high-strength cartridge-brass jacket and spiral nose cuts combine to drive huge, uniform mushrooms through the toughest game with ease.



Catibes GoderEDI No. Builet Wt. (grs.) Builet Type PREMIER* ACCUTTP									
450 Bushmaster	PRAISOBI A 260 A Acculto								



260 GRAIN, 450 BUSHMASTÉR



PREMIER® NITRO SPORTING CLAYS

Smoke targets and all competitors with the finest sporting clays load in the world today. The Premier® Nitro performance that's dominated trap and skeet competitions for years is now available in high-velocity, 1-oz. loads specially formulated for the sporting clays enthusiast. Combining mild recoil with target-grinding pattern consistency, the new Premier Nitro Sporting Clays loads were created in answer to requests from NSCA All American Team Captain Wendell Cherry. They're extensively field tested and proven to crush the long birds with an astounding 1,350 fps. muzzle velocity in your choice of #7 ½ or #8 shot. And guaranteed to take your game to new heights and lengths in 2010.




Index Length Velocity Dunces Shot EDI No. Gauge (in.) (ft/sec @ 3 ft.) of Shot Sizes										
PREMIER® NITRO SPORTING CLAYS										
STS12NSC17 12	23/4 1350 1 71/2,8									




TACK-DRIVING MASTERY

OF THE MOST EXTREME CONDITIONS.

The Model 700[™] remains the world's most accurate rifle out of the box, but never, ever stops evolving or improving. New additions this year include the Model 700 [™] XCR II, the Model 700 XCR II Camo Rocky Mountain Elk Foundation Edition, the Model 700 XCR II Camo Bone Collector Edition, the Model 700 SPS Tactical and the Model 700 VTR A-TACS® and the Model 700 CDL SF Limited Edition in 280 Remington.

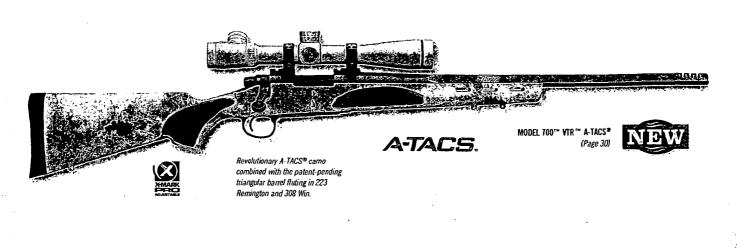




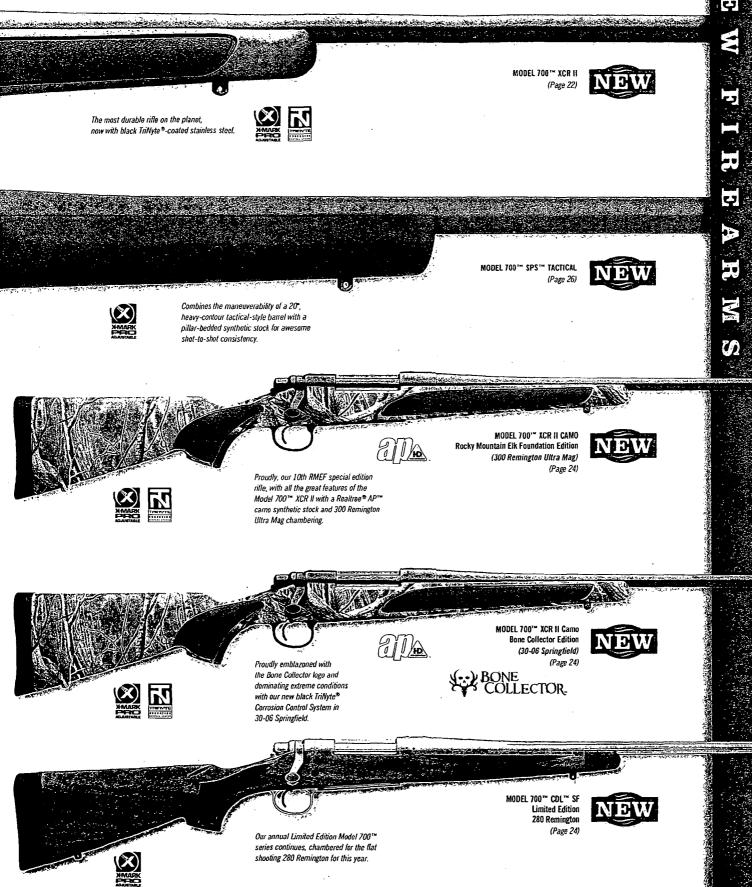





The tough-as-nails bad boy of the Remington pump-action legacy adds four new members to the family this year. New armor-clad additions include the Model 887 Nitro Mag in black synthetic with a 26" barrel, Model 887 Nitro Mag Tactical. Model 887 Combo with two specialized barrels and Rem. Chokes for waterfowl and turkey and a Model 887 Bone Collector Edition equipped with a versatile 26" barrel and proudly displaying the Bone Collector logo. Also new in 2010 is the Model 887 fully rifled extra barrel with rifle sights.

Visit Remington.com for more details.

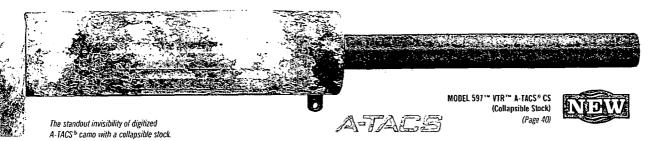


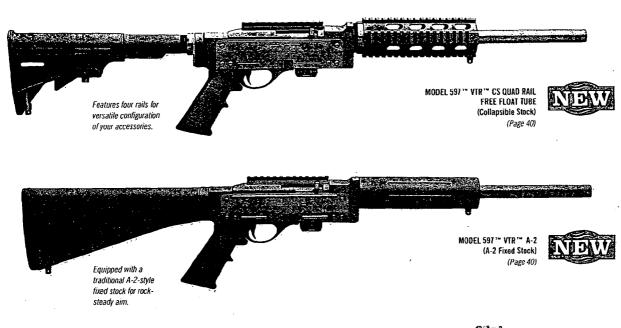

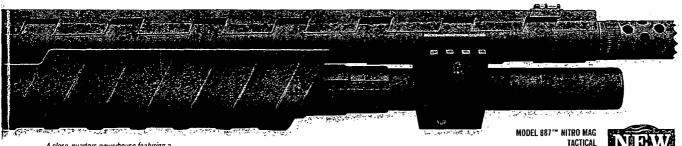

A close-quarters powerhouse featuring a quick-pointing 18 1/2" barrel and a pre-installed 2-shot magazine extension.



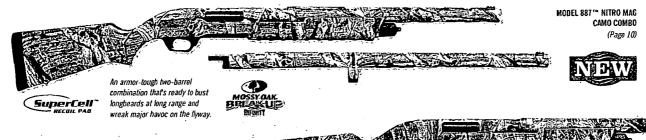



Birds have bones, and they don't stand a chance against this special Bone Collector Edition Model 887.™



MODEL 887™ NITRO MAG BONE COLLECTOR (Page 10) COLLECTOR.





NEW SEMI-AUTO WORKHORSES FOR FIELD, WOODS AND WATER.

World-famous Model 11-87[™] speed, mild recoil and reliability in three new configurations. Choose from the classic appeal of our **Model 11-87 Sportsman® Field**, our completely updated **Model 11-87 Sportsman Super Magnum Synthetic** and **Model 11-87 Sportsman Super Magnum Waterfowi** featuring overmolded grips, HiViz[®] sights and more, and the long-range lethality of the **Model 11-87 Sportsman Super Magnum ShurShot® Turkey**.



America's favorite pump action is once again setting the standard for performance in a host of applications. This year, we're proud to introduce the Model 870 "Express* Tactical A-TACS* Camo the Model 870 SPS** Super Magnum Turkey/Predator w/Scope, the Model 870 Express Turkey Camo and the Model 870 Express Super Magnum Turkey/Waterfowl.





MODEL 11-87™ SPORTSMAN® FIELD (Page 12)

The timeless field, clays and upland Sportsman you've been waiting for.



MODEL 11-87 ™ SPORTSMAN? SUPER MAG SYNTHETIC (Page 12)

NOW WITH OVERMOLDED GRIPS SuperCell*

Birds know it as the big punisher, but it's never been more comfortable to shoot thanks to a host of upgrades.



MODEL 11-87 ™ SPORTSMAN® SUPER MAG WATERFOWL (Page 12)



Superior handling and concealment, rock-steady aim and extended-range precision are hallmarks of this new offering.



NOW WITH OVERMOLDED GRIPS




MODEL 11-87™ SPORTSMAN® SUPER MAG SHURSHOT® TURKEY



ALEST MANAGEMENT



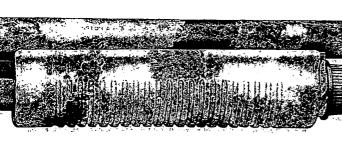



Renowned tactical performance with the revolutionary concealment of A-TACS® digitized camouflage.



MODEL 870™ EXPRESS® TACTICAL A-TACS® CAMO





The extreme reliability and hunting performance of the Model 870 ** Express* in a specialized turkey platform.



MODEL 870™ EXPRESS® TURKEY CAMO (Page 16)



SuperCell'



An all-inclusive turkey- and predator-pounding package, including a TruGlo® illuminated red/green-dot sight.

NOW WITH OVERMOLDED GRIPS





MODEL 870™ SPS™ SUPER MAG TURKEY/PREDATOR W/SCOPE (Page 18)





BUILT WITH ARMOR SKIN, BONES OF STEEL AND A 60-YEAR LEGACY OF GREATNESS.


The most durable shotgun on the planet. Born of the gunmaking expertise that brought you the best-selling, most trusted shotgun of all time, the Model 870,™ the Model 887™ Nitro Mag is an armor-clad warrior here to carry the torch of our great pump-gun legacy through the most extreme conditions on earth. Our exclusive ArmorLokt™ process seals the receiver and barrel in a vault of weather-impervious synthetic armor that's both completely rustproof and tough as nails. Similar to the Model 870, its receiver is crafted of solid steel and the barrel is hammer forged to last a lifetime. Twin steel action bars ensure smooth, positive chambering and ejection. And the sleek receiver design, awesome balance and natural pointing characteristics spell trouble for any bird within reach of its 12-gauge 3 ½" Super Magnum capability. The extremely rugged synthetic stock and fore-end are ergonomically contoured to offer a positive grip and comfortable handling. Swivel studs are built-in.

For 2010, the all-black Model 887 Nitro Mag is available with a 26" or 28" barrel, sporting a solid rib and included Modified Rem¹^M Choke. The Model 887 Nitro Mag Waterfowl Camo is dressed from butt to bore in vivid, high-detail Realtree[®] Advantage[®] MAX-4 HD¹^M camo, with a 28" barrel and an extended Over Decoys Rem Choke optimized for non-toxic waterfowl loads. We're also proud to introduce the ultimate knockout one-two for waterfowl and turkey, the Model 887 Nitro Mag Combo. It comes with a 22" turkey barrel with HiViz[®] fiber-optic rifle sights and a 28" waterfowl barrel with a HiViz[®] sight. To add to this already astounding offer, Extended Waterfowl and Super Full Turkey Rem Chokes are included. For Bone Collector fans, there's the Model 887 Nitro Mag Bone Collector Edition with a 26" barrel and emblazoned with the show's logo. Our new Model 887 Nitro Mag Tactical combines supreme toughness and dependability with a handy 18 ½" barrel, a 2-shot magazine extension and a barrel clamp with integral Picatinny rails for mounting your flashlight or other accessories. It also includes a ported, extended tactical Rem Choke and receiver mounted on Picatinny rail.



ARMORLOKT™ COATING. All exterior surfaces are locked in a vault of nail-tough polymer armor that's impenetrable to moisture and will never rust. This overmolded construction not only minimizes maintenance, it withstands abrasion and punishment like no other. Consider it full-coverage insurance for anything the season throws at you.



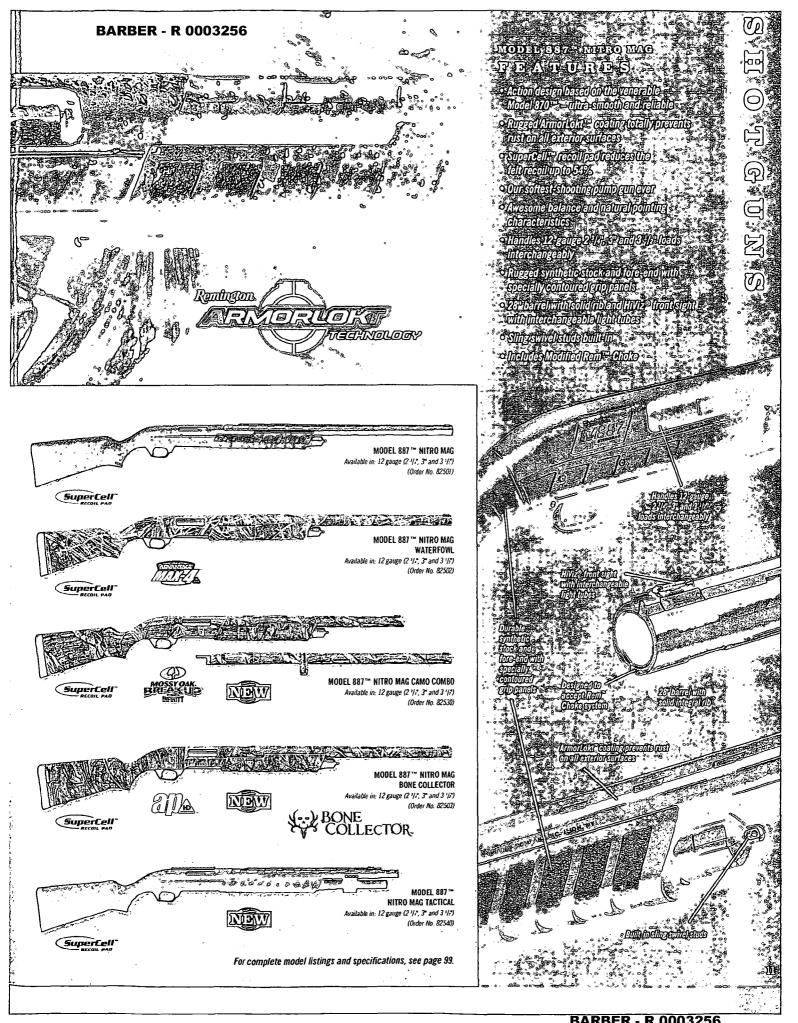



MODEL 11-87



RUT TO STRUT, IN EVERY STAND, BLIND, FIELD AND CLAYS COURSE BETWEEN.

No matter the season, our Sportsman answers the call with the lethal blend of speed, reliability and smooth operation that have made the Model 11-87™ a standout since its introduction. These are workhorse shotguns, built to our legendary and uncompromising standards for autoloader performance. This year's lineup includes new 12- and 20-gauge field versions; a specialized fully rifled slug gun; all-purpose models in 12 and 20 gauge, black or camo; and a 20-gauge compact model with adjustable length-of-pull system. Truly as timeless and versatile as the American sportsman, the new **Model 11-87™**Sportsman® Field is a return to the roots of the Remington® semi-automatic shotgun — all-around utility and classic looks for clays, field and upland hunting. It features a handsome, satin-finished walnut stock and fore-end with fleur-di-lis checkering, and is available in 12- and 20-gauge versions with 2 ¾" and 3" capability. The nickel-plated bolt and gold-plated trigger perfectly accent the satin sheen of the barrel and receiver. Barrels are 28" on the 12-gauge model and 26" on the 20-gauge version. Both have a vent rib with dual beads and accept Rem™ Chokes (modified choke included).

Still deer season's MVP, the **Model 11-87 Sporstman ShurShot® Camo Cantilever** combines the extended-range slug accuracy of a fully rifled barrel with the ambidextrous comfort, maneuverability and rock-steady aim of ShurShot pistol-grip stock covered in Realtree® Hardwoods® Grey camo for concealment. The 21" barrel is handy in the wood and is fitted with a cantilever rail for easy scope mounting. With unfailing reliability, superior handling characteristics and breadth of line, the Model 11-87 Sportsman family continues to redefine semi-automatic shotgun performance.

MODEL 11-87[™]

SuperCell*

SPORTSMAN® SUPER MAGNUM




THE QUICKEST & SMOOTHEST IN SUPER MAGNUM STRENGTH.

Its speed, versatility, bone-crushing power and swift pointing characteristics couldn't be topped, so we added a host of upgrades to our Model 11-87th Sportsman® Super Magnum for 2010 to improve handling, sight acquisition and more. All models now feature rubber overmolded grip panels on the stock and fore-end for a sure hold in all weather conditions and a black padded sling, with other enhancements on individual configurations. These shotguns tame the biggest, baddest, 3 ½" 12-gauge rounds with a soft-shooting action and our revolutionary SuperCellth recoil pad.

Our new Model 11-87 Sportsman® Super Magnum Waterfowl hides right along with you thanks to full Mossy Oak® Duck Blind™ camo coverage. It can be custom-fit to your build, clothing and shooting form; and includes an Adjustable Length of Pull Kit, offering a full 1" of adjustability. The 28" barrel accepts Rem™ Chokes. And the included Wingmaster HD® Specialized Waterfowl choke tubes are a lethal ticket when the birds are cupped and committed. It also comes with HiViz® sights featuring interchangeable light pipes. You'll find the same sights on the 28" vent-rib barrel of our do-all Model 11-87 Sportsman Super Magnum Synthetic.

The **Model 11-87 Sportsman ShurShot® Super Magnum Turkey** is the cutting edge in comfort, concealment and precision shot placement, boasting the ambidextrous ShurShot pistol-grip stock and full Realtree® APG™ HD™ coverage. Its 23" barrel has fully adjustable TruGlo® rifle sights and accepts Rem Chokes (Wingmaster HD Turkey Choke included).

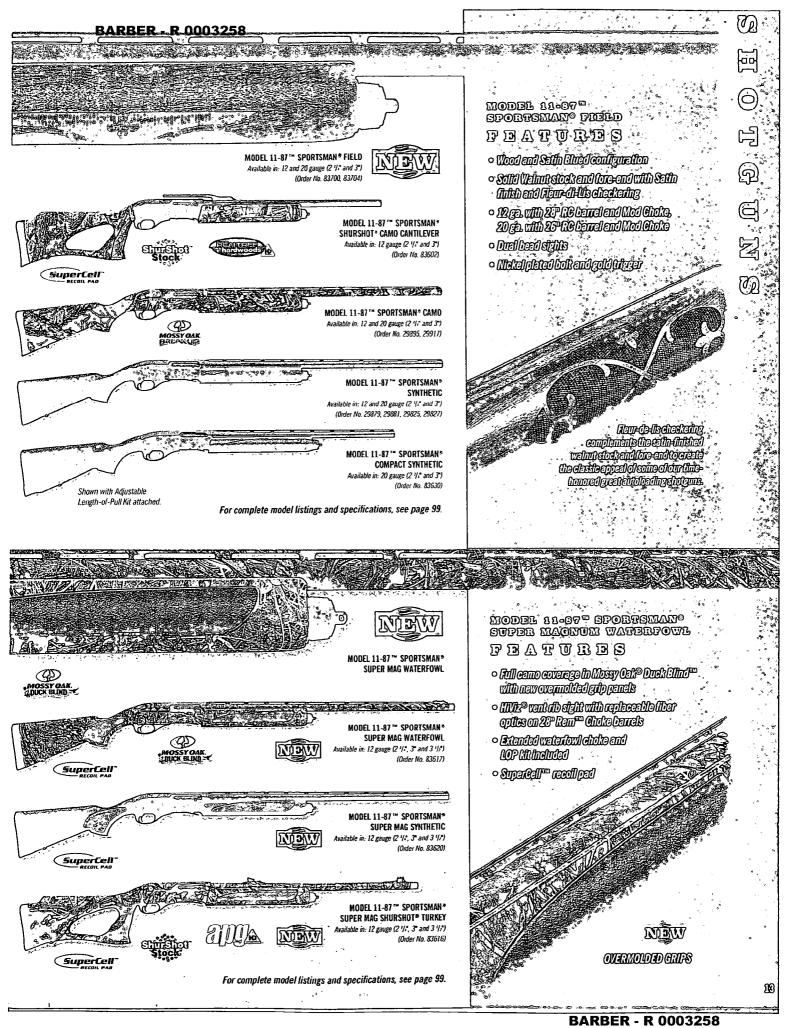

MODEL SP-10

SPECIAL PURPOSE



For serious extended-range shotgunners, the

Model SP- $10^{\tau M}$ is the ultimate in lethality – from duck blinds to the turkey woods and everywhere in between. Its 3 $\frac{1}{2}$ " 10-gauge payloads are significantly superior in patterning efficiency to 12-gauge 3 $\frac{1}{2}$ " guns, and even produce less felt recoil. It features a corrosion-resistant gas-operated action in which a small cylinder – not the entire piston – moves, helping dampen rearward force. Ultra-reliable and smooth, it's the only shotgun worthy of the ultimate bird-leveling payload.

Ducks and geese beware: The big gun is now available with the state-of-the-art wetlands concealment — new Mossy Oak® Duck Blind™ camouflage. The **Model SP-10™ Waterfowl** features a 26" Rem™ Choke barrel with a high-visibility fiber-optic sight system, and comes with a full set of three Briley extended specialized waterfowl choke tubes.

Our **Model SP-10 Thumbhole** camo will reach out and bust a tom in grand fashion. Its thumbhole stock, adjustable Williams® fiber-optic Fire Sights[™] and handy 23" barrel make it the ultimate gobbler stopper. It's also fully dressed in Mossy Oak® Obsession[™] camo.

The **Model SP-10 Magnum Camo** and **Model SP-10 Magnum Satin** come equipped with 26" or 30" vent-rib Rem™ Choke barrels with twin beads and interchangeable Full and Modified Rem™ Chokes. Choose from a Mossy Oak® Obsession or a traditional wood-stocked Satin finish.

TACTICAL


SHOTGUNS

ONE OF THE WORLD'S MOST TRUSTED & ACCOMPLISHED TACTICAL TEAMS.

Year after year, rugged ultra-dependable our legendary pump action Remington tactical shotguns are the #1 choice of law enforcement agencies across the country. They are and continually evolve as they're called to serve in new, increasingly demanding environments. Built on that's become the gold standard for high-risk applications, the new 12-gauge Model 870™ Express®

Tactical A-TACS® Camo is fully dressed in A-TACS digitized camo that absorbs surrounding light for ultimate concealment in urban environments. It has a quick-pointing 18 ½" barrel and includes our extended ported Tactical Rem™ Choke. SpeedFeed® IV pistol-grip stock optimizes control and dampens recoil with a SuperCell™ pad. For rapid target acquisition, it features a receiver-mounted, fully adjustable XS® Ghost Ring Sight rail with removable white bead front sight — Picatinny-style rail accepts optics and sight systems as well. This shotgun packs a full 7 rounds of 2 ¾" or 3" 12-gauge firepower with the factory-installed 2-shot extension. The Model 870™ Express® Tactical with XSR® Ghost Ring Sights has all the same great features, but with a standard black synthetic stock and fore-end. Both models have drilled and tapped receivers and sling swivel studs.

Our all-new **Model 887**TM **Nitro Magnum Tactical** pump shotgun features a receiver and barrel fully encased in our exclusive ArmorLokt TM coating for rustproof, tough-as-nails dependability. It has an 18 ¹/₂" barrel, factory-installed 2-shot magazine extension and an ergonomically molded black synthetic stock and fore-end. The famous **Model 1100** TM **Tactical** shotguns come with our standard grip stock or the SpeedFeed IV pistol-grip stocks and a choice of 18" or 22" barrels. They're chambered for 2 ³/₄" 12 gauge.

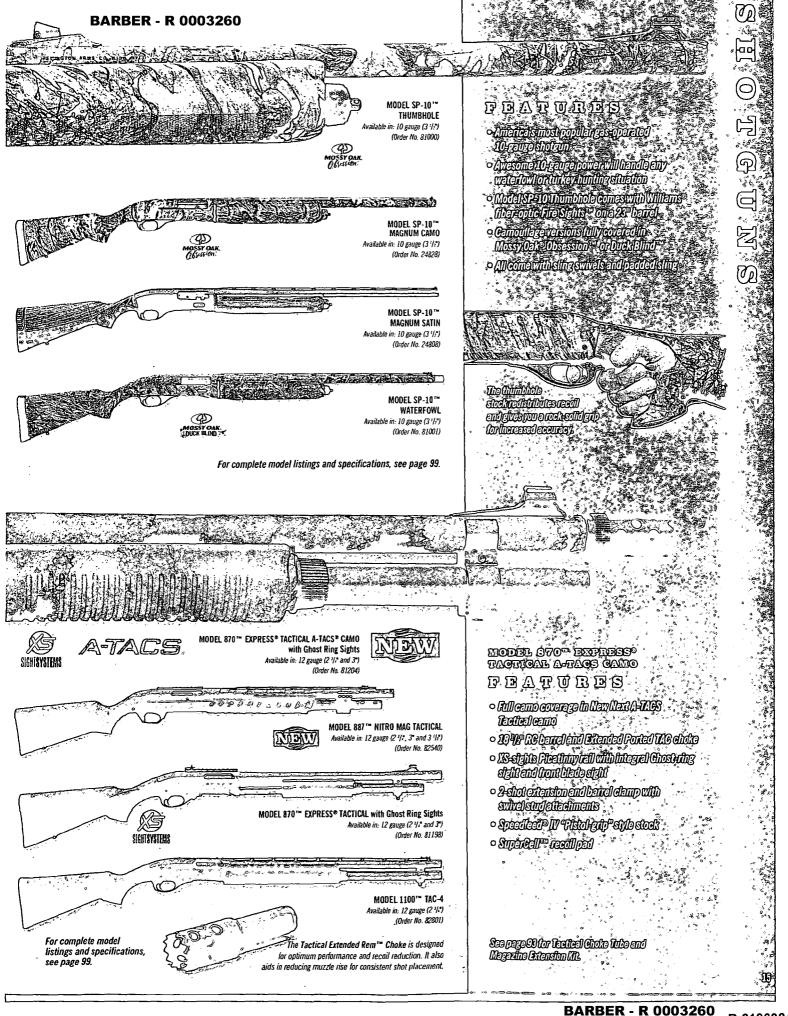



MODEL 870

SuperCell



NOT JUST TIMELESS AND DEPENDABLE THE BEST PUMP SHOTGUN EVER BUILT.

Sure as autumn arrives, the Model 870™ Wingmaster® rises to meet another day in the upland fields and woods of America. The Model 870 is so smooth and reliable that today - nearly 60 years after its introduction - it's still the standard by which all pump shotguns are measured. With a receiver machined from a solid billet of steel, it is the model of enduring strength. True to its original design, the pump glides with silky surety on two twin action bars for the utmost in positive chambering and ejection. These characteristics, along with its flawless balance and natural pointing qualities, have made the Model 870 the best-selling, most trusted shotgun of all time - of any action type, from any manufacturer. As the most aesthetically refined representative of our prestigious pump-action family, the Model 870 Wingmaster is a true American icon.

Available in 12 gauge 2 3/4" and 3", 20 and 28 gauge, and 410 bore, it has a custom-quality finish and handsome American walnut woodwork. The receiver and barrel are richly blued and highly polished for classic appeal. We also offer a broad selection of barrel and choke options to fit your application.

MODEL 870 **EXPRESS®**

SuperCell




AMERICA'S FAVORITE PUMP SHOTGUN.


Its solid, dependable action makes it America's favorite, and our continual upgrades make it the most advanced, well-rounded family of pump shotguns around. Along with continually evolving designs, this shotgun's superiority is a matter of rugged dependability, great pointing characteristics and versatility. In fact, the Model 870[™] has been the standard for slide-action performance for 60 years.

Our new Model 870 Express® Super Magnum Turkey/Waterfowl is just the dual-purpose bird slayer you've been waiting for. It cycles 2 ¾", 3" and 3 ½" 12-gauge rounds interchangeably and features full Mossy Oak® Bottomland™ camo coverage that blends into everything from the hardwoods to the flooded timber. A 26" barrel with HiViz® fiber-optics sights makes it ideal for virtually ever turkey hunting or waterfowl situation. Includes Wingmaster HD® Waterfowl and Turkey Extra Full Rem™ Chokes.

The 12-gauge (2 3/4" and 3") Model 870 Express Turkey Camo is the freezer-filling Express standard in a specialized design that'll wreck any tom's love life. It has a compact 21" barrel with a Turkey Extra Full Rem™ Choke and HiViz® fiber-optic sights. The stock is dressed to kill in Mossy Oak® Break-Up camo.

Our Model 870 Express ShurShot® Synthetic Turkey is optimized for big birds with the revolutionary ShurShot® synthetic pistol-grip stock that's contoured to accommodate both right- and left-handed shooters, while offering a steady-aiming platform that handles like lightning. A 21" barrel adds to its superb maneuverability. Mossy Oak® Obsession coverage on the stock and fore-end keeps you concealed. Includes Turkey Extra Full Rem Choke. With our Model 870 Express ShurShot Synthetic Fully Rifled Cantilever, the buck stops way out there. It features the incredible stability and comfort of our ambidextrous ShurShot stock and a 23" fully rifled barrel. Also available in 20 gauge.

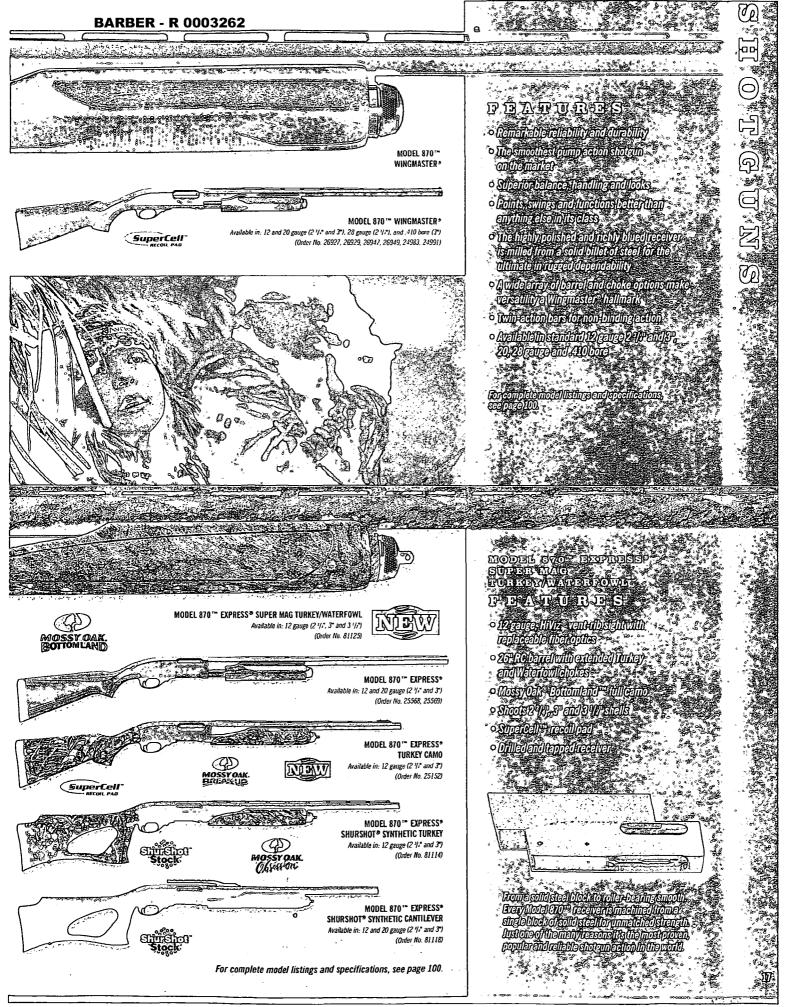

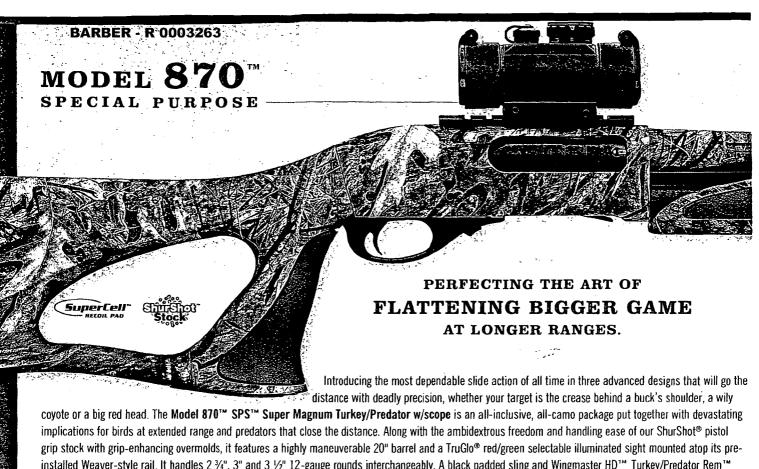

installed Weaver-style rail. It handles 2 ¾", 3" and 3 ½" 12-gauge rounds interchangeably. A black padded sling and Wingmaster HD™ Turkey/Predator Rem™ Choke are included.

Our 12-gauge Model 870™ SPS™ ShurShot® Synthetic Super Slug advances deer-leveling technology to farther reaches and smaller group sizes than ever before. The 25 1/2" extra-heavy, 1"-diameter barrel is pinned to the receiver to control vibration for rifle-like shot-to-shot consistency. For optimal slug flight, the barrel is a full 25 ½" long and features six Parabolic Ultragon™ rifling grooves with a 1-in-35" twist. You also get the rock-steady aim and awesome control of our ShurShot pistol-grip synthetic stock. Receiver is drilled and tapped with Weaver rail included. Our Model 870 SPS ShurShot Synthetic Turkey features our ShurShot synthetic pistol-grip stock and a compact 23" barrel. The fully adjustable TruGlo® fiber-optic sights and an extended Wingmaster HD Turkey Rem Choke maximize pattern placement.





No shotguns have won more titles or are better equipped for the high-volume regimen of today's elite shooters. Prepare to see record scores crushed at a rapid rate by our latest upgrade to the lineup — the new Model 1100™ Premier Sporting series. Featuring nickel receivers with intricate fine-line embellishments and gold accents, they're as aesthetically impressive as they are sweet to point and shoot. Gold triggers and a custom Premier Sporting hard case complete the package. The Premier is offered alongside our original Model 1100 Sporting shotguns. Both the Model 1100 Sporting and Sporting Premier series offer discriminating shooters 12, 20, 28 and 410 options with semi-fancy American walnut stocks and fore-ends, vent-rib Rem™ Choke barrels and four Briley™ extended chokes as standard equipment.

Our Model 1100 Competition is super-tuned for the competitive scene. By overboring the 30" barrel and lengthening the forcing cones, we improved shot-to-shot pattern consistency and made what was one of the softest-recoiling actions in the world even easier on your shoulder. The receiver and all internal parts feature a nickel-Teflon[®] finish for the smoothest, most reliable cycling ever. It's optimized for 2 3/4" target loads and light field loads. Its optional adjustable comb can be fine-tuned to your shooting preference, and the barrel has a 10mm target-style rib. All these, plus a host of other upgrades, transform an already legendary design into an unstoppable force at the range.

Generations of die-hard competitors have made our Model 1100 Classic Trap and famous Model 870™ Classic Trap venerable mainstays. From 16s to the very back line, they continue to shoot their way to the top of major events every year.







MODEL 870" SPS" SUPER MAGNUM TURKEY/PREDATOR W/SCOPE Available in: 12 gauge (2 '/i'', 3" and 3 '/:") (Order No. 81062)



UPER TUG

MODEL 870" SPS" SHURSHOT® SYNTHETIC SUPER SLUG Available in: 12 gauge

(2 1/1" and 3") (Order No. 82101)





SuperCell*



MODEL 870™ SPS™ SHURSHOT® SYNTHETIC TURKEY

Available in: 12 gauge (2 1/1, 3" and 3 1/2") (Order No. 81061)

See pages 92-93 for ShurShot® stocks and Wingmaster HD™ Choke Tubes.


For complete model listings and specifications, see page 101.

MODEL 870 "SPS" SUPER MAGNUM TURKEY/PREDATOR W/SCOPE

DIDAMINISTED S

- 12 gauge, 2 3/4", 3" and 3 1/2" chamber
- 20" barrel Turkey/Predator Extended Rem™ Chake included
- ShurShot® pistol grip stock with black overmolded grip panels
- TruGlo® 30mm Red/Green Dot Scope (Model TG8030DB) pre-mounted
- Full Mossy Oak® Obsession™ camo coverage
- Includes padded, quick-attach sling



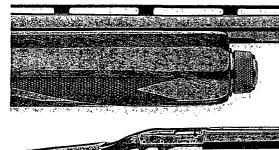

MODEL 1100** PREMIER SPORTING SERIES Available in: 12, 20, 28 gauge (2 1/4) and 410 bore (3**) (Order No. 82842, 82846, 82854, 82858)

MODEL 1100" SPORTING SERIES 12, 20, 28 gauge (2 1/4) and 410 bore (3") (Order No. 25315, 25399, 29583, 29549)



MODEL 1100™ COMPETITION Available in: 12 gauge (2 1/4) (Order No. 26919)



MODEL 1100™ CLASSIC TRAP Available in: 12 gauge (2 1/4) (Order No. 25333)




MODEL 870™ CLASSIC TRAP Available in: 12 gauge (2 1/3) (Order No. 24857)

For complete model listings and specifications, see page 101.

MODEL 1100 PREMIER SPORTING SERIES FEATURES

- · Nickel-plated receivers with gold inlay
- New fine-line embellishments on receivers
- Gold triggers and gold embellishments on receivers
- Semi-fancy, solid American walnut stocks and fore-ends
- · All models will come packaged in a custom Premier Sporting case
- · Twin target-style bead sights
- · High grade walnut stocks

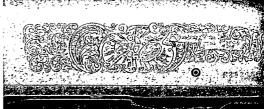


Intricately embellished nickel receiver of Model 1100" Premier Sporting models.

I AM THE LEGENDARY MODEL 700."

I AM THE STANDARD

BY WHICH ALL OTHERS ARE MEASURED AND CONTINUALLY FALL SHORT.

When the Model 700™ was introduced more than 45 years ago, it was ahead of its time, and it's even more so today. With enhancements such as our X-Mark Pro® Adjustable Trigger, the TriNyte® Corrosion Control System and the continual addition of hot new calibers, barrel contours and stock designs; the strongest and most accurate line of factory-built rifles in the world, is now also the most technologically advanced and versatile. We're proud of the Model 700's heritage — the superior out-of-the-box accuracy, the rock-solid dependability and the generation it's linked to. But we're even more excited about where it's headed.

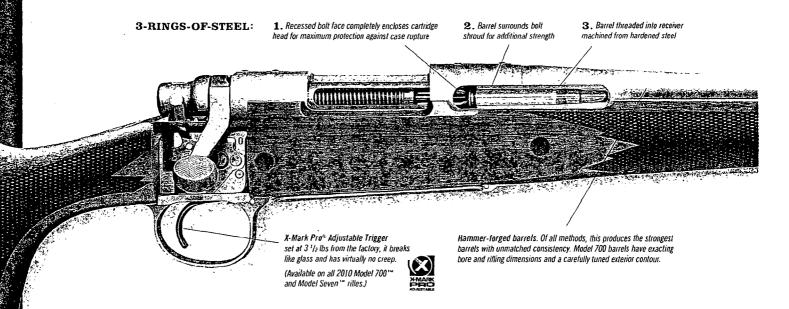

WHAT LEGENDS ARE MADE OF.

A breakthrough design in every sense, the Model 700^{TM} emerged in 1962 as the first major advancement in the bolt-action rifle category since the 1890s. It was a long-awaited answer to the desires and demands of the hunting and shooting public — a supremely accurate rifle with sleek lines that was built to handle the higher pressures of the latest cartridge innovations. Since then, it has established itself as the most accurate and most popular factory-built rifle in American firearms history.

While there are many claims about accuracy in hunting rifles, the Model 700's heritage speaks louder than any words. Generations of hunters and shooters agree no other production rifle shoots tighter groups with so many bullets and loadings — right out of the box. Its inherent ability to place shots in a tiny cluster is what makes it the envy of every other riflemaker. But much more than that, it is the #1 bolt-action platform of choice for military and law-enforcement sniper units, and custom gunmakers worldwide. It has won more NRA Hunting Rifle Championships than any other firearm, and it's taken big game on every continent in the world.


BARBER - R 0003266

THORS SECURITY SECURITY

The Model 700 the engineered with a cylindrical receiver, instead of the traditional flat-bottom type. Machined from solid-steal bar stock, this design provides enhanced digitily and strength while forming a more consistent bedding area for the action in the stock. This regulates branches and also helps bring the barried to rest in the same place shot after shot. All of which translates to builts hitting the paper with near identical point of impact, shot after shot.

TO MINISTEONIE PUT .

With the dramatic increase in precision of our manufacturing processes and the introduction of our X-Mark Pro® Vityger system, the exceptionally estap Model 700 trigger assembly gets better every year. And it's been the best in the industry since its creation. Our ultra-fast lock time of 25-80 milliseconds is the best in the industry today, greatly minimizing the circles of shooter movement for improved on-game and on-target results. The X-Mark Pro Adjustable. An externally adjustable trigger, with 2 lbs. range of adjustment, set at 3 % lbs. pull.

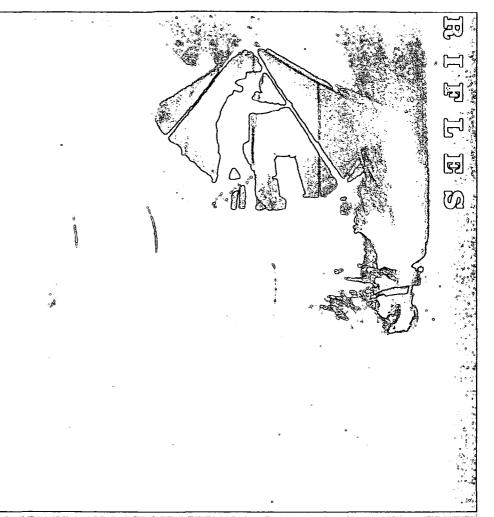

,

S-THINGS-OD-STUBL.


The strongest action in the world. Without question, the Remington Model 700 offic is the strongest action ever conceived. Glose the bolt and your cartifige is locked in a triple-reminered walls of steel. The action's unique destign also fully supports your cartifige, exceiling a flighter, more precise fit in the chamber and more exact affigment with the bore.

THIS LINGSAND CONTUINOUS.

The Model 700 has been a standout since its birroduction—at the range, in the field and on the reach—but its guis are what makes it the begandary lixture it is today. All its superior design elements come together with unmatched precision in our nation's longest-running manufacturing facility. Each ville is then sent out into your hands where the next great chapter is written.



BARBER - R 0003266

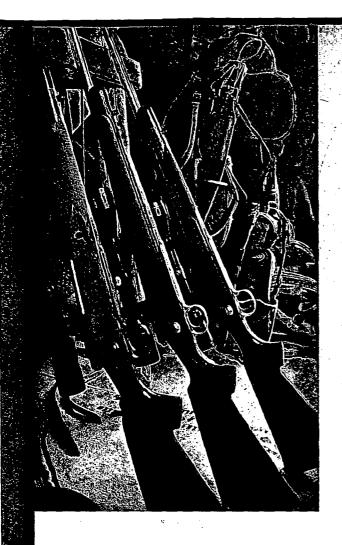

LEADING THE WAY ANYWHERE, ANYTIME.


When you build the world's best production hunting rifle, demand is high and the places it's called to serve are as diverse as its owners. For this reason, the Model 700™ family has evolved into the most complete and highly adapted rifle line available in the world today. There are stainless, rich blued and matte finishes to choose from with a variety of stock options, including camo and colored synthetic. With options from the 17 Remington® Fireball all the way up to the devastating 458 Win Mag, the range of calibers is unrivaled in the industry. Our nail-tough TriNyte® Corrosion Control System is the ultimate weapon against extreme conditions. And the revolutionary X-Mark Pro® Trigger is now externally adjustable for a clean break at the preferred weight of all shooters.

MODEL 700[™] XCR II



The most durable hunting rifle ever built. Featuring our TriNyte® Corrosion Control System, the introduction of the Model 700™ XCR in 2005 stretched the previous durability limits of stainless steel. And for 2010, the **Model 700 XCR II** is redefining its looks as well. The stainless steel barrel and receiver are now coated with matte black TriNyte for a more classic look with less glare for superior stealth. It's every bit as impervious to extreme conditions, with the same proven track record in accelerated saltwater testing that opened the world's eyes to the power of our patented technology. Simply put, TriNyte delivers scratch and corrosion resistance dramatically superior to standard stainless steel as well any protective coating by any other manufacturer.

The Model 700 XCR II is also optimized for sure handling in adverse climates. Its feature-laden olive drab green synthetic stock is a technological marvel that looks and feels the part with patented Hogue rubber overmolding featured at the grip and fore-end areas. These revolutionary enhancements give you a positive grip in the slickest environments. And shots are made infinitely more comfortable with our SuperCell™ recoil pad — the most effective on the market today. Our X-Mark Pro® Trigger System gives you a level of crispness and shot control once only available through high-dollar customization. Choose from a wide range of hard-hitting big-game cartridges, all delivered with the tack-driving accuracy only a legendary Model 700 barreled action could produce.

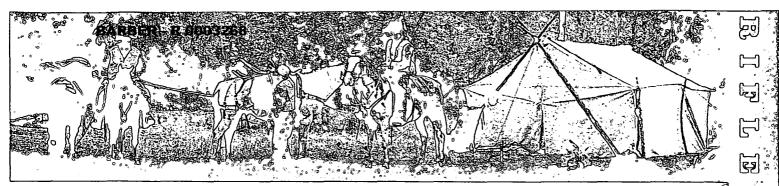

TRINYTE® CORROSION CONTROL

SYSTEM. (Patent Pending). Consisting of 416 Stainless Steel, electroless nickel and proprietary PVD, this armor-tough, multi-layer



As proved in a rigorous

independent laboratory, our

armor-tough, multi-layer

TriNyte® coating forms a virtually impenetrable barrier

to corrosion. It's the most

effective on the planet, in fact.

saltwater test by an

coating is the world's most effective barrier against rust and abrasion for firearms, yet is only a fraction of a human hair in thickness. The only thing you'll notice is the near invincibility.

Remington® with Trillyte®

Competition (stainless steel

TRIGGER IS NOW EXTERNALLY

ADJUSTABLE. It breaks like glass, has virtually zero creep and offers a level of shot control unmatched by any factory trigger today.




ADJUSTABLE

The X-Mark Pro® Trigger delivers true custom-grade performance in a production trigger, and for 2010 is user-adjustable with readily available tools. Not that you'll feel the need. This year's version will also come from the factory with a lighter average pull weight — $3\,^{1}\!/\!2$ with 2 lbs. range of adjustment. While others use gadgets and add-ons to hide inconsistencies, Remington eliminates them

with state-of-the-art manufacturing techniques and the tightest possible production tolerances. A mirror-like finish on its components enhances corrosion resistance and adds to its breaks-like-glass feel. The externally Adjustable X-Mark Pro Trigger is now standard equipment on all cataloged Model 700™ and Model Seven™ rifles.

For more information, visit www.remington.com

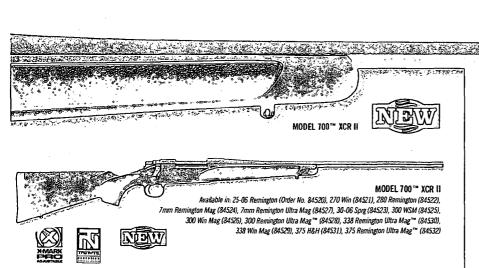


E E A T V B E S

- · Propulating Vallyte® Courosion Control System provides unpresedented corrosion resistance
- Stock Ceatures patented public rovermolding technology from Llogue® on grip and fore-end erees
- · Rectures a 24" standard and unegroun, 25" Rem Ultro Meg, and 24" 375 USD/ 375 Rem Ultro Meg with offlost juts
- odregemental political legal la
- · Dilled and tapped for scope mounts

For complete model (Isthese and specifications, see page 102.

9

O)

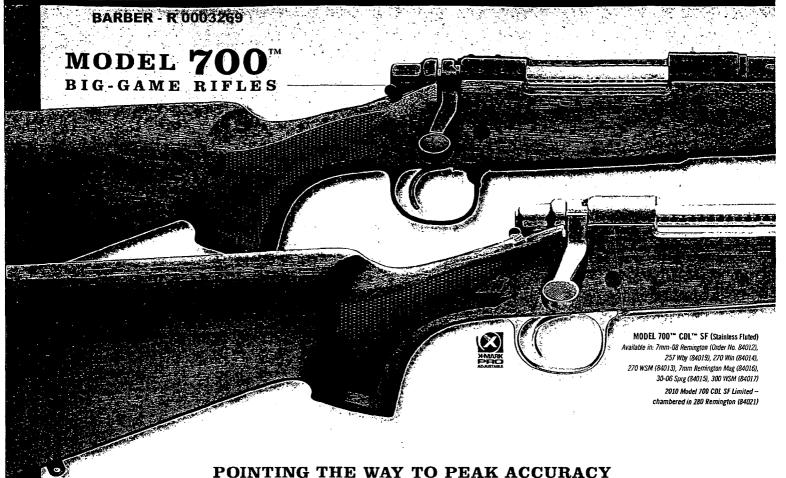

& PERFORMANCE FOR

NEARLY 50 YEARS.

The Remington® Model 700,™ a rifle with no equal, and a superior performer in every way. Its accuracy and dependability have become the standard by which all other centerfire rifles are measured and continually fall short. Still the most accurate out-of-the-box rifle made, the Model 700 brings its famous action and renowned consistency to this diverse family of guns. All are now equipped with our externally adjustable X-Mark Pro® trigger system.

Featuring our armor-tough new black matte TriNyte® Corrosion Control System on its stainless steel barreled action, the Model 700 XCR II is still most durable rifle ever built, and now more stealthy than ever. Our RMEF Model 700 XCR II is our 10th Limited Edition Rocky Mountain Elk Foundation rifle. It has a stock dressed in Realtree® APTM HDTM camo and is chambered for the biggest, baddest, hardest-hitting 30 caliber in the woods — the 300 Remington Ultra Magnum. Also new in the family is the Model 700 XCR II Camo Bone Collector Edition, emblazoned with Michael Waddell's Bone Collector logo and built to master the most extreme conditions.

The Model 700 CDL™ is available with a distinctive high-polish blued finish and our ever-popular satin finish. Our line of Model 700 CDL SF rifles, offered in a wide range of chamberings, has become extremely popular. This year's Model 700 CDL SF Limited Edition comes in the deadly 280 Remington. Preferred for high-country hunts, the Model 700 Mountain Rifle continues to be a favorite thanks to its sleek lines, classic looks and lightweight carrying ease.




TriNvte® Corrosion Control System (Patent pending). Consisting of electroless nickel and proprietary PVD, this armor-tough, multilayer coating is the world's most effective barrier against rust and abrasion for firearms,

yet is only a fraction of a human hair in thickness. The only thing you'll notice is the near invincibility. Available in a variety of finish colors.





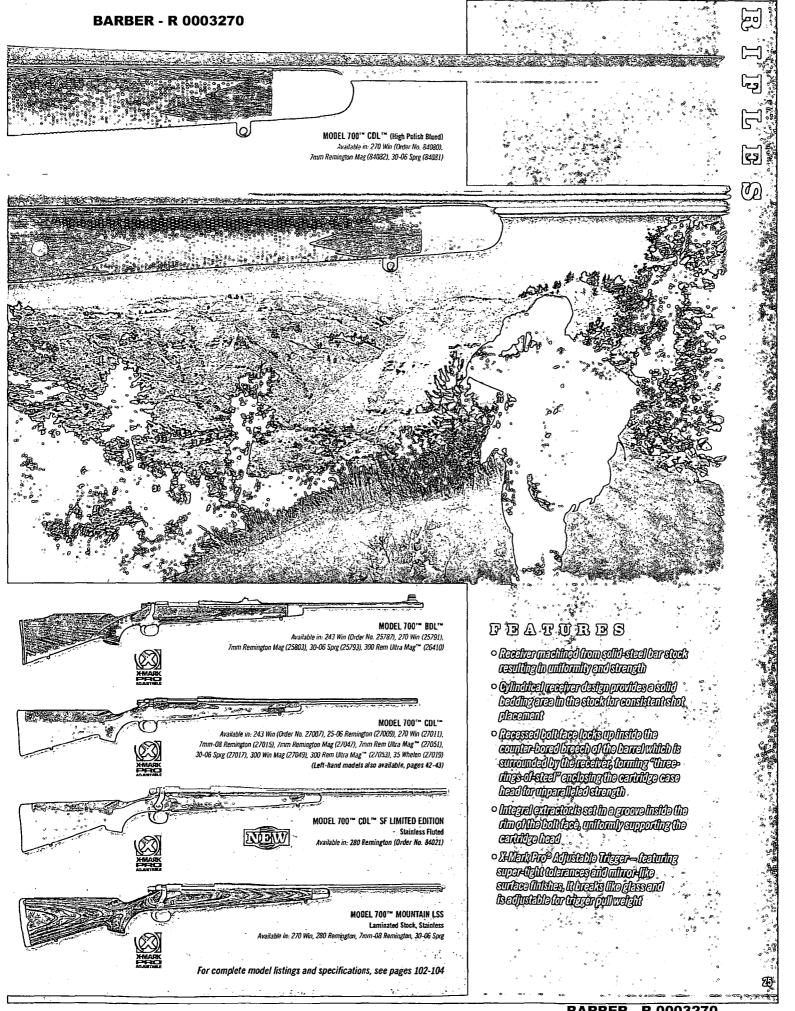




The Model 700TM SPSTM (Special Purpose Synthetic) puts legendary Model 700 accuracy and reliability within reach of most avid enthusiasts. It's a no-frills, tack-driving game-dropping machine built with everything you love about the Model 700, including a hammer-forged barrel, externally adjustable X-Mark Pro® trigger, SuperCellTM recoil pad and, of course, hair-splitting precision, straight out of the box. It features an ultra-rugged, ergonomically designed synthetic stock for superior weather resistance and handling. Standard finish is a matte blue for toughness and concealment. The Model 700 SPS Stainless has a stainless steel barrel and receiver for added corrosion resistance. Both are chambered in a wide variety of popular calibers for hunters and shooters of all preferences. With the Model 700 SPS "Buckmasters" Edition, you'll find all the standard features of our popular Model 700 SPS with the addition of a specially engraved floorplate featuring the Buckmasters logo and a Realtree® Hardwoods® HDTM SPS camo stock. Chambered in six popular calibers.


Our **Model 700 SPS Tactical** is a highly maneuverable member of the family, built for tack driving accuracy with a 20" heavy-contour tactical-style barrel and dual-point pillar bedding in its black synthetic stock. Hogue overmoldings on the stock facilitate sure handling, and it has a semi-beavertail fore-end for added stability off a rest. Chamberings include 223 Remington and 308 Win.



When our patented triangular barrel contour made its debut in varmint/target weight on the Model 700™ VTR, it was deemed one of the most innovative barrel designs conceived. Meet its big-game evolution, the Model 700™ XHR (Xtreme Hunting Rifle), firmly seated atop the food chain with the renowned accuracy and supreme strength of our Model 700 action as its foundation. Pick it up, and the first thing you'll notice is the impeccable balance. With a magnum contour barrel crafted in our patent-pending triangular formation, the rifle seems to point itself. This barrel design allows us to shave weight while maintaining the rigidity of a traditional round barrel. And the weight that remains is in all the right places. Plus, its surface area facilitates rapid cooling for more accurate follow-up shots. Not that you'll need them. Like all new Model 700s, the XHR features our new externally adjustable X-Mark Pro® trigger system that comes set from the factory with 3 ½ lbs. pull, and can be easily fine-tuned to your preference — by you.

Its cutting-edge performance and looks don't stop at the barrel. The Realtree® AP™ HD™ camo synthetic stock is equipped with patented Hogue overmolding accents at the grip and fore-end areas for comfort and a firm hold in adverse conditions. Then we added the world's most effective recoil pad — SuperCell — that reduces rifle kick to a gentle push. The barrel and action are finished in durable satin black oxide. A hinged floorplate magazine and jeweled bolt round out the impressive list of features. Gain the ultimate lethal advantage with the Model 700 XHR.

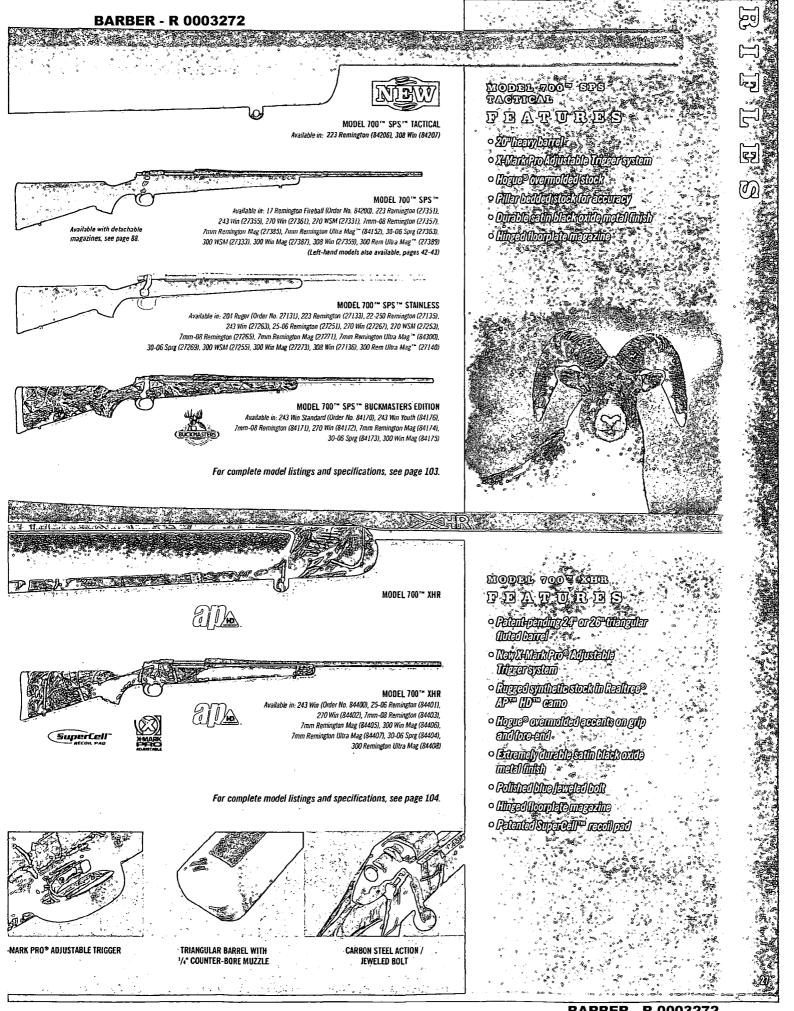

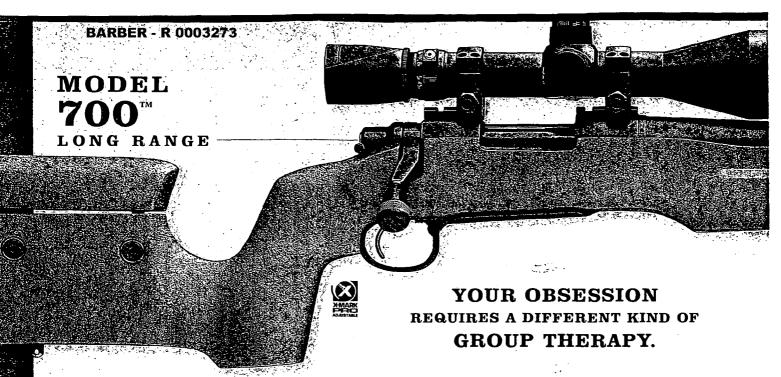

For all those cursed with perfectionism, we'd like to present a permanent fix. The tack-driving **Model 700[™] Target Tactical** rifle is a confluence of family traits borrowed from our world-class Model 700 tactical, target and varmint rifles that come together like five shots in one hole. With its triangular VTR barrel configuration and Bell & Carlson Medalist Varmint/Tactical stock, its looks are nearly as remarkable as its ability to print tiny groups. The 26[™] barrel has a ¼[™] counterbored muzzle to protect the rifling and stabilize bullet flight. It is also 5-R hammer-forged with tactical/target-style rifling like that used in our famous M-24 military rifles for the utmost in shot-to-shot consistency. Our externally adjustable X-Mark Pro[®] trigger adds to the impeccable control. And its stock has a fully adjustable comb and length of pull with a tapered fore-end for minute elevation adjustments on a rest. All of its accuracy-enhancing features are built on the legendary Model 700 foundation.

Although it has all the renowned design aspects and industry-leading out-of-the-box accuracy of a Remington varmint rifle, the **Model 700'** Sendero SF II is chambered for long-action magnum cartridges for extended-range, big-game performance. It's equipped with a high performance composite stock reinforced with aramid fibers, featuring a contoured beavertail fore-end with ambidextrous finger grooves and palm swell. A full-length aluminum bedding block creates an accuracy-enhancing platform for its barreled action. For rapid cooling and reduced weight, its 26" heavy contour barrel features six longitudinal flutes.

For more tactical solutions, the Model 700 XCR Tactical Long Range Rifle and the Model 700 XCR Compact Tactical Rifle both feature diamond-hard TriNyte® PVD coating and the externally adjustable 40-X trigger.



"Why yes, that's really five shots." Tell your friends it's genetics. Fact is, when it comes to precision, there's no finer pedigree in the industry than Remington[®] varmint rifles. With our **Model 700[™] SPS[™] Varmint**, staking claim to our legendary accuracy is a more attainable feat than ever.

The Model 700 SPS Varmint is capable of punching tiny groups straight out of the box because it's built on the Model 700 action, the most solid, dependable and trusted in existence.

Its 26" heavy contour barrel is perfectly matched to its high-velocity caliber offerings, including the hot 17 Remington® Fireball. Plus, the ergonomically designed black synthetic stock has a vented beavertail fore-end for enhanced grip, reduced weight and better heat dissipation. And, sharp predator eyes won't spot the tough, non-reflective matte blued finish on the barrel and receiver. Other standard features include a hinged floorplate magazine, sling swivel studs, and a drilled and tapped receiver. The Model 700 SPS Varmint is destined to leave a lasting impression on any varmint that crosses its line of sight.

BARBER - R 0003274

.S-R Factical Rilling 1 in 11 1/4"

MODEL 700™ TARGET TACTICAL

(Scape, base and rings not included)



MODEL 700™ TARGET TACTICAL

Available in: 308 Win (Order No. 84456)



300 Win Mag (84462), 308 Win (84461)



MODEL 700™ SENDERO SF (I

Available in: 264 Win Mag (Order No. 27307), 7mm Remington Mag (27311), m Rem Ultra Mag (27315), 300 Win Mag (27313), 300 Rem Ultra Mag (27318)


For complete model listings and specifications, see pages 104-105

MODEL 700 TABGET TAGTICAL PPATORDS

وي

(D)

- o 25° VIII (Idangular barrel profile) with 4 promiter bare
- · Serianner logge leelled lenger dilling Casadon M-20 dilling)
- Call & Garlson Medallst Vannihi (Farellee) stock: withedjustable combend langth of pull
- ं विद्यासिकी होत्री निविधितिकी
- oddrodlberdllesell.
- · X-Mark Pro® Adjustable Original

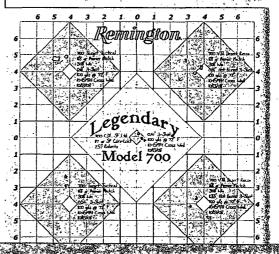

Available in: 17 Remington Fireball (Order No. 84213), 204 Ruger (84214),


MODEL 700™ SPS™ VARMINT

mington (84216), 223 Remington (84215), 243 Win (84217), 308 Win (84218)


MODEL 700™ SPS™ VARMINT (Left-Hand) Available in: 17 Remington Fireball (Order No. 84225), 22-250 Remington (84226) 223 Remington (84227), 243 Win (84228), 308 Win (84229)

FEATURES

- · Navly designed SPS Varmint stock with vented beavertell tore-end
- · Dual front elling swivel stude finefuled (one rear)
- · 25" heavy-confour barrel (0.220" muzzle O.D.)
- ∘ Legendary Model 700 ^{im} action
- · Different temperatures of the company of the comp

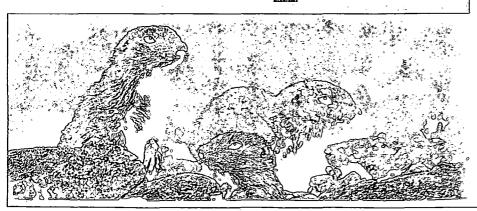

For complete model listings and specifications, see page 104.

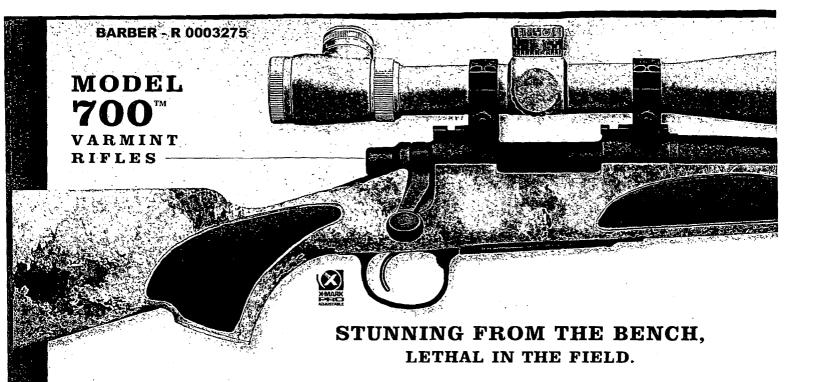

Built on the famous Model 700™ cylindrical action, Remington® Varmint rifles are the most accurate factory-built models we produce. You'll be stunned by the degree of precision you get straight out of the box. The varmints won't be so lucky.

On the new Model 700TM VTRTM A-TACS,® our revolutionary patent-pending triangular barrel design and one of the most advanced camo patterns ever devised converge to make a massive impact on varmint populations and shatter the previous standards for varmint-rifle performance. The 22" triangular barrel weighs less than traditional heavy barrels yet delivers the same degree of heat dissipation and rigidity. An integral muzzle brake with top-side venting reduces muzzle rise so you can keep your eye on the target. And mark our words, this rifle is a ghost in virtually any terrain. A Remington exclusive, the A-TACS camo pattern on its stock is formulated with a digitized pattern that absorbs surrounding light for chameleon-like versatility. Vents in the fore-end quicken barrel cooling. Like all new Model 700 rifles, it features the externally adjustable X-Mark Pro® Trigger system. Chamberings for this year are 223 Rem and 308 Win. Dual front swivel studs facilitate bipod and sling together. The original Model 700 VTR has identical features with an OD green synthetic stock and six available chamberings from the hot 204 Ruger to 308 Win.

If you value tiny groups and the big-time weather resistance of stainless steel and synthetic, consider our **Model 700 Varmint Stainless Fluted (SF)** an instant treasure. Its 26" heavy-contour barrel is fluted for weight reduction while maintaining rigidity and rapid cooling. We also added a concave dish crown that protects the rifling lands and promotes tack-driving bullet flight. The rugged synthetic stock has overmolded panels for a sure grip and a vented beavertail fore-end that keeps air flowing around the barrel.

Our **Model 700 VL SS** is equipped with a laminated thumbhole stock for enhanced stability, comfort and durability. Vents in its semi-beaver tail fore-end facilitate rapid cooling of the heavy-contour stainless barrel. For those who prefer a more traditional varmint rifle, there's the time-tested Model 700 VLS with its classic laminated stock and satin-blued barrel.

There's also the **Model 700 VS SF II**, a finely tuned machine with full-length aluminum bedding block that creates an ultra-stable, accuracy-enhancing platform. Further improving its shot-to-shot consistency is a 26" heavy contour barrel that's fluted for rapid cooling. Its high performance composite stock is reinforced with aramid fibers and features a contoured beavertail fore-end, ambidextrous finger grooves and a palm swell.







MODEL 700™ VTR™ A-TACS® Available in: 223 Remineton (Order No. 84352), 308 Win (84354)

(Scope, base and rings not included)



ATACIS

MODEL 700™ VARMINT SF

Available in: 17 Remington Fireball (Order No. 84340), 204 Ruger (84341), 22-250 Remington (84342), 223 Remington (84343), 220 Swift (84344), 308 Win (84345)



MODEL 700" VTR"

Available in: 17 Remington Fireball (Order No. 84367), 204 Ruger (84369), 22-250 Remington (84373) 223 Remington (84370), 243 Win (84368), 308 Win (84371)




VTR INTEGRAL MUZZLE BRAKE



OVERMOLDED GRIPS ON STOCK



VTR TRIANGULAR BARREL CONTOUR



MODEL 700™ VL SS™ THUMBHOLE

Available in: 204 Ruger (Order No. 27443), 223 Remington (27445), 22-250 Remington (27447)



MODEL 700™ VLS™ Varmint Laminated Stock

railable in: 204 Ruger (Order No. 27467), 223 Remington (27491),

22-250 Remington (27489), 243 Win (27495), 308 Win (27499)



MODEL 700™ VS SF™ II

Varmint Synthetic, Stainless Fluted

Available in: 17 Remington Fireball (Order No. 84352), 204 Ruger (26333), 220 Swift (26339), 223 Remington (26337), 22-250 Remington (26335)

For complete model listings and specifications, see pages 104-105.

MODEL 700 VARMINT FEATURES

All features of the legendary Model 700 plus:

- 26" heavy contour barrel (0.820" Muzzle O.D.) most models, for the ultimate in long-range accuracy (22" barrel on VTR models)
- · Concave target-style barrel crown
- · Either composite or laminate stocks
- · Stock features full-length aluminum bedding block for enhanced stability and shot-to-shot consistency (VS SF™ II only)
- Six longitudinal flutes reduce barrel weight and increase heat dissipation (Varmint SF & VS SF II)
- Tactical style dual front swivel stud system for convenient mounting of bi-pod and sling (VTR, Varmint SF & VS SF II)





THE SHORT ACTION WITH A MASSIVE GAME-DROPPING REACTION.

The first time you carry it in the field, you'll understand why it's considered one of the finest dense-cover rifles in America. Lightning-fast in close quarters and superbly accurate for the long shot, the compact, short-action Model SevenTM has been a knock-down, drag-out leader in the woods since it was introduced in 1983. Its receiver and action design are based on the Model 700^{TM} and deliver the highest level of out-of-the-box accuracy, strength and reliability in a platform that's 2 $\frac{3}{8}$ " shorter overall and weighs just 6 $\frac{1}{2}$ lbs. (standard calibers). When you match this handy design with some of the hardest-hitting calibers known to big game — the short action magnum cartridges — you need a longer barrel. Thus, Model Seven rifles in these chamberings have a 22" magnum contour barrel.

The **Model Seven™ CDL** is the quintessential short-action hunting rifle featuring a classically styled American walnut CDL stock, a clean satin-finished barrel (except 350 Remington® Mag; 20" magnum contour barrel with sights) and our SuperCell™ recoil pad. It's chambered in a broad range of calibers from 17 Remington® Fireball up to 270WSM and 300WSM for everything from varmints to big game.

The **Model SevenTM Predator** is every predator and varmint's worst nightmare. It weighs in at 7 lbs. and is dressed butt to bore in Mossy Oak® BrushTM camo for the ultimate in mobility and concealment. The Predator's fluted, magnum-contour 22" barrel promotes awesome long-shot repeatability and cools quickly when the action heats up. Speaking of hot — the lineup of calibers, including our

17 Remington Fireball at 4,000 fps, is sure to light 'em up.


ZOTM

MODEL 770

READY TO HUNT,
RIGHT OUT OF THE BOX.

Simply the finest, most complete embodiment of out-of-the-box accuracy and hunting performance in the industry today. Perfect for any hunter looking to fast-forward through the process of selecting a scope and components, the Model 770th comes with a pre-mounted and boresighted 3-9x40mm riflescope. But most importantly, it's built to our rigorous standards for accuracy and reliability. Just choose your ammo and you're ready to shoot.

The rock-solid action is fitted with a precision-crafted button-rifled barrel to produce the tight groups and game-dropping results you expect from every Remington firearm. Its ergonomically contoured synthetic stock has a raised cheekpiece for rapid scope-to-eye alignment, plus grip texture in all the right places to maximize handling ease in the field. Offerings include the **Model 770TM Stainless Camo** with a stainless steel barrel and receiver, and the added concealment of a Realtree® APTM HDTM stock; or the standard **Model 770** with matte blued metalwork and a black synthetic stock. Chambered in a wide range of long and short-action calibers, the Model 770 is the quickest way to experience legendary Remington bolt-action performance, and a full freezer.



MODEL SEVEN™ CDL



MODEL SEVEN ** CDL Available in: 17 Remington Fireball (Order No. 85900), 243 Win (26417), 260 Remington (26419), 270 WSM (26361), 7mm-03 Remington (26421), 300 WSM (26367), 308 Win (26423), 350 Remington Magnum (26369)



MODEL SEVEN™ PREDATOR

Available in: 17 Remington Fireball (85950), 204 Ruger (85951), 22-250 Remington (85953), 223 Remington (85952), 243 Win (85954)

For complete model listings and specifications, see page 106.

PBATTRE


ecoupling applications are constituted in the contraction of the contr


<u></u>

وجما

وي

- ्र एकाँके दुर्वासी सामग्रीकार हिन्दी हैं जिल्ला है जिल्ला है
- · Ceiting Upsemples adaystronghes the Model (Coetton: "Uncoeting volsteel" with the bolk teco-band and tecetiver one sting the ceitiff sheet
- ् भूगीतिरीर्वेद्याद्वित्वाद्वित्वाद्वित्वाद्वित्वाद्वित्वाद्वित्वाद्वित्वाद्वित्वाद्वित्वाद्वित्वाद्वित्वाद्वी जन्म
- o Avellettle in Winchester Shoot Megrum eaffices for the utiline to in compact magrum performance

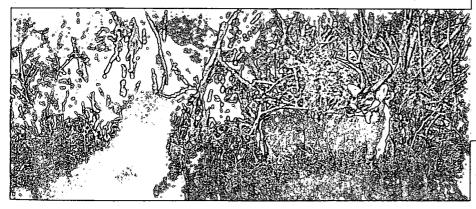

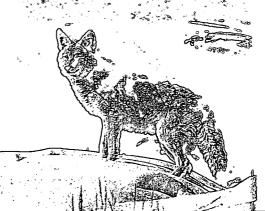


MODEL 770 " STAINLESS CAMO Available in: 270 Win (Order No. 85655), 7mm Remington Mag (85657), 30-06 Sprg (85656), 300 Win Mag (8563)

200



MODEL 770^{1**}
Available in: 243 Win (Order No. 85630), 270 Win (85632),
7mm-08 Remington (85631), 7mm Remington Mag (85635),
30-06 Sprg (85633), 300 Win Mag (85636), 308 Win (85634)



For complete model listings and specifications, see pages 106.


PATURES

- · Dadroffellres CP III companielle socidest product sing substitus
- · Protonymounted and bone algued 8-0x20 mil scope
- · Smooth canning (O) degree bold
- ે Date Chief (પ્રોકૃતિ) હતી કર્યા કરવા છે. જસ્ટીને પ્રોકૃત લાં પાણ કર્યા કરવા છે. પાણ કર્યા છે. પાણ કર્યા છે. પાણ કર્યા હતા છે. પાણ કર્યા હતા છે. જે જો મ
- o Ultrafecturete G-grove, bullopdilled, ordnene-grede steel barrel (22° steptarde allbers and 22° megnum cellbers.







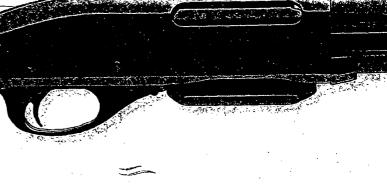

BECAUSE SOMETIMES

YOU NEED A QUICK ONE-TWO


THREE-FOUR-FIVE ...

Maybe you flinched? Or the animal turned at the last split-second? Either way, our Model 7600™ centerfire rifle will get you back on target — instantly. Because not only are they built to deliver legendary Remington® first-shot accuracy, they're also designed for ultra-fast follow-up shots — without ever having to unshoulder your rifle.

Our ever-popular **Model 7600** is one of the most proven deerslayers in the woods. It has a 22" barrel, a four-round magazine and is available in wood and durable synthetic models. All of our centerfire pumps feature quick-release magazines and Remington's rotary bolt lock-up design for exceptional strength, safety and reliability.

MODEL 750[™]


AUTOLOADING RIFLES





In the field, patience is a virtue, but when it's time to take action, sometimes you need the speed of a Model 750.[™] Its improved gas system provides faster, smoother cycling. And its balanced low-profile design handles like lightning. Rapid follow-ups are its specialty, but famed Remington one-shot accuracy comes standard.

The **Model 750 [™] Woodsmaster[™]** features a sleek American walnut stock and fore-end with machine-cut checkering. Felt recoil is diminished by its ultra-efficient gas operated action.


For added durability in all conditions, the **Model 750 Synthetic** features all the Model 750 improvements only with a synthetic stock and fore-end. Go ahead, throw that narrow window wide open with the quickest gun in the woods, the Model 750.

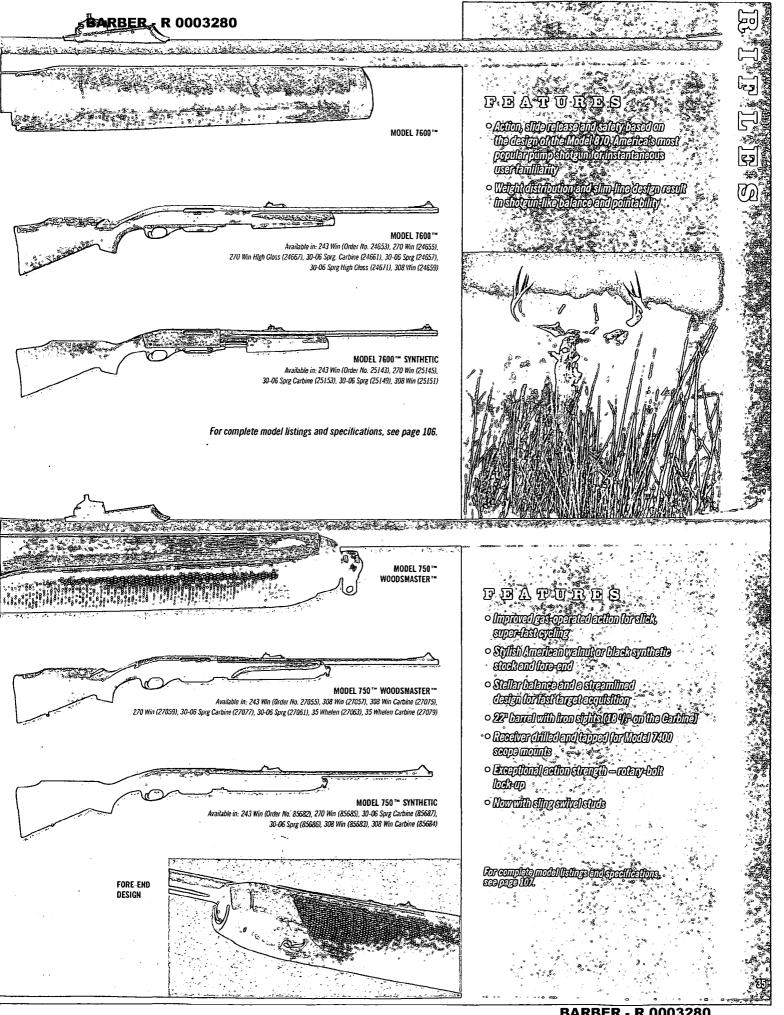


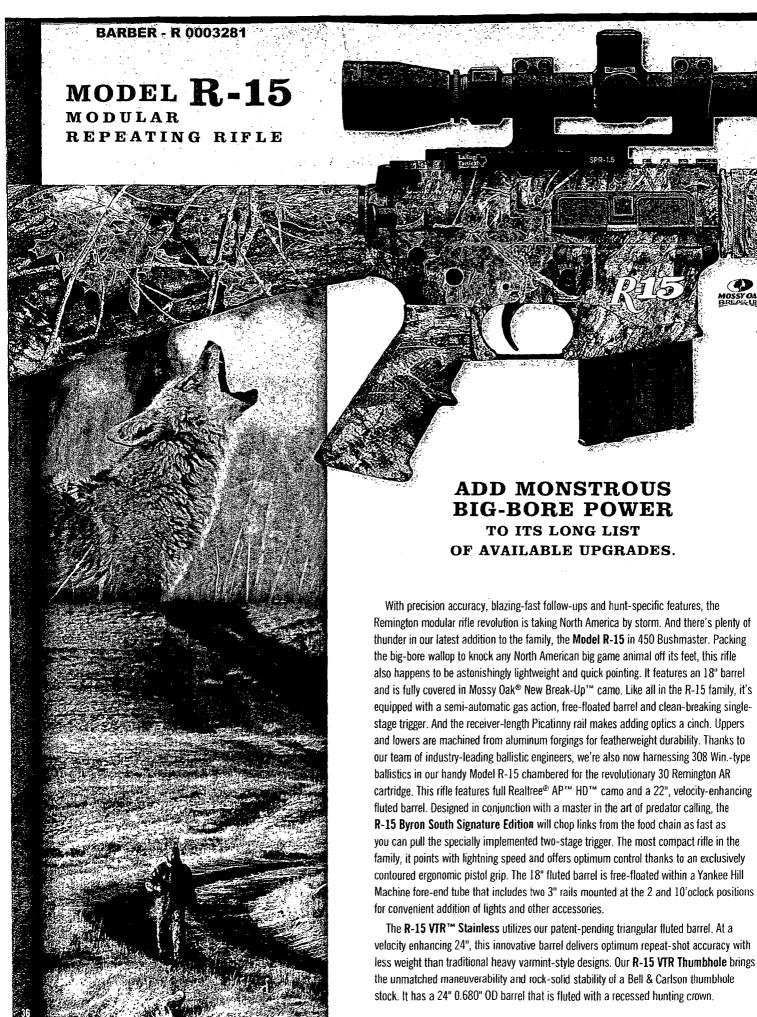

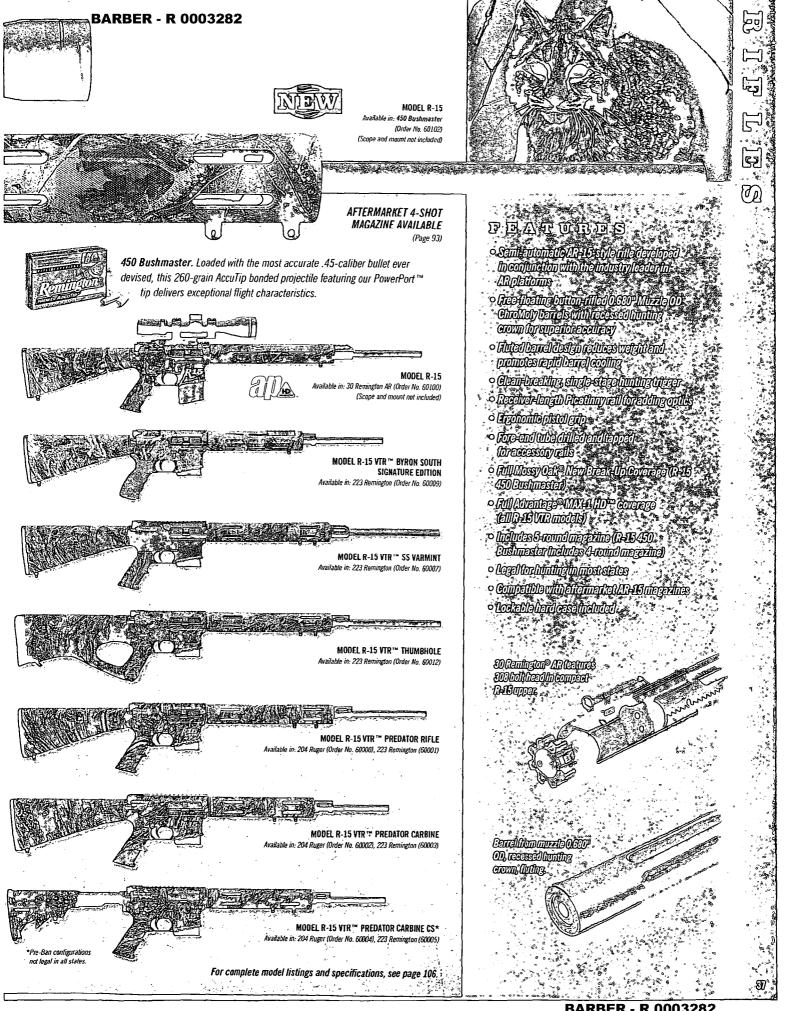

MODEL R-25 MODULAR

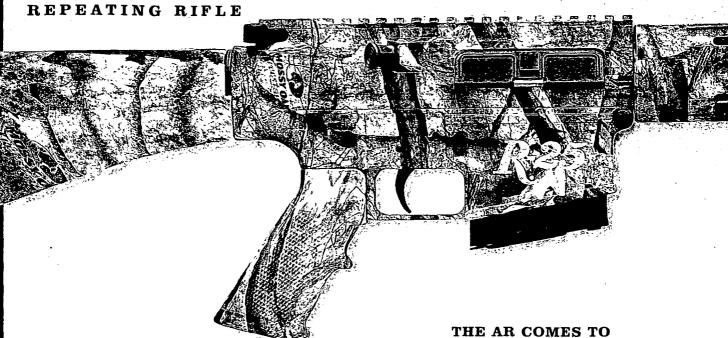





Remington brought the hunting-rifle prowess, and a leading manufacturer of modular repeating rifles introduced us to the 308 Win platform. What emerged is a masterwork of game-dropping performance and hunt-specific features that will load any camp's meat pole with unrivaled efficiency — the new Model R-25. An advanced, highly lethal blend of accuracy, fast follow-ups and light recoil chambered for three of today's most popular short-action hunting cartridges — 243 Win, 7mm-08 Remington and 308 Win. This rifle is everything varmint and predator hunters love about our R-15 in a beefed-up design that easily handles cartridges suitable for big-game hunting.


For peak accuracy, its precision-crafted 20" ChroMoly barrel is free-floated within the machined aluminum fore-end tube. Six longitudinal flutes forward of the gas block keep weight to a minimum and tacilitate rapid heat dissipation. The barrel also features a recessed hunting crown to protect the rifling and aid in more consistent bullet flight. When it's time to make the shot, the R-25's ergonomic pistol-grip gives you unmatched control and rock-steady aim. As a whole, this rifle has a balanced, stable design that makes it deadly from the offhand position. True to our hunting market, the traditional two-stage trigger found on AR-platform rifles has been exchanged for a crisp, single-stage version that comes from the factory set at 4 1 /₂ to 5 lbs.

Its carefully tuned upper and lower are machined from rugged aluminum forgings. The entire gun is dressed in Mossy Oak® Treestand™ camo that makes it virtually invisible in the field. We included a 4-round magazine, and the R-25 is compatible with DPMS 308 Win-type magazines and accessories. Front and rear sling swivel studs are installed.

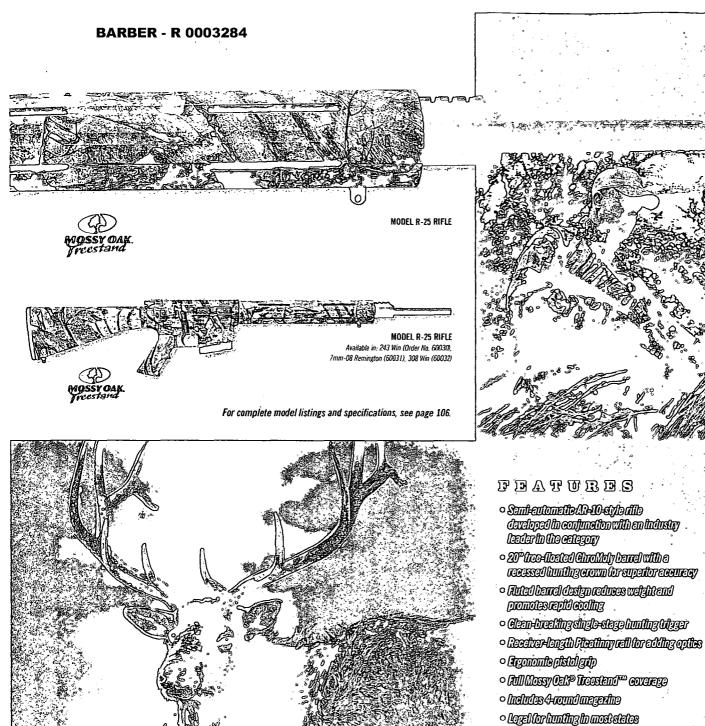

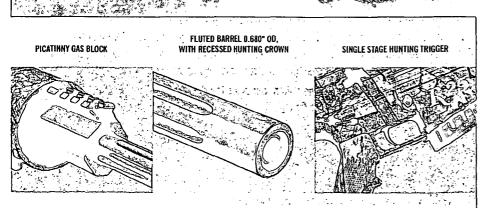

- o Loodiette liend easer Included



الج

چې

(D)

MODEL 597[™] VTR[™]

IF LOOKS COULD KILL A BRICK OF AMMO...

Get your high-volume shooting fix for less.


a little gun with big-time centerfire attitude.

semi-auto plinking and hunting fun than you can shake

its 16" barrel at. Reliability and supreme accuracy are hallmarks of the Model 597 action — proudly hailed as the most advanced semi-automatic rimfire available today.

Our Model 597 VTR A-TACS® is covered in revolutionary A-TACS digital camouflage that absorbs surrounding light for concealment in varied environments. It has a Pardus A2-style pistol-grip stock with a collapsible design that provides rapid length-of-pull adjustment. A receiver-mounted Picatinny-style rail accepts optics and accessories. Our Model 597 VTR CS has all the same features with a matte blued finish and black synethic stock. This rimfire is also available with a quad-rail free-floated tube that gives you ample space to trick it out with accessories — the Model 597 VTR CS Quad Rail. The Model 597 VTR A-2 has a traditional, fixed A-2-style pistol-grip stock and a receiver-mounted accessory rail. It's available with 10- and 30-round magazines. All other models in this lineup include 10-round magazines, but can easily be fit with high-capacity aftermarket options.

MODEL 597[™]



The speed with which they zip out rounds is rivaled only by the striking appearances of our new additions to this venerable, semi-auto rimfire lineup. Easily the most advanced rimfire rifle ever built, the Model 597th represents the first technological breakthrough in the category in 35 years.


Our Model 597 action is #1 in autoloading rimfire reliability and out-of-the-box accuracy. The Model 597TM TVPTM (Target-Varmint Plinker) takes full advantage of the superior design. Truly the ultimate 22 target-rifle platform, this tack-driver features a 20" stainless heavy barrel and a laminated thumbhole stock that's contoured to accommodate right- and left-handed shooters with equal comfort. It offers impeccable balance for offhand shooting.

The Model 597 FLXTM leads the way in concealment with a FLX Digital camo stock. To game, the pattern assumes the detail and definition of surrounding limbs, leaves and shadows for near invisibility. Speaking of turning heads, our Mossy Oak® Blaze Orange Camo and Mossy Oak Pink Camo Model 597 are perhaps the most distinctive rimfires ever built. All have 20", standard-contour

carbon steel barrels and TruGlo® fiber-optic front sights. The **Model 597 Magnum Synthetic** features a stagger-stacked eight-round capacity magazine.

MODEL 597 **
MAGNUM SYNTHETIC

Available in: 22 Win Mag (Order No. 26560)

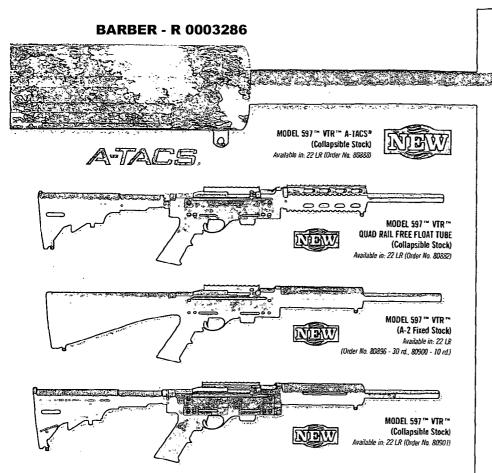

L B V L A B B B Woder 20.4 Albe V-lves وح


اوج

ප

(gp)

- ् दिवाविभूग्ये १० दृष्ट्यभूगाव्यवीय व्यवस्थाति व्यवस्थाति । इत्यासम्बद्धाः
- o Bull on Model 597 *** 22 din litro action
- o 16º barrel
- choise elderellos entres.
- · Receiver anounted Fleeting-Style tell
- · Revolutionary A=10650 digital comoutings

For complete model listings and specifications, see page 1001.

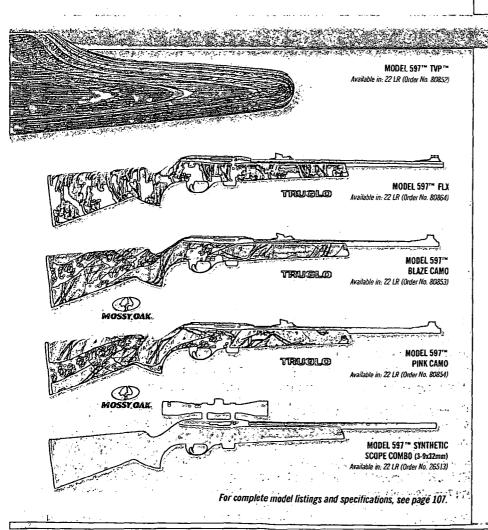

FBATTRBS


- ं छवीभ्यपिकालः हाउरिका विद्यापकः स्प्रिते, रिकी-हरिक्श स्पृतिकालीः
- Offered in both textured (Infsh synthetic or laminated wood stocks
- Non-glane matter thinks
- Petented, 10-shot metel detechnide megezho, 0-shot for megrum
- Last-shot, hidd-open bolk for added safety
- ં Tareno at the appropriate the company of the com
- o Seeperall included on Model 597 ^m TVP

Model 597° boli trevels on trib tool-steel guilde relis for Aeroless trevelselse

Unique ettechment system digidly/phis banel to receiver for padeotellignmentend enhensedeceurey

िहारिसीवरि

lidd-open Corpositive Clentification ofenny chamber




કરાંગાઇ દિશામાં જાઈ દિક્ષિતિની વિદેશિનુ શિલ્લોની ક્ષાના દેશિકાની દિલ્લોની સ્થાપની

Palanted drop-out style staggered-stack boxmagarine essuresucitable lacding and last, caryucicading

4






For those who still love the look and feel of a classic rimfire rifle, our Model 572™ BDL™ Fieldmaster® and Model 552™ BDL Speedmaster® may be the finest available today. They combine richly blued carbon steel barrels with generously checkered high-gloss American walnut woodwork. But their beauty truly shines through a five-shot cluster — their tack-driving accuracy has made them an enduring customer favorite.

The versatile **Model 572™ BDL™ Fieldmaster®** is one of the most popular pump-action 22 rimfires made in America today. It handles 22 short, 22 long and 22 long rifle cartridges interchangeably. Other features include big-game sights, a positive cross-bolt safety and a grooved receiver for scope mounts.

The lightning-quick **Model 552TM BDLTM Speedmaster®** is the only American-made 22 autoloader that handles 22 short, long and long rifles interchangeably. It's also equipped with iron sights, a positive crossbolt safety and a receiver grooved for scope mounts.

LEFT-HANDED RIFLES

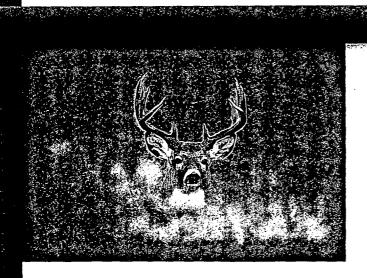




Nowhere will you find as broad a selection of left-handed centerfires. Remington® is proud to offer these specially configured Model 700™ rifles so everyone can experience the legendary accuracy and dependability of our flagship bolt action. This year, we've expanded the lineup with our Model 700™ SPS™ Left-Hand featuring a black matte finish and rugged synthetic stock. And we still offer the industry's first and only left-handed rifle made specifically for youth and small-stature shooters, Model 700™ SPS™ Compact Synthetic. Along with our unrivaled standards for out-of-the-box accuracy, all include the X-Mark Pro™ Trigger system for the highest degree of crispness and shot control you can get from the factory.

The **Model 700™ SPS™ Varmint** sports a 26" heavy-contour barrel complemented by a vented beavertail fore-end for rapid cooling and improved shot-to-shot consistency. It comes in five great short-action calibers including the hot 4,000-fps 17 Remington Fireball. Other standard features include a non-reflective black matte finish, hinged floorplate magazine, sling swivel studs and a drilled and tapped receiver.

The **Model 700™ CDL™** is the quintessential hunting rifle, embodying the best in traditional good looks, as well as our leading-edge standards for precision, durability and cartridge chamberings. The **Model 700™ SPS™ Compact Left-Hand** has a 1" shorter length of pull, swift-handling 20" barrel and is offered in two venerable big-game calibers: 243 Win and 7mm-08 Remington.

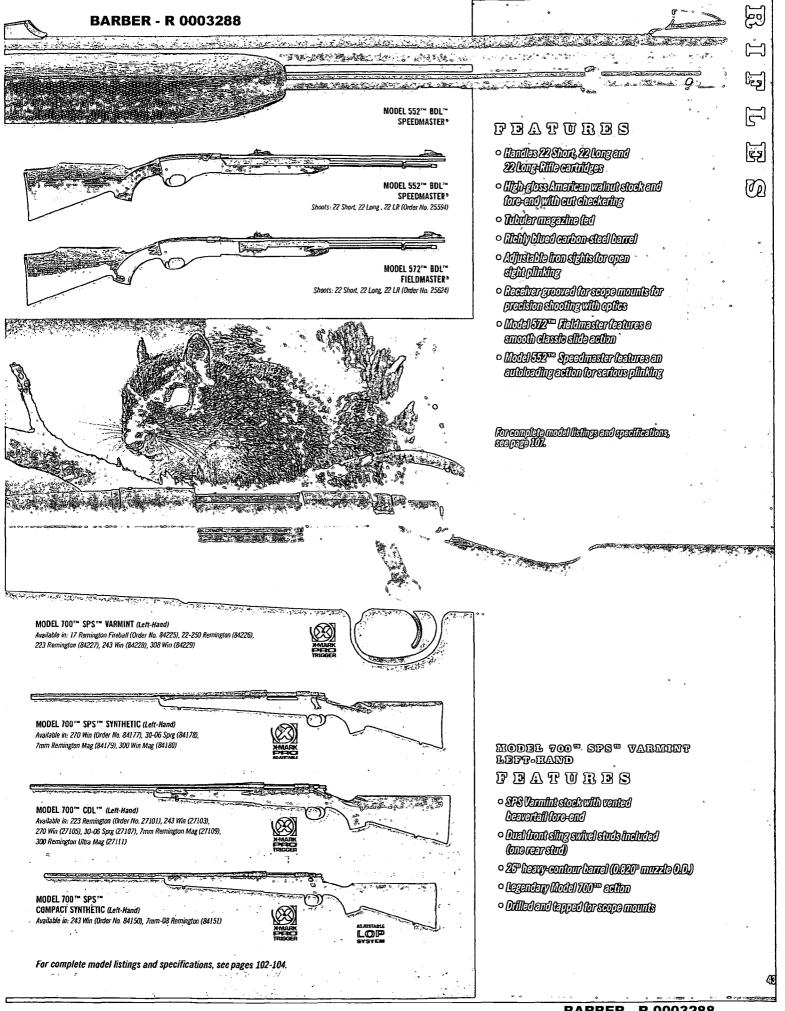


COMPACT FIREARMS



FOR EVERY TRADITION, THERE IS A BEGINNING.

Included with all 2010 synthetic Compact firearms, our Adjustable Length of Pull System offers a full 1" of adjustment, so any compact model can be custom-fit to shooters of small stature and grow alongside youngsters — all the way up to standard LOP.

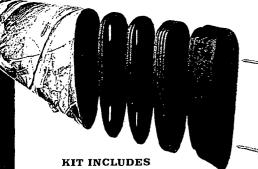

- Two 1/4" LOP spacers
- One 1/2" LOP spacer
- Corresponding screw lengths to accommodate 3 different lengths
- . Full 1" of adjustment
- SuperCell™ recoil pad


See page 92 for the Adjustable Length of Pull Kit.


Young shooters are more likely to become stewards of the shooting sports if they start with a gun that fits properly. Exactly why we crafted our standard, premium-grade stocks with a shorter length of pull, then fit them to some of our finest firearms. For 2010, all synthetic compact firearms are equipped with our Adjustable Length of Pull System. So, fit can be customized to youngsters as they grow, and adults requiring a shorter length of pull can tailor compact firearms to their specific needs. For the ultimate in shooting comfort, all Compact rifles and shotguns also feature the world's most effective recoil pad — SuperCell.* Rifles feature 20" barrels and youth shotguns have 21" barrels (20" for deer gun).

The **Model 770[™] Compact** is the ultimate first centerfire rifle. It's chambered for the mild-recoiling 243 Win and comes out of the box with a pre-mounted, boresighted 3-9x40mm scope.

Other centerfires include our workhorse, short-action Model 700™ SPS™ Compact Synthetic. Now in a left-handed version chambered for 243 Win and 7mm-08 Remington, it's the first-ever southpaw compact rifle offering. Our Managed Recoil 7mm-08 Remington ammunition is the perfect complement to this addition. Our Model 700 SPS Buckmasters "Young Bucks" Compact comes in 243 Win, and features a specially engraved floorplateand Realtree® Hardwoods® Grey HD™ stock.


You wanted some "wow" factor for young ladies, and we answered with the 20-gauge Model 8701" Express® Compact in Mossy Oak® Pink Camo. We also offer our 20-gauge Model 870 Express Compact with Realtree® Hardwoods® HDTM stock and fore-end, as well as our 20-gauge Model 870 Express Compact Jr. in black synthetic. All Jr. offerings have a 1" shorter length of pull than standard compact models. The gas-operated action of the 20-gauge Model 11-87TM Sportsman® Compact makes it the ultimate light-recoiling compact shotgun.

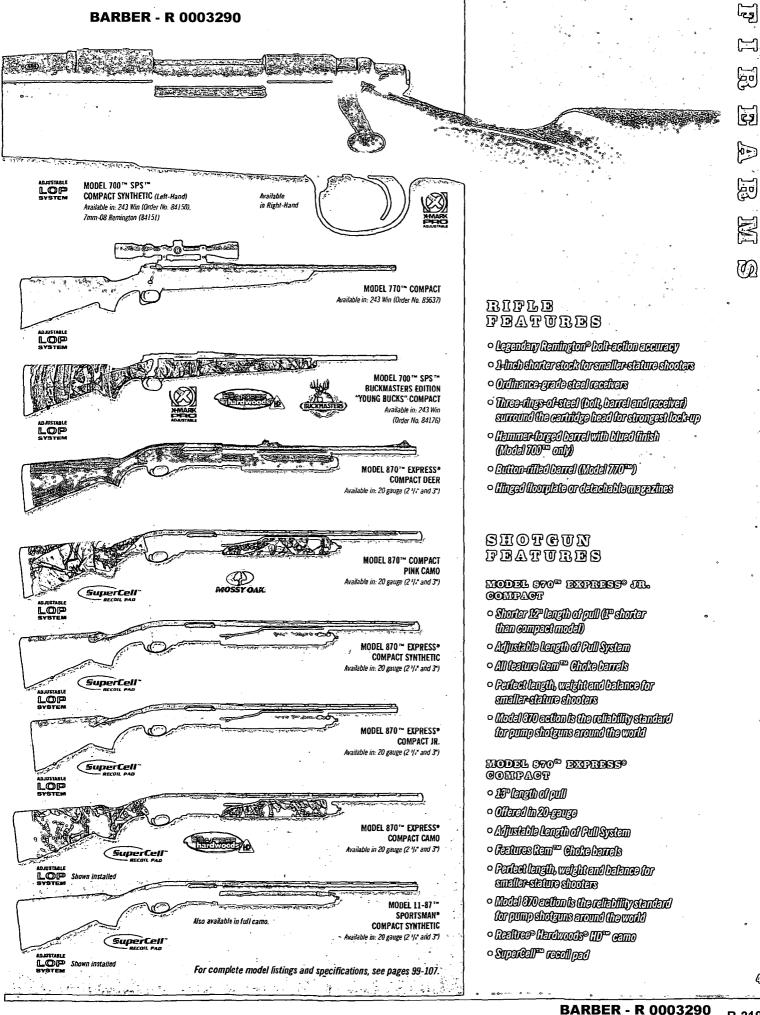


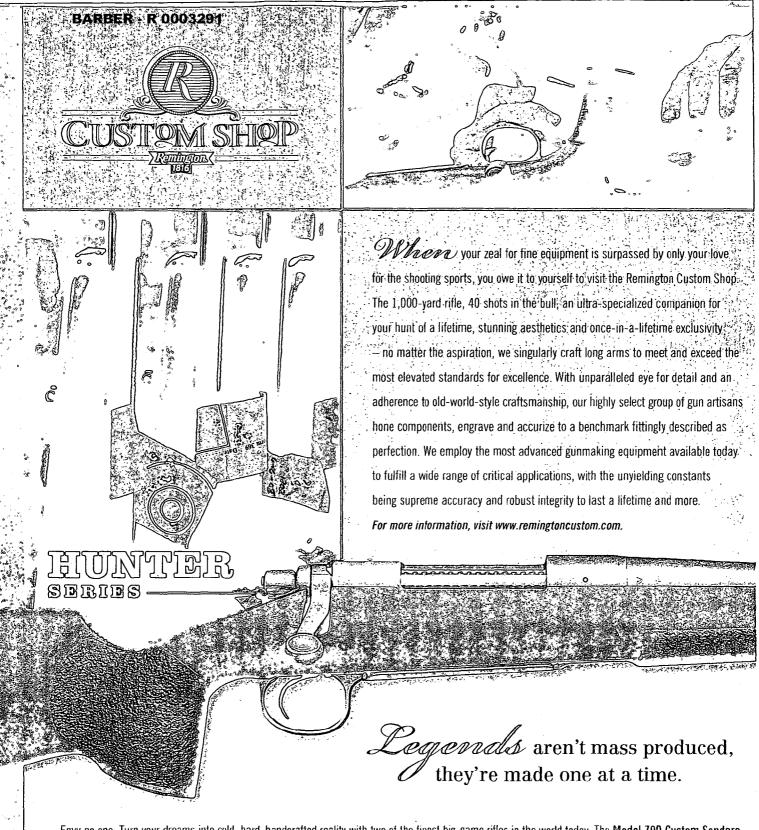

Envy no one: Turn your dreams into cold, hard, handcrafted reality with two of the finest big-game rifles in the world today. The Model 700 Custom Sendero, Model 700 Alaskan/African Wilderness Rifle II (AWR II) and Model 700 North American Custom. Designed and built by hand in the Remington Custom Shop by the most skilled gunsmiths and firearm engineers in the industry, they take the Model 700's world-renowned accuracy to a level that can only be achieved through personal attention. Expect sub-MOA groups and every component and contour optimized to perform flawlessly. For a lifetime and more.

The Model 700 Custom Sendero was born from the original Model 700 Sendero, built for the long-range hunter. The Custom Shop barrel has aluminum bedding pillars and is mated to "blue printed" actions to achieve our guaranteed accuracy standards. The premium custom design synthetic stocks have a full-length bedding block. With this rigid, precise support for the action and barrel, positioning and harmonics are highly regulated to achieve impeccable shot-to-shot consistency. At the squeeze, you'll experience the pinnacle of crispness and control with our Model 40-X " adjustable trigger that's tuned and set in the Custom Shop at a breaks-like-glass 3 lbs.

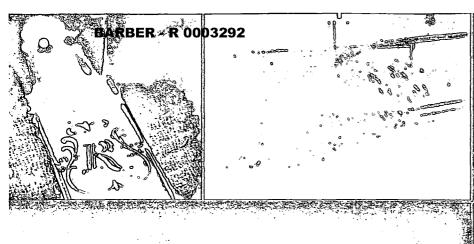

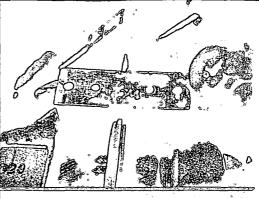

 \bigcirc


Ø.

لج

0

O

6



TANCHNIA PRESED AND COURTAGES.


Custom-turned end chembered bernels, blue printed actions and bolk large lapped to ensure full contact and deliver plapoint accourage.

ENCINIALED FITHVITHS.
The extreme precision with which a Gustom Shop dilabs built creates a flawless meshing of components and a piece of mechinary that will go the distance. Greatesting You be the judge.

ENCINIER TO FUE.
Your discounts designed and creditally sentous shootens. From our hands to yours, a Gustom
Shop dills to a dinaly turned instrument.

INCHNIBITED TOUCH.
All mington Oustom tille is a true shooter's
tool, designed and built to weather the
hardest conditions.




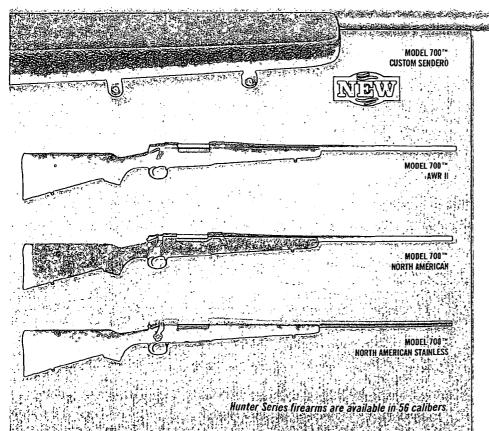

FEATURES

- o "Elimprinted" Model 700° statuless or carbon steel action to ensure receiver tage and bolt face squareness and uniform locking by contact
- Settin blued metal (Initsh and Javaled bolk body (North American Model)
- Setth Statutess bernel assembly and favoled bolk body (North American Statutess Model)
- Gustom Guned and chambared hammer forged (fluted barrels (AWR II) and North American Gustom)
- Machined steel (rigger grand and engraved floorplate assembly
- · Recessed crown
- Model 4D-X adjustable tutgger tuned and sex by Qustom Shop at 8 lbs.
- All diles 20 celiber and smaller must deliver sub-MOL accuracy or better pulor to stilpment


.

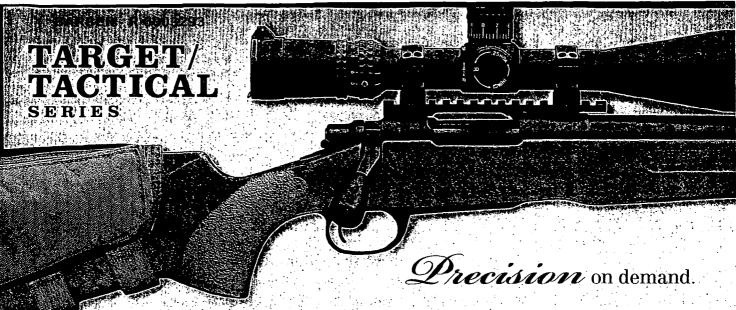

The rifles in this series are far-reaching testimony to our entrenchment in the tactical community, superior R&D and full-time commitment to augmenting a trained marksman's skills. **The Model XM3 Rifle System**, chambered for 308 Win, is fully rigged and ready to launch sub-MOA strikes out to 1,000 yards. Incorporating today's most advanced technologies, it is an unparalleled fusion of compact sizing, light weight, accuracy and range designed from the ground up by Lt. Col. USMC Ret. Norman A Chandler II of IBA under contract with the Defense Advanced Research Projects Agency (DARPA). His system starts with the legendary Model 40-XTM action platform. The receiver is mounted to a compact, 18 ½" stainless steel (mil-gauged) Hart barrel featuring a 1:10 twist with six grooves. It is match chambered and threaded to accept SureFire's muzzle brake/sound suppressor adapter. Titanium is used for the action, recoil lug, Picatinny rail mount and scope rings to reduce overall weight. A Nightforce NX3 3.5-15x 50mm illuminated mil-dot reticle scope is the ultimate in target detection. The lightweight stock is custom-designed by IBA and McMillan (A1-3) with removable length-of-pull spacers, plus forward grooves on the fore-end for a sure grip. It facilitates installation of the UNS Mount designed for night vision mounting. Proven dependable after 500 hours of saltwater testing, the Man-O-War metal finish is available in black and OD green.


Hand-built in the Remington Custom Shop on our venerable 40-X action, the fully equipped Model 40-XS™ Tactical Rifle System comes with a Harris® bipod, world-class Leupold optics, Turner® AWS tactical sling and swivels in a Pelican® hard case. Its 416 stainless steel, 24" barreled action is coated with our proprietary non-reflective black polymer for protection, then custom-bedded in a McMillan A5 series stock with adjustable length of pull. This rifle and our Model 40-X™ Tac Mod with folding side stock and detachable magazine system, sit firmly atop the food chain in accuracy and dependability wherever they are called to serve.


The tack-driving Model 40-XBTM TDR (Target Deployment Rifle) and Model 40-XBTM TIR (Target Interdiction Rifle) have premium, match-grade stainless steel barrels that are hand-lapped for the utmost in consistency. Both are equipped with custom-tuned match triggers and feature built-in Surefire muzzle brakes.

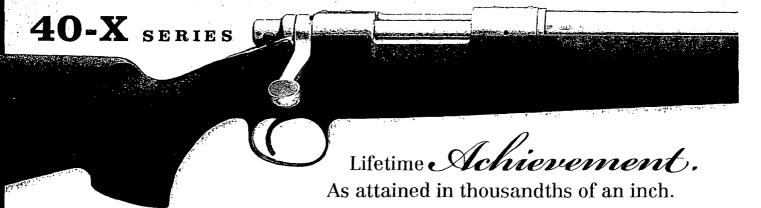

When you have a lifelong passion for precision, nothing says you've arrived like a five-shot group you can cover with a dime, and very few rifles on earth can elevate you to this stage in life as quickly as our Model 40-XTM series. Built on our world-famous Model 40-X action, the very same action that's dominated benchrest competitions since its creation in 1962, these rifles are handcrafted in the Remington Custom Shop to deliver the pinnacle of shot-to-shot consistency. The blueprinted action is impeccably squared to the barrel, and the barreled action is then hand-fitted and epoxy-bedded into the stock, creating a solid, exacting piece of machinery best compared to surgical equipment. An external adjustment on the 40-X trigger gives you a 1 ½- to 3 ½-lb. range, with a special 2-oz. trigger available as an option for select models. The stainless steel barrels are button rifled and hand lapped, then finished with a concave crown.


Our **Model 40-XB Rangemaster** has a satin-finished American walnut stock with a front swivel block and fore-end guide rail. The **Model 40-XB Rangemaster Thumbhole** has a two-tone brown laminated hardwood stock with a satin finish and a rock-steady thumbhole grip stock. Aramid-fiber-reinforced fiberglass forms the stock of the **Model 40-XB** **KS. For both the Model 40-XB Rangemaster and Model 40-XB KS, the metalwork is all stainless steel for right-handed models. The left-handed model has a blued carbon steel receiver. All Model 40-X series rifles are available in a broad selection of chamberings.

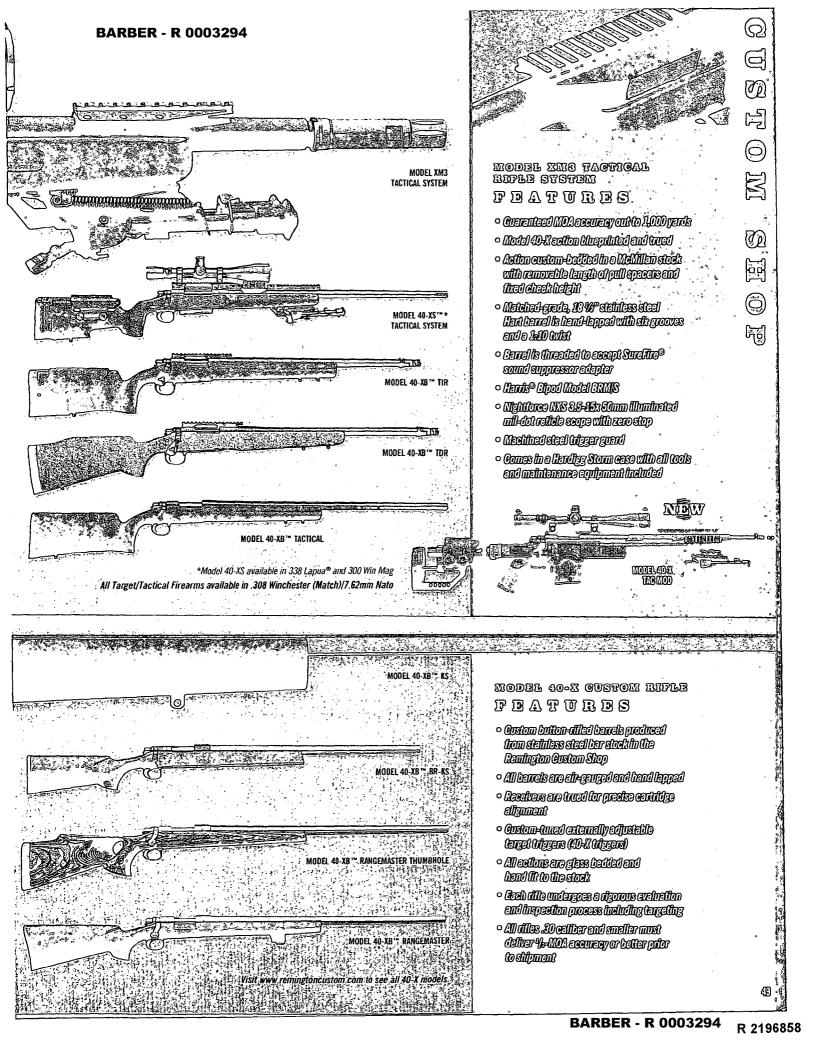


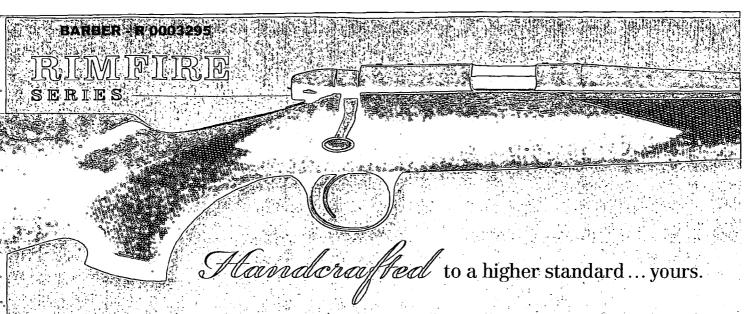

When you're holding a Model 547th Custom, quality of life tends to increase in proportion to the number of rounds you fire. These rifles deliver guaranteed 1/2" groups or better at 50 yards, and do it with striking aesthetics and the substantial feel of a centerfire. Available in your choice of 22LR or 17HMR or by special request 22 magnum and 17 Mach 2. They're based on our famous Model 504 with many performance-enhancing details that only come with personal attention from our select group of industry-leading gunsmiths and firearm engineers. At the heart of their astounding accuracy is a button-rifled Shilen® barrel. These hand-lapped barrels start with a high-precision chamber (match-grade in 22LR offering) and are finished with a concave dish or target crown to protect the rifling and better stabilize bullets. Barrels are then locked to the solid-steel receiver with an advanced clamp design for the utmost in strength and stability. Lovers of the Model 700 will appreciate that the bolt has been expertly configured to mirror our legendary centerfire's. And before the rifles leave the factory, triggers are hand-tuned to a crisp 3-lb. pull.


The **Model 547 "C" Grade** has a sleek, C Grade contoured barrel with highly refined C-grade woodwork adorned with traditional cut checkering, then finished and polished by hand. It is complemented by a rich, high-polish-blued receiver and barrel. Our **Model 547 Target** has an 18 ½ stainless steel Shilen barrel with a heavy target contour. It has a target-style walnut stock built with the painstaking attention to detail that makes our Custom Shop craftsmen the best in the business. The **Model 547 Classic** has a redesigned fine-quality walnut stock virtually identical to the Model 700 CDL's, with a straight comb, elegant black grip cap and fore-end tip, and cut checkering. No matter which you choose, the Model 547 Custom is truly the rifle of a lifetime, and untold thousands of rounds.

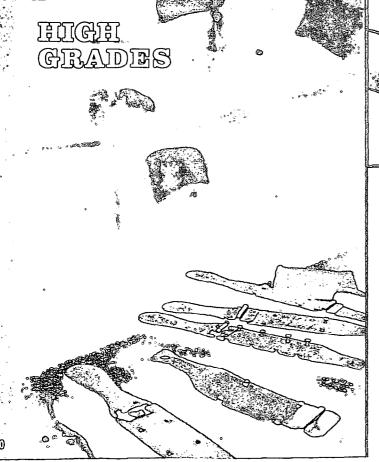

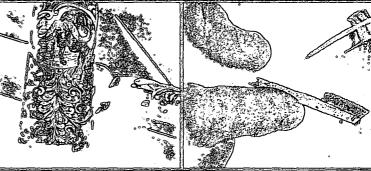

If you dream it, we can build it.

When your vision for a custom firearm extends well beyond the blueprint, enlist our elite group of highly skilled craftsman to bring the dream to fruition. A Remington Custom Shop High Grade rifle or shotgun is anything you want it to be. Our in-house master engraver will work with you produce all desired patterns and degrees of coverage, from standard to full customization. Your stock can be crafted to any

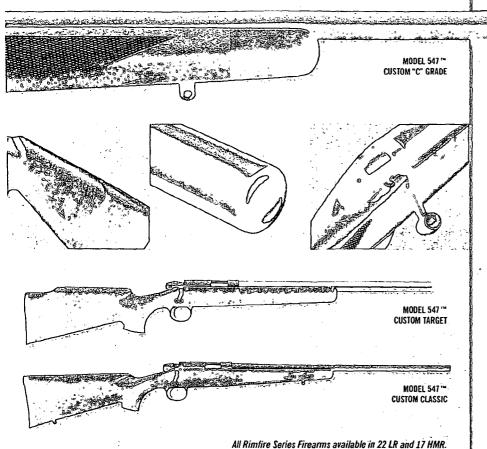

MODEL 547 CUSTOM BIFFLE PBATURES

- · Builed high polish blued and to a many button-tilled 22" Stillen barrel .
- Match chamber (2213) with conceve "dish" crown

a


Q


(P)


(P)

6

- Stylish both handle modeled after the popular Model 700 bolk bandle
- o Drieggeted one place boll Handle and cool thraptice
- Redesigned stock with black fore-end tip and grip cap and "OU Style" checkerthis
- Oustom Shop turned trigger sext at 8 Us.
- Organized accuracy: 42°5-shot group @ 50 yards with gallary (स्त्रीक्री शिक्सको (स्त्रीक्री








Special request in 22 magnum and 17 Mach 2.

dimension and hand-checkered to your exact specifications. Choose from the world's finest selection of wood, all the way up to the most highly figured. We will finish and polish it by hand to match your desired sheen and colorization. How about an intricate design you'd like placed in 24 karat gold inlay? Nothing is out of reach. At Remington Custom Shop, precision engineering and artistry perfectly meld to exhibit guncraft in its highest form.



Don Talbot Master Engraver

Build your dream gun today at www.remingtoncustom.com

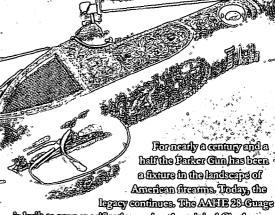

halfthe Parker Complete been Designation of supplies American firenms. Today, the

is built to your specifications using the original Charles Perker Co. blusprints and drawings, and priced at \$49,000. We train arregionle exert the west grew of these shortest will be offered are evallable exclusively from the Rentington Arms Co. Visit our Web site at www.parkergunnskers.com or e-mail us at parker@remington.com.



THE COLD STATEMENTS CAME DROPPING ACCURACY. JAW DROPPING PERFORMANCE.



The standard in premium ammunition lias a name - Premier Gold Box Acqualization of extensive research and development, state-of-the-ant bading facilities, and, of course, the bighest-quality components, Premier Cold Box ammunfillon is just what you expect from the market leader in centerfie dile annualita.



PRIMITIES CORPERORES WHERA BONDED® PREPARED APRANTE PRIMITE ACCOUNTS PRIMITIFIC SCHOOLOGO PRIMIPE GOPPER-SOLID PREMIUM MATERIE PRIMITER DISINFEGRATOR® WAY TO VIEW



PREMIER CORE-LOKT ULTRA BONDED°



THE NEW STANDARD OF ACCURACY IN BONDED HUNTING BULLETS. Premier® Core-Lokt® Ultra Bonded®

is a bullet in a class of its own. It is the first and only bullet to successfully maximize the best features of two great types of hunting bullet construction. It delivers the extreme accuracy and retained energy you would expect from a tipped bullet, in combination with the outstanding penetration and weight retention that only a bonded, non-tipped bullet could deliver. This unique design provides the hunter a Premier bullet that

yields devastating on-game performance from 50 to 500 yards. Premier Core-Lokt Ultra Bonded – the new standard in high-performance hunting bullets.

CORE-LOKT' ULTRA BONDED' EXPANDS RELIABLY AT ALL REASONABLE HUNTING DISTANCES.





100 Yards



200 Yards






300 Yards



400 Yards

30-06 SPRG, 150-GR. PREMIER® CORE-LONT* ULTRA BONDED,* 5 SHOTS, .6", 100 YDS.




up to 95% weight retention for ultimate

(See page 68 for complete listings.)




COLD TAKE			· · · · · · · · · · · · · · · · · · ·
PREMIE	R° CORE-LOK	(T° ULTRA BO	NDED*
223 Remington	PRC223R4	62	Core-Lokt* Ultra Bonded
243 Win	PRC243WC	100	Core-Lokt' Ultra Bonded
25-06 Remington	PRC2506RA	115	Core-Lokt* Ultra Bonded
260 Remington	PRC260RB	140	Core-Lokt* Ultra Bonded
270 Win	PRC270WB	140	Core-Lokt* Ultra Bonded
6.8mm Rem SPC	PRC68R4	115	Care-Lokt* Ultra Bonded
7mm Remington Mag	PRC7MMRA	140	Care-Lokt* Ultra Bonded
7mm Remington Mag	PRC7MMRC	160	Core-Lokt* Ultra Bonded
7mm Remington SA UM	PR7SM1	140	Core-Lokt* Ultra Bonded
7mm Remington SA UM	PR7SM4	160	Care-Lokt* Ultra Bonded
7mm Rem. Ultra Mag	PR7UM1	140	Core-Lokt* Ultra Bonded
7mm Rem. Ultra Mag	PR7UM2-P2	160	Care-Lokt' Ultra Bonded
30-06 Springfield	PRC3006A	150	Core-Lokt* Ultra Bonded
30-06 Springfield	PRC3006B	168	Core-Lokt' Ultra Bonded
30-06 Springfield	PRC3006C	180	Core-Lokt* Ultra Bonded
300 Win Mag	PRC300WA	150	Core-Lett: Ultra Bonded
300 Win Mag	PRC300WC	180	Core-Lokt* Ultra Bonded
308 Win	PRC302V/A	150	Core-Lokt* Ultra Bonded
308 Win	PRC308WC	180	Core-Lokt* Ultra Bonded
300 Remington SA UM	PR300SM1	150	Core-Lokt* Ultra Bonded
300 Remington SA UM	PR300SM4	180	Core-Lakt* Ultra Bonded
300 Remington Ultra Mag	PR300UM4	180	Core-Lokt* Ultra Bonded
300 Remington Ultra Mag	PR300UM3-PZ	180	Core-Lokt* Litra Bonded
338 Win Mag	PRC338WA	225	Core-Lok1* Ultra Bonded

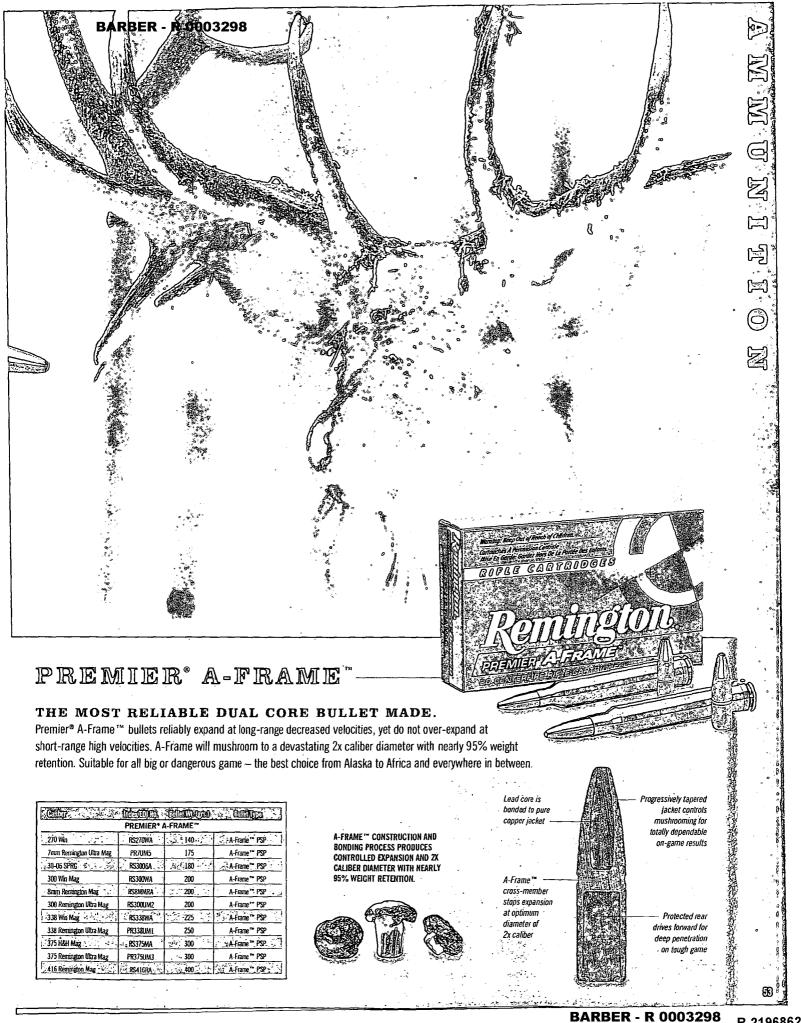



PREMIER ACCUTIP

PRECISELY THE BIG-GAME BULLET OF YOUR

DREAMS. It's the most accurate, polymer-tipped big-game bullet available today. Along with match-grade precision, it delivers an unprecedented combination of laser-flat trajectory and devastating terminal performance. AccuTip bullets expand quickly — producing an awesome level of transferred energy – to dispatch medium and big game with lightning authority. A thicker jacket and harder lead core regulate weight retention and optimize penetration. Make the switch and, trust us, big game won't know what hit 'em.

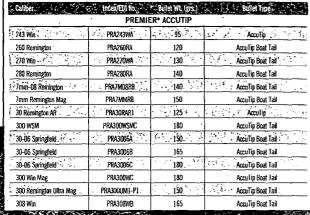

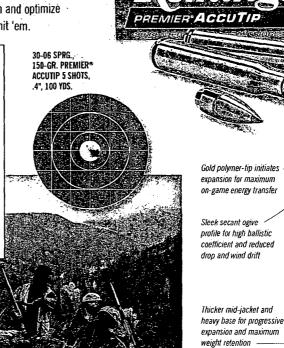

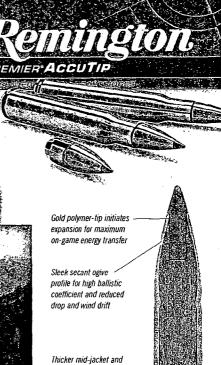


CARTRIDGES

ACCUTIP

PREMIER SCIROCCO BONDED

THE TOUGHEST POLYMER-TIPPED BULLET

AVAILABLE. The remarkable Swift™ Scirocco™ Bonded bullet maintains its status as the industry leader in bonded tipped bullets by delivering the highest ballistic coefficient of any bullet of its kind for the flattest trajectory and maximum retained energy. Combine that with unsurpassed accuracy and superior weight retention, Premier® Scirocco is unquestionably the most effective bonded, tipped bullet to sit atop a factory load. When a tougher tipped bullet is needed, turn to Scirocco.





30-06, 180-GR PREMIER* SWIFT™ SCIROCCO* BONDED 5 SHOTS. .8", 100 YDS.

SWIFT" SCIROCCO" BONDED BULLETS EXPAND RELIABLY OVER A WIDE RANGE OF TERMINAL VELOCITIES.



100 Yards



200 Yards





PF	EMIER' SCIROC	CO" BOND	ED
243 Win	PRSC243WA	90	Scirocco™ Bonded
270 Win	PRSC270WA	130	Scirocco ** Bonded
7mm Remington Mag	PRSC7MMB	150	Scirocco ** Bonded
7mm Remington Ultra Mag	PRSC/UM1	150	Scirocco ** Bonded
30-06 Springfield	PRSC3006C	150	Scirocco " Bonded
30-06 Springfield	PRSC3006B	180	Scirocco ** Bonded
300 Win Mag	PRSC300WB	180	Scirocce ** Bonded
300 WSM	PRSC300WSMB	180	Scirocco *** Bonded
308 Win	PRSC308WB	165	Scirocco** Bonded
300 Remington Ultra Mag	PR300UM5	150	Scisocca** Bonded
300 Remington Ultra Mag	PR300UM3	180	Scirocco*** Bonded
300 Remington Ultra Mag	PR300UM3-P2	180	Scirocco™ Bonded

PREMIER · ACCUTIP-V

PINPOINT DETONATION. Expect dynamite results. In varmint calibers,

AccuTip-V combines superb flight characteristics and match-grade accuracy with a design


optimized for explosive on-game results. At impact, AccuTip's gold polymer tip is driven rearward causing the thin jacket and soft lead core to fragment violently. First and foremost, though, it gets there precisely shot after shot — it's the most accurate

varmint bullet you can shoot.



AccuTip component bullets are now available to handloaders. (See page 68 for complete listings.)





ACCUTIP-V

	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1		18,400,314			
			20 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	44.00		34
	The state of the s				100	- 11
			30 (12.15)	Signatura (mga marini mari		- 22
		- T. C.		9.15.55		-
			1. 18 19 19 19 19 19 19 19 19 19 19 19 19 19	3.4		200
	A STATE OF THE STATE OF	4 4 19 4 4 4	5.3.25	17 December 1997	はっている かんかい カマラン	
	=1	(Tel-		1000		ye = 5
11.	and the same of th	4		法保护人 化自己合金	The second second second	
		7.7			and the same of th	***
No. 194			10			* 21
	- 107 S.G. 12.20					
7.7		And the second				-
						28
	Carlotte Comment	40				-51
	天 (1977) (1978) (1978)		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			
	- e-	10.50				•
						331
	0.00	The state of the s				V. (1)
						-NI
J	2000					3.5
		0.70		The Charles of the Con-		54C
		1				201
The state of the s	THE PERSON NAMED IN		* 1 St. 5	4.7. 2 4. 4. 4. 4. 4. 4.		25
the same of the same of			12.00	100 Per 100 Pe	120	-
	200 100 100 100 100 100 100 100 100 100	The second second	3-3			331
the second secon			End C			299
100				S. C. C. C.		4
20,000	10 10 10 10 10 10 10 10 10 10 10 10 10 1	45 15 15 15 15 15	3.97			0.7
		100	200	100		. ×
· 公共联系	50000	一个人	Territoria de la companya della companya della companya de la companya della comp		建设技术等等的	311
2 m - 2 m		100	300		A STATE OF THE STA	CAL
1.574		11.5		The state of the state of		3.5
· 01.25		12.		100 m	A THE LOCK HIS	98
- 25	258392628	6855.7	The State of the S	4 M. S. L. 1880		331
and the same of th		(C)		THE PARTY OF THE P		
			especial expension and		A CONTRACTOR OF THE PARTY OF TH	
	1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	5.00 mm (1975)		4.60		381
The man the state of the state	S	建物态的 。	2005 Sept. 100 No. 100		建设设置 (1) 10 10 10 10 10 10 10 10 10 10 10 10 10	
	1. 3. 4.4 (2.5) (第二) \$P\$ \$P\$	株/5 今字 デー・	TO SERVICE THE RESERVE	4.4	10 PM	-77
			A 10 (1997) 15 (1997)			CO.
	1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	20 M	以来的人们的关系	A CONTRACTOR OF THE		37
	CONTRACTOR OF THE SAME	14.00 m	TO THE REPORT OF THE PARTY OF T		CANAL STREET,	723
	12 3 1 Sec. 1	T. 1882 118	S 12 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	10 TO \$110 PM		200
137.20.00	2005 AF 11 - 0 250 A			1 63 39 / 68 86 8	1日に対象したがに対する	4.5
2. 4.400	3 12 2	一种人们的	Sec. 15 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	क्षा प्रशास के लिए		T-1
20 30 30 30	**************************************		13. 37.	1 2 724 7 : 14	Co. and St. Co.	100
Ernse -					The second secon	· · · ·
						-

	PREMIE	R* ACCUTIP-V	
17 Remington Fireball	PRA17FB	20	AccuTip-V
17 Remington	PRA17RA	20	AccuTip-V
204 Ruger	PRA204A	32	AccuTip-V
204 Ruger	PRA204B	40	AccuTip-V Boat Tail
221 Remington Fireball	PRA221FB	50	AccuTip-V Boat Tail
22 Hornet	PRA22HNA	35	AccuTip-V
222 Remington	PRA222RB	50	Accutip-V Boat Tail
223 Remington	PRA223RB	- 50	AccuTip-V Boat Tail
223 Remington	PRA223RC	55	AccuTip-V
22-250 Remington	PRA2250RB	50	AccuTip-V Boat Tail
243 Win	PRA243WB	. 75	AccuTip-V Boat Tail

AccuTip-V: Varmint-Specific Cartridge

PREMIER® DISINTEGRATOR® VARMINT

FRANGIBLE AND LEAD-FREE. EXPLOSIVELY VOLATILE ON GAME.

Now you see him. Now you don't. Disintegrator® Varmint. Loaded with lead-free frangible bullets that meet the requirements of non-toxic hunting areas, this ammunition delivers radical, explosive expansion that shatters the capabilities of conventional

lead core/copper jacketed bullets. Because they break into tiny fragments at impact, Disintegrator Varmint bullets will not ricochet, offering added peace of mind wherever you shoot. Extremely tight manufacturing tolerances combined with our industry-leading components produce tiny groups on paper as well. Get the supreme accuracy you expect from Remington with spectacular on-game results in two popular calibers: 223 Remington and 22-250 Remington, both with 45 gr. JHP bullets.

Caliber	Index/EDI No.	Bullet WL (grs.)	Bullet Type
	DISINTEGRA	TOR" VARMIN	vit -
223 Remington	- DVZZZRA	45	Jacketed fron Core HP
22-250 Remington	DV22250RA	45	Jacketed Iron Core HP






30 REMINGTON® AR

HITS LIKE A 308.

CARRIES

LIKE A 223.

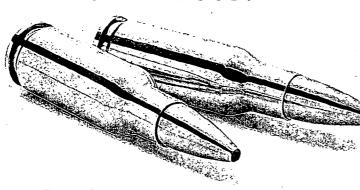


FIRST IN THE FIELD:


THE WORLD'S ONLY 30-CAL. BIG-GAME CARTRIDGE FOR THE LIGHTWEIGHT R-15 PLATFORM.

ONLY FROM REMINGTON.

Remington® now brings you 30 caliber hunting performance in a lightweight R-15 modular repeating rifle. Our **30 Remington® AR** cartridge produces big-game-dropping ballistics similar to the venerable 308 Win. with pressures perfectly suited to our lightweight R-15 platform. Comparable terminal power was once only available in the heavier AR-10 platform. This cartridge is the ultimate synergy of our ammunition and firearms expertise, as its development forever changes the shape of both categories, creating a revolutionary new big-game hunting system. Our lightweight R-15 platform — its minimal recoil, rapid follow-ups, easy maintenance and inherent accuracy — is now chambered for a cartridge that will put down deer-sized game with gusto. This year's offerings include the most trusted big-game bullet of all time, Core-Lokt, the pinnacle of polymer-tipped accuracy, AccuTip and an economical UMC loading. As a cartridge, the 30 Remington AR breaks new ground. In conjunction with our R-15 modular repeating rifle, it marks the







PREMIER® COPPER-SOLID® —

PURE ACCURACY AND DEVASTATING TERMINAL RESULTS – UNLEADED. Experience the game-leveling advantage of the finest lead-free bullet design on the market today. While it's classified as non-toxic, no big-game animal it comes in contact with will contest against its lightning-like terminal effects. It delivers extremely deep penetration with nearly 100% weight retention and has a sleek ogive profile with a polymer tip and boat tail base that give it outstanding flight characteristics. In fact, it's one of the finest extended-range lead-free hunting bullets we've ever offered due to its extremely high ballistic coefficient. At impact, the polymer tip

acts as a wedge; plowing through a built-in expansion chamber and initiating a mushroom that's consistently 1.8x bullet diameter — creating a large terminal wound channel from close range to the farthest reaches of your shooting ability. For the pinnacle of shot-to-shot consistency, these rounds are loaded using our industry-leading manufacturing processes and Remington Premier Gold Box™ components.



Collective and a fallouth No. 2 Bullet William PREMIER® COPPER-SOLID® 243 Win PCS243WB 270 Win PCS270W 130 Copper Solid Tipper 7mm Remington Mag PCS7MMA 140 Copper Solid Tipper PCS3030W/ 150 PCS3006A - 150 PCS3006B 165 30-06 Springfield PCS300WA 150 Copper Solid Tipped 300 Win Mag PCS300WE 165 Copper Satid Tippe 150 PC\$308WA Copper Solid Tippe

NEW

NEW

NEW

NEW

300 Remington Ultra Ma

PREMIER® MATCH

IF THERE WERE A STRONGER WORD THAN ACCURATE. WE'D USE IT HERE.

Ever hear the phrase, "you could drive tacks with 'em?" Well, they're probably talking about Remington® Premier® Match ammunition. Using only match-grade bullets, Premier Match ammunition employs special

loading practices to ensure world-class performance and accuracy with every shot. Maybe some day there will be a stronger word than accurate to describe Premier Match.

Until then we'll continue to prove it on paper.

308 WIN, 168-GR. PREMIER* MATCH 5 SHOTS, .6", 100 YDS.



	PREMIER	MATCH	
223 Rémington	R223R6	62	· Hotlow Point Match :
223 Remington	RM223R1	69	MatchKing* BTHP
223 Remington	RM223R3	η	MatchKing® BTHP
6.8mm Remington SPC	RM68R1	115	MatchKing* BTHP
308 Wiri	RM308W7	168	Matchking® BTHP
308 Win	RM308W8	. 175	MatchKing* BTHP


REMINGTON® ULTRA MAG.™

BIG GAME'S HIGHER POWER.

REMINGTON® ULTRA MAG.™

A revolution in high-performance big-game ammunition. In each of its calibers, the Remington Ultra Mag™ cartridges produce the highest velocities, the flattest trajectories and the highest energy levels available to big-game hunters today. This is due to their large case capacities and innovative, non-belted magnum case designs. These cases hold dramatically more powder and align with unmatched precision within the bore, making the world's most lethal family of cartridges the most accurate, as well. Available in the most trusted bolt-action rifle of all time—the Model 700™—the Ultra Mag™ family is a truly superior gun and ammunition system geared for today's most discriminating hunters.

INNOVATIVE CASE DESIGN RESULTS IN A "NON-BELTED MAGNUM" WITH A LARGER CASE DIAMETER, WHICH ALLOWS FOR DRAMATICALLY INCREASED POWDER CAPACITY.





7mm Remington® Ultra Mag.™ With a muzzle velocity over 3,450 fps, it's one of the flattest-shooting big-game

of the lattest-shooting Org-gar rounds on the planet – flatter than Timm STW, flatter than a 22-250 varmint load. It's the perfect choice for long-range shots on any North American big game.

375 Remington® Ultra Mag.™
The ultimate in stopping power.
With over 5,000 ft-lbs of energy
at the muzzle, it delivers more
energy at 200 yards than 375
H&H at 100 yards — and with
the same flat-shooting trajectory
as a 150-grain 270 Win load.

300 Remington® Ultra Mag.™
The extreme standard for big game. With a 180-grain bullet, it delivers a muzzle velocity of 3,250 fps with 2,160 ft-lbs of retained energy at 500 yards. That's right, a frained marksman could knock an elk off its feet at nearly a quarter of a mile.


338 Remington® Ultra Mag.™
An excellent cartridge for bear,
elk and moose, Loaded with
a 250-grain bullet, it delivers
over 600 ft-lbs greater muzzle
energy than 338 Win Mag and
retains a flatter trajectory all
the way out to 500 yards.



SHORT-ACTION ULTRA MAG.™

Magnum performance in a lightweight, short-action firearm and ammunition package. Premier[®] Short-Action Ultra Mag[™] cartridges offer ballistic performance equivalent to the two most popular belted magnums — 300 Win Mag and 7mm Remington Mag — in a fast handling short-action rifle. They feature a highly efficient case design that duplicates or exceeds belted magnum ballistics with less powder, in turn, generating less felt recoil.

Plus, they're inherently more accurate. The cartridge headspaces off the shoulder of the case, rather than a belt, promoting more precise bore alignment. It's big-time performance in a little package.

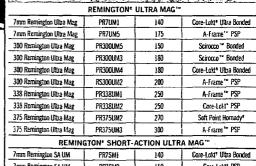


7mm Remington SA UM	PR7SM1	140	Core-Lokt* Ultra Bonded
7mm Remington SA UM	PR7SM2	150	Core-Lokt* PSP
7mm Remington SA UM	PR7SM4	160	Core-Lokt* Ultra Bonded
300 Remington SA UM	PR300SM1	150	Core-Lokt* Ultra Bonded
300 Remington SA UM	PR300SM2	165	Core-Lokt* PSP
300 Remington SA UM	PR300SM4	180	Core-Lokt* Ultra Bonded

POWER LEVEL® AMMUNITION


One gun. One chambering. The ballistic characteristics of three cartridges.

Power Level® Ammunition allows you to incrementally tailor the performance of your rifle and ammunition to match your intended game species and hunting range, similar to the way shotgunners use 2 ¹/₂", 3" and 3 ¹/₂" loads. The point of impact between Power Level loads stays within 2" out to 200 yards, so you'll have little to no scope adjustment when changing Power Levels. Now when you choose the 7mm or 300 Remington Ultra Mag,™ you're getting three guns in one. Simply put, never before has one cartridge offered this kind of versatility.


POINT OF IMPACT ACROSS ALL POWER LEVELS WITHIN 2", OUT TO 200 YARDS.




THE CONCEPT - SHOTGUN/SHOTSHELL

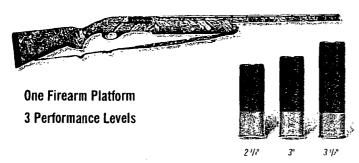

THE IDEA - APPLIED TO THE CENTERFIRE RIFLE

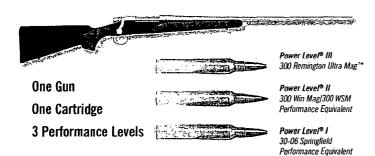

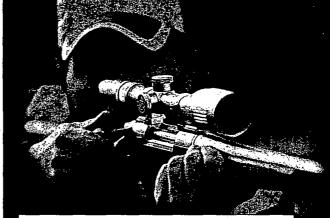

	CID		a Deplement of the Landson		
PR7UM1	7mm Ultra Mag	III	7mm Ultra Mag	140	Core-Lokt® Ultra Bonded®
PRSC7UM1	. 7mm Ultra Mag	111	7mm Ultra Mag	150	Scirocco™ Bonded
PR7UM5	7mm Ultra Mag	AI .	7mm Ultra Mag	175	A-Frame™
PR300UM5	300 Ultra Mag	III '	300 Ultra Mag	150	Scirocco** Bonded
PR300UM3	300 Ultra Mag	m	300 Ultra Mag	180	Scirocco*** Bonded
PR300UM4	300 Ultra Mag	01 .	300 Ultra Mag	180 ·	Core-Lokt® Ultra Bonded®
RS300UM2	300 Ultra Mag	-	300 Ultra Mag	200	A-Frame **
PR/UM2-P2	7mm Ultra Mag	112	7mm Remington Mag	160	Core-Lokt® Ultra Bonded®
PR300UM2-P2	300 Ultra Mag	11	300 Win/300 WSM	180	Core-Lokt® Ultra Bonded®
PR300UM3-PZ	300 Ultra Mag	0	300 Win/300 WSM -	- 180	Scirocco** Bonded
R7UM1-P1	7mm Ultra Mag	.1	270 Win	140	Core-Lokt*
PRA300UM1-P1	300 Ultra Mag	1	30-06 Springfield	150	AccuTip™
R300UM1-P1	300 Ultra Mag	1	30-06 Springfield	150	Core-Lokt*

POWER LEVEL® III MAXIMUM ENERGY —

MAXIMUM ENERGY -EXTREME RANGE

- 300 Remington Ultra Mag[™] performance
- The biggest, toughest game at extreme ranges

Remington. POWER LEVEL III
PREMIER SCIRCO BONDED

SCOREMINGTON WERE AND PROPERTY OF THE PROPER

Simply the biggest, baddest, flattest-shooting 30 caliber in production today. At 200 yards, it delivers 485 ft-lbs. more energy than the 300 Wby Mag and 28% more energy than the 300 Win Mag or 300 WSM.

POWER LEVEL® II

MAGNUM ENERGY - EXTENDED RANGE

- 300 Win Mag, 300 WSM performance
- Medium and large big game at extended ranges

Remington POWER LEVEL II. A PREMIER CORE-LOKT ULTRA BONDED . SOOKE SINGLON ULTRAVIACE . A

With velocity and down range ballistics that mirror the 300 Win Mag and 300 WSM, Level II is ideal for elk, muleys or whitetails at extended range.

POWER LEVEL® I

TERMINAL ENERGY (

- 30-06 Springfield performance
- Whitetail-sized game out to long range



Performs identically to the 30-06, the caliber that's dropped more big game than any other. The optimum deer hunting Power Level — coast to coast.



Core-Lokt.® For more than six decades, it has remained the leader in centerfire deer ammunition. And deservedly so.

The Deadliest Mushroom in the Woods™

300 WSM

308 Win

300 Wby Mag

338 Win May

338 Win Mag

35 Remington

35 Whelen

338 Remington Ultra Ma

350 Remington Mag

300 Remington SA Ultra Mag

The Core-Lokt bullet design is the original controlled-expansion bullet — and one of the most effective ever developed. Its progressively tapered copper jacket is locked to a solid lead core, promoting perfectly controlled expansion and high weight retention for absolutely dependable on-game results. You'll find its time-proven performance in both soft point and pointed soft point versions - and in a range of bullet weights for virtually every centerfire hunting caliber made.

T POINT		S	OFT POIN
Iron	Soft point shape provides broad ntal area for high nergy impact and rapid expansion	Spitzer shape profile for improved velocity and flatter trajectory	
		"Lokt" in place to penetration ——————	
	Jackets designed reliable expansio		

	CORE-LOKT SO	OFT POINT	
257 Roberts	R257	117	Soft Point
270 Win	R270W4	150	Soft Point
280 Remington	R280R2	165	Soft Point
30-30 Wm	R30301	150	Soft Point
30-30 Win	R30302	170	Soft Point
30-06 Springfield	R30064	180	Soft Point
30-06 Springfield	R30067	220	Soft Point
308 Martin* Express	R308ME1	150	Soft Point
308 Win	R308W2	180	Soft Point
303 British	R303B1	180	Soft Point
32 Win Special	R32W\$2	170	Saft Point
8mm Mauser	REMSR	170	Soft Point
35 Remington	R35R2	200	Soft Point
450 Bushmaster*	R450B1	250	Soft Point
C	ORE-LOKT HOL	LOW POINT	
30-30 Win	R30303	170	Hollow Point

R300WSM1

R308W1

R300W81

PR300SM2

R300UM1-P1

R338W1

R338W2

PR338UM2

R35R1

R35WH1

R350M1

150

150

180

150

225

250

250

200

Pointed Soft Point

REMINGTON RIFLE

Proof of our dedication to providing you with the widest selection of centerfire ammunition in the industry, our Rifle series consists of a multitude of calibers and popular bullet styles to match your specialized hunting and shooting pursuits. All assembled with premium components and the ultra-tight tolerances that put more home reloading presses on the back shelf than any other brand. Remington Rifle.



BRONZE POINT® TIPPED

Introduced by Remington® over 80 years ago, these were the first bullets to utilize a tipped design. Today Bronze Point still delivers exceptional long-range performance on medium-sized game. Sleek profile generates flat trajectory. On impact, the bronze tip is driven backward to create rapid, but controlled expansion.





Aerodynamic tip for superior long-range ballistics and rapid expansion

			til fill bed	
- 1		REMINGT	ON' RIFLE	
-	17 Remington	R17R2	25	Hollow Paint
	22 Hornet	R22HN1	45	Pointed Soft Point
	22 Hornet	R22HN2	45	Hollow Point
	220 Swift	R220S1	50	Pointed Soft Point
	222 Remington	R222R1	50	Pointed Soft Point
1	223 Remington	R223R1	55	Pointed Soft Point
	223 Remington	R223R3	55	Metal Case
	22-250 Remington	R22501	55	Pointed Soft Point
	243 Win	R243W1	. 80	Pointed Soft Point
	25-20 Win	R25202	86	Soft Point
1	250 Savage	R250SV	100	Pointed Soft Point
	6.8mm Remington SPC	R68R1	115	Open Fip Match (OTM)
	6.8mm Remington SPC	R68R2	115	Metal Case
	270 Win	R270W1	100	Pointed Soft Point
1	7mm-08 Remington	R7MQ82	120	Hollow Point
	30 Carbine	R30CAR	110	Soft Point
	30 Remington AR	R30RAR2	150	Pointed Soft Point
	30-06 Springfield	R30069	55	Pointed Soft Point
Į	30-06 Springfield	R30061	125	Pointed Soft Point
	7.62x39mm	R762391	125	Pointed Soft Point
	7mm Rem SA Ultra Mag	PR7SM3	160	Pointed Soft Point
	32-20 Win	R32201	100	Lead
1	338 Lapua Mag	RM338LMR1	250	Scenar
EW	338 Marlin Express	R338ME1	250	Soft Point
ı	35 Whelen	R35WH3	250	Pointed Soft Point
	375 H&H Mag	R375MI	270	Soft Point
	375 Remington Ultra Mag	PR375UM2	270	Soft Point
	444 Martin	R444M	240	Soft Point
EW	450 Bushmaster	PRA450B1	260	AccuTip
	45-70 Government	R4570L	300	Semi-Jacketed Hollow Point
	45-70 Government	R4570G -	405	. Soft Point


BRONZE POINT® TIPPED					
270 Win	R270W3	130	Bronze Point Tipped		
30-06 Springfield	R30063	150	Bronze Point Tipped		
30-06 Springfield	R30066	180	Bronze Point Tipped		

PC	OWER-LOKT	HOLLOW P	DINT
222 Remington	-R2Z2R3	_ 50	Power-Lokt Hollow Point
223 Remington	R2Z3R3	55	Power-Lokt Hollow Point

POWER-LOKT HOLLOW POINT

Remington® Power-Lokt® delivers unmatched performance for small game and varmint hunting. The thin copper jacket is electrolytically plated to the lead core for near-perfect concentricity and gyroscopic balance. The result? Dead-on, benchrest-type accuracy with instant fragmentation on impact.





243 WIN, 80-GR REMINGTON® POWER-LOKT® HOLLOW POINT, .5", 100 YDS.



Plated copper jacket for superior accuracy and instant fragmentation on impact



MANAGED-RECOIL'

REDUCE RECOIL TO IMPROVE YO

At some point, all shooters feel the negative effects of recoil. Some hunters experience the frustration of missing a target because of flinching. Others know the aggravation of losing the opportunity for a second shot because of the time it takes for scope recovery. Then there's the shoulder pain after a day of hunting or practicing, which may deter future practice sessions. To fight these effects of recoil, Remington® developed Managed-Recoil® ammunition.

The Managed-Recoil ammunition succeeds where other recoilcontrol ammunition fails. Past attempts at curbing recoil have focused solely on the amount of gunpowder in the ammunition. Remington's Managed-Recoil focuses on the entire cartridge by incorporating a specially designed bullet built to perform at lower velocities.

FEATURES

- Fully effective hunting performance with less than 50% of the recoil of standard cartridges
- · Less anticipation of recoil
- · Increased shooter confidence and improved shot placement
- · Quicker scope recovery for faster second shot placement
- Point of aim is within 2" of a standard cartridge at 100 yards
- · Target practice without the recoil pounding
- Specially designed bullets are optimized to deliver 2x expansion with over 75% weight retention on shots out to 200 yards

FULLY EFFECTIVE ENERGY AND EXPANSION OUT TO 200 YARDS:



yards



100 yards



150 yard:



200 yards

MANAGED-REC




YOUTH AND WOMEN. Managed-Recoil® allows youth and women to practice and hunt effectively and comfortably with half the recoil. It even lets you use an existing gun without readjusting the scope because "point of aim — point of impact" is nearly identical to standard cartridges at 100 yards.

PRACTICE MAKES PERFECT. For targe shooters and hunters who target shoot to improve their performance, Managed-Reck cartridges provide more time on the range, without the bruises to prove it. After your practice session, you can switch to full-pol ammunition without scope adjustment.

MANAGED-RECOIL® COPPER SOLID™ SABOT SLUG.

The best-selling terminal performance and accuracy of our Copper Solid Slugs is now available in Managed-Recoil loads. With 40% less recoil, they're perfect for anyone who wants outstanding on-game results in rifled barrels without the



rearward punch. Or, use them to sight-in, then step up to full loads. There's no finer slug load for young or recoil-sensitive hunters.



MANAGED-RECOIL® SLUGGER® RIFLED SLUG.

Managed-Recoil® Slugger® Rifled Slugs offer remarkably effective performance with 45% less felt recoil than full velocity Sluggers. With effective energy out to 80 yards, these 1-ounce slugs easily handle the majority of smooth

bore shotgun deer hunting ranges. Also
 check out Managed-Recoil Buckshot;
 it's an ideal close-range performer.

	(C.3)			THE DOWN			(1) E3:
		MAN	AGED-R	ECOIL® SLUGGER	RIFLED SL	.UG	
RL12RS	12	\top	21/4	1200	1		Rifled Shug
			MANA	GED RECOIL® BU	CKSHOT		
RL12BK00	12		21/4	1200	T - 1	8	00 BK

JARKSMANSHIP IN THE FIELD.

No scope readjustment necessary. Remington® Managed-Recoil® Point of Impact is nearly identical to full velocity loads. Point of impact comparison at 100 yards. 30-06 Sprg. 125-grain Managed-Recoil® 30-06 Sprg. 150-grain PSP Core-Lokt May not operate all recoil or gas-operated firearms

APPLICATIONS




HUNTING WITH CONFIDENCE. Managed-Recoif® Rifle ammunition is designed for fully effective hunting performance out to 200 yards with less than half the recoil of a standard load. A shooter not anticipating the heavy recoil of a full load can better place a first shot on a game animal, and quickly re-acquire the target for a follow up shot.

• RECOIL-SENSITIVE HUNTERS. For shooters that are unable or unwilling to tolerate the recoil of a standard cartridge on the range or on the field, Managed-Recoil® Cartridges are the perfect solution. Effective performance with half the recoil.


50% LESS RECOIL.

Remington® Managed-Recoil® centerlire cartridges deliver 50% less recoil than standard velocity ammunition. Managed-Recoil 270 Win, 308 Win and 30-06 actually deliver less recoil than a standard velocity 243 Win!

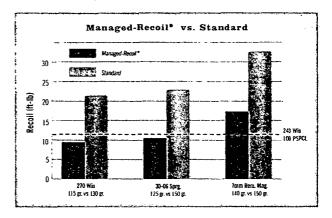

LETHAL PUNCH OUT TO 200 YARDS.

Managed-Recoil® rounds pack a lethal punch at the most common deer-hunting ranges. In fact, their energy levels exceed 1,100 ft.-lb. at 200 yards. Managed-Recoil 30-30 delivers 919 ft-lb. at 100 yards and is fully effective on deer-sized animals out to 125 yards.

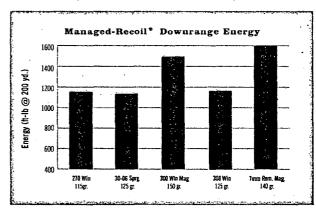

Caliber	Index/ EDI No.	Bullet Wt. (grs.)	Bullet Type	Muzzle	50 yd.	Velocity (ft./s 100 yd.	ec.) 150 yd.	200 yd.	Muzz	e 50 yd.	Energy (ft. 100 yd.	lb.) - 150 yd	200 yd.	50 yd	Traje 100 y	tory (in.) i. 150 ý	1. 200 yd
				MAI				FIRE RIFLI									
260 Remington	Ŕ12601	140	✓ Care-Lokt® PSP ✓	2300	2206	2115	2024	1935 *	1644	1512	1389	·÷ 1273	1165	0.1	zero	₹.;? . 2.1	· 17-6.3
7mm-08 Remington	RL7M081	140	Care-Lakt* PSP	2300	2195	2095	1995	1895	1644	1498	1361	1235	1118	0.2	zera	-2.1	-6.5
270 Win.	RL270W2 .	115	Care-Lakt* PSP	2710	2558	2412	2270	2133	1875	1671	1485	1315	1161	0.1	zero	., 7, 1.6	48
30-30 Win.	RL30301	125	Care-Lokt® PSP	2175	1993	1820	1658	1508	1313	1102	919	763	631	0.3	zero	-3.0	-9.1
30-06 Springfield	- RL30062	125	Care-Lokt® PSP	2660	Ź495	2335	2182	2034	1964	1727	1513	1321	1148	· 0.1	Zero	15	##49 A
300 Win. Mag.	RL300W1	150	Core-Lokt* PSP	2650	2509	2373	2241	2113	2339	2097	1875	1672	. 1486	-0.1	zero	-1.5	-4.7
308 Win.	RL308W1	125	Care-Lokt® PSP	2660	-2501	2348	2199	2057 💝	1964	1736	1529	1342	21174 3	0.1	Zero	参 题15	13 14 9 14 15
7mm Remington Mag.	RLJMM4	140	Care-Lakt* PSP	2710	2594	2482	2372	2265	2283	2092	1915	1749	1595	0.0	zero	-1.5	-4.5
300 Remington Ultra Mag	~RL300UM1	150.	Care-Lokt* PSP++	<u></u>	2669	2528	2391	- 2258	2639	> 2372	2127	1903	1698	0.3	0.8	zeró	23

MANAGED-RECOIL® BUCKHAMMER® LEAD SLUGS. Managed-Recoil® Technology has been applied to Remington's most devastating lead slug. We've reduced felt recoil by over 40% to make the BuckHammer® easier on the shooter without sacrificing its on-game performance. The Managed-Recoil BuckHammer 12-gauge slug travels at a fast 1,350 fps at the muzzle and maintains an impressive 1,032 ft-lb.

of deer-stopping energy at 100 yards. The 20-gauge, at 1,275 fps., delivers 746 ft.-lb. of energy at 100 yards. Standard



BuckHammer and Managed-Recoil BuckHammer slugs are designed for use with fully-rifled barrels or rifled choke tubes.

•													
	Index/ EDI No.	Gauge	Length (in.)		Vel Muz	ocity (ft./sec 50 yd.	.) 100 yd.	Muz.	nergy (ftl 50 yd.	b.) 100 yd.	Trajec 50 yd.	tory (in.) 100 yd.]
٠.			7-5		GED-RECO						1.	. सं अर्थक	ı
-	RI 12LSS	·鲜12 写	3 2 1/1	11/16	1350	<u>M07</u>	972	第1991學	1340	第1032年	2000	的现在分	1
ı	RL20LSS	. 20	23/	1/4	1275	1057	938	1379	948	746	0.0	-6.2	ı

PISTOL & REVOLVER



32 SEW.

R32SW 11/2

88

EVERY APPLICATION.

ONE BRAND. Remington® has been making centerfire handgun ammunition longer than anyone. It should then come as no surprise that we offer the broadest line of pistol and revolver ammunition available. With loadings tailored to virtually every potential shooting application, our line includes vast choices of calibers, bullet weights, bullet styles and combinations of all these. Choose from a complete range of traditional bullet styles, as well as from some of the most sophisticated handgun bullets made. All cartridges are assembled from the highest quality components - with meticulous quality control - to assure reliability in all handgun actions.

32 29M	- K3ZSW	1 72	88	resti kontri nose	(680 ,	645	910	J 90	91	13	1 25	10.5	5
32 S&W Long # y	R32SWL	188	98	Lead Round Nose	705	670	635	115	98	88	23"	10.5	4
32 (7.65min) Auto.	. R32AP	1%	71	Metal Case	905	855	810	129	115	97	1.4"	5.8	4"
157 Mag ** 2	R357M7	C 5 % &	110	Semi-lacketed Hollow Point	129575	1094	975	ME 410	292	232	0.8	÷ 3.5	1
	R357M1	51/5	125	Semi-Jacketed Hollow Point	1450	1240	1090	583	427	330	0.6*	2.8	4*
CANAL.	R357M2	5 1/3	158	Semi-lacketed Hollow Point	1235	1104	1015	535	428	361	0.8	3.5	4.
	R357M3	51/2	158	Soft Point	1235	1104	1015	535	428	361	0.8	3.5"	4"
	R357M5	5 1/2	158	Semi-Wadcutter	1235	1104	1015	.535	428	361	0.8	3.5	4
	R357M10	51/6	180	Semi-Jacketed Hollow Point	1145	1053	985	524	443	388	. 0.9	3.9	8%
9mm Luger	R9MM1	14	115	Jacketed Hollow Point	1155	1047	971 -	341	280	241	0.9*	3.9"	4"
	. R9MM3	1%	115	Metal Case	1145	1048	978	335	280	244	0.9	4.0"	4*
	R9MM6	17%	- 115	Jacketed Hollow Point +P‡	- 1250	1113	1019	399	316	265	0.8	3.5	` 4"
	R9MM2	11/4	124	Metal Case	1110	1030	971	339	292	259	1.0	4.1"	. 4"
	R9MM8	11%	147	Jacketed Hollow Point (Subsonic)	990	941	900	320	289	264	1.1	- 49	. #
380 Auto.	R380A1	11%	88	Jacketed Hollow Point	990	920	868	191	165	146	1.2"	5.1	4"
	R380AP	1%:	95	Metal Case	955	865	785	190	160 .	130	ir	5.9	*
38 S&W	R38SW	11%	146	Lead Round Nose	685	650	620	150	135	125	2.4"	10*	r.
r 38 Special** .*	R38\$10	11%	110	Semi-Jacketed Hollow Point +P ‡	995	926	871	242' .	210	185	12	5.1	P .
	R38S16	11/2	110	Semi-Jacketed Hollow Point	950	890	840	220	194	172	1.4"	5.4	4"
	R3852	-11/2	125	Semi-Jacketed Hollow Point +P ‡	945	898	858	248	224	204	1.3	5.4	. 4°
	R38S3	11/2	148	Targetmaster® Lead WC Match	710	634	566	166	132	105	2.4	10.8"	4
	R38S5	, 1%	158	Lead Round Nose	755	723	692 -	200	183	168	-20.	8.3" >	4
	R3856	11/4	158	Semi-Wadcutter	755	723	692	200	183.	168	2.0	8.3*	4*
보기 기품이	R38512	1%	158	Lead Hollow Point +P ‡	890	855	823	278	257	238	1.4	6.0	4
38 Short Cott * *	R38SC	1%	125	Lead Round Nose	730	685	645	150	130	115	2.2	9.4"	6*
40 S&W	R40SWI	5 1/2	155	. Jacketed Hollow Point	1205	1095	1017	499	413	356	0.8	3.5	4*
	R40SW2	5 1/2	180	Jacketed Hollow Point	1015	960	914	412	368	334	1.3*	4.5*	4-
41 Rem. Mag.**	R41MG1	2 1/2	210	- Saft Paint	1300	1162	1062	788	630	526	0.7	3.2	4.
44 Rem. Mag.**	R44MG2	2 1/2	240	Soft Point	1180	1081	1010	741	623	543	0.9	3.7"	4*
	R44MG3	21/2	240	Semi-Jacketed Hollow Point	1180	1081	1010	741	623	543	0.9	3.7"	.4
44 S&W Special**	R44SW	21/2	246	Lead Round Nose	755	725	695	310	285	265	2.0"	8.3"	6"
45 Coli**	R45C1	2 1/2	225	Semi-Wadcutter	960	890	832	460	395 :	346	1.3	5.5	5
	R45C	21/2	250	Lead Round Nose	860	820	780	410	375	340	1.6*	6.6"	5*
45 Auto	R45AP2	21/2	185	Jacketed Hollow Point	1000	939	889	411	362	324	1.1	4.9	5.
_	R45AP4	2 1/2	230	Metal Case	835	800	767	356	326	300	1.6*	6.8	5*
•	R45AP7	21/2	230	Jacketed Hollow Point (Subsonic)	835	800	767	356	326	300	1.6*	6.8	5

Metal Case

Lead Round Nose

760 707 659

90 81 73 25° 10.5

645 610

‡Ammunition with "+P" on the case neadstan *Test Barrel Length **Vented Barrel Ballistics

GOLDEN SABER[™] HPJ





DEAD-SERIOUS BULLET INNOVATION.

A superior bullet for when the stakes are at their highest. Designed for law enforcement and personal defense, the Golden Saber™ High Performance Jacket successfully combines: match-type accuracy, deep penetration, maximum expansion and near 100% weight retention.

			PREMIE	Re GOI DE	N SARFR	™ HPI/H	IGH PERFO	RMANCE	IACKET)			
357 Magnum*	GS357MA	5 1/2	125	1220	1095	1009	413	333	283	0.8"	3.5	4"
9mm Luger	GS9MMB	11/2	124	1125	1031	963	349	293	255	1.0	4.0"	4
	GS9MMC	11/2	147	990	941	900	320	289	264	1.1*	4.9"	4"
9mm Luger (+P)	GS9MMD .	i 1/2	124	1180	1089	1021	384	327	287	0.8"	3.8"	4"
380 Auto.	GS380B	11/2	102	940	901	886	200	184	170	1.2*	5.]"	4-
38 Special (+P)*	GS38SB	11/2	125	975	929	885	264	238	218	1.0"	5.2"	4"
40 S&W	GS40SWA	5 1/2	165	1150	1040	964	485	396	340	1.0"	4.0"	4"
	GS40SWB	5 1/2	180	1015	960	914	412	368	334	1.3"	4.5"	4"
45 Auto.	GS45APA	21/2	185	1015	951	899	423	372	332	1.1"	4.5	5*
	GS45APB	21/2	230	875	833	795	391	355	323	1.5"	6.1*	5-
45 Auto. (+P)	GS45APC	21/2	185	1140	1042	971	534	445	388	1.0*	4.0"	5*

‡Ammunition with *+P* on the case headstamp is loaded to higher pressure. Use only in fixearms designated for this cartridge and so recommended by the gun manufacturer.





is reduced from groove to bore diameter, so the bullet is precisely aligned before the Driving Band engages the rifling. The result: match-grade accuracy and reduced barrel friction that conserves velocity

The high-performance jacket expands to a larger diameter than lead core - aver 1.6x diameter, Minimal lead deformation retain energy for deeper penetration.



Pistol and Revolver Interchangeability chart is located on page 107

UMC® AMMUNITION

UMC* HANDGUN CARTRIDGES.

All UMC ammunition is American-made in Lonoke, Arkansas, using first-quality factory-fresh brass and clean-shooting Kleanbore® primers to provide the best value for practice, personal defense and hunting.



UMC® RIFLE CARTRIDGES.

Made in the USA, value-priced and ideal for high-volume shooting, our UMC centerfire rifle ammunition is loaded in seven popular calibers, including the 30-06 Sprg, 308 Win, 7.62x39mm, 30 Carbine and 303 British. The 45- and 50-grain jacketed hollow point loads in 223 Remington and 22-250 Remington are perfect for varmint hunters. Available in



UMC® LEADLESS™ HANDGUN CARTRIDGES.

A must have for shooters that frequent indoor ranges, economical UMC® LeadLess™ cartridges virtually eliminate lead exposure at the firing line. Specially designed bullet actually prevents the vaporization of lead from the bullet's base upon firing. Standard



bullet weights duplicate the ballistics of conventional loads.

Nose profile designed to function smoothly in all action types

Full-length copper jacket	
Powder blended for consistent velocity ——	
High-quality reloadable brass case	

Clean-shooting, lead-free priming Solid lead core protected by thick copper jacket



Enclosed base virtually eliminates airborne lead at firing line




Caliber	Index/	Primer, No.	(grs.)	Bullet Style (Va Mar	ochy (t./s 50 rds	e 100 yes	E Muz	ergy (ft- 50 yds	bs) & > 100 yds	Mid-ran 50 yds	ge Trajectory 100 yds
				UMC*	HANDGI	JN CAR	TRIDGES					
9mm Luger	L9MM1	1 %	115	JHP	1135	1041	973	329	- 277	242	0.9*	4.0
	L9MM2	1%	124	MC	1100	1030	971	339	292	259	1.0	4.i*
	L9MM3	1 %	115	MC	1145	1048	978	335	280	244	0.9*	4.0*
	L9MM9	1 %	147	MC	990	941	900	320	289	264	1.1*	4.9*
10mm Auto	L10MM6	21/	180	MC	1150	1063	998	529	452	398	0.9"	3.7
25 Auto (6.35mm)	L25AP	1 1/4	50	MC	760	707	659	64	56	48	2.0"	8.7"
32 Auto	L32AP	1%	71	MC	- 905	855	810	129	115	97	· 1.4*	5.8
357 Magnum**	£357M12	5 <i>Y</i> :	125	JSP	1450	1240	1090	583	427	330	0.6*	2.8"
357 Sig.	L357S1	.5 ⅓.	125	MC	1350	1146	1018	506	422	359	0.7	3.3"
	L357S2	5 %	125	JHP	1350	1157	1032	506	372	296	0.7	3.2
38 Super Auto+P	L38SUP	19	130	MC	1215	1099	1017	426	348	298	0.8"	3.6
38 Special + P**	L38S2	114	125	JHP	945	898	858	248	224	204	1.3"	5.4*
38 Special**	13855	14	158	LRIN	755	123	692	200	183	168	2.0"	8.3
	L38\$11	1 %	130	MC	790	766	743	173	163	153	1.7*	7.2"
380 Auto	L380AP	1%	95	MC	955	865	785	190	160	130	1.4"	5.9
40 S & W	L40SW2	5 ⅓	180	JHP	1015	960	914	412	368	334	1.3"	4.5*
	L40SW3	5 1/4	180 -	MC	990	940	898	392	353	- 322 -	1.1*	4.9
	L40SW4	5 1/4	165	MC	1150	1040	964	485	396	340	1.0	4.0"
44 Remington Mag**	L44MG7	2 1/4	180	ISP	1610	1365	1175	1036	. 745	55I	0.5"	2.3
45 Auto	L45AP1	2 1/-	185	MC	1015	955	907	423	375	338	1.1*	4.8*
5 <u>5 9</u> 9 9 5 9	L45AP4	2 1/2	230	MC	835	800	767	356	326	300	1.6*	6.8
	L45AP7	2 %	230	JHP	835	800	767	356	326	300	1.6"	6.8
45 GAP	L45GAP4	2 1/2	230	MC	880	-84L -	805	395	361	. 331	1.5	6.2


Caliber	Index/ EDI No	Primer No.	Wt. (grs.)	Bullet ZStyle	Vel Muz	ocity (ft./: 100 yds.	ec) 200 yds	Muz	Energy (ft	lbs.) s. 200 yds. ^f	50	Short-ra	nge Traji 150	ctory (i 200	n inche 250	300
							RFIRE									
17 Remington Fireball	L17FBV	1%	25	IHP	3850	3280	, 2780	823	597	429	0.0		0.9	ZETO	-2.0	-5.4
223 Remington	L223R3	11/2	55	MC	3240	2759	2326	128	929	660	-0.1	0.6	zero	-1.9	-5.5	-11.0
1. 1.	L223R7	71/2	45	HP	3550	2953	2430	1259	871	590	. 0.1	. 0.4	, 'zero'	1.7	-4.8	-9.7
-	L223R8	71/2	50	JHP	3425	2899	2430	130	933	655	-0.1	0.5	zero	-1.7	-4.9	-9.9
	L223R9	714	62.,	CTFB ·	- 3100 ·	2734	2396	- , 132	1029	790	0.1	0.6	zero	-1.9	-5.4	-10.6
22-250 Remington	L22503	9 1/2	45	JHP	4000	3340	2770	1598	1114	767	-0.3	0.2	zero	-1.2	-3.5	-7.2
	L22504	91/2	50	- IHP	3820	3245	2739	1620	1169	.833	-0.1	0.8	0.9	Zero	2.0	5.4
7.62x39mm	1762391	71/2	123	MC	2365	2060	1780	152	1159	865	Q.1	zero	-2.2	-6.8	-14.1	-24.5
30 Carbine	L300R1	61/2	110	MC	1990	1567	1236	967	600	373	0.6	ZETO'	-4.2	-12.9	-27.2	-48.6
30 Remington AR	L30RAR1	71/1	123	MC	2800	2464	2152	214	1658	1264	0.9	2.1	1.9	zero	-3.8	-9.7
y 308 Win.	L308W4	.9%	.150	MC *	. 2820	, 2533	2263	264	2137	1705	-0.1	zero	" -1.2	3.9	- 8.4	į4.7 · · ;
308 Win.	L308W4B	9 1/2	150	MC	2820	2533	2263	264	2137	1705	-0.1	ZETO	-1.2	-3.9	-8.4	-14.7
30-06 Springfield	L30062	91/2	150	MC ,	,2910	2617	2342	282	2281	1827	.0.2	Zero	LL	-3.6	-7.7	-L3.6
303 British	L303B1	91/2	174	MC	2475	2209	1960	236	1885	1484	0.1	zero	-1.9	-5.9	-12.2	-21.4

Caliber	index/ .EDI No.	Primer No.	Wt. (grs.)	Bullet Style	Muz	elocity (ft., 50 yds.	sec.) 100 yds.	Muz.	ergy (ft- 50 yds	bs.) .100 yds.	Mid-range 50 yds.	Trajectory 100 yos.
			UMC	LEADL	.ESS~ F	IANDGL	IN CARTRI	DGES				•
Sprin Luger	LL9MM11	3014.73	¥115 🖫	FNEB	.1145	1048		335	3 280	, (244	0.9	4.0
	LL9MM2	1 1/2	124	FNEB	1100	1030	971	339	292	252	1.0	4.1*
y 134 8 136	LL9MM9 🛬		147 3	FNEB	990	941	900	:: 320	289	264	s 11°.,	- 4.9
38 Special**	LL38S17	1% .	125	FNEB	850	822	796	201	188	176	1.4"	6.4"
38 Special+P**	€1138\$2 A	*1 1/ × 15	≸125 ÷	FNEB	≠ 975	935	√ 3 89 9 ×	>264	242	224	1.2	.4.9
380 Auto	LL380AP2	1 1/2	95	FINEB .	955	865	785	- 190	160	130	L.4"	5.9
40 S & W 🔑 🚓	¥31140SW5 ∴	₹5% (180	FNEB	·990	, ~ 9 40	· 898 ·	392	£/353	€ 322	\$11°.	2.7.49
45 Auto	LL45AP8	2 1/2	230	FNEB	835	. 800	- 767	356	326	300	1.6*	. 6.8°


*Note: These ballistics reflect vented barrel.

CITB = Closed Tip Flat Base | MC = Metal Case | FNEB = Flat Nose Enclosed Base | JHP = Jacketed Hollow Point | JSP = Jacketed Soft Point | LRN = Lead Round Nos

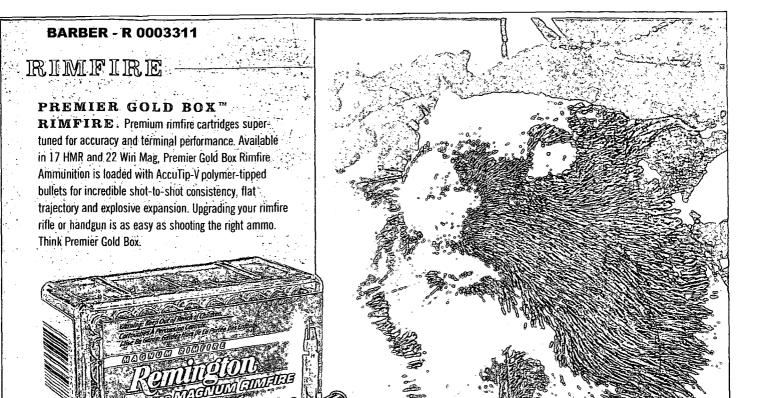

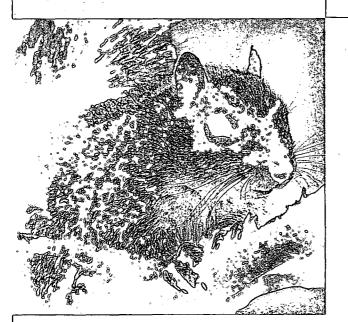

COMPETITION/TARGET RIMFIRE. When it comes to competition-grade rimfire ammunition, there's only one name good enough to share the Remington® brand — Eley. A company with a reputation for the world's most accurate and reliable rimfire ammunition, Eley, Ltd. has teamed up with Remington to offer three grades of their premier 22 long rifle ammunition for the serious target shooter: Target

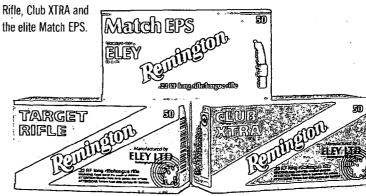

									10,4			D.
Rimfire Magnum				PF	REMIER ² GO	LD BOX RIMFI	RE					
Premier* 17 HMR	PR17HM1	17	Acculip-V	2550	2212	1901	245	185	136	0.1	0.0	-2.6
Premier* 22 Wm Mag	PR22M1	33	AccuTip-V	2000	1730	1495	293	219	164	0.6	0.0	-4.5

0.4	TO THE	****	10.74						.me			
		3 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	1)[2]	CO	MPETITION/T	ARGET RIMFIF	RE	· inspired				
22 LR Remington/Eley			· 									
Match EPS	RE22EPS	40	Lead Flat Nose	1085	1006	941	105	90	79	0.3	0.0	-7.1
Club Xtra	RE22CX	40	Lead Round Nose	1085	1006	941	105	90	79	0.3	0.0	-7.1
Target Rifle	RE27T	40	Lead Round Nose	1085	1006	941	105	- 90	79	0.3	0.0	-7.1

^{**}Note: Sight height 1.5" above axis of bore.



your sights, Remington® offers the perfect 22 rimfire ammunition for any occasion.

Remington rimfire ammunition delivers the quality you expect. That's because we put the same level of care into making our rimfire ammunition as we do our centerfire ammunition, so you'll get the maximum performance from every shot.

CONTRACTOR OF THE PROPERTY OF	7.7 127-11215-0-1					12.38665		6.7-7- 2-1		2.7 (A 2262) 47	
CIEWED.			01000					Morros de la composición dela composición de la composición de la composición dela composición dela composición dela composición de la composición de la composición dela composición del composición dela	1916 1916		ß.
22 Rimfire Magnum	3										
Remington 22 Magnum	R22M1	40	Jacketed Hollow Point	1910	1610 , 1350	324	230	162	0.9	0.05.7	7 - 1
Remington 22 Magnum	R22M2	40	Pointed Soft Point	1910	1600 1340	324	227	159	1.0	0.0 -5.8	
Call and facility			0.0000			CD ₂ 2		wes.		1007(fb))© 100715 1007	ůs.
22 LR Hyper Velocity			•								
Yellow Jacket®	1722/1700+	-33	Truncated Cone Hollow Point	1500		165	114	85	02	0.0 4.1	1 ;
Viper*	1922/1900+	35	Truncated Cone Solid	1410	1198 1056	159	115	89	-0.1	0.0 -4.7	7
22 Short High Velocity			*****	1. 4/4		2.7					<u> </u>
Remington Golden Bullet	1022/1000+	29	Plated Lead Round Nose	1095	982 903	11	62	52	- 0.3	0.0 -7.4	4
22 LR High Velocity	主 发生		? W <u> </u>			1.			A	J. W. 12 1. 2.	
Remington Golden Bullet	1522/1500+	40	Plated Lead Round Nose	1255	1113 1017	140	110	92	0.0	0.0 -5.6	6
Remington Golden Bullet	1622 +/1600 + +	. 36	Plated Hollow Point	1280	1117 . 1010	131	100	82	0.0	0.0 *-, -5.0	6 .
Thunderbolt*	TB-22A+++	40	. Round Nose	1255	11131017	140	110	92	0.0	0.0 -5.6	6
Cyclone*	CY-22HP+++	. 36	Hollow Point	1280	1117 1010	f. 131	, 100	82	0.0	0.0 -5.0	6
Garne Load	GL-22HP	36	Hollow Point	1280	1117 1010	131	100	82	0.0	0.0 -5.6	6
22 LR Standard Velocity											
Target	6122/6100+	40	Round Nose	1150	1048 976	, 117	. 98	85	0.2	0.0 -6.	4
22 LR Subsonic™		7 .		- 1 25							
Subsonic	SUB22HP/SUB22HP1+	38	Hollow Point	1050	965 901	93	79	69	0.3	-0.0 ,-7.	7.
22 LR Low Noise											
CBee	C8-22U00+	33	Hollow Paint	740	687 638	40	35	30	-15	0.0 -16	آء و
						- :					

COMPONENTS

REMINGTON® RELOADING COMPONENTS. If you reload your own cartridges, then you shouldn't settle for anything but the best reloading components in the business — Remington. We offer industry-leading products that are changing the way sportsmen think about reloading.



PREMIER®
CORE-LOKT®
ULTRA BONDED®
BULLETS. Combine
world-class accuracy with
bonded bullet toughness to
give unmatched on-game
performance. Core-Lokt Ultra
Bonded — the new performance standard for your big
game hunting handloads.





PREMIER® ACCUTIP
BULLETS. Top off your
handloads with the most accurate
polymer-tipped bullet available today.
Near-perfect concentricity and an
overall ballistically superior design
make it one of the flattest-shooting
bullets in the world. Choose AccuTip
for big-game hunting or AccuTip-V for
awesome performance on varmints.

Index/EDI No. Description





CORE-LOKT® BULLETS.

"The Deadliest Mushroom in the Woods," now a handloading component. It's the original controlled-expansion big-game bullet, delivering massive energy transfer as it expands to nearly 2x original diameter. For dead-sure reliability,

choose Core-Lokt bullets for your hunting handloads.



Index/EDI No.	Description .								
CENTERFIRE PRIMERS									
X22600	1 1/2 Small Pistol								
X22604	2 1/2 Large Pistol								
X22626	5 1/2 Small Pistol								
X22606	6 1/2 Small Rifle								
X22628	7 1/2 Small Rifle BR								
X22608	9 1/2 Large Rifle								
X22622	9 1/2 M Magnum Rifle								
ETRONX"	ELECTRIC CENTERFIRE PRIMERS								
XEL22610	9 1/2 Large Riffe (Electric)								

Index/EDI No									
CONSU	MER PACK BAG	GED RIFLE	BULLETS						
RB2241	224	45	HP						
RB2242	224	50	PSP						
RB224P1	224	50	PLHP						
RB2244	224	55	MC						
RB2243	224	55	PSP						
RB224P2	224	55	PLHP						
RB2247	224	62 '	HP Match						
RB243PI	243	80	PLHP						
RB2432	243	80	PSP						
RB2682	6.8mm	115	MC						
RB3085	308	150	MC ·						
RB303B	310 (303 Brit.)	180	SP Core-Lokt						
RB3231	8mm	185	PSP Core-Lakt						
RB4571	457	300	SJHP						
CONSUM	IER PACK BAG	GED PISTOL	BULLETS						
RB9MM3	9mm	115	MC						
RB9MM11	9mm	115	FNEB						
RB9MM5	9mm	115	JHP						
RB9MM2	9mm	124	MC						
RB9MM8	9mm	147	JHP						
RB380AP	356 380 Auto	95	MC						
RB38S11	356 38 Special	130	MC						
RB357M7	357/38	110	SJHP						
RB357M1	357/38	125	SJHP						
R8357M2	357/38	158	SJHP						
RB40SW1	40/10mm	155	JHP						
RB40SW3	40/10mm	180	MC						
RB40SW5	40/10mm	180	FNEB						
RB40SW2	40/10mm	180	JHP						
RB41MGI	41	200	SJHP						
RB44MG6	44	210	SJHP						
RB44MG3	44	240	SJHP						
RB45AP4	45 Automatic	230	MC						
RB45AP8	45 Automatic	230	FNEB						
RB45AP7	45 Automatic	230	JHP						

CONSUMER PACK RIFLE BRASS									
RC17FB	17 Remington Fireball								
RC17R	17 Remington								
RC204R	204 Ruger								
RC22H	22 Hornet								
RC221FB	221 Remington Fireball								
RC222R	222 Remington								
RC223R	223 Remington								
RC2250R	22-250 Remington								
RC226S	220 Swift								
RC243W	243 Win								
RC6MMR	6mm Remington								
RC2506R	25-06 Remington								
RC2520W	25-20 Win								
RC257R	257 Roberts								
RC65S	6.5x55 Swedish Mauser								
RC260R	260 Remington								
RC68SPCR	6.8mm Remington SPC								
RC270W	270 Win								
RC270WSM	270 WSM								
RC7M08R	7mm-08 Remington								
RC7MMG	7mm Remington Magnum								
RC7MMRS	7mm Remington SA Ultra Magnum								
RC7MMRA	7mm Remington Ultra Magnum								
RC280R	280 Remington								
RC3030W	30-30 Win								
RC300RS	300 Remington SA Ultra Magnum								
RC300RA	300 Remington Ultra Magnum								
RC3006	30-06 SPRG								
RC300WM	300 Win Mag								
RC300WSM	300 WSM								
RC303B	303 British								
RC308W	308 Win								
RC3220W	32-20 Win								
RC8MSR	8mm Mauser								
RC8MM6	8ram Remington Magnum								
RC338W	338 Win Mag								
RC338RA	338 Remington Ultra Magnum								
RC350R	350 Remington Magnum								
RC35W	35 Whelen								
RC375H	375 H&H Magnum								
RC375RA	375 Remington Ultra Magnum								
RC4440W	44-40 Win								
RC4570G	45-70 Government								
	SUMER PACK PISTOL BRASS								
RC357MG	357 Magnum								
RC357X	357 Maximum								
RC9MM	9mm Luger								
RC38AS	38 Super Auto + P								
RC38SP	38 Special								

CONSU	MER PACK PISTOL BRASS (cont.)
RC40SW	40 S&W
RC41RA	41 Remington Magnum
RC44RA	44 Remington Magnum
RC44SW	44 S&W
RC45C	45 Cott
RC45A	45 Aute
RC454C	454 Casult


Index/ED) No.:	Caliber	Wt (gr.)-7	Bullet Type						
	CORE-LOKT® UI								
RBC2433	243/6mm	100	PSP						
RBC2571	25	115	PSP						
RBC2642	26/6.5mm	140	PSP						
RBC2682	27/6.8mm	115	PSP						
RBC2772	27/6.8mm	140	PSP						
RBC2841	28/7mm	140	PSP						
RBC2843	28/7mm	160	P\$P						
RBC3081	30	150	PSP						
RBC3082	30	168	PSP						
RBC3083	30	180	PSP						
RBC3381	338	225	PSP						
PREMIER* ACCUTIP BULLETS									
RBA1771	17	20	AccuTip-V						
RBA2042	20	40	AccuTip-V						
RBA2241	22	50	AccuTip-V						
RBA2242	22	55	Accutip-V						
RBA2431	24/6mm	75	AccuTip-V						
RBA2432	24/6mm	95	AccuTip .						
RBA2642	26/6.5mm	140	AccuTip						
RBA2771	27	130	AccuTip						
RBA2841	2B/7mm	140	AccuTip						
RBA2842	28/7mm	150	AccuTip						
RBA3081	30	150	AccuTip						
RBA3082	30	165	AccuTip						
RBA3083	30	180	Accutip						
	CORE-LOKT	BULLETS							
B2432	24/6mm	100	PSP						
B2571	25	100	PSP						
B2462	25/6.5mm	140	PSP						
82772	27	130	PSP						
B2842	28/7 mm	150	P\$P						
B3081	30	150	PSP						
B3083	30	180	PSP						
B30301	30	150	SP						

RR = Bench Rest | FNE9 = Flat Nose Enclosed Base HP = Hollow Point | HHP = Jacketed Hollow Point | MC = Metal Case PLHP = Power Lott Hollow Point | PSP = Pointed Soft Point SHP = Semi-Jacketed Hollow Point | VP = Soft Point

BARBER - R 0003314 PREMIER ACCUTIP BONDED SABOT SLUG

THEY PUNCH HUGE HOLES WITH PINPOINT ACCURACY, AND IT'S ALL ABOUT THE TIP.

The AccuTip doesn't just look intimidating, it's flattening whitetails and competitors in the tipped-slug market with devastating ferocity. Guided by our Power Port™ Tip, these bonded sabot slugs hit with a degree of accuracy and terminal performance unmatched by any other we've tested. It is a true masterpiece of aerodynamics that consistently prints tiny 100-yard groups and transfers tremendous knockdown force to the farthest reaches of shotgun range. At 58-cal, our 12-gauge version is the largest tipped slug you'll find anywhere. In field testing, both the 12- and 20-gauge versions produced huge wound channels and crumpled every deer they touched with a single shot. Spiral nose cuts, bonded construction and a high-strength cartridge-brass jacket come together on game to create large, perfect mushrooms with over 95% weight retention from 5 to 200 yards. With performance as revolutionary as its appearance, this is one deer-hunting tip sure to get results.

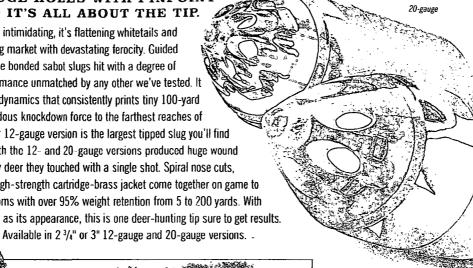




	12 garge),	 20 gauge
Power Port™ Tip delivers dramatically superior ACCURACY	Yes	Yes
Spiral nose cuts and proprietary bonding technology CONTROL EXPANSION at all ranges	5-200 yards	5-150 yards
High WEIGHT RETENTION at all distances	98% @ 100 yards	98% @ 100 yards
Slug jacket made from HIGH-STRENGTH cartridge brass	Yes	Yes
Designed for use in FULLY-RIFLED barrels only	Yes	Yes






(Index) (DI No.	. Comp		EIF QUE (DE) PRE	(MIZ) MIER• AI	DOL.	DOVA BONDED	SABOT S	LUGS	1007A	50x2	1007d	10071
PRA12	12	23/4	385-gr.	1850	1611	. 1401 4	2925.	2218	1677	2.7	3.6	0.0
PRA12M	12	3	385-gr.	1900	1656	1439	3086	2344	1771	2.5	. 3.4	. 0.0
PRA20	20	23/4	260-gr.	1850	1610	1399	1976	1496	1130	2.7	3.6	0.0
PRA20M	20	3	260-gr.	1900	1655	1438	2084	~ 158i	1193	2.5	3.4	0.0

t 0.0 indicates yardage at which shotgun was sighted in



i2-gauge

التنزا



BARBER - R 0003315

HIGH-PERFORMANCE SABOT SLUGS


PREMIER® CORE-LOKT® ULTRA BONDED® SABOT SLUGS. This is one slug that's anything but sluggish when it comes to performance. The Remington® Core-Lokt Ultra Bonded® is a sleek, ultra-fast, flat-shooting shotgun sabot slug that's wirtually in a close of its own. With incomitible accuracy

sabot slug that's virtually in a class of its own. With incredible accuracy, it delivers a 385-grain, 50-caliber, jacketed, bonded bullet that yields near 100% weight retention and expands to 2x in diameter.

Designed for use in fully rifled barrels only, the Core-Lokt

Ultra Bonded offers a high-tech blend of sabot

Ultra Bonded offers a high-tech blend of s power and surgical precision that could be just what the doctor ordered.

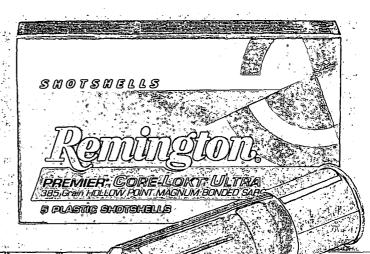

MANAGED-RECOIL® COPPER SOLID™ SABOT

SLUGS. The best-selling terminal performance and accuracy of our Copper Solid Slug is now available in a reduced recoil load. With 40% less recoil, they're perfect for anyone who wants outstanding on-game results without the rearward punch. Or, use them to sight-in, then step up to full loads. There's no finer slug load for young or recoil-sensitive hunters.



	Arii ne	Dign.	Signit.		W.	in a			n Torre		100	il ver
		5	PREMIER*	CORE-L	OKT• UL				GS			
PR12CLU	12 .	23/4	385-gr.	1900	1770	1648	3086	2682	2325	1.8	2.4	0.0
PR20CLU	20	21/4	26 0 -gr.	1900	1750	1615	2084	1774	1506	2.0	2.7	0.0
			PRE	MIER* C	OPPER	SOLID" S	ABOT SLI	JGS				
PR12CS	12	21/4	1	1450	1320	1208	2040	1689	1417	0.01	-3.5	_
PR12MCS	12	3	1	1550	1408	1283	2331	1923	1597	0.01	-2.9	
PR20CS	20	21/	3/4	1500	1360	1240	1444	1187	986	0.01	-3.1	
			MANAG	ED RECO	DIL COP	PER SOLI	D™ SABQ	T SLUG				
RL12CS	12	2 1/4	1	1200	1113	1046	1400	1204	1063	0.0	-5.5	_

† 0.0 indicates yardage at which shotgun was sighted in

PREMIER* COPPER SOLID* SABOT SLUGS. The

unique, all-copper shotgun deer load. Designed specifically for use in fully rifled barrels. Outstanding on-game performance with 2x

caliber expansion and virtually 100% weight retention. Consistently delivers $2^{1}/2^{n}$, 5-shot groups at 100 yards.



HIGH-PERFORMANCE LEAD SLUGS

BUCKHAMMER* **LEAD SLUGS**. When it's time to put the hammer down, this lead slug delivers a devastating one-two punch of precision and explosive power. Specifically designed for rifled barrels and rifled choke tubes, it has an attached stabilizer that optimizes

flight to produce 3-inch, 100-yard groups. And weight retention at impact is consistently 100 percent. Choices include 12- and 20-gauge full-power and Managed-Recoil® versions. This season, put that big buck down for the count with the hardest-hitting, most accurate lead slug in the woods. BuckHammer.®

The BuckHammer's lead slug offers near 100% weight retention with full 12-gauge (.73 cal.) diameter.



The innovative design of the stabilizer allows the BuckHammer® to deliver 3' groups at 100 yards with 13% more energy than any other lead slug on the market. (3°, 1°)/• oz. 12 gauge)





The BuckHammer* Lead Slug exhibits impressive accuracy by putting 100 shots inside an amazing 3 1/2* group at 100 yards. 2 3/4*, 1 oz. 20 gauge)

findes/EDI No.	c.					100 yd	Ei Muz	ergy (ft1 50 yd	0.5			ien Ten
				BUCK	HAMME	R* LEAD :	SLUGS					
SP12LSS	12	2 1/4	1 1/4	1550	1320	1145	2935	2177	1600	0.0	-3.6	_
SP12MLSS	12	3	11/3	1500	1234	1059	3232	2281	1710	0.0	-4.0	_
SP20LSS	20	2 1/4	1	1500	1159	995	2236	1461	1074	0.0	-4.6	_
SP20MLSS	20	3	l	1550	1245	1051	2470	1592	1135	0.0	-4.1	
			MANA	GED-REC	DIL" BUC	КНАММ	R" LEAD	SLUGS			_	
RL12LSS	12	2 1/4	11/4	1350	1107	972 -	1991 -	1340	1032	0.0	-5.5	
RL20LSS	20	2 1/4	1/3	1275	1057	938	1379	948	746	0.0	-6.2	

		ALCOHOL: NAME OF STREET		3.00mCerLife			Muz		Allendar American	N. T. BOIL AND C	Anex
	1 1						ED SLUGS				
SPHV12RS	12	21/1	· 1/h	1800	1252	978	2751	1517	813	0.01	-4.1
SPHV12MRS	12	. 3	'/s	1875	1302	998	2989	1442	847	0.0↑	-3.7
SPHV20RS	20	21/4	1/2	1800	1321	1037	1575	848	523	0.0↑	-3.6
				SLUG	GER" RIF	LED SLUG	S				
SP12RS	12	23/4	1	1560	1175	977	2361	1340	926	0.0†	-4.8
S12SRS	12	2 1/4	1	1680	1285	1045	2738	1605	1059	0.0†	-3.8
S12MRS	12	3 -	1	1760	1345	1075	3005	1753	1121	0.0†	3.4
SP16RS	16	21/4	%	1600	1175	965	1989	1072	724	0.01	-4.8
SP2ORS	20	21/4 .	1/1	1580	1240	1034	. 1513	931	648	0.0†	-4.2
SP41RS .	.410	21/2	1/5	1830	1335	1040	654	348	211	0.0†	-3.5
			MANA	GED-REC	OIL* SLU	GGER' RI	FLED SLUG				
RL12RS	12	21/4	- 1	1200	988	.873	1397	948	739	0.0†	-7.4



This higher velocity slug exits the barrel at 1,800 fps, 13% faster than standard 1 oz. slugs. The 7 / $_{8}$ oz. Slugger High Velocity delivers more energy at 50 yards with flatter trajectory on deer than standard 1 oz.

slugs. Produced in most popular slug loadings $-2\,^3/4$ " and 3" 12 gauge and 2 $^3/4$ " 20 gauge. Designed for the avid deer hunter using smooth bore guns.



SLUGGER® RIFLED SLUGS.

Remington's most popular, accurate, hard-hitting slug. Slightly oversized for great smooth-bore shotgun performance, resulting in better sealing against the barrel wall for greater accuracy.



EXPRESS® MAGNUM AND EXPRESS® BUCKSHOT.

One of the great values in shotgun deer loads. A combination of heavy cushioning behind the shot column and a granulated polymer buffering helps maintain pellet roundness for tight, even patterns.

Index/ EDI No.	Gauge	-Shell Length	Yelocity (ft/sec. @ 3 ft.)	Buckshot Size	Pellet Count
-	EXPRES	S° MAGNUM E	BUCKSHOT LOADS	S - BUFFERE	j
12SB00	' 12	2 %	1290	00 -	12
12HB000	. 12	3*	1225	000	10
12HB00	12	3*	1225	00	15
12HB4	- 12	3"	1225	. 4	41
1235B00 ¹	. 12	31/8	1125	00	18
•	EX	PRESS* BUCK	SHOT LOADS - B	UFFERED	
128000	12	2 1/2	1325	⇒- 000 · 5	8 %
12B001	12	2 %	1325	00	9
1280	12	2 1/1	1275	. 0	12
12B1	12	23/6	1250	1	. 16
1264	12	2 1/10	1325	4	27 -
20B3	20	2 1/1	1220	3	20
2.		MANAGED	RECOIL* BUCKSI	1 0T	·
RL12BK00	12	272 /	1200 -	00	

1 Utilizes Remington* Power-Piston one-piece wa

WINGMASTER HD

DROP-DEAD BETTER.®

Absolutely no shotshell on the market can touch Wingmaster HD at long range. All of its revolutionary characteristics — optimized density, choke responsiveness and consistent roundness — come together on game with an unmatched level of deadly force. Patterns with Wingmaster HD will put a Drop-Dead Better® 60% of its pellets in a 30" circle at 60 yards!

At 12.0 g/cc, it's 10% denser than lead and 56% denser than steel. Most importantly, it's the scientifically proven most lethal combination of bone-crushing energy and pellets on-bird. Wingmaster HD is also nearly as soft as steel shot, which makes it easier on your barrel than most high-density loads. And it's more responsive to chokes, allowing you to open up the pattern for closerange hunting or stretch shotgun range to its farthest reaches. Dramatically stretch your kill zone with the most deadly extendedrange payload you can buy. Remington Wingmaster HD.



Wingmaster HD® Waterfowl and Predator Payloads

THE ULTIMATE EXTENDED-RANGE PAYLOAD

- Denser patterns
- Devastating pellet energy
- Flies true near perfect shape

FEATURES

- HD = Heavy Density
- 12.0 g/cc density for optimal combination of pellet count and pattern density
- Proprietary composite of Tungsten-Bronze-Iron
- · Round, consistent pellets:
- Travel straighter and longer
- Improve long-range lethality
- Tighter patterns
- More even pellet distribution
- · Uniform pellet density
- Softer pellets are easier on your barrel and more responsive to chokes
- Better patterns at long and short ranges more lethal than lead
- Approved for waterfowl hunting by the USF&W and Canada



MORE UNIFORM WEIGHT.


Wingmaster HD's smooth, round pellets are extremely aerodynamic. They are uniform in weight and true to listed shot size.

Non-toxic, 56% denser than steel and 10% denser than lead, it's the most lethal choice whatever you're shotgunning for: WATERFOWL TURKEY


PREDATORS


12.0 G/CC - BEST PELLET MATERIAL DENSITY.


Testing proves Wingmaster HD® delivers the best combination of pellet energy and pattern density.

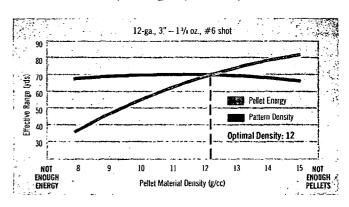


DEEPER PENETRATION AT LONG RANGES.

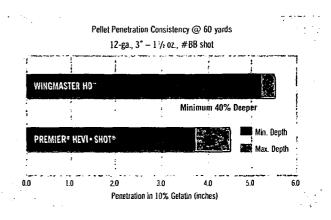

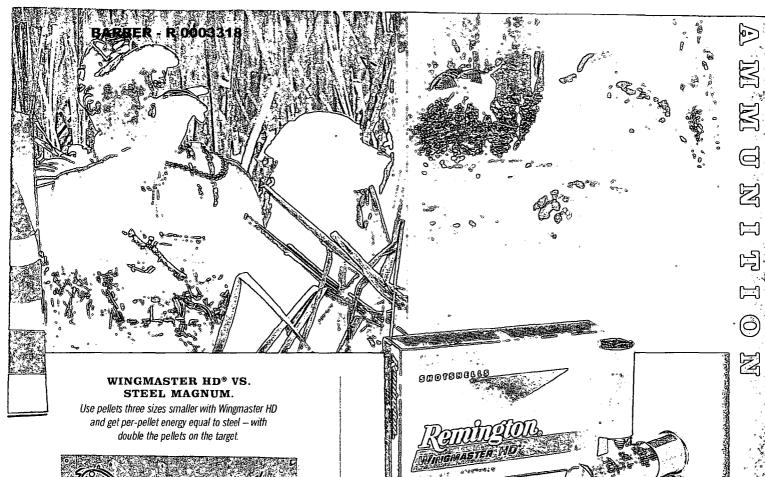



Wingmaster $HD^{\oplus} - 12$ -ga., $3^{\circ} - 1^{3}/8$ oz., #6 shot

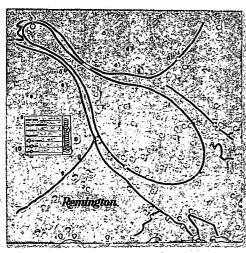


Steel Magnum - 12-ga., 3" - 1 3/8 oz., #3 shot

WINGMASTER HD® TURKEY PAYLOADS

Long range turkey devastation. Its smooth, round shape delivers awesome aerodynamics and sustained payload energy.

	e de la companya de l			Cama	
WII	NGMASTER H	ID* WATERFO	WL PAYLOADS -	10 ROUNDS PE	R BOX
RW10B		1			BB .
RW102 RW104	10	31/2	1300	1%	2
RW12S4 RW12S6	-12	21/45	1325	- 3.1% T	# 2 * 6 F - 18 F
RW122 - RW124 RW126	12		1450	7714T	2
RW12M2 RW12M4 RW12M6	12	33	1450	11/4	2
RW12HMB RW12HM2 RW12HM4	12	33.3 F.	1300	Th. "	BB . 2
RW1235MB RW1235M2 RW1235M4	-12	31/4,-	-1300	- 1%	BB 2
RW1235M6					. 6
RW20SM4 -	20	- 21/.	1300	· · · · · · · · · · · · · · · · · · ·	6
RWZ0M4	<i>≟</i> 20 −−−	ىقىدى ئار	1300	11/1	4 3
	MASTER HD	MAGNUM T	URKEY PAYLOAD	S - 5 ROUNDS	PER BOX
RW12HMH4 RW12HMH6	12-	3	1225	1%-	4
RW1235HM4	£ 12	131/2	1225	1/6 5	CF (4 705)
RW20HM4	20	3	1185	1%	4
w	INGMASTER	HD® PREDAT	OR PAYLOADS -	10 ROUNDS PE	R BOX
RW12VT	- 12 -	3/2/3	1300	11/6	Tet 12
RW1235VT	. 12	31/2	1350	1%	T

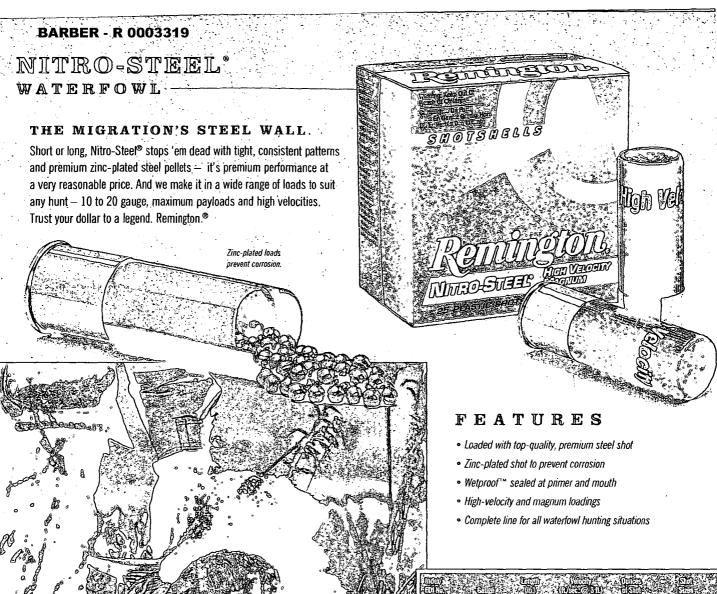

	NITRO	-STEEL® HIGH	VELOCITY MAC	NUM LOADS	
NS10MT_	10	3 1/1	1260	11/4	BB, 2
NS12HVS	12	23/4	1390	1 1/6	2,4
NS12S	12	2 1/4	1275	1 %	BB, 2, 4
NS12MC	12	3	1450	1 1/4	BBB, BB, 1, 2, 3, 4
NS12HM	12	3	1300	1 1/4	T, BBB, BB, 2, 3, 4
NS1235	12	3 1/2	1300	1 %	1, BBB, BB, 2
NS16HV	16	2 1/4	1300	15/16	2,4
NS20HVS	20	21/4	1425	3/4	2,4
NS20M	20	3	1330	1	2,4

SPORTSMAN° HI-SPEED" STEEL LOADS



HIGH VELOCITY, HIGH VALUE.

- · Economical, Hi-Speed™ steel loads
- · Waterfowl loads for every hunting situation
- Upland loads for use in non-toxic zones and for practice shooting
- · Shot size selection to match your game

	養去	7.63	de alem	्र <u>शि</u> ष्ट्यं अस्त्रिक्	
and the second	S	PORTSMAN® H	I-SPEED" STEE	L LOADS	r to the second
OIVHTZ2	10	31/2	1500	1 1/4	BB, 2
SST12	12	21/4	1365	1	6.7
SST12S	12	21/4	1375	1 1/4	2, 4
SSTHV12H	12	3	1550	11//	BB, 2, 4
SSTHV12HM	12	3	1400	11/4	BB, 1, 2, 3, 4
SST12HM	12	3	1300	11/4	BB, 2
SSTHV1235	12	31/3	1550	11/4	BB, 2
SST20	20	21/4	1425	7/.	7

BARBER - R 0003320

LEAD MAGNUMS

PREMIER: HIGH VELOCITY MAGNUM COPPER-PLATED BUFFERED TURKEY LOADS.

The high-performance lead load for avid turkey hunters. 3" and 3 1/2" 12-gauge payload leaves the muzzle at 1,300 fps. Delivers hard-hitting knockdown power. Loaded with our Power Piston® one-piece wad and Magnum-grade Copper-Lokt® lead shot for dense patterns and deep penetration.






PREMIER® MAGNUM COPPER-PLATED BUFFERED TURKEY LOADS.

Our original Magnum turkey loads. As fine a lead shotshell as you can carry in the woods. Magnum-grade Copper-Lokt® shot is cushioned with special polymer buffering and further protected by our Power Piston® one-piece wad for dense, even patterns. Delivers superb performance and devastating knockdown power out of tightly constricted turkey chokes.

PREMIER® DUPLEX® MAGNUM COPPER-PLATED BUFFERED LOADS.

A specialized layering of Magnum-grade Copper-Lokt® No. 4 shot over No. 6 shot. Larger pellets deliver excellent retained energy and penetration, while smaller pellets enhance pattern density. Awesome versatility for uncertain shooting distances on turkeys and late-season pheasants.



Excellent for turkey or long-range pheasants. Heavy payloads of Magnum-grade shot are packed with polymer buffering and enclosed in our patented Power Piston® one-piece wad to provide dense, even patterns and uniform shot strings.





EDI No	Gauge	(in.)	(fL/sec. @,3 f		of Shot	Sizes
PREMIER	HIGH VELOCI	ITY MAGNUM	COPPER-PLATE	D TURK	EY LOADS	- BUFFERED
PHV12M	12	3	1300	7	1%-	4, 5, 6
PHV1235M	12	3 1/2	1300		2	4, 5
PREM	MIER* MAGNU	M COPPER-PL	ATED LEAD TU	RKEY L	OADS - BUI	FFERED
PIOHM	10	31/2	1210		2 1/4	4
P12SM	12	2 1/4	1260		11/2	4,5
P12XHM	- 12] 3	1175	<u>ان ا</u>	2	4, 5, 6
P1235M	12	. 31/2	1150		2 1/4	4
P20XHM	20	3	1185	53 3	174 775	6
PR	REMIER' DUPL	EX* MAGNUM	COPPER-PLAT	ED LOA	DS – BUFFI	RED
MP12S	12 .	21/4	1260	2	11/1	4x6
MP12H	12	3	1210		1%	4x6
*.		NITRO MAG	LOADS - BUF	FERED		
NM12S	12	2 1/4	1260	\$ 1.44	1%	2,4,6
NM1Z	12	3	1280		1%	4,6
NM12H	12	3.	1210	1.10	17/17	2,4,6
NM20S	20 .	2 1/4	. 1175		1%	4, 6
NM20H	20	3 ~,	1185	ι į.	14	4,6
	NITRO	O TURKEY® MA	AGNUM LOADS	- BUFF	ERED	
NT12S4	12	1274 1	1260	200	- 1½	4
NT12H	12	3	1210	:L	1%	4, 5, 6
-NT1235	12	3 1/1	1300		2	4, 5, 6
NT20M	źn .	1 1	1185		11/	

Index Velocity Onnces Shot

NITRO TURKEY®



NITRO TURKEY® EXTENDED RANGE BUFFERED MAGNUMS.

- · Nitro Mago extra-hard lead shot
- Patterns over 80% with Super Full choke
- Patterns like copper-plated shot

UPLAND

NITRO PHEASANT® LOADS.

For pattern, energy and performance, nobody beats
Nitro Pheasant. The best of our Pheasant load offerings,
Nitro Pheasant uses Remington's own Copper-Lokt®
copper-plated lead shot with high antimony content,
the hardest lead we make for hunting. Hard shot stays
rounder for truer flight, tighter patterns and greater
penetration. So when it comes to bringing down tough
birds like pheasant, you need a load that delivers
maximum pattern density and lethal energy — you need
Nitro Pheasant. Available in both high velocity and
magnum loadings in both 12 and 20 gauge.



Remuse E R


PHEASANT LOADS.

For the broadest selection in game-specific upland lead shotshells, Remington® Pheasant Loads are the perfect choice. Their high velocity and long-range performance are just right for any pheasant hunting situation. Standard high-base payloads include 12, 16, and 20 gauge.



EXPRESS* EXTRA LONG RANGE LOADS.

Time-proven performance for all upland game. The choice of experienced small game hunters across the country because our Express line offers the best balance of payload and performance. Available in a broad selection of loadings – from 12 gauge to 410 bore – with shot sizes ranging from BB all the way down to 9.

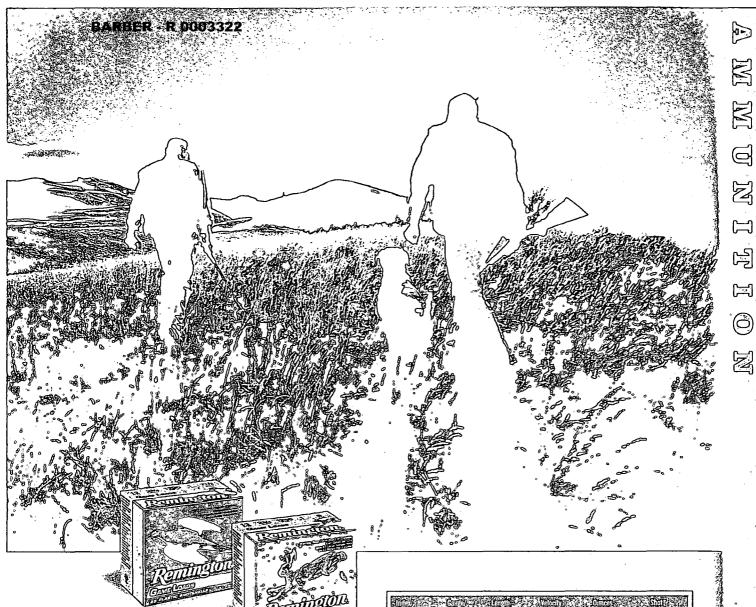

LEAD GAME LOADS.

Budget-stretching shotshells for a wide variety of hunting. Available in 410 bore, 20-, 16- and 12-gauge loadings.



SPORT LOADS.

Economical, multi-purpose loads. Built with our premium Power Piston® wad and plastic Unibody hulls. Loaded with No. 8 shot. Ideal for skeet, trap and sporting clays, as well as quail, doves and woodcock.

STEEL GAME AND TARGET LOADS.

Specifically designed for upland birds and clay target shooting where mandated. One ounce of steel No. 7 has nearly the same pellet count as 1 1/8 oz. of lead No. 8. Perfect combination of velocity and pattern density at normal distances.



	NITE	O PHEASANT	* LOADS - COPPE	R-PLATED	
NP12	12	21/1	1400	1%	, 4, 5, 6
NP12M	12	21/4	1300	1%	4, 5, 6
NP12HV	· ' 12 ·	21/	1450	1 %	4,5,6
NP12HM	12	3	1350	1%	4, 5
NP20	20	21/	1300		5,6
NP20M	20	3	1185	1 1/4	5, 6
	E	XPRESS* EXT	RA LONG RANGE	LOADS	
SP12	12	21/	1330	11/4	BB. 2, 4, 5, 6, 7 1/2, 9
SP16	16	23/4	1295	1 1/4	4, 6, 7 1/2
SP20 :	20	23/4	1220	1 4%	4, 5, 6, 7 1/2, 9
SP28 '	28 -	23/.	1295	3/4	6, 7 1/2
SP410	.410	21/1	1250	· //	4,6,71/1
SP413	.410	3	1135	п/в [°]	4, 6, 7 1/2
		PHE	ASANT LOADS		
PL12	12	2 1/4	1330	7 1% 3	4, 5, 6, 7 1/2
PL16	16	21/4	1295	1 1/4	6
PL20	20	~ 21/4	1220		4, 5, 6, 7 1/2
		PROMOT	IONAL GAME LOA	DS	
GL12 -	12	21/.	1290	1.4%	£ 6.71/4,8·
GL16	16	21/	1200	1	6.7 1/2,8
, GL20 🗧 🧻	20	. 21/. :	1225	1.16	6.7 1/2,8
GL410*	.410	21/2	1200	1/1	6
		SI	PORT LOADS		
RI2SL	12	24	i290	1. 1. 7.	8
R20SL .:	20	21/1	1200	7/1	8
		STEEL GAM	E AND TARGET L		-
GLSTL12 -	12	-21/4	1325	1.51.53.	G 7 7 3
GLSTL20	20	27/-	1325	7. 1/4	7

TARGET LOADS

PREMIER® NITRO 27° HANDICAP TRAP LOADS.

Designed for long-yardage trapshooting and long-range sporting clays, our custom powder blend, Power Piston® wad and Premier® STS® primer mix have improved the Nitro 27's performance allowing more consistent velocities, 15% better pattern performance and softer

recoil. So if you're looking for tremendous targetbreaking performance, choose the improved Nitro 27.



PREMIER® STS® TARGET.

The standard in target shooting reliability. Absolutely consistent from shot to shot. Bar none, the most reliable, most reloadable shells you can shoot. Available in 12, 20, 28 gauge and 410 bore.






GUN CLUB® TARGET LOAD LINE.

An excellent choice for economical shooting. These high-quality shells are loaded with the same care as our top-of-the-line STS® loads and NEW feature a Power Piston® wad and the reliable STS® Primer mix. Many shooters are discovering that they can get acceptable reloading life while stretching their shooting dollar.



MANAGED RECOIL STS TARGET. Dramatically reduced recoil – 40% less in the 12-ga. load — with target-grinding STS® consistency and pattern density. Ideal for new shooters and recoil-sensitive individuals.

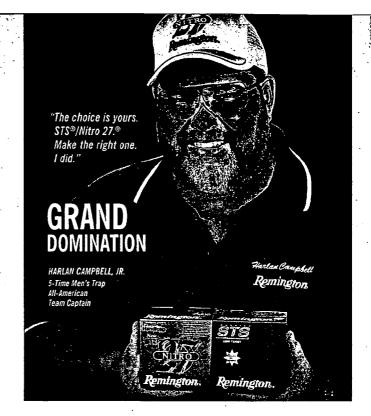

COMPETITORS AT THE GRAND CHOOSE REMINGTON® AS THEIR WINNING AMMUNITION.

Great champions think alike. For the seventh
year in a row, shooters who used Remington
shells won more trophies than competitors using
other brands at the 2009 ATA Grand American World Trapshooting
Championship. And for good reason! Remington STS® and Nitro 27® target

loads provide softer recoil, better pattern performance, and more consistent velocities (not to mention the most reloadable hull on the market). Isn't it time you switch to Remington and step into the winner's circle?

		e deligi			(1141) (1140)		一种
	P	REMIER* STS* TARGET LOA	DS - EX	TRA HARE	STS* TARGE	SHOT	
STS121	12	Premier STS Target	21/4	2 3/4	1185	1	7 1/1, 8, 8 1/2
STS12LR	12	Premier STS Low Recoil	2 1/4	2 1/2	1100	1 1/6	8
STS12L	12	Premier STS Light Target	23/4	23/4	1145	11/4	7 1/2, 8, 8 1/2, 9
STS12LH	12	Premier STS Light Handicap	27/2	3	1200	1%	7 1/2.8
STS12NH1	12	Premier Nitro 27 Handicap	23/4	HNDCP	1290	ı	7 1/2, 8
STS12NH	12	Premier Hitro 27 Handicap	23/4	HNDCP	1235	1 1/2	71/:.8
STS12NSC	12	Premier STS Nitro Sporting Clays	23/4	Max	1300	1%	7 1/2, 8
STS12NSC1	12	Premier STS Nitro Sporting Clays	27	Max	1350	1	7 1/: , 8
STS12P	12	Premier STS Pigeon	2 1/4	31/4	1235	11/4	71%
STS20LR	20	Premier STS Low Recoil	27/	2 1/.	1135	1/4	9
STS20SC	20	Premier STS Target	2 1/4	2 1/2	1200	1/4	8
STS20	20	Premier STS Target	2:4	2 1/:	1200	<i>'\h</i>	9
STS28NSC	28	Premier STS Nitro Sporting Clays	2%	21/4	1300	7/4	71/:
STS28SC	28	Premier STS Farget	23/4	2	1200	2/4	8
STS28	28	Premier STS Target	23/4	2	1200	3/4	9
STS410NSC	.410	Premier STS Nitro Sporting Clays	2 1/:	Max	1300	y :	8
STS410SC	.410	Premier STS Target	21/2	Max	1200	1/2	81/4
STS410	.410	Premier STS Target	2 1/2.	Max	1200	1/:	9
		MANAGED-REC	OIL" ST	Y TARGET	LOADS		
RLSTS12	12	Managed-Recoil STS Target	23/4		1100	%	848
RLSTS20	20	Managed-Recoil STS Target	23/2	-	1100	4	81/:
		GUN CLU	JB* TAR	GET LOAD	S		
GC121	12	Gun Club	21/2	2 1/4	1185	ì	7 1/2,8
GC12L	12	Gun Club	23/4	23/4	1145	1 1/6	71/1, 8, 9
GC12	12	Gun Club	21/=	3	1200	1%	7 1/2,8
GC20	20	Gun Club	2 1/:	2 1/2	1200	1/4	71/:, 8.9


BARBER - R 0003324


COLLECTIBLES

2010 BOY SCOUTS OF AMERICAS KNIFE

- 2nd year knife of a 5 year program
- · BSA® Officially Licensed Product
- Original RS4233 scout pattern created in 1924
- Made with tooling from the original Remington Bridgeport, Conn. factory
- · Undergoes over 115 hand operations
- Includes a 4" x 6" reproduction of Norman Rockwell's painting "I Will Do My Best," circa 1945
- Made in the USA ===



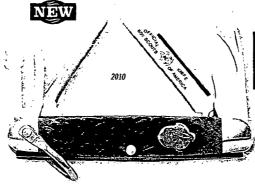








Z

3

Boy Scouts of America*, the Universal Emblem, Be Prepared*, are either registered trademarks or trademarks of the Boy Scouts of America in the United States and/or other countries. "I Will Do My Best", by Norman Rockwell. Used with permission of the Boys Scouts of America. Manufactured under license from the Boy Scouts of America. All rights reserved.

2010 COPPERHEAD BULLET KNIFE "DOUBLE STRIKE"

- · R2253 Copperhead pattern
- Blade material/options 440 high carbon stainless steel (Ladder Damascus Blade also available — Limited Offering)
- Blade measurements 3" clip blade with long nail pull and a 3" spey blade with long nail pull
- Closed measurement 3 3/4"
- Handle material/points of interest Mahogany jigged bone with bullet shield. The distinctive large bolster that the Copperhead pattern is known for has the Remington logo stamp.
- Made in the USA







REMINGTON® CUTLERY COLLECTOR'S CLUB


In 2009, Remington introduced the Remington Cutlery Collector's Club (RCCC). With the introduction of the Club, we have experienced a renewed interest in knife collectors world wide with interest in expanding their Remington collections.

In 2009 RCCC created two membership knives, the standard membership knife was the Senator RC6163 and the Junior Membership knife, the single blade Barlow RBC41. RCCC's "Knife of the Year" was an exquisite recreation of the first knife ever produced by Remington the RC103.

You must be a RCCC member to purchase these knives and many other special offer knives. For more information on how to join the Club or to find out more details on this knife and the other special offer knives you can log onto www.remingtoncutlery.com or mail in your request for more information to Remington Cutlery Collector's Club, 870 Remington Drive, Madison, NC 27025

"SHOOT LIKE A GIRL... IF YOU CAN!™" SERIES KNIVES

- 440 high carbon stainless steel blades with mirror finish
- Smooth pink bone handle
- Made in the USA








7


PREMIER TACTICAL KNIVES


TANGO® SERIES

- Overall length 10 ½" (Fixed), Closed measurement 4 ¾" (Folder)
- Blade material −5 ¹/₅" (Fixed), 3 ⁵/₅" (Folder); Civilian Grade: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo; Law Enforcement Grade: 440C stainless steel Mill Spec: Mil-C 13924 blade with etched Remington® LE logo; Military Grade: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- Blade options Drop, Clip and Tanto
- Handle material G-10





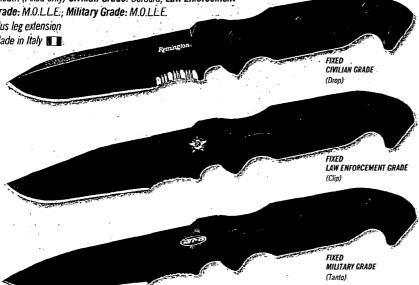

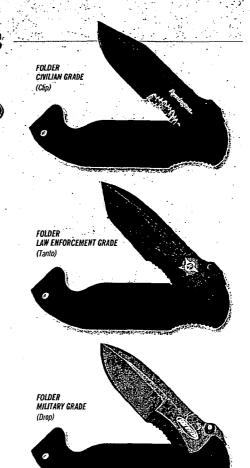







ZULU® SERIES

- Overall length 10 ½" (Fixed), Closed measurement 4 ¾" (Folder)
- Blade material 4 3/4" (Fixed), 3 5/8" (Folder); Civilian Grade: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo; Law Enforcement Grade: 440C stainless steel Mill Spec. Mil-C 13924 blade with etched Remington® LE logo; Military Grade: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- Blade options Drop, Clip and Tanto
- · Handle material Anodized aluminum with 3M non-slip inserts



dark inset

BARBER - R 0003326

PREMIER™ RESCUE

ESCAPE"

Blade material — 440C stainless steel with Teflon® coating

• Blade options - Single: 3 1/2" Sheepfoot blade Double: 3 1/2" Sheepfoot blade and 3" push button automatic seat belt/web cutter

• Handle material - Rugged, slip resistant Forprene handle with glow in the dark insets, solid one piece 4.5mm thick glass breaker and lanyard hole


• Handle point of interest - Open back frame spine allows easy cleaning of knife

• Handle options - Black or Olive Green Double: Blade lock button in handle | Single: Pocket clip

• Sheath - Heavy duty Cordura sheath with M.O.L.L.E. system

Made in Italy




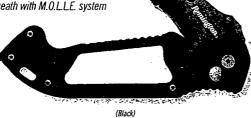

M.O.L.L.E.

SING! F

(5 1/2" Closed)



(Olive Green)

PREMIER™ EXCURSION

EXCURSION™ (FIXED)

Overall length − 9 5/8" (Clip), 9 1/2" (Gut Hook)

• Blade material - 420 stainless steel PTFE-Teflon® coated and etched Remington® logo, Clip: 4 1/2" long, Gut Hook: 4 1/4" long

• Blade options - Clip and Gut Hook

· Handle material - Injection molded black rubber with 420 SS frame

• Sheath - Cordura with belt loop






PREMIER™ TACTICAL SHEATHES

- · Designed to fit fixed blade knives of many sizes
- . Made of the best quality cordura and built to withstand rigorous use
- · Removable belt extension
- M.O.L.L.E. securing strap
- · Front pocket with removable closure
- · Kydex blade protector insert which can be removed for easy cleaning
- · Adjustable leg strap with rubberized weave to hold in place while active
- · Tight weave cord for extra tie down ability and/or additional uses
- · Available in Black, OD Green and Tan










PREMIER™ HUNTING KNIVES

ELITE HUNTER® SERIES


- Overall length − 9 ½" (Fixed), Closed measurement − 4 ½" (Folder)
- Blade material 440C stainless steel with satin finish, 4 1/4" long
- Blade options (Fixed) Drop Point and Clip Point
- Blade options (Folder) Single: 3 3/8" Drop Point | Single: 3 3/8" Clip Point | 2-Blade: 3 3/8" Drop Point and 3 1/4" heavy duty Saw | 3-Blade: 3 3/8" Drop Point, 3 1/4" heavy duty Saw, and 3 3/8" Gut Hook
- Handle material 6061 aircraft aluminum scales with optional insets
- Handle options Olive Wood and Genuine Stag insets




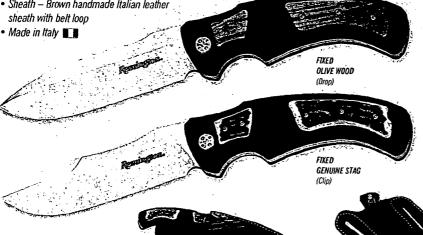

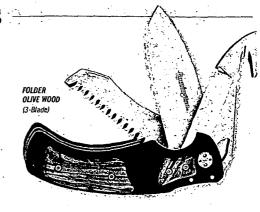



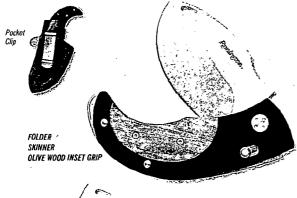


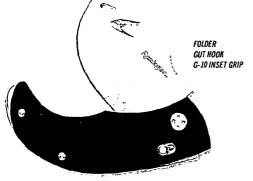



ELITE SKINNER™ SERIES

- Overall length 8" (Fixed), Closed measurement 4" (Folder)
- Blade material 440C stainless steel with satin finish, 3" long
- · Blade options Deep swell belly Skinner and Gut Hook
- Handle material (6061 aircraft aluminum with inset options Folder) or Solid with finger grooves for ergonomic grip and lanyard hole
- Handle options Olive wood and G-10 (insets Folder Only)
- Sheath Black and Brown handmade Italian leather sheaths with quick release snaps and pocket clip for quick belt or pack attachment

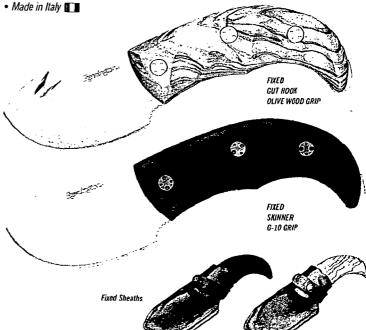



KNIVES

SPORTSMAN SERIES F.A.S.T. (FIXED)

- Blade material/options 440 stainless steel with bead blast finish or black oxidized coating with a serrated/straight combo edge
- Blade Length −5³/₃", 3.9mm thick
- · Handle material Anodized aluminum scales with rubberized coating riveted to a solid one piece 3.9mm thick tang with lanyard hole
- Handle options Black, Mossy Oak® Obsession®. Mossy Oak® Blaze Orange (New for 2009) or Realtree® Advantage® MAX-4 HD™
- Overall length 10 ½
- · Sheath Heavy duty black nylon sheath with belt loop






SPORTSMAN™ SERIES F.A.S.T.® (FOLDER)

- Fast Action opening with a Soft Touch handle
- Blade material/options 440 stainless steel with bead blast finish or black oxidized coating with a serrated/straight combo edge
- Blade lengths Large: 3 5/8" | Medium: 3 1/8"
- Handle material Anodized aluminum scales with rubberized coating; includes pocket clip and lanyard hole
- Handle options Black, Mossy Oak® Obsession,® Mossy Oak® Blaze Orange (New for 2009) or Realtree® Advantage® MAX-4 HD™
- Closed measurement Large: 5" | Medium: 4 1/a"








STAINLESS STEEL BLADE MOSSY OAK* BLAZE ORANGE HANDLE



MATTE BLACK HANDLE











KNIVES

HERITAGE SERIES

The Remington Arms Crest Shield, found on the front bolster of each Heritage Series knife, represents a tradition dating back to the 1800s. From 1888 to 1914, this crest could be found on every firearm manufactured by Remington Arms Co., Inc. And is still used today.

- Handle options Delrin Stag (New for 2010), Green Jigged Bone and Laminated Wood, nickel silver bolsters and thick brass liners
- Blade materials 440 high carbon stainless steel and hollow ground
- Made in the USA

DELRIN STAG

































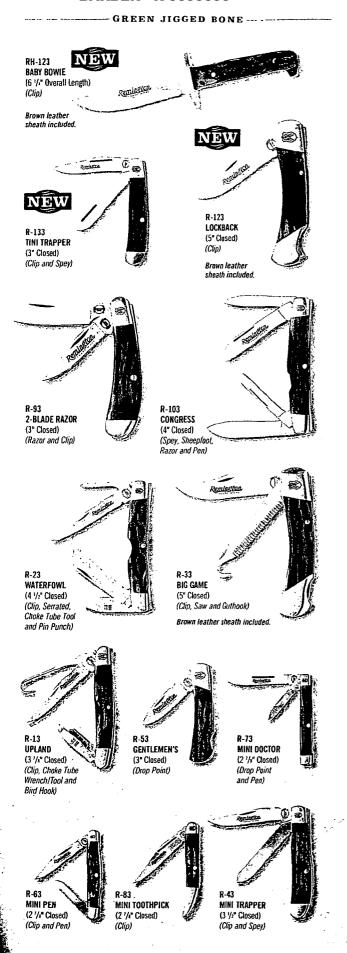

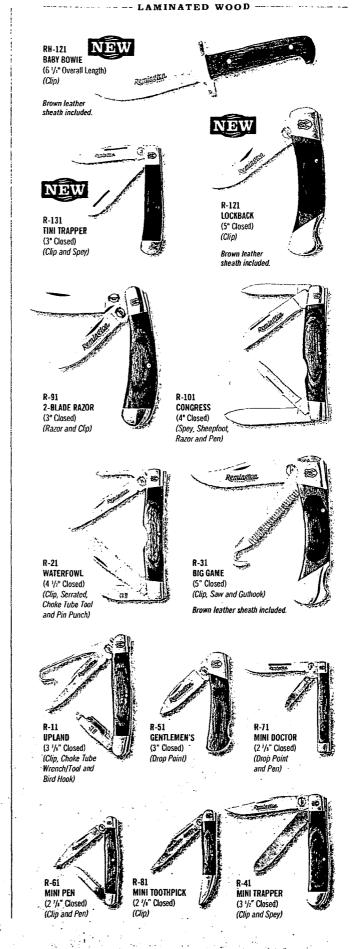

KNIVES -

1911 MULTI-TOOL

- G10 handles
- · Black oxide finish
- Dual bushing wrench/plier head
- · Mainspring housing punch
- Bottle opener/screwdriver
- Can opener
- 8Cr13MoV steel drop/serrated blade
- · Bit driver system with 5 double sided bits
- Liner lock and thumb stud
- Belt case included





WINGMASTER" MULTI-TOOL

- · The ultimate waterfowl/upland multi-tool
- Scissor head with bone notch cut-out and lock
- 3" saw
- 1 3/4" blade
- Guthook
- Choke tube wrench (12- and 20-ga.)
- · LED push button light
- · Ergonomic handles with rubber inserts for easy grip
- · Heavy duty nylon sheath with belt loop included



SPORTSMAN™ SERIES (FIXED)

- Overall length 9 3/4" (Drop, Skinner, Skinner Clip), 93/8" (Clip), 93/16" (Drop w/Gut Hook)
- Blade material 420HC (high carbon) stainless steel with etched Sportsman™ Series logo
- Blade Length − 4 ⁵/₈" (Drop, Drop w/Gut Hook), 4 1/4" (Clip), 49/16" (Skinner), 311/16" (Skinner Clip)
- · Blade options -- Drop and **Gut Hook**
- · Handle material Black synthetic non-slip
- · Sheath Black leather





DOVE/QUAIL CLEANING SET

- Caping knife overall length 5 1/2"
- Hook overall length: 4 1/4"
- Needle nose scissors overall length: 4 1/2"
- · All three tools fit into a black nylon sheath with belt loop





DUCK/PHEASANT

- Caping knife 440 stainless steel with bead blast finish and measures 6 3/4" long
- Hook overall length 7"
- · Scissors bane notch cut out for clipping wings with ease and measures 6"
- · All three tools fit into a black nylon sheath with belt loop

CLEANING SET

BIG GAME SKINNER SET • Knife material - one piece 440 stainless steel knives with mirror finish and have a finger ring for easy carry and grip

- Gut hook Easy to sharpen hook measures 7 1/4"
- Skinner overall length: 7 3/8"
- Caping blade overall length: 6 1/2"
- · All three knives fit snug in a heavy duty black nylon sheath with belt loop



M

BARBER - R 0003332

KNIVES

INSIGNIA EDITION™ (FIXED) .

- Overall length 8"
- Blade material 440 stainless steel, 3 1/2" long
- Blade options Drop and Gut Hook
- . Handle material Black Laminate and Burl Wood with Sportsman™ Series medallion inlayed in handle
- Sheath Black leather



INSIGNIA EDITION " (FOLDER)

 Handle options — Black Laminate and Burl Wood with Sportsman™ Series medallion inlayed in handle Blade materials – 440 stainless steel



















and Pen)





(Clip with Thumb Stud)





DECALS

- · Vinyl die cut decals
- · Waterproof
- · Oil, acid and alkali resistant
- · Usable on smooth and corrugated surfaces
- Heat resistant up to 350 degrees
- Up to 7 years outdoor durability
- · Available at Remington retailers

























CLEANING KITS

UNIVERSAL ALL-A-ROUND KIT

- Cleans all your shotguns, rifles and pistols (22 caliber to 12 gauge)
- Contains an assortment of brushes, 3-piece brass rod, patches, patch puller and waterprooffstain resistant Rem Pad
- Portable cleaning station packaged in a polyethylene storage tube that hangs on a peg or sits on a shelf for convenience

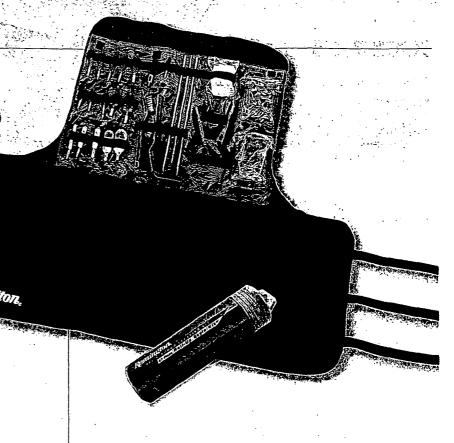

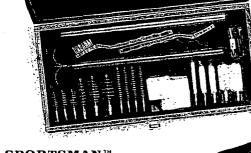


SPORTSMAN™ UNIVERSAL KIT


- 27-piece (true count) cleaning kit — includes 50 patches (22 caliber to 12-gauge)
- 3-piece brass rod accepts standard #8-32



FIELDMASTER® KIT

- Brass 3-piece rod with swiveling handle
- Rem® Oil (1-oz.) and Brite Bore ™ (2-oz.)
- An assortment of bronze bore brushes for 22, 270 and 30 calibers as well as 12 and 20 gauges

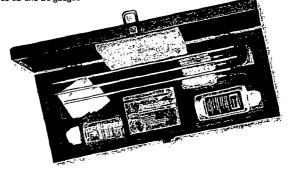

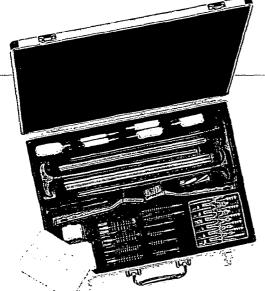

TARGETMASTER™ DELUXE KIT

- 52-piece (true count) kit has all you need includes 100 patches
- Sturdy aluminum case with positive latches
- 3 sets of 3-piece rods: Rimfire rod (17-22), Centerfire rod (22 and up) and Shotgun/muzzleloader rod
- Adapters allow for cleaning of handguns (17-50)



REMINGTON CLEANING KITS READILY ACCEPT STANDARD #8-32 CLEANING BRUSHES, MOPS, JAGS AND STANDARD SHOTGUN BRUSHES/MOPS. (THE RIMFIRE ROD IN THE TARGETMASTER ACCEPTS .17 COMPONENTS, AND HAS AN ADAPTER FOR #8-32 ACCESSORIES.)

CHEMICALS



REM® OIL

- · Cleans dirt and grime from exposed metal surfaces while displacing non-visible moisture from metal pores
- · Protects internal and external metal parts from rust and corrosion
- Exclusive Teflon formula provides a thin, long-lasting film that keeps actions working smoothly by reducing metal-to-metal wear
- · Available in: 10 oz. aerosol can, 6 oz. spray pump (MoistureGuard), 4 oz. aerosol can, 2 oz. bottle with child resistant cap and 1 oz. squeeze bottle with child resistant cap





• 6" x 8" wipe cloth saturated with Rem Oil

 Available in: 12 Count Clampack, 100 Count Display and 60 Count Pop-up Canister (with large 7" x 8" wipes)



GREASE

- Uses Volatile Corrosion Inhibitor Technology
- · 6cc multi-purpose grease syringe
- · Safe on all metal surfaces
- · Instantly provides superior long-lasting lubrication and protection
- Penetrates into smallest cracks and crevices

REM SHOTGUN CLEANER

- Cleans trigger groups, gas ports, choke tube hreading, receivers, chambers, barrels and magazine tubes
- · Dissolves powder residue, fouled lubricants, burnt carbon deposits and gunk
- Blasts away gummy caked on grime from hard to reach areas such as ejectors, firing pin assemblies, trigger components and bolt recesses
- Available in: 18-oz. aerosol can





REM® ACTION CLEANER

- · Easily cleans dirt, powder residue and cakedon lubricants from disassembled actions and fire-control mechanisms
- . Dries quickly and leaves no residue
- Available in: 10.5-oz. can with jet-spray extension tube

BRITE BORE™ SOLVENT

- Dissolves carbon and powder fouling, removes copper, lead and plastic deposits
- · Handy size for field range use
- · Low odor contains no CFC's
- Available in: 6 oz. can, 4 oz. jar and 2 oz. bottle





REM® DRILUBE™

- · Teflon-based lubricant provides a tough, non-congealing film without the residue of dry graphite lubes
- Keeps firearms functioning dependably to -40°F
- · Available in: 4 oz. aerosol can

40-X™ BORE CLEANER™

- Formerly Remington Bore Cleaner
- 40-X name ties into the product's origins in Precision Benchrest Shooting
- · Formulated for rifles to improve cleaning, accuracy and performance
- Fast and easy to use no soaking or foul odors
- Available in: 2 oz. white oval bottle with child resistant cap and 4 oz. squeeze bottle



GUN STORAGE

MOISTUREGUARD™ GUN PLUGS


- · Uses Volatile Corrosion Inhibitor Technology
- · Protects all metals from rust and corrosion
- Place in chamber or mount in gun cabinet/safe to protect gun
- · Leaves no scent or residue
- · 30 cubic feet of protection
- Use as a snap cap
- Available in: 12 gauge, 20 gauge, Centerfire and New for 2009 – Pistol Plugs (Offered in Universal and 22 caliber)



GUN SACK

- . Thick 100% polyester fabric protects against dirt and scratches
- Draw string closure
- · Treated with silicon to help protect from rust
- One size fits all with or without scope (52" long)



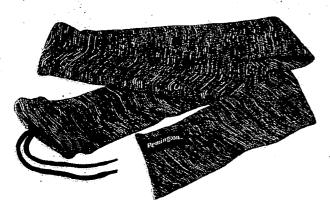

MOISTUREGUARD™ SUPER SAFE PLUG

- · Uses Volatile Corrosion Inhibitor Technology
- · Protects all metals from rust and corrosion
- · Place or hang in gun cabinet/safe -
- Superior storage protection
- · Leaves no scent residue ...
- 216 cubic feet of protection for up to one year





MODEL 365 MINI DEHUMIDIFIER

- · Protects up to 60 days before recharging is necessary
- · Self-contained unit requires no wiring or extension cords

REM DRI™ 35 DESICCANT

- Removes moisture to prevent rust corrosion and eliminates odors in gun safes and cabinets
- · No electricity required
- · Rechargeable for multiple uses





CABLE LOCK

- · Fits most shotguns, rifles and pistols
- California approved




TRIGGER BLOCKS

VCI

Available in: 3-Pack or Single

MISCELLANEOUS

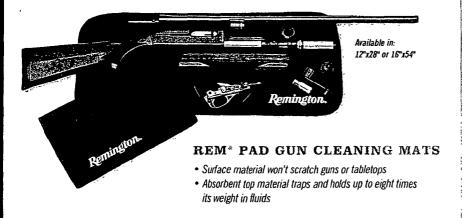

BORE LIGHT


- Ideal for inspecting used firearms, cleaning firearms and inspecting bore for obstructions
- · Includes both curved and straight light tubes
- · LED light eliminates intense glare



MOISTUREGUARD™ REM® CLOTH

- Uses Volatile Corrosion Inhibitor Technology
- 10" x 10" multi-purpose cloth wipe

 Instantly protects all metals from rust and corrosion



CLEANING PATCHES

- For all shotguns, black powder guns, rifles and rimfire rifles
- 100% cotton
- Enclosed in polybag for easy carrying in the field
- Pre-sized for optimum cleaning


SCOPE MOUNTS


INTEGRAL SCOPE MOUNTS - HIGH

- Fits 30mm scope tube without inserts or 1" with inserts
- Z-2 alloy construction 50% stronger than aluminum
- Super strong design base & lower ring all in one
- Secure attachment TORX® grade 8 tactical screws
- Fits all Remington Model 700's
- · Available in black or silver
- Made in the USA





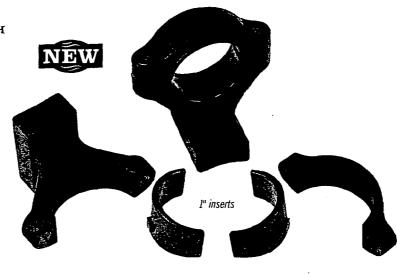




INTEGRAL SCOPE MOUNTS - MEDIUM

- · Fits I" scope tube only
- Z-2 alloy construction 50% stronger than aluminum
- Secure attachment TORX® grade 8 tactical screws
- .• Fits all Remington Model 700's
- · Available in black or silver
- · Made in the USA






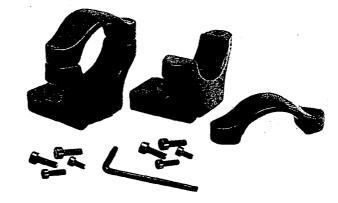

R-15 MINI RISER

- Full Advantage® Max-1 HD™
- · Fits any Picatinny rail
- · Larger screw for more clamping power
- Made from aircraft quality aluminum and hardcoated to Mil. Specs.
- 1.3" long



R-15 1/2" PICATINNY RISER

- Full Advantage® Max-1 HD*
- 3/4" long

R-15 4" FORE-END RAIL

- Full Advantage® Max-1 HD™
- Made from aircraft quality aluminum and hardcoated to Mil. Specs.
- Standard Picatinny configuration
- · Co-witness with flat top upper receiver
- Mounting screws included
- 1/4" tall



.

1-)

Ų

S


S

Ü

STOCKS/FORE-ENDS

MODEL 870™ & 11-87™ SHURSHOT™

- · Ambidextrous design for turkey, deer and predator hunters
- · Ergonomic grip for solid shot placement
- · Lightweight synthetic construction
- · Available in Black and Mossy Oak® Obsession
- · Comb designed for perfect eye alignment with sights and/or scope
- · Molded in sling swivel stud

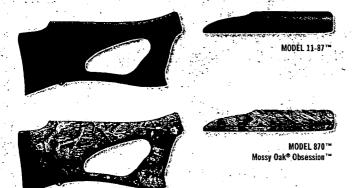

MODEL 870, 1100 & 11-87

- Available in Black and Mossy Oak® Break-Up®
- 16-ga. and 12-ga. Adult and Compact




MODEL 700™ & MODEL SEVEN™

· Available in Black synthetic



For a full listing of available stocks & fore-ends, visit www.remington.com

ADJUSTABLE LENGTH OF PULL KIT




Kit includes:

- Two 1/4" LOP spacers
- One 1/2" LOP spacer
- Corresponding screw lengths to accommodate 3 different lengths

For a complete list of compatible firearms, visit www.remington.com

EXTRA BARRELS

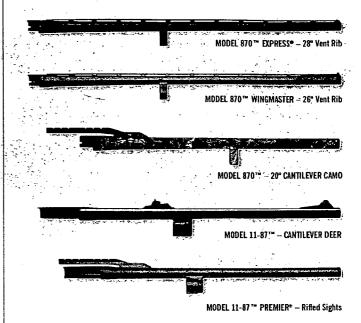

For a complete list of extra barrels, see page 109.


SUPERCELL™ RECOIL PAD



OUR PUMP BEATS THEIR SEMI-AUTOS.

The world's most effective recoil pad. So potent, in fact, it single-handedly helped our Model 870 generate up to 54% less recoil than our leading competitors' autoloading shotguns with factory pads. Its millions of tiny Super Cells absorb and release energy over a longer time period to create a more comfortable shooting experience than was ever before possible with conventional materials.



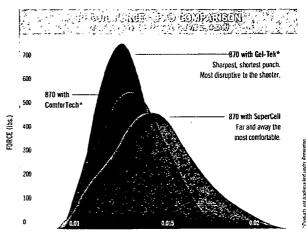

TIME (sec.)

CHOKE TUBES





CHOKE TUBE BAG

- · Holds six flush or extended chokes
- · Pocket with zipper for wrench
- · Heavy-duty zippered Cordura pouch
- Belt loop for carry convenience



CHOKE TUBE WRENCH

• Comes in 12 and 20 gauge




MAGAZINES



MODEL 870™ MAGAZINE EXTENSION KIT

- · Add more rounds to your shotgun's capacity
- Extends magazine chamber:
 - 18" Extension adds 2 extra shots
 - 20" Extension adds 3 extra shots
- · Available in Blued or Parkerized finish
- Package includes tube assembly, swivel assembly with screw, magazine extension spring and coupling

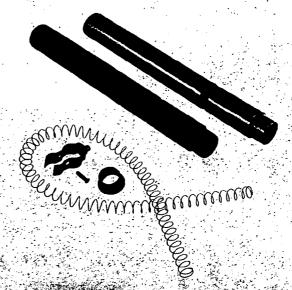



93









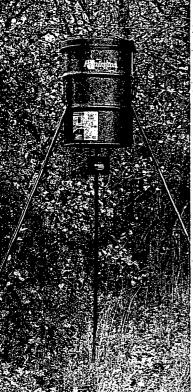

Air Rifles & Soft Air Rifles

CROSMAN CORP.
7629 Route 5 & 20
East Bloomfield, NY 14443
1-800-7AIRGUN
crosman.com
remington.com/airguns

Area Rugs, Mats and Carpet

MILLIKEN & CO. 201 Lukken Industrial Dr. West La Grange, GA 30240 800-342-5539 remington.com/lodgecabin

ATV Accessories

ARCTIC CAT 601 Brooks Ave. South Thief River Falls, MN 56701 218-681-8558 arcticcat.com remington.com/atv

Calendars

CALENDAR PROMOTIONS / GLOBAL MARKETING 2121 Belvedere Charlotte, NC 28205 800-862-8393 countrygallerycalendars.com remington.com/lodgecabin

Decorative Wooden Collectables

VINTAGE EDITIONS, INC. 88 Bluff Lane Taylorsville, NC 28681 828-632-4985 vintageeditions.com remington.com/lodgecabin

Dog Kennels

KENNEL AIRE 801 E. North St. Ottawa, KS 66067 800-346-0134 kennel-aire.com remington.com/pets

Eye & Hearing Protection, Safety Gloves, Hard Hats, Vests and Footwear

RADIANS
7580 Bartlett Corp Drive
Bartlett, TN 38133
901-388-7776
radiansinc.com
remington.com/safetygear
remington.com/footwear

Fine Art Prints

WINFIELD GALLERIES
748 Hanley Industrial Court
St. Louis, MO 63144
314-644-2805
remingtonartwork.com
remington.com/lodgecabin

Food Plot Products, Scent Lures and Game Calls

BUCK EXPERI
262, Principale, C.P. 10
Saint-Benjamin
Quebec GOM 1NO
Canada
418-594-5009
buckexpert.com
remington.com/wildlife

Flashlights, Lanterns, Headlights & Spotlights

RAYOVAC 601 Rayovac Drive Madison, WI 53711 800-237-7000 rayovac.com remington.com/lodgecabin

Game Calls

WILDGAME INNOVATIONS
101 Cason Road
Broussard, LA 70518
337-839-6267
remington.com/gamecalls

Gun Cases, Paper Targets and Shooting Accessories

THE ALLEN COMPANY
P.O. Box 445
525 Burbank St.
Broomfield, CO 80020
303-469-1857
allencompany.net
remington.com/huntshoot

Gun Safes and Cabinets

LIBERTY SAFE AND SECURITY, INC. 1199 West Utah Ave. Payson, UT 84651 800-247-5625 libertysafe.com remington.com/safes


Headwear


CUTDOOR CAP COMPANY, INC. 1200 Melissa Lane Bentonville, AR 72712 800-826-6047 outdoorcap.com remington.com/apparel










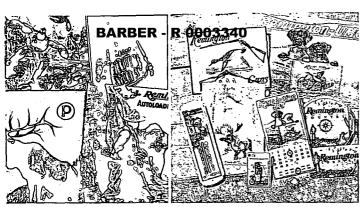







<u>PARAMOUNT</u> P.O. Box 9 #1 Paramount Drive Bourbon, MO 65441 800-255-4287 paramountapparel.com

<u>ZIPPO</u>

33 Barboui

zippo.com

814-368-2700

Sporting Dogs

Socks

FOX RIVER MILLS

Osage, IA 50461

remington.com/footwear

800-247-1815

foxsox.com

P.O. Box 298

Lighters and Lighter Accessories COASTAL PET PRODUCTS 911 Leadway Ave. Alliance, OH 44601 Bradford, PA 16701 800-321-0248 coastalpet.com remington.com/personal remington.com/pets

Meat Snacks, Steak Snacks, Beef Jerky & Sausage Sticks

TRAIL STEAKS 4295 Cromwell Road, Suite 205 Chattanooga, TN 37421 877-875-3759 trailsteaks.com remington.com/food

Outdoor Clothing

THE BRINKMANN CORPORATION 4215 McEwen Rd Dallas, TX 75244 877-525-9070 brinkmann.net remington.com/apparel

Sporting Sunglasses & Disposable Lighters

<u>HALPERN</u> 8290 Amwiler Road Atlanta, GA 30360 800-624-5280 halpernimport.com

Tin Signs, Magnets, License Plates and **Light Switch Covers**

DESPERATE ENTERPRISES, INC. P.O. Box 604 Sharon Center, OH 44274 330-239-0500

desperate.com remington.com/lodgecabin

Treestands

W.I.C. - REMINGTON TREESTANDS P.O. Box 352 Windom, MN 56101 507-831-2540 remingtontreestand.com remington.com/huntshoot

Video Games

MASTIFF LLC. 2762 B. Octavia St. San Francisco, CA 94121 415-674-6615 mastiff-games.com

Wallpaper Borders & **Bathroom Accessories**


YORK WALLCOVERINGS P.O. Box 5166 York, PA 17405 717-846-4456 yorkwall.com remington.com/lodgecabin


Wildlife Feeders and **Digital Game Cameras**


BA PRODUCTS 602 Fountain Parkway Grand Prairie, TX 75050 800-847-8269 remingtonfeeders.com remington.com/wildlife


FOR MORE INFORMATION OR LICENSEE OPPORTUNITIES,


CONTACT US AT 336-548-8535 OR VALUEDPARTNER@REMINGTON.COM













Q

હિંટ

[بين]

ريخ آجيا

Z



93

					7	1						100 St. 100 St.	3 V. 3			
CLISTR	NUMBER .	(g)	ENLET STILE (N	PRIMIER -	MIZZE 100	VELOCITY (fps.) 200 300	400 500	10021E 100	Person (R-fa) 200 300 4	00 500	507 100	INCE TRAJECTORY 150 250	300 100	LONG-RIVE 150 200 2	E TRABECTORT* 50 300 400	SULISTIC SOO EDEFRICION
17 Remington Fireball	-GRAPITO	2	(Adject)	η_{ii}	(III) (III)	W) W	E E	W W	I 27 1	5 W	€08 022 ((i) 4(i) 4(ii)	a ir	20 °05. 0	0 20 186	00 00s
17 Remington	TUTEV TRAVEA	20 20	Costine/	E. PER 1 198	3850 3280 4250 3594	THE PARTY OF THE P	Color September 1	873 591		A Company of the Company	No real party and the	19 200 - 20 m - 419 - 428	Contract of the Contract of th	Sea of Charles and Charles	0 25 AN	CAS PERCENT
1) managan	R17R2	25	Hollow Point	1/h	4040 3428	2895 2420	and the second second		465 325 2		OR OTHER DESIGNATION OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN	18 zaro 1.9	10 To	1.9 1.5 m		32.0 0.187
204 Ruger	War.	<u> 572</u>	Action)	Ne.	420 333	3M 252		1253 (37)	63 M 8	35 25	400 00 t	J - OB <i>A</i> D	a c	(a) find A	5 (0 dp	230 (020)
	PRAZO(B	0	Accip(Ball)	Wa.	8800 ,8451	30/6 (267)	See 2001	189] 1038	(22) (35) (4	3 88 -					6 <0, 100 c	
22 Hornet	rzzena rzzeni	33	Accelling-V	51/2		1502 1120	Carried Street	722 417	225 127 0	0 70	The second second	د سور سده باشور برونگ		200. 435. 410		155.3 0109
	RZZHNZ	45 45	Hollow Point	61/2	2690 2042 2690 2042	1502 1128 1502 1128	<u> </u>			10 70 10 70				zero -4.3 -12 zero -4.3 -12		162.0 0.130 162.0 0.130
-220 Swift	, R220Si	50	Pointed Soft Point	91h		2617, 2135	<u> </u>			25 204				1.0 zero 2		46.1 0.175
221 Rem. Fireball	GAZID.	0	MODE	"Wi	200 200	all in	122133	(E. 70)	60 (5 (2 208	OE OF 1	TE OL	Di 711	V do s	4 (8) Eq. (535 (123)
222 Remington	R222R1	50	Pointed Soft Point	71/2	3140 2602	2123 1700				02 136				1.7 zero -3		72.8 0.175
	R222R3	· 50	Power-Lakt* Hallow Point Acculted V Book Fail	7½ 125 2	3140 2635	2182 1777	1432 1172 11740 1471		529 351 2 629 454 3	28 152 50 40 60				1.6 zero -3 1.57 zero -3		-67.1 0.188 -51.73 2.0.242
223 Remington	DV223RA	45	Lacketed from Tin Core HP	11/2	3550 2911.	100		10 m		10 132	-101 - 10.5 z		10.3 25,			54.7 0.161
	1223R3	55 4	. UMC Metal Case 1	7.7	3240 2759			- 1282 . 929		07 207.	AND THE RESIDENCE	the state of the s	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		12 81 25.5	
	LZZ3RJ	45)	LIMC* Lacketed Hollow Point	. 1½ -	3550 2953	2430 1964	1559 1241	1259 871	590 385 2	43 154	-01 , 04 % (2	no. 717 348 ×	9.7 , 2.4"	29 · 22 /ze	ro . 4.0 . 19.3	493 0173
	L223R8	750	UNIC Lacketed Hollow Point	€ 7 ½ °	4	2430 2007	, 1633 , 1324	1302 933		96 , 195″	Kar Street Street		99 : 1:13	1.3 Zen 2	20 2 12 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	527 0192
	PRAZZIRB PRAZZIRC	J.	Accilio Vibrati al 18 anno 19	1.0	341D 2989	2605 (22252 2500 \$2172	0 1928 2 1636 M	1282 ± 995 4	733 563 4 753 576 4	13 2 21/2 21 2 312	0.75 0.65	90 8 4 1 2 2 4 1	TO WATER	26 a 20 a	n 2,345,15782 88*718: 217: 3	COLUMN TERM
	R223R1	55	Pointed Soft Point	71/2	3240 2747	2304 1905	A STATE OF THE PARTY.	A STATE OF THE PARTY.		95 197	The state of the s	A STATE OF THE PARTY OF	STATES	1.5 zero -3	CALL THE PARTY IN	58.6 0.197
	R223R2	55	Power-Lokt* Hollow Point	71/2	3240 2773	2352 1969			675 473 3					L4 zero -3		55.1 0.209
	R223R3	55	Metal Case	71/2	3240 2759	2326 1933	1587 1301	1282 929	660 456 3	07 207	0.0 0.6 z	ero -1.9 -5.5 -	11.0 1.6	1.5 zent -3	.1 -8.1 -25.5	57.0 0.202
	PRC223R4	62	Core-Lokt® Ultra Bonded"	71/2_	3100 2695	2324 1983				86 273				1.5 zero -3		54.8 0.234
	R223R6	62 62	Hollow Point Match Chised Tip Flat Base	11/2	3025 2572	2162 1792 2396 2083			643 442 2 790 597 4	98 204	0.2 0.7 z			1.7 zero -3 1.5 zero -3		66.4 0.205 50.1 2 0.261
· ·	RM223R1	69	MatchKing* BTHP	11/h	3000 2720	2457 2209	3 3 3 4 3 4 3 4 3	1 100 1	100	98 473	7 30 14 45	3 34 3 34	10.3 1.6	1.5 zero -2	<u> 4 4.76 (2000) 40 70 70</u>	45.4 0.336
	RM223R3	77 .	MatchKing* BTHP	71/2		2303 2081		<u> </u>		98 480				1.7 zero -3		51.7 0.362
22-250 Remington	127503;	45-	LRMC* Jacketed Hollow Point	£91/2	4000 : 3340	2770 2266	1819 1440	1598 -1114	767 5.513 / 3	31 - 207	-01 02 2	ero 12 3 35, ±	12 16,	21 × 1.6 2	n 30 145	367 0173
	[22504]	50 %	UNIC® Jacketed Hollow Point	91/2		2739 2286	584 546 and	21620 1169	100	92 < 258	Se will strait	19 zerő. 1-21-	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	22√×17 za	C 327 7 C 2 2 2 4 2	36.1 (0.192)
ì	DV22250RA	45	Accuting V Boot Tail 2003	9½ 第9½	4000 3293 3800 3339	2690 2159	1696 1320 2198 1878	No. of Parties and Parties	or winds a service of	87 174 : 36 392 € 5	00 09	19 zano 21 19 00 - 19		22 17 ze	Contract of the Contract of th	40.6 0.161 29.13 1-0.242 21
Ì	R22501	55	Pointed Soft Point	91/2	3680 3137	2656 2222	AND THE BUILDING	* 大阪治療などのないから、後の	A CHARLE AND THE	10 272	10 July 10 Jul	100	Carlot Manager	24 1.8 ze	27 4 5 1 mg 12 CM 7 12 CM	38.3 0.197
6mm Remington‡	R6MM4	100	Core-Lakt* Pointed Soft Point	91/2	3100 2829	2573 2332				83 792			9.3 1.4	1.3 zero -2		40.8 0.356
243 Win.	PRA243W8	075g	Accuracy Boat Tall	9/13	3375 3065	27/5 2504	2248, 2008	1897# 1564	1282 1044 8	42 / 671 ·	\$0.0° 0.4 \$ 2	m 14# 40%	78 20.	24 是 1.8 E 7t	m _30F 133Y	30.6 20.330
]	R243W1	80	Pointed Soft Point	91/2		2593 2259		1993 1551		76 495				2.7 2.0 ze		37.3 0.255
	PC\$243WB **	80	Power-Lokt* Hollow Point Copper Solid Tipped	91/2	3350 2955 3350 3011	2593 2259 2696 2403	1951 1670 - 2128 1872		1194 906 6 1291 1025 8	76 495 04 622	0.0 0.5 z	T		27 2.0 ze 25 1.9 ze		37.3 0.255 33.1 0.299
	PRSC243WA	.90	Swift Scirocco," Bonded	91/2		2635 2411		-	1388 1162 9			كتنينسمه	89 1.4			383 0.390
	PRAZASWA A	95	Acculant staff	91/2	3120 2847	2590 7 2347	2118, 1902,	2053 5 1710	1415 1162 > 9	46 . 763 -	00 05	m, 114 46	92 05	1.3 zero 2	15.5 663 (195)	40.2 0.35524
	PRC243WC	100	Core-Lokt* Ultra Bonded**	91/2	2960 2709	2471 2246		<u> </u>		17 745				1.5 zero -2		44.3 D.373
25-06 Remington	R243W3 R25062	100	Care-Lakt* Pointed Soft Point Care-Lakt* Pointed Soft Point	91/2	2960 2697 3230 2893	2449 Z215 2580 Z287				82 708 01 689			10.4 1.6 -9.1 1.3	1.5 zero -2 1.3 zero -2		-45.4 0.356 -41.7 0.292
25 00 Normagun	PRC2506RA	115	Core-Lokt* Ultra Bonded**	91/2	3000 · 2751	2516 2293				06 903			9.9 1.6	1.4 zero -2		42.5 0.380
]	R25063	120	Care-Lakt* Pointed Soft Point	91/2	2990 2730	2484 2252	2032 1825	2382 1985	1644 1351 11	100 887	0.1 0.6 z	ero -1.9 -5.2	10.1 1.6	1.4 zero -2	8 -72 -21.4	-44.1 0.362
25-20 Win.	R25202	86	Soft Point	61/2	1460 1194	1030 931	858 797	407 272		41 121			89.1 zero			315.5 0.190
250 Savage	R250SV	100	Pointed Soft Point	91/2		2210 1936				30 474			15.3 2.0	1.8 zero -3		58.6 0.285
257 Roberts 6.5x55 Swedish	R257 R65SWEI	117	Core-Lakt* Soft Point Core-Lakt* Pointed Soft Point	91/2	2650 2291 2550 2353	1961 1663 2164 1984	1404 1199 1814 1654		999 718 5 1456 1224 10	12 373 223 850				2.3 zero -4 2.1 zero -3		-78.2 0.240 -57.8 0.435
6.5mm Remington Mag	R65MM2	120	Core-Lokt* Pointed Soft Point	91/2 M			2102 1867		1830 1475 11					3.0 2.1 ze		35.3 0.323
260 Remington	PRAZGORA*	120	Acculin Boat lail	: 91h	2890 , 2697	2512 2334	2163 -2000	2392° 2083	1807 1560 - 1	340 1146	01: 07: 1	en 18 (49)	95 16	15 ≠ neno 2	8, 12, 20,7	417 . 0.480
	R260R1	140	Core-Lokt* Pointed Soft Point	91/2			1979 1812		1712 1448 12		 			1.7 nero -3		47.2 0.435
]	PRC260RB	140 -140 E	Core-Lokt* Ultra Bonded'* Core-Lokt* Pointer Soft Point	9½ 29½		2365 2185	2013 1849 1660 1511		1739 1484 12 1232 }1029 ≰8	-	£	ero -2.2 -6.0 1.9 -59 -12.0		1.7 zero -3	2 81 23.6	47.6 0.457 68.9 0.435
264 Win. Mag.	R264W2	140	Core-Lokt* Pointed Soft Point	9 ¹ / ₂ M	100 A 100 A 100 A	- 14-	2114 1914	173-35-70-2	2018 1682 1	VV. 18420. 3		100 22 23 25 25 25 25 25	18 CH . 12 . 18.	1.4 zero -2		41.3 0.384
6.8mm Rem. SPC	R68R1	115	Open Tip Match (OTM)	91/2		2135 1911		1759 1437		40 584				2.0 zero -3		61.2 0.344
ļ	R68R2	115	Metal Case	91/2			1565 1363	 	1076 825 6					2.1 zero -4		683 0.292
	RM68R1	115	MatchKing* BTHP	91/2			1676 1484	1759 1428		17 562				2.1 zero -4		62.5 0.333
270 Win.	PRC68R4 R270W1	115	Core-Lokt* Libra Bonded** Pointed Soft Point	91/2	2625 2332 3320 2924		1574 1372 1916 1636	1759 1389 2448 1898		33 481 15 594				2.1 zero -4 2.8 2.0 ze		-67.8 0.295 -38.5 0.252
	81270H2	1007230		97/6			£1636 1425 £	Company of the Print	1161 896 6	NO. OF LANS.		167-488-1004			4 42 356	
}	PRAZTOWA:	130	Acculin Boat Tail	91/2	T. 100	24 CA CA	- 2254 2076	100	2009: 1721 ; 1	A	200	Bo 11,541	20 V 2 4-25-2-10		4 64 : 186	7,000
	PRSC270WA	130	Swit Sciroco Bonded	91/2		2627 2425			1991 1697 14					1.3 zero -2		382 0433
}	R270W2	130	Core-Loke* Pointed Soft Point	91/2		2510 2259			1818 1472 1				9.8 1.5	1.4 zero -2		433 0336
	R270W3 PCS270WA	130	Bronze Point Copper Solid Tipped	91/2	3060 2802 3060 2837		2110 1904 2229 2044		1890 1565 12 1988 1693 14				95 1.5 91 24	1.3 zero -2 2.8 2.0 ze		-41.1 0.372 -332 0.431
1	PRC270WB	140	Core-Loid* Ultra Bonded**	91/2	2925 2667	2424 2193			1826 1495 12					25 20 Z		-46.4 0.360
[RS270WA	140	Swift A-Frame* PSP	91/2	2925 2652		. 1923 1711	 	1782 1439 1				10.9 1.7	1.5 zero -3		48.0 0.339
	R270W4	150	Core-Loke* Soft Point	91/2			1618 1385	2705 2087		72 639		tero -2.4 -6.7	13.0 2.0	1.8 zero -3		-612 0261
270 WSM	R270WSM1	130	Core-Lokt" Soft Point	91/2M	3285 2986		2196 1963	-	2114 1724 1		100 miles (100 miles (82 21	25 19 ze		322 0336
280 Remington ^T	PRAZBORA :	140	Accurate Core-Loke Pointed Soft Point	91/2			2265 2009 2102 1905		2129, 1846 L. 1986 1657 L.		1.777	ero. 18 48 ero -19 -5.1	92* 25* 4 98 15	29 21 x zz 14 zzro 2	no 14 - 148 8 - 1.0 - 20.5	33.0 0.486 z
	R280R1	150	Core-Loke* Pointed Soft Point	91/2	2890 2624		1912 1705		1875 1518 12				11.2 1.8	1.6 zero -3		-42.8 0.346
1	R280R2	165	Core-Lokt* Soft Point	91/2			1701 1479		1805 1393 10					1.8 zero -3		-57.8 0.290

7mm -08 Remington	かんい はりつ	Tr.		14.21	350	Teatro	u j			. E == (C	dis-Net				- 6 to 1 to 2		I	(0.5		44	1
	R7M082	120	Hollow Point	91/2	r 20 222.	7776 7467		1992 1778	2398 19	79 1621 I				0 1.9	-53 -10			ZETO -2.9	73	21.7 -44.9	0.343
	R7M082	140	Core-Lott * Pointed Soft Point	91/2		2725 2467 2625 2402		1988 1798		42 1793 1					-5.7 -11.			zero -3,1		-22.9 -46.8	0.343
	PRAJMOSRB	140	Accuring Boat Tail	91/2						16 1925 1										-21.1 -42.5	0.486
	RL7M081	140		91/2				2146 .1986			*		-0.7 zer -zeno -2.			حضات					-
			Core-Lokt® Pointed Soft Point			2151 1951		1590 1433				13. 14			12.4 -21.			æro -4.8			0.390
7mm Rem Magnum	PRC7MMRA	140	Core-Lold* Ultra Bonded**	91/2M		2934 2707		2283 2086					0.5 zer		4.3 -8.4			zero -2.4		-17.7 -36.0	0.409
}	R7MM4	140	Core-Lott Pointed Soft Point	91/2M	La Service	923 2684		2243 2039			178 1564 1		0.5 zer		4.4 -8.5		2.6	1.9 zero		-14.2 -32.0	0.390
ļ	RL7MM4	140	Core-Loke Pointed Soft Point	9 /2 M.S	-	2482 2265	100	1855 1533			118 31081, 8	married the ta	(E) - 1		8.7 (15	200	ZB10 3	£243 £65		308 21 592	0.388
	PCS7MMA	140	Copper Solid Topped	91/2		2964 2762		2385 2208		30 2372 2					-42 -8 .1			1.8 zero		-13.2 -29.5	0468
	PRSC/MMB	150	Swift Scirocco" Bonded	91/2M				2419 2262		52 2520 2	-7		0.5 zer		-4.3 -8.2			zero -2.3		-17.0 -34.0	0.533
ţ	PRAZMMRA	140	Accutip Boat Fail	97/M,	7 7 7 7 7	911 277	E 44			44 2397 2	A CONTRACTOR	100 C Se 1-1-1-1-	, 0.5 ger	A	42 30			1.8 zem	3.0		0.486
Į.	PRAZMANAS	150	Accultip Boat Fail	-9½M.	3110	2926 -2749	2579	2415 2258	3221 28	50 2516 2	215 19 43 41	97 🚁 0.0)05 ver	0 16	43 -8 2] 13	12	zero -2.3	5.9	-17 -34.1	0.530
į	R7MM2	150	Core-Lokt* Pointed Soft Point	91/2M	3110 2	2830 2568	2320	2085 1866	3221 26	67 2196 1	92 1448 1	60 0.0	0.6 zer	0 -1.7	-4.8 -9.3	1.4	1.3	zero -2.6	-6.7	-199 -41.1	0.346
ĺ	PROMMRC	160	Core-Lokt≤ Uitra Bonded™	9½M	2950 2	2724 2510	2305	2109 1924	3091 26	36 2237 1	87 1581 1	115 0.1	O.6 zer	n -1.9	-5.2 -10.	1.6	1.4	zero -2.8	-7.1	-20.8 -42.4	0.415
ſ	R7MM3	175	Core-Lokt* Pointed Soft Point	974	2860 2	2645 7440	2244	2057 1879	3178 27	18 2313 1	56 1644 1	72 0.2	0.7 zar	o -2.1	-5.6 -10.	1 1.7	1.5	ието -3.0	-7.6	-22.1 -44.8	0.427
7mm Mauser (7x57)	R7MSR1	140	Core-Lokt® Pointed Soft Point	91/2	2660 3	2435 2221	2018	1827 1648	2199 18	43 1533 1	266 1037 8	44 0.0	zem -1.	4 -4.4	-9.1 -15.	3 2.2	1.9	zero -3.6	-9.2	-27.4 -55.3	0.390
7mm Remington	PR7SM1	140	Core-Lokt* Ultra Bonded™	91/2M	3175	2934 2707	2490	2283 2086	3133 26	76 2277 1	27 1620 1	153 O.1	0.5 zer	0 -1.5	-4.3 -8.4	1.3	1.2	zero -2.4	-6.0	-17.7 -36.0	0.409
SA Ultra Magʻ	PR7SM2	150	Core-Lokt* Pointed Soft Point	91/2M	3110 2	2831 2568	2321	2087 1867	3221 26	69 2197 1	793 1450 1	161 0.0	0.6 zer	o -1.7	-4.8 -9.3	2.5	2.9	2.1 zero	-3.6	-15.7 -35.9	0.346
İ	PR7SM4	160	Core-Lokt* Ultra Bonded**	91/2M	2960 2	2733 2518	2313	2117 1931	3112 26	54 2252 1	000 1592 13	123 0.1	0.6 zer	0 -1.9	-52 -9.9	2.7	3.1	2.2 zero	-3.7	-16.2 -36.5	0.414
7mm Rem Ultra Mag	PR7UM1	140	Core-Lokt* Ultra Bonded**	91/2M	3425	3170 2929	2701	2485 2278	3646 31	23 2667 2	268 1919 1	513 -0.2	0.3 zer	0 -1.3	-3.6 -7.0	1.8	22	1.6 zero	-2.7	-1L.7 -26.4	0.409
POWER	PRSC/UM1	150	Swift Scirocco Bonded	9½M		3132 2948		2602 2438	3682 32						-3.6 -7.0	—	22	1.6 zero		-11.4 -25.3	0.533
LEVEL III	PR/UM5	175	Swift A-Frame* PSP	91/2M		2831 2645		2296 2212		14 2718 2			0.6 zer		47 -9.0		28 -	20 zero		-14.5 -32.2	0.493
POWER LEVEL (I	PR7UM2-P2	160	Core-Lokt* Ultra Bonded**	91/2M		2724 2508		2108 1922	3091 26		84 1578 1		0.6 zer		-5.2 -10.			zaro -2.8		-20.8 -42.4	0.433
	R7UM1-P1	140	Core-Lokt* Pointed Soft Point	91/2M		2768 2549		2139 1950			700 1422 1		0.6 zer		-5.0 -9.6		3.0			-15.8 -35.6	0.409
POWER LEVEL I 30 Carbine	L30CRI	110	UMC* Metal Case	372m		1567: 1236		923 842					7.0 25 7.200 4		272: 48			2.2 zero -7.3 -20.4		-105.6 -211.8	0.465
30 Caroine		2 1			, ,	Pr	. 4				21 700 1-200	See a Constitution								- W. C. S. C. J. S. S.	-
	R30CAR	110	Soft Point	61/2		1567 1236		923 842	967 60			73 0.6	zero -4.		-27.2 -48.	_\		-12.9 -27.2		-117.1 -225.5	0.166
30 Remington AR	PRA30RARI	125	AccuTip Boat Tail	11/2		2531 2278		1816 1610	2176 17			19 0.3	0.8 zer		-6.3 -12			zero -3.4		-25.8 -53.5	0.335
	R30RAR1	125	Core-Lokt* Pointed Soft Point	71/2		2465 2154		1606 1380	2176 16			29 0.3	0.9 28		-6.9 -13.			zero -3.8		-29.4 -62.7	0.267
1	R30RAR2	150	Core-Lokt® Pointed Soft Point	71/2		2302 2047		N/A N/A				VA 0.0	zero -1.		-10.6 -18.			zero -4.3		-32.5 -67.9	0314
	L30RAR1	123	Metal Case	71/2	-	2464 2152	0 0 0 1 0 -	1603 1376	2141 16	58 1264 9	48 701 5	17 0.3	0.9 zer		-6.9 -13.			zero -3,8		-29.5 -62.9	0.266
30-30 Win.	RI 30301	125	Core-Loke Pointed Soft Point	972	শুক্ত	1820 1508	1255	1022 975	TERN ST	19 (31). <i>(</i>	37: 325: 2	II. 09	EO D	J 30	1911/288	20)	2.5EQ	-512 -101	-203	निक्कः न(६०)ः	0.215
Ĺ	R30301	150	Core-Lokt* Soft Point	91/2	2390	1973 1605	1303	1095 974	1902 12	96 858 !	65 399 3	16 0.2	zero -2.	4 -7.6	-16.1 -28.	3 1.6	zero	-4.3 -12.1	-24.0	-64.2 -133.2	0.193
[PSC3030WA	150	Copper Solid Tipped	9 /2	2220	1806 1448	1185	1022 924	1641 10	86 698 4	68 348 2	84 0.5	.zero -3.	6 -103	-21.237.	3 52	4.2	zero :-8.3	-21.8	-68.6 -149.0	0.186
	R30302	170	Core-Lokt* Soft Point	91/2	2200	1895 1619	1381	1191 1061	1827 13	55 989 7	20 535 4	25 0.3	zero -2.	7 -8.3	-17.1 -29.	1.8	ZEF0	-4.6 -12.6	-24.5	-626 -125.3	0.254
	R30303	170	Core-Lakt* Hollow Paint	91/2	2200	1895 1619	1381	1191 1061	1827 13	55 989 7	20 535 4	25 0.3	zero -2.	7 -8.3	-17.1 -29.	1.8	zero	-4.6 -12.6	-24.5	-62.6 -125.3	0.254
30-40 Krag	R30402	180	Core-Lokt* Pointed Soft Point	91/2	2430 2	2213 2007	1813	1632 1468	2360 19	57 1610 1	14 1064 8	6L 0.1	zero -1.	8 -5.6	-11.6 -19.	1.2	zero	-3.2 -8.5	-16.2	-39.9 -76.7	0.383
30-06 Sprg. Accelerator *	R30069	55	Pointed Soft Point	91/2	4080 3	3484 2964	2499	2080 1706	2033 14	82 1073 7	63 528 3	55 -0.4	0.2 zer	o -1.0	-3.0 -6.2	1.4	1.8	1.4 zero	-2.6	-12.2 -30.0	0.197
30-06 Springfield	R30061	125	Pointed Soft Point	91/2	3140 2	2780 2447	2138	1853 1595	2736 21	45 1662 1	269 953 7	06 0.0	0.6 26	0 -1.9	-52 -10	1 1.5	1.4	zero -2.8	-7.4	-224 -47.6	0.268
ja V	RE0072	125	Corporation of the Corporation o	9/15	250 - 2	2335 2834	1757	1509 1800	1931 15	i iii	3 · E 2 · 4	9 -01	ஹ சி	3 49	00) 4B	FFO	(ED)	29 <i>I</i> I3	a[12]	-839 <i>- 73</i> 0	0257
Ī	7L30062	150	UMC* Metal Case	19/2	32910	2617, \$2342	2084	1843 [1622]	\$2820 \$22	812182771	46美1131 編8	75 N ±02	zero el	366	77 13	3 3 16	16	zero *₹3.2	8.2	244 112509	0.314 %
ı	PRSC3006C	150	- Swift Scirocco Bonded	91/2	2910	2696 2492	2298	2111 1934	2820 .24	21 , 2069 1	58 1485 11	46 3 01	,20.7 ∶2æ	020	53 10	2 2 1.6	. 15	zero ↓ 2.9	173 a	21.1 4-423	. 0.435
Ī	PRA3006A	150	Acciding Boat Fail	·9/2	2910 . 5	2686 2473	2270	2077 1893	2820 24	01 2037 1	16 1436 1	E3 00	07 2	o ~ 20 ^	54: 40	3 30	115	220 . 29	-JA	215, 437	0.415
	R30062	150	Core-Lokt* Pointed Soft Point	91/2	2910	2617 2342	2083	1843 1622	2820 22	81 1827 1	45 1131 8	76 0.2	0.7 zer			1 1.8	1.6	22	****		27600,4000
ŀ	R30063	150	Bronze Point	91/2		2656 2416		1974 1773						o -2.2	-5.9 -11.	+ 1 1.0		ZEIU -J.Z	-8.2	-24.4 -50.9	0.314
. }	PRC3006A	150	Core-Lokt® Ultra Bonded™							49 1944 1	596 1298 1	147 0.2						zero -3.2 zero -3.0		-24.4 -50.9 -22.7 -46.6	0.314
Į.				1 91/2 1	2910 2	2631 2368	2121						0.7 zer	o -2.0	-5.6 -10	8 1.7	1.5	zero -3.0	-7.7	-22.7 -46.6	0.365
ſ		150		91/2		2631 2368 2678 2458		1889 1674	2820 23	05 1868 1	198 1188 9	33 02	0.7 zer	o -2.0 o -2.1	-5.6 -10 -5.8 -11	8 1.7 2 1.8	1.5 1.6	zero -3.0 zero -3.1	-7.7 -8.0	-22.7 -46.6 -23.8 -49.3	0.365 0.331
-	PCS3006A PCS3006R	150	Copper Solid Tipped	91/2	2910	2678 2458	2248	1889 1674 2048 1860	2820 23 2820 23	05 1868 1 88 2012 1	198 1188 9 383 1397 †1	33 02 52 201	0.7 zer 0.7 zer 0.7 zer	o -2.0 o -2.1 o -2.0	-5.6 -10 -5.8 -11 -5.4 -10	B 1.7 2 1.8 4 - 1.7	1.5 1.6	zero -3.0 zero -3.1 zero -2.9	-7.7 -8.0 -7.4	-22.7 -46.6 -23.8 -49.3 -21.8 -44.5	0.365 0.331 0.400
į	PC\$30068	165	Copper Solid Tipped Copper Solid Tipped	9½ ,9½	2910 -2800	2678 2458 2597 2403	2248 2217	1889 1674 2048 1860 2039 1870	2820 23 2820 23 2872 24	05 1868 1 88 2012 1 70 2115 1	198 1188 9 83 1397 †1 800 1523 1	33 02 52 201 281 - 01	0.7 zer 0.7 zer 0.7 zer 2.780 -1	o -2.0 o -2.1 o -2.0 4 -4.3	-5.6 -10 -5.8 -11 -5.4 -10 -8.6 -14	8 1.7 2 1.8 4 1.7 6 2.1	1.5 1.6 1.5 (zero -3.0 zero -3.1 zero -2.9 zero -3.3	-7.7 -8.0 -7.4 -8.2 ½	-22.7 -46.6 -23.8 -49.3 -21.8 -44.5 -23.4 -47.1	0.365 0.331 0.400 0.447
	PC\$30068 PRA30068	165 165	Copper Solid Tipped Copper Solid Tipped Acculin Boat Let	9 ½ 49 ½ 9 ½	2910 2 2800 2	2678 2458 2597 2403 2597 2403	2248 2217 2217	1889 1674 2048 1860 2039 1870 2039 1870	2820 23 2820 23 2872 24 2872 24	05 1868 1 88 2012 1 70 2115 1 70 2115 1	98 1188 9 83 1397 †1 800 1523 11	33 02 52 01 281 - 01 281 02	0.7 zer 0.7 zer 0.7 zer 2ero -1	0 -2.0 0 -2.1 0 -2.0 4 4.3 0 -2.1	-5.6 -10. -5.8 -11. -5.4 -10. -8.6 -14. -5.9 -11	B 1.7 2 1.8 4 1.7 6 21	1.5 1.6 1.5 (1.8	zero -3.0 zero -3.1 zero -2.9 zero -3.3	-7.7 -8.0 -7.4 -8.2 ×	-22.7 -46.6 -23.8 -49.3 -21.8 -44.5 -23.4 -47.1 -22.8 -46.24	0.365 0.331 0.400 0.447
	PC\$30068 PRA30068 R30068	165 [165] [165]	Copper Solid Tipped Copper Solid Tipped Accolling Boart Test Core-Lakt® Pointed Soft Point	9 /h 29 /h 9 /h 9 /h	2910 7 2800 7 2800 7 2800 7	2678 2458 2597 2403 2597 2403 2534 2283	2248 2217 2217 2047	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621	2820 23 2820 23 2872 24 2872 24 2872 23	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1	98 1188 9 983 1397 †1 800 1523 11 900 1523 11 534 1220 9	33 02 52 01 281 201 281 02 63 03	0.7 zer 0.7 zer 0.7 zer 0.8 zer 0.8 zer	0 -2.0 0 -2.1 0 -2.0 4 -4.3 0 -2.1 0 -2.3	-5.6 -10 -5.8 -11 -5.4 -10 -8.6 -14 -5.9 -11 -6.3 -12	8 1.7 2 1.8 4 1.7 6 21 1 2.0	1.5 1.6 1.5 (1.5) 1.8 (1.6)	zero -3.0 zero -3.1 zero -2.9 zero -3.3 zero -3.2 zero -3.4	-7.7 -8.0 -7.4 -8.2 × -7.9 -8.7	-22.7	0.365 0.331 0.400 0.447 0.447 0.339
	PCS30068 PRA30068 R30068 PRC3006B	165 165 165 168	Copper Solid Tipped Copper Solid Tipped Account Boet Text One-Lokt* Pointed Soft Point Core-Lokt* Ultra Bonded **	9 1/2 39 1/2 9 1/2 9 1/2 9 1/2	2910 1 2800 2 2800 2 2800 2	2678 2458 2597 2403 2597 2403 2534 2283 2546 2306	2248 2217 2217 2047 2079	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1866 1668	2820 23 2820 23 2872 24 2872 24 2872 23 2974 24	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1984 1	98 1188 9 93 1397 †1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1	33 02 152 01 281 02 63 03 137 03	0.7 zer 0.7 zer 0.7 zer 0.8 zer 0.8 zer 0.8 zer	0 -20 0 -21 0 -20 4 -43 0 -23 0 -23	-5.6 -10. -5.8 -11. -5.4 -10. -8.6 -14. -5.9 -11. -6.2 -11.	8 1.7 2 1.8 4 1.7 6 2.1 1 2.0 9 1.9	1.5 1.6 1.5 (1.5) 1.8 1.6 1.7	zero -3.0 zero -3.1 zero -2.9 zero -3.2 zero -3.4 zero -3.3	-7.7 -8.0 -7.4 -8.2 -2 -7.9 -8.7 -8.5	-22.7 46.6 -23.8 49.3 -21.8 44.5 -23.4 47.1 -22.8 46.2 -25.9 -53.2 -25.1 -51.7	0.365 0.331 0.400 0.447 0.339 0.356
	PCS30068 PR30068 PRC30068 PRC30068	165 165 165 168	Copper Sofal Topped Copper Sofal Topped Account Deat Test Core-Lock* Pointed Soft Point Core-Lock* Uthra Bonded ** Account Death Test Account Death Test	9 /h 9 /h 9 /h 9 /h 9 /h 9 /h	2910 2 2800 2 2800 2 2800 2 2800 2 2725 2	2678 2458 2597 2403 2597 2403 2534 2283 2546 2306 2539 2380	2248 2217 2217 2047 2079 2188	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1866 1668 2024 1867	2820 23 2820 23 2872 24 2872 24 2872 23 2974 24 2967 25	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1984 1	98 1188 9 83 1397 1 800 1523 1 800 1523 1 804 1220 9 813 1299 1 814 1637 1	33 02 152 01 281 201 283 02 63 03 337 03 99 03	0.7 zer 0.7 zer 0.7 zer 0.7 zer 0.8 zer 0.8 zer 0.8 zer 0.8 zer 0.8 zer	0 -20 0 -21 0 -20 4 -43 0 -23 0 -23 0 -23	-5.6 -10 -5.8 -11 -5.4 -10 -8.5 -14 -5.9 -11 -6.3 -12 -6.2 -11 -6.1 -11	1.7 2 1.8 4 1.7 6 2.1 1 2.0 9 1.9 6 2.9	1.5 1.6 1.5 (1.5) 1.8 1.6 1.7 1.7	zero -3.0 zero -3.1 zero -2.9 zero -3.3 zero -3.4 zero -3.3 zero -3.3	-7.7 -8.0 -7.4 -8.2 ½ -7.9 -8.7 -8.5 -8.2	-227 46.6 -238 49.3 -218 -44.5 -234 47.1 -228 46.2 -25.9 53.2 -25.1 51.7 -42.37 44.97	0.365 0.331 0.400 0.447 0.339 0.356
	PCS3006B PRA3006B R3006B PRC3006B PRC3006C RS3006A	165 165 165 168 180	Copper Sofal Topped Copper Sofal Topped Accounty Boat Lot Core-Lots* Pointed Soft Point Core-Lots* Utra Bonded ** ##################################	91/h 91/h 91/h 91/h 91/h	2910 2 2800 2 2800 2 2800 2 2800 2 2725 2	2678 2458 2597 2403 2534 2283 2546 2306 2539 2380 2465 \$2243	2248 2217 2217 2047 2079 2188	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1866 1668 2024 1867	2820 23 2820 23 2872 24 2872 24 2872 23 2974 24 2967 25 32913 524	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1984 1 76 2226 1 29 2010 1	98 1188 9 283 1397 1 200 1523 1 200 1523 1 200 1523 1 201 1523 1 201 1523 1 201 1523 1 201 1523 1 201 1523 1 201 1523 1 201 1523 1 201 1523 1	33 02 52 01 28 - 01 28 02 63 03 337 03 839 03	0.7 zer 0.7 zer 0.7 zer 0.7 zer 0.8 zer	0 -20 0 -21 0 -20 4 -43 0 -23 0 -23 0 -23 0 -23	-5.6 -10. -5.8 -11. 5.4 -10. -8.6 -14. -5.9 -11. -6.3 -12. -6.2 -11. -6.1 -11. -6.3 -12. -6.3 -12. -6.3 -12.	8 1.7 2 1.8 6 21 1 20 1 20 9 1.9 6 221	1.5 1.6 1.5 1.8 1.6 1.7 1.7 2.0	zen 3.0 zen 3.1 zen 2.9 zen 3.3 zen 3.2 zen 3.4 zen 3.3 zen 3.3	-7.7 -8.0 -7.4 -8.2 ½ -7.9 -8.7 -8.5 -8.2	-227 46.6 -238 49.3 -218 -44.5 -234 47.1 -228 46.2 -25.9 -53.2 -25.1 -51.7 -230 47.9 -26.5 54.4	0.365 0.331 0.400 0.447 0.339 0.356 0.480
	PC330068 PRC30068 PRC3006B PRC3006C PRC3006C	165 165 165 168 180 180	Coppor Solid Topped Coppor Solid Topped Accounty Boat Fail Core-Ladd* Pointed Soft Point Core-Ladd* Utra Bonded** Accounty Boat Fail Swell A Frame* PSP	9 /h 9 /h 9 /h 9 /h 9 /h 9 /h 9 /h	2910 2 2800 2 2800 2 2800 2 2800 2 2725 2 2700 3 2700 3	2678 2458 2597 2403 2597 2403 2534 2283 2546 2306 2539 2380 2465 \$2243 2480 2270	2248 2217 2217 2047 2079 2188 2032 2070	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1866 1668 2024 1857 1833 31648 2 1882 1704	2820 23 2820 23 2872 24 2872 24 2872 23 2974 24 2967 25 32913 24	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1984 1 75 2226 1 29 2010 1	198 1188 9 283 1397 1 200 1523 1 200 1523 1 200 1523 1 201 1523 1 201 1523 1 201 1523 1 201 1537 1 201 1343 1 201 1343 1 201 1343 1 201 1343 1	33 02 52 01 28 02 63 03 337 03 83 03 85 00 61 00	0.7 zer 0.7 zer 0.7 zer 0.7 zer 0.8 zer	0 -20 0 -21 0 -20 4 43 0 -21 0 -23 0 -23 0 -23 3 42 3 42	-5.6 -10. -5.8 -11. 5.4 -10. -8.5 -14. -5.3 -12. -6.2 -11. -6.1 -11. -8.8 -15.	8 1.7 2 1.8 5 1.7 6 2.1 1 2.0 9 1.9 6 2.1 1 2.1	1.5 1.6 1.5 1.8 1.6 1.7 1.7 2.0 1.8	zero -3.0 zero -3.1 zero -2.9 zero -3.3 zero -3.2 zero -3.4 zero -3.3 zero -3.3 zero -3.3 zero -3.3 zero -3.3	-7.7 -8.0 -7.4 -8.2 -7.9 -8.7 -8.5 -8.2 -8.9	-221 45.6 -238 49.3 -218 44.5 -234 47.1 -223 46.2 -25.9 53.2 -25.1 51.7 -239 47.7 -26.6 54.4 -25.8 52.7	0.365 0.331 0.400 0.447 0.339 0.356 0.356
	PCS30068 (FFA30068) R30068 PRC30068 (FRA3006C) PRC3006C PRSC3006C	165 165 168 180 180 180	Copper Solid Topped Copper Solid Topped Accounty Boak Fall Core-Ladd* Pointed Solt Point Core-Ladd* Utna Bonded ** Accounty Boak Fall Swell A Frame* PSP Core-Ladd* Utna Bonded ** Swell A Frame* PSP Swell A Frame* PSP Swell Solid &* Swell Solid Bonded ** Swell Solid Bonded ** Swell Solid Bonded **	9% 9% 9% 9% 9% 9% 9%	2910 2 2800 2 2800 2 2800 2 2800 2 2705 3 2700 3	2678 2458 2597 2403 2537 2403 2534 2283 2546 2306 2539 2380 2465 \$2243 2480 2270 2522 2351	2248 2217 2217 2047 2079 2188 2032 2070	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1866 1668 2024 1867 1833 1648 2024 1878 2028 1878	2820 23 2872 24 2872 24 2872 23 2974 24 2957 25 42913 24 2913 24 2913 25	05 1868 1 88 2012 1 70 2115 1 70 2115 1 152 1909 1 18 1984 1 76 2225 1 29 2010 1 57 2059 1	198 1188 9 23 1397 1 200 1523 1 200 1523 1 200 1523 1 201 1523 1 201 1523 1 201 1523 1 201 1523 1 201 1523 1 201 1524 1 201 1 201 1524 1 201 1 201 1 201 1 201 1 201 1 201 1 201 1 201 1 201 1 201 1 201 1 201 1	33 02 52 01 28 02 83 02 63 03 137 03 139 03 85 00 161 00	0.7 zer 0.7 zer 0.7 zer 0.7 zer 0.8 zer 0.8 zer 0.8 zer 0.8 zer 0.8 zer 0.9 zer 0.1 zer 1. zer 1. zer 1. zer 1. zer	0 -20 0 -21 0 -20 4 43 0 -23 0 -23 0 -23 0 -23 3 42 3 42 3 440	-5.6 -105.8 -115.4 -108.5 -145.9 -116.3 -126.2 -116.1 -118.9 -158.7 -15.	8 1.7 2 1.8 4 1.7 6 2.1 1 2.0 9 1.9 5 0.9 4 2.1 1 2.1 2 2.0	1.5 1.6 1.5 1.8 1.6 1.7 1.7 2.0 4.18 2 1.8 1.8	zero -3.0 zero -3.1 zero -2.9 zero -3.2 zero -3.4 zero -3.3 zero -3.3 zero -3.5 zero -3.5 zero -3.5 zero -3.5	-7.7 -8.0 -7.4 -8.2 -7.9 -8.7 -8.5 -8.2 -8.9 -8.9 -8.9 -8.1	-221 45.6 -238 49.3 -218 44.5 -234 47.1 -229 46.2 -259 53.2 -25.1 51.7 -239 47.7 -238 52.7 -239 41.9	0.365 0.331 0.400 0.447 0.339 0.356 0.480 20.377 0.402
	PCS30068 (PFA30068) PRC30068 PRC30060 PRC30060 PRC30060 PRC30068 PRC30068	165 165 168 180 180 180 180	Copper Solid Topped Copper Solid Topped [According Boat Lot] Core-Lotel* Pointed Solt Point Core-Lotel* Utra Bonded* Swith A-Frame* PSP Core-Lotel* Utra Bonded* Swith Scirccon* Bonded* Swith Scirccon* Bonded* Core-Lotel* Solit Point	9/h 9/h 9/h 9/h 9/h 9/h 29/h 3/h	2910 2 2800 2 2800 2 2800 2 2800 3 2700 3 2700 3 2700 4	2578 2458 2597 2403 2597 2403 2534 2283 2546 2306 2539 2380 2465 \$2243 2480 2270 2522 2351 2348 2023	2248 2217 2217 2047 2079 2188 2002 2070 2186 1727	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1866 1668 2024 1867 1833 31648 2 1882 1704 2028 1878 2 1466 1251	2820 23 2872 24 2872 24 2872 24 2872 24 2974 24 2557 25 2913 24 2913 22 2913 22	05 1868 1 88 2012 1 70 2115 1 52 1909 1 18 1984 1 76 2225 1 29 2010 1 25 2010 1 42 2208 1 303 1635 1	98 1188 9 803 1397 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1524 1 9	33 02 152 01 281 02 63 03 107 03 109 03 109 00 109 00 109 00 100 00	0.7 zes 0.7 zes 0.7 zes 0.7 zes 0.7 zes 0.8 ze	0 -20 -21 0 -21 0 -20 4 43 0 -23 0 -23 0 -23 0 -23 3 -24 2 3 3 -42 3 3 -40 3 5 -49	-5.6 -10 -5.8 -11. -5.4 -10 -8.6 -14. -5.9 -11 -6.2 -11. -6.1 -11 -8.9 -15. -8.7 -15 -8.3 -14.	8 1.7 2 1.8 4 1.7 6 2.1 1 2.0 9 1.9 9 1.9 0 10.9 1 2.1 1 2.1 2 2.2 1 2.2 3 2.4	1.5 1.6 1.5 1.8 1.6 1.7 1.7 2.0 1.8 1.8 1.7 2.1	zero -3.0 zero -3.1 zero -2.9 zero -3.2 zero -3.2 zero -3.4 zero -3.3 zero -3.3 zero -3.5	-7.7 -80 -7.4 -82 -2 -79 -85 -82 -89 -7:83	-227 45.6 -238 49.3 -218 44.5 -234 47.1 -228 46.2 -25.9 53.2 -25.1 51.7 -229 47.9 -25.8 52.7 -23.8 -72.8	0.365 0.331 0.400 0.447 0.339 0.356 0.480 2.0377 0.402 1.0500 0.248
	PCS30068 (PRA30368) R30068 PRC30060 PS30060 PRC30060 PRC30060 PRSC30068 R30064 R30065	165 165 168 180 180 180 180 180	Copper Solid Topped Copper Solid Topped Account Boat Fail Core-Ladd* Pointed Soft Point Core-Ladd* Utra Bonded ** Account Boat Fail Swell A Frame* PSP Swell A Frame* PSP Swell Scircoon* Bonded ** Swell Scircoon* Bonded **	9/h 9/h 9/h 9/h 9/h 9/h 9/h 9/h 9/h	2910 2800 2800 2800 2800 2725 2700 2700 2700 2700 2700 2700 27	2578 2458 2597 2403 2537 2283 2536 2306 2539 2380 2465 \$2243 2480 2270 2522 2351 2348 2023 2469 2250	2248 2217 2217 2047 2079 2188 2002 2070 2186 1727 2042	1889 1674 2048 1860 2039 1870 1825 1621 1826 1621 1826 1833 34643 1832 1704 2028 1878 1466 1251 1846 1663	2820 23 2820 23 2872 24 2872 23 2872 23 2974 24 2957 25 32913 24 2913 22 2913 22 2913 22 2913 24	05 1868 1 88 2012 1 70 2115 1 52 1909 1 18 1984 1 76 2225 1 22 2010 1 57 2059 1 42 2208 1 33 1635 1 36 2023 1	98 1188 9 983 1397 1 900 1523 1 900 1523 1 913 1299 1 914 1637 1 915 1415 1 910 1644 1 912 859 6 916 1362 1	33 02 52 01 23 01 23 02 63 03 03 03 00 03 80 00 61 00 00 00 00 00 00 00 00 00	0.7 zes 0.7 zes 0.7 zes 0.7 zes 0.8 ze	0 -20	-5.6 -10 -5.8 -11 -5.4 -10 -8.5 -14 -5.9 -11 -6.2 -11 -6.1 -11 -8.3 -15 -8.3 -14 -10.3 -18 -8.8 -15	8 1.7 2 1.8 4 1.7 6 21 1 2.0 9 1.9 6 21 1 2.1 1 2.1 1 2.1 2 22 1 20 3 24 4 21	1.5 1.6 1.5 1.8 1.7 1.7 2.0 1.8 1.8 2.1 2.1 1.8	zero 3.0 zero 3.1 zero 2.9 zero 3.3 zero 3.4 zero 3.4 zero 3.5	-7.7 -8.0 -7.4 -7.9 -8.7 -8.5 -8.2 -8.9 -8.9 -11.0 -9.0	727 466 738 493 7318 445 732 471 720 462 725 532 725 517 729 479 728 527 733 749 733 728 734 728	0.365 0.331 0.400 0.447 0.339 0.356 0.480 20.377 0.402 0.248 0.383
	PCS30068 (PFA30068) PRC30068 PRC30060 PRC30060 PRC30060 PRC30068 PRC30068	165 165 168 180 180 180 180	Copper Solid Topped Copper Solid Topped [According Boat Lot] Core-Lotel* Pointed Solt Point Core-Lotel* Utra Bonded* Swith A-Frame* PSP Core-Lotel* Utra Bonded* Swith Scirccon* Bonded* Swith Scirccon* Bonded* Core-Lotel* Solit Point	9/h 9/h 9/h 9/h 9/h 9/h 29/h 3/h	2910 2800 2800 2800 2800 2725 2700 2700 2700 2700 2700 2700 27	2578 2458 2597 2403 2597 2403 2534 2283 2546 2306 2539 2380 2465 \$2243 2480 2270 2522 2351 2348 2023	2248 2217 2217 2047 2079 2188 2070 2186 1727 2042 2084	1889 1674 2048 1860 2009 1870 1825 1621 1866 1668 2024 1857 1833 1648 2 1832 1704 2023 1878 1466 1251 1846 1663 1889 1725	2820 23 2820 23 2872 24 2872 23 2872 23 2974 24 2957 25 32913 24 2913 22 2913 22 2913 22 2913 24	05 1868 1 88 2012 1 70 2115 1 52 1909 1 18 1984 1 76 2225 1 22 2010 1 57 2059 1 42 2208 1 33 1635 1 36 2023 1	98 1188 9 803 1397 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1523 1 900 1524 1 9	33 02 52 01 23 01 23 02 63 03 03 03 00 03 80 00 61 00 00 00 00 00 00 00 00 00	0.7 zes 0.7 zes 0.7 zes 0.7 zes 0.7 zes 0.8 ze	0 -20	-5.6 -10 -5.8 -11. -5.4 -10 -8.6 -14. -5.9 -11 -6.2 -11. -6.1 -11 -8.9 -15. -8.7 -15 -8.3 -14.	8 1.7 2 1.8 4 1.7 6 21 1 2.0 9 1.9 6 21 1 2.1 1 2.1 1 2.1 2 22 1 20 3 24 4 21	1.5 1.6 1.5 1.8 1.7 1.7 2.0 1.8 1.8 2.1 7 4 2.1 2.1	zero -3.0 zero -3.1 zero -2.9 zero -3.2 zero -3.2 zero -3.4 zero -3.3 zero -3.3 zero -3.5	-7.7 -8.0 -7.4 -7.9 -8.7 -8.5 -8.2 -8.9 -8.9 -11.0 -9.0	-227 45.6 -238 49.3 -218 44.5 -234 47.1 -228 46.2 -25.9 53.2 -25.1 51.7 -229 47.9 -25.8 52.7 -23.8 -72.8	0.365 0.331 0.400 0.447 0.339 0.356 0.480 2.0377 0.402 1.0500 0.248
	PCS30068 (PRA30368) R30068 PRC30060 PS30060 PRC30060 PRC30060 PRSC30068 R30064 R30065	165 165 168 180 180 180 180 180	Copper Solid Topped Copper Solid Topped [According Boat Lot] Core-Lotel* Pointed Solt Point Core-Lotel* Utra Bonded " According Boat Lot Swith A-Frame", PSP Core-Lotel* Utra Bonded " Swith Scirccon", Bunded # Core-Lotel* Solt Point Core-Lotel* Pointed Soft Point Core-Lotel* Pointed Soft Point	9/h 9/h 9/h 9/h 9/h 9/h 9/h 9/h 9/h	2910 2200 2200 2200 2200 2200 2200 2200	2578 2458 2597 2403 2537 2283 2536 2306 2539 2380 2465 \$2243 2480 2270 2522 2351 2348 2023 2469 2250	2248 2217 2047 2047 2079 2188 2070 2186 1727 2042 2084	1889 1674 2048 1860 2039 1870 1825 1621 1826 1621 1826 1833 34643 1832 1704 2028 1878 1466 1251 1846 1663	2820 23 2872 24 2872 24 2872 23 2872 23 2974 24 2867 25 32913 24 2913 22 2913 22 2913 24 2913 24	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1984 1 76 2225 1 2010 1 57 2069 1 42 2208 1 30 31635 1 36 2023 1 68 2077 1	98 1188 9 983 1397 1 900 1523 1 900 1523 1 913 1299 1 914 1637 1 915 1415 1 910 1644 1 912 859 6 916 1362 1	33 02 52 01 28 02 33 03 03 03 03 03 00 03 85 00 161 00 105 00 105 00 108 00	0.7 zero 0.7 zero 1. z	0 -20 0 -21 0 -20 4 43 0 -23 0 -23 0 -23 3 42 3 42 3 42 3 42 3 42 3 42 3 42	-5.6 -10 -5.8 -11 -5.4 -10 -8.5 -14 -5.9 -11 -6.2 -11 -6.1 -11 -8.3 -15 -8.3 -14 -10.3 -18 -8.8 -15	8 1.7 2 1.8 4 1.7 6 21 1 20 9 1.9 5 0.9 1 21 1 2.1 2 22 1 20 3 24 4 21 0 21	1.5 1.6 1.5 1.8 1.7 1.7 2.0 1.8 1.8 1.7 2.1 1.8	zero 3.0 zero 3.1 zero 2.9 zero 3.3 zero 3.4 zero 3.4 zero 3.5	-7.7 -8.0 -7.4 -8.2 -7.9 -8.7 -8.5 -8.2 -8.9 -8.9 -8.1 -11.0 -9.0 -8.8	727 466 738 493 7318 445 732 471 720 462 725 532 725 517 729 479 728 527 733 749 733 728 734 728	0.365 0.331 0.400 0.447 0.339 0.356 0.480 20.377 0.402 0.248 0.248
	PCS30068 (PRA30068) R30068 PRC30060 RS30060 PRC30060 PRC30060 RS30064 R30064 R30065 R30066	165 165 168 180 180 180 180 180 180	Copper Solid Topped Copper Solid Topped Precolling Book Text Core-Loudy* Pointed Solt Point Core-Loudy* Down Bonded** Availing Book Text Swift A-Frame PSP 1886* Core-Loudy* Solid Point Core-Loudy* Solid Point Bronze Point	9/h 9/h 9/h 9/h 9/h \$9/h \$9/h \$9/h 9/h 9/h	2910 2800 2 2800 2 2800 3 2800 3 2700 3 2700 4 2700 4 2700 4 2700 4 2410 4 2410	2678 2488 2597 2403 2597 2403 2534 2283 2536 2306 2339 2390 2465 \$243 2480 2270 2522 2351 2469 2250 2485 2280	2248 2217 2217 2047 2079 2188 2070 2186 1727 2042 2084 1632	1889 1674 2048 1860 2009 1870 1825 1621 1866 1668 2024 1857 1833 1648 2 1832 1704 2023 1878 1466 1251 1846 1663 1889 1725	2820 23 2872 24 2872 24 2872 24 2872 25 2974 24 2913 24 2913 25 2913 22 2913 24 2913 24 2913 24 2913 24	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1984 1 76 2225 1 2010 1 57 2069 1 42 2208 1 30 31635 1 36 2023 1 68 2077 1	383 1188 9 383 1397 1 300 1523 1 300 1523 1 301 1523 1 303 1229 1 304 1537 1 305 13415 1 307 1664 1 308 309 6 306 1362 1 306 1362 1 307 308 7	33 02 52 01 28 02 33 03 03 03 03 03 00 03 85 00 161 00 105 00 105 00 108 00	0.7 zero 0.7 zero 1. z	0 -20 0 -21 0 -20 4 43 0 -23 0 -23 0 -23 3 -23 3 -42 3 -40 3 -42 3 -42 0 -62	-5.6 -10 -5.8 -11 -5.4 -10 -8.5 -14 -5.3 -12 -6.2 -11 -6.3 -15 -8.7 -15 -8.7 -15 -8.7 -15	8 1.7 2 1.8 4 1.7 5 1.7 5 1.9 1.9 1.9 1.9 1.9 1.9 1.9 1.9 1.9 1.9	1.5 1.6 1.5 1.8 1.7 1.7 2.0 2.1 2.1 1.8 2.1 2.1 1.8 2.2 1.8 2.2 1.8	zero 3.0 zero 3.1 zero 2.9 zero 3.2 zero 3.2 zero 3.4 zero 3.5	-7.7 -8.0 -7.4 -8.2 -7.9 -8.7 -8.5 -8.2 -8.9 -8.1 -11.0 -9.0 -8.8 -18.4	727 456 728 493 7218 445 7234 711 720 462 729 532 729 532 729 532 729 532 729 729 739 728 739 728 739 728 739 728	0.365 0.331 0.400 0.447 0.339 0.356 0.480 2.0377 0.402 0.248 0.383 0.412
300 Savage	PCS30068 PR30068 PRC30068 PRC30060 PRS30060 PRS30060 PRS30060 PRS30060 PRS30066 R30065 R30066 R30067	165 165 168 180 180 180 180 180 180 180 180	Copper Sofid Topped Copper Sofid Topped (Accounty Boart Let) Core-Lafe* Privated Soft Privat Core-Lafe* With Bonded ** Accounts Boart Let Swift Aframe Lype Core-Lafe* Uttre Bonded ** Swift Schoons Bonded ** Soft Schoons Bonded ** Core-Lafe* Privated Soft Privat Bronze Point* Core-Lafe* Soft Point Core-Lafe* Soft Point	9/h	2910 2800 2 2800 2 2800 3 2700 3 2700 2 2700 2 2700 2 2410 2 2630 3 2 2630 3 2 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	2678 2458 2597 2403 2597 2403 2534 2283 2546 2306 239 239 2466 2243 2460 2270 2522 2351 2348 2023 2469 2250 2485 2230 2485 2230	2248 2217 2217 2047 2079 2188 2070 2186 1727 2042 2084 1632 1853	1889 1674 2048 1860 2009 1870 1825 1621 1866 1668 2024 1857 1832 1704 2023 1878 1466 1251 1846 1663 1899 1725 1422 1245	2820 23 2872 24 2872 24 2872 24 2872 25 2974 24 2913 24 2913 25 2913 22 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 8 1984 1 76 2225 1 57 2069 1 42 2208 1 30 3 1635 1 36 2023 1 563 2077 1 16 1708 1	393 1188 9 303 1397 † 1 300 1523 1 300 1523 1 300 1523 1 301 1229 1 303 1229 1 304 1637 1 305 1415 1 306 306 1 307 308 7 308 308 7 308 308 6	33 02 52 01 28 02 28 02 28 02 28 02 30 03 30	0.7 zaz 0.7 zaz 0.7 zaz 0.7 zaz 0.8	0 -2.0 0 -2.1 0 -2.1 0 -2.1 0 -2.3 0	-5.6 -10 -5.8 -11 -5.4 -10 -8.5 -14 -5.9 -11 -6.3 -12 -6.2 -11 -6.1 -11 -8.9 -15 -8.7 -15 -8.7 -15 -8.7 -15 -8.7 -15	8 1.7 2 1.8 4 1.7 6 2.1 1.8 1.9 1.9 1.9 1.9 1.9 1.2 1.2 1.2 1.2 1.2 1.2 1.2 1.2 1.2 1.2	1.5 1.6 1.5 1.8 1.7 1.7 2.0 1.8 1.8 1.8 1.1 1.8 1.8 1.8 1.8 2.1 1.8 2.1 2.1 2.1 2.1 2.1 2.1 2.1 2.1 2.1 2.1	zero 3.0 zero 3.1 zero 2.9 zero 3.3 zero 3.4 zero 3.5	-7.7 -8.0 -7.4 -7.4 -8.2 -7.9 -8.7 -8.5 -8.2 -8.9 -8.3 -11.0 -9.0 -8.8 -18.4 -10.4	727 466 728 493 7218 445 7234 411 729 623 729 532 721 717 729 729 717 729 729 727 729 729 727 729 729 727 729	0.365 0.331 0.400 0.447 0.339 0.356 0.377 0.402 0.248 0.383 0.412 0.294
300 Savage	PCS10068 PR400068 PRC30068 PRC30068 PRS30064 PRS30064 PRS30066 RS30066 RS30067 RS30067	165 165 168 180 180 180 180 180 180 180 180 150	Copper Sofal Topped Copper Sofal Topped Accounty Boart Test Core-Loke* Pointed Soft Point Core-Loke* With a Bornded ** Accounting Boart Test Swift Aframe_Lys Swift Aframe_Lys Swift Schooons* Bonded ** Core-Loke* Pointed Soft Point Brouze Point* Core-Loke* Pointed Soft Point	9/h 9/h 9/h 9/h 9/h 9/h 9/h 9/h 9/h 9/h	2910 2200 2200 2200 2200 2200 2200 2200	2678 2458 2597 2403 2597 2403 2537 2403 2538 2283 2538 2283 2380 2480 2270 2527 2351 2480 2250 2482 2250 2485 2280 2485 2280 2486 2250 2485 2280 2486 2250 2485 2280 2486 2250 2485 2280 2486 2250 2486 2250 2586 2250 2586 2586 2586	2248 2217 2047 2079 2188 2070 2186 1727 2042 2042 2084 1632 1853 2340	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1866 1663 2024 1867 1879 1794 1466 1251 1846 1663 1889 1725 1422 1246 1631 1432	2820 23 2820 23 2872 24 2872 23 2872 23 2974 24 2957 25 2913 24 2913 22 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 25 2913 24	05 1868 1 70 2115 1 70 211	188 188 187 188 189	33 02 52 01 28 02 63 03 37 03 39 03 60	0.7 zaz 0.7 zaz 0.7 zaz 0.7 zaz 0.8	0 -2.0 0 -2.1 0 -2.1 0 -2.1 0 -2.3 0	-56 -10 -58 -11 -54 -10 -85 -14 -53 -12 -53 -12 -62 -11 -83 -15 -87 -15 -83 -14 -103 -18 -88 -15 -87 -15 -129 -22 -101 -17 -44 -8	B 1.7 2 1.8 4 1.7 6 2.1 1 2.0 9 1.9 9 1.2 1 2.1 2 1.2 1 2.1 2 1.2 3 2.4 4 2.1 0 2.1 4 1.3 6 2.4 7 1.3	1.5 1.6 1.5 1.8 1.7 1.7 20 1.8 1.8 1.8 1.8 1.8 1.8 20 2.1	zero 3.0 zero 3.1 zero 2.9 zero 3.2 zero 3.2 zero 3.4 zero 3.3 zero 3.5	-7.7 -8.0 -7.4 -8.2 -7.9 -8.7 -8.5 -8.9 -8.3 -11.0 -9.0 -8.8 -18.4 -10.4 -6.3	727 4666 728 493 7218 445 7234 471 7220 452 7251 517 720 4721 720	0.365 0.331 0.400 0.447 0.339 0.356 0.302 0.402 0.402 0.402 0.402 0.402 0.402 0.402 0.402 0.402 0.402 0.402 0.402 0.402 0.402
300 Sarage	PCS0068 RG0068 RG0068 PRC30068 PRC30068 RS30064 RS30064 RS0065 R30066 R30067 RG3057 RG3057 RG3057	165 165 168 180 180 180 180 180 180 180 180 150 150	Copper Sofal Topped Copper Sofal Topped Accounty Boart Test Core-Lote* Pointed Soft Point Core-Lote* With a Bornded ** **Price Test Swift Aframe_Psy Swift Aframe_Psy Swift Scrocco* Bended ** Swift Scrocco* Bended ** Core-Lote* Forinted Soft Point Brouze Point Core-Lote* Soft Point Core-Lote* Pointed Soft Point	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½	2910 2200 2 2800 2 2800 2 2800 2 2800 3 2700 3 2700 2 2700 2 2700 2 2700 2 2700 2 2700 2 2700 3 2700	2678 2458 2597 2403 2537 2403 2534 2283 2546 2306 2539 2399 2465 2243 2460 2250 2485 2280 2130 1870 2354 2095 2354 2095 2354 2095 2354 2095 2354 2095 2354 2095 2354 2095	2248 2217 2047 2079 2188 2002 2070 2186 1727 2042 2084 1632 1853 2340 1870	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1866 1663 1882 1704 1466 1251 1846 1663 1889 1725 1422 1246 1631 1432 2065 1810	2820 23 2820 23 2872 24 2872 23 2872 23 2974 24 2957 25 2913 24 2913 22 2913 24 2913 25 2913 24 2913 25 2913 24 2913 24 2913 25 2913 24 2913 24 2913 24 2913 25 2913 24 2913 25 2913 24 2913 25 2913 25 2913 2913 25 2913 2913 2913 2913 2913 2915 2913 2915 291	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1984 1 70 2225 1 23 2010 4 2 2208 1 36 2023 1 36 2023 1 36 2023 1 45 1462 1 47 2311 1 47 2311 1	393 1188 9 303 1397 † 1 300 1523 1 300 1523 1 300 1523 1 301 1229 1 303 1229 1 304 1637 1 305 1415 1 306 306 1 307 308 7 308 308 7 308 308 6	33 02 52 201 28 02 63 0.3 337 0.3 390 0.3 88 2 0.0 61 0.0 90 0.0 88 0	0.7 zaz 0.7 zaz 0.7 zaz 0.7 zaz 0.8 zaz 0.8 zaz 0.8 zaz 0.8 zaz 0.8 zaz 0.8 zaz 0.8 zaz 0.8 zaz 0.1 zaz 1. zaz 1	0 -20 0 -21 0 -20 4 -43 0 -23 0 -23 0 -23 0 -23 0 -23 0 -23 0 -23 3 -42 3 -42 3 -42 0 -62 5 -48 0 -16 5 -49	-56 -10 -58 -11 -54 -10 -85 -14 -53 -12 -53 -12 -62 -11 -83 -15 -87 -15 -83 -14 -103 -18 -88 -15 -87 -15 -129 -22 -101 -17 -44 -8	8 1.7 2 1.8 3.5 3.5 3.5 3.5 3.5 3.5 3.5 3.5 3.5 3.5	1.5 1.6 1.5 1.8 1.6 1.7 1.7 20 1.8 1.8 1.8 280 2.1 1.2 2.2	zero 3.0 zero 3.1 zero 2.9 zero 3.2 zero 3.4 zero 3.2 zero 3.4 zero 3.5 zero 4.1 zero 2.4 zero 2.4	-7.7 -80 -7.4 -82 -87 -85 -89 -89 -11.0 -90 -8.8 -18.4 -10.4 -6.3	727 466 728 493 7218 445 7234 411 729 626 729 532 721 517 729 478 729 478 729 478 729 478 729 478 729 520 729 520 720 520 7	0.365 0.331 0.400 0.447 0.339 0.356 0.356 0.402 2.30500 0.248 0.333 0.412 0.234 0.314 0.234
300 Savage	PCS30068 FRA30068 FRA30068 FRA30060 FRA30060 FRA30060 FRA30060 FRA30064 FRA30064 FRA30067 FRA30667 FRA3067 FRA30067 FRA30061 FRA30061 FRA30061 FRA30061 FRA30061 FRA30061 FRA30061 FRA30061 FRA30061	165 165 165 165 180 180 180 180 120 150 150 150	Copper Sofal Toped Copper Sofal Toped Account Boat Total Core-Lold* Pointed Soft Point Core-Lold* With a Bonded ** **Point B Cost Total Swift A Frame**, PSP** Core-Lold* With a Bonded ** Swift A Frame**, PSP** Core-Lold* With a Bonded ** Swift Soft Point Bonded ** Core-Lold* Soft Point Bonded ** Core-Lold* Soft Point Core-Lold* Pointed Soft Point Core-Lold* Vitra Bonded **	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2910 2200 2 2800 2 2800 2 2800 2 2700 2 2700 2 2410 2 2530 2 2550	2678 2458 2597 2403 2537 2403 2534 223 2546 2306 2539 2390 2465 2243 2469 2250 2485 2280 2485 2280 2485 2280 2485 2280 2485 2280 2485 2280 2485 2280 2485 2280 2485 2280 2487 2566	2248 2217 2047 2079 2188 2070 2188 2070 2070 2084 1632 2084 1853 2340 2384	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1826 1668 2024 1887 1833 31648 1832 1774 2023 1878 1456 1651 1459 1725 1422 1245 1631 1432 2065 1810 1559 1445 2120 1873	2820 23 2872 24 2872 24 2872 24 2872 24 2872 24 2872 24 2973 24 2913 22 2913 24 2913 22 2913 24 2913 22 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 24 2913 25 2913 25 2915 2915 25 2915 2915 25 2915 2915 25 2915 2	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1984 1 70 2225 1 223 2010 4 57 2226 1 23 2010 4 6 2023 1 6 1708 1 6	38 1188 9 383 1397 1 300 1523 1 300 1523 1 301 1523 1 313 1299 1 314 1537 1 315 1 315 1 316 1 317 1 318 5 1 319 6 1 31	33 02 201 52 01 33 02 33 02 33 02 33 03 03 03 03 03 00 03 00 00 00 00 00	0.7 zes 20.7 zes 20.7 zes 20.8 zes 20.1	0 20 20 21 21 22 23 24 24 25 24 25 24 25 26 26 26 26 26 26 26 26 26 26 26 26 26	-56 -100 -100 -100 -100 -100 -100 -100 -10	8 1.7 2 18 8 1.7 1 1 2 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1	15 16 15 18 18 16 17 20 21 18 18 220 21 12 220 21	zero -3.0 zero -3.1 zero -2.9 zero -3.2 zero -3.4 zero -3.3 zero -3.5 zero -2.4	-7.7 -80 -7.4 -82 -82 -87 -85 -89 -71.0 -90 -8.8 -184 -104 -6.3 -6.1	727 4666 728 493 7218 445 7234 471 7220 623 7259 532 7251 517 720 777	0.365 0.331 0.400 0.447 0.339 0.356 0.309 0.356 0.402 0.402 0.303 0.402 0.248 0.383 0.412 0.254 0.314 0.310
	PCS0068 FR40068 FR50068 FR50068 FR50060 FR50060 FR50060 FR50064 FR50064 FR50066 FR50067 FR50067 FR50067 FR50069 FR50060 FR5	165 165 165 165 180 180 180 180 150 150 150 150 150 150 150 150 150 15	Copper Sofial Topped Copper Sofial Topped Pocculing Boat Test Core-Lodd* Pointed Soft Point Core-Lodd* Within Bornded Topped Pocculing Boat Test Swift Africane, PSP Swift Africane, PSP Swift Soft Point Core-Lodd* Soft Po	9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9½ 9	2910 2200 2200 2200 2200 2200 2200 2200	2678 2458 2597 2403 2534 2283 2536 2306 2539 2309 2455 \$2243 2480 2270 2522 2351 2538 2023 2485 2290 2530 1870 2354 2095 2530 2534 2075 2534 2075 2534 2075 2534 2075 2534	2248 2217 2017 2017 2019 2188 2070 2188 2070 2070 2084 1632 2084 25073 2384 25073 3	1889 1674 2048 1860 2039 1870 2039 1870 1825 1621 1826 1668 2024 1837 1832 1704 2023 1873 1456 1663 1457 1625 1422 1245 1631 1432 2055 1810 1556 1443 2120 1873	2820 23 2872 24 2872 24 2872 25 2874 24 2967 25 32913 24 2913 22 2913 24 2913 22 2913 24 2913 24 2913 25 2913 24 2913 24 2913 24 2913 25 2913 25 2915 2915 2915 2915 2915 2915 2	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1884 1 70 2225 1 23 2010 1 57 2225 1 24 2228 1 25 2010 1 16 1703 1 16 1703 1 16 1703 1 16 1703 1 16 1703 1 175 1223 1 175 1223 1 175 1223 1 175 1223 1 177 2268 2	38 1188 9 383 1397 1 300 1523 1 300 1523 1 301 1523 1 313 1299 1 314 1537 1 315 1 315 1 316 1 317 1 318 1 31	33 02 52 201 33 02 33 02 33 02 33 03 33 03 33 03 36 03 38 20 38 20 38 20 38 00 30 00	0.7 zas 0.7 zas 0.7 zas 0.7 zas 0.8 zas 0.8 zas 0.8 zas 0.8 zas 0.8 zas 0.8 zas 0.8 zas 0.1 zas 2.1 zas 1.2	0 20 20 21 21 21 21 21 21 21 21 21 21 21 21 21	56 -100 -100 -100 -100 -100 -100 -100 -10	8 1.7 2 18 8 1.7 2 18 8 1.7 2 18 8 1.7 2 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1	15 16 15 18 18 16 17 20 21 18 18 220 21 12 220 21 12	200 30 200 31 200 200 33 30 30 30 30 30 30 30 30 30 30 30 3	-7.7 -8.0 -7.4 -8.2 -7.3 -8.7 -8.5 -8.9 -7.8 -11.0 -9.0 -8.8 -18.4 -10.4 -6.3 -6.1	727 4666 728 493 7218 445 7234 771 7220 622 7259 532 7251 517 720 407 7265 544 726 728 728 728 728 728 729 728 729 728 729	0.365 0.331 0.400 0.447 0.339 0.356 0.402 0.402 0.303 0.402 0.294 0.314 0.294 0.310 0.310
300 Savage 300 Win Mag	PCS0068 FR40069 R0066 PRC3006 PRC3006 RS3006 RS3006 PRC3006 R30066 R30066 R30066 R30066 R30067 R3007	165 165 165 180 180 180 180 180 180 180 180 180 180	Copper Sofial Topped Copper Sofial Topped Accounty Boat Lot Core-Lotal* Pointed Soft Point Core-Lotal* Ultra Bonded ** **Local In Boat Lot Core-Lotal* Ultra Bonded ** Swift A Frame **, PSP ** Core-Lotal* Ultra Bonded ** Swift Spirocon **, Bonded ** Swift Spirocon **, Bonded ** Swift Spirocon **, Bonded ** Core-Lotal* Soft Point Core-Lotal* Pointed Soft Point Core-Lotal* Formed Soft Point Core-Lotal* Formed Soft Point Core-Lotal* Doubled ** Core-Lotal* Ultra Bonded **	9/h 9/h 9/h 9/h 9/h 9/h 9/h 9/h	2910 2200 2 2800 2 2800 2 2700 2 2700 2 2700 2 2700 2 2700 2 2700 2 2700 2 2700 2 2410 2 250 2 250 2 250 2 250 2 250 2 250 2 2 2 2	2678 2458 2597 2403 2597 2403 2534 2283 2546 2306 2539 2389 2465 2270 2524 2023 2469 2250 2469 2250 2459 2250 2459 2250 2459 2590 2534 2055 2534 2055 2534 2055 2534 2055 2534 2055 2534 2055 2534 2055 2534 2055 2534 2055 2534 2055 2534 2055 2534 2055 2534 2055 2535 2534 273 213 2967 22666	2248 2217 2217 2217 2217 2019 2188 21802 21702 2002 2000 2002 2002 2002 2004 1632 2340 1853 2340 2324 25272 2617 2617 2617	1889 1674 2048 1860 2039 1870 1825 1621 1826 1668 2024 1887 1833 34643 2 1832 1704 2023 1873 1466 1251 1466 1251 1469 1251 1422 1245 1631 1432 2055 1810 1656 2445 2120 1873 2257 2255	2820 23 2820 23 2872 24 2872 24 2872 23 2874 24 2957 25 32913 24 2913 22 2913 24 2837 22 2837 282 2837 282	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1884 1 70 2225 1 2010 1 257 2069 1 42 2208 1 16 1708 1 45 1452 1 16 1708 1 145 1452 1 175 1266 1 176 1268 2 177 2668 2	38 1188 9 383 1397 1 300 1523 1 300 1523 1 301 1523 1 303 1299 1 304 1537 1 305 1533 1 307 1 308 1533 1 309	33 02 52 201 33 02 33 02 33 03 33 03 33 03 36 03 38 00	0.7 zero 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	0 20 20 21 21 21 21 21 21 21 21 21 21 21 21 21	56 - 100 - 1	8 1.7 2 1.8 1.5 1.7 1.5 1.5 1.5 1.5 1.5 1.5 1.5 1.5 1.5 1.5	1.5 1.6 1.5 1.8 1.6 1.7 2.0 2.1 1.8 2.1 1.8 2.1 1.8 2.1 1.2 2.1 1.2 2.1 1.2	200 30 30 30 30 30 30 30 30 30 30 30 30 3	-7.7 -8.0 -7.4 -8.2 -7.9 -8.7 -8.5 -8.2 -7.9 -8.5 -8.2 -11.0 -9.0 -8.8 -11.0 -12.0 -13.0 -	727 456 728 493 7218 445 729 462 725 517 726 527 726 540 727 728 7	0.365 0.331 0.400 0.447 0.339 0.356 0.402 0.356 0.402 0.303 0.402 0.303 0.412 0.294 0.314 0.294 0.310 0.310 0.310
300 Savage 300 Win Mag	PCS0068 FR40069 R0066 PRC3006 PRC3006 RS3006 RS3006 PRC3006 R30066 R30066 R30066 R30066 R30067 R3007	165 165 168 180 180 180 180 150 150 150 150 180 180 180 180 180 180 180 180 180 18	Copper Sofial Topped Copper Sofial Topped Accolling Boart Set Core-Lots* Pointed Soft Point Core-Lots* Ultra Bonded ** *** **Poonting Boart Set Core-Lots* Ultra Bonded ** ** **Swift A Frame **, PSP ** ** **Core-Lots* Ultra Bonded ** ** **Swift Scircory **, Bonded ** ** ** ** **Core-Lots* ** ** ** ** ** ** ** ** ** ** ** ** **	9 1/2 9 1/2 1 1/2	200 2200 2200 2200 2200 2200 2200 2200	2678 2458 2597 2403 2597 2403 2534 2283 2546 2306 2539 2369 2465 2270 2524 2023 2469 2250 2459 2250 2450 2250 2531 2666 26337 2299 2633 2299 2633 2299 2634 2035 2634 2035 2639 2634 273 2133 2869 2250 2634 2035 2639 2634 273 2133 2869 2250 2634 2035 2639 2634 273 2133 2869 2505 2634 2035 2639 2634 273 2133 2869 2505 2634 2505 2635 2505 2634 2505 2635 2505 2634 2505 2635 2505 2634 2505 2635 2505	2248 2217 2217 2217 2019 2188 219 2000 2188 219 2000 2188 2000 2188 2340 2340 2384 2572 318	1889 1674 2048 1860 2039 1870 3039 1870 1825 1621 1826 1628 2024 1837 1832 1704 2023 1873 1846 1625 1859 1725 1859 1725 2026 1810 1956 1443 2120 1873 2257 2255 2229 2250	2820 23 2820 23 2872 24 2872 24 2872 257 2874 24 2957 25 2913 24 2913	05 1868 1 88 2012 1 70 2115 1 70 2115 1 52 1909 1 18 1884 1 70 2225 1 29 2010 1 57 2069 1 42 2208 1 16 1708 1 16 1708 1 16 1708 1 175 1482 1 175 1482 1 177 2698 2 177 2098 2	188 188 188 189	33 02 52 201 33 02 33 02 33 02 33 03 33 03 33 03 36 03 36 03 36 00	0.7 zero 1. 200 ze	0 20 2 21 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	56 - 100 - 1	8 1.7 1 1 1 2 1 1 2 1 1 2 1 1 2 1 1 2 1 1 2 1 1 2 1 1 1 2 1 1 1 2 1	1.5 1.6 1.5 1.8 1.6 1.7 2.0 2.1 1.8 1.8 1.8 1.8 2.0 2.1 1.2 2.1 1.2 2.1 1.2 2.1 2.1 2.1 2.1	200 30 30 30 30 30 30 30 30 30 30 30 30 3	-7.7 -8.0 -7.4 -8.2 -7.9 -8.7 -8.5 -8.2 -9.1 -9.0 -8.8 -11.0 -10.4 -6.3 -10.4 -6.3 -10.4 -6.3 -6.1 -6.3 -6.1 -6.3 -6.1 -6.3 -6.3 -6.3 -6.3 -6.3 -6.3 -6.3 -6.3	727 456 728 493 7218 445 729 462 729 532 725 517 726 527 728 728 728 728 729 7	0.365 0.331 0.400 0.447 0.339 0.356 0.400 2.040 0.402 0.248 0.333 0.412 0.294 0.314 0.294 0.314 0.310 0.294 0.310 0.294
300 Savage 300 Win Mag	PCS0068 FR40069 R0066 PRC3006 ER830064 RS30064 RS30064 RS30066 RS30067 RS30067 RS30067 RS30067 RS30067 RS30067 RS30068 RS30067	165 165 168 180 180 180 150 150 150 150 180 180 180 180 180 180 180 180 180 18	Copper Sofid Topped Copper Sofid Topped Accounty Boart Let! Core-Lark** Privated Soft Privat Core-Lark** Privated Soft Privat Accounty Boart Let! Swift A-Frame: Type Sofid Swift Schrodoro Bonded** Swift Schrodoro Bonded** Swift Schrodoro Bonded** Core-Lark** Privated Soft Privat Core-Lark** Utary Bonded ** Core-Lark** Utary Bonded ** Swift Sorroom Bonded ** Swi	9/h	210 2200 2200 2200 2200 2200 2700 2700 2	2678 2458 2597 2403 2597 2403 2598 2396 2598 2396 2599 2290 2599 2290 2599 2599 2599 2699 2699 2699 2699 2699 2699 2699 2699	2244 2217 2047 2079 2188 2070 2186 2072 2042 2084 1632 2384 25723 2224 2224 2224 2224 2224 2224 2224 2	1883 1674 2048 1860 2039 1870 2039 1870 1825 1621 1856 1663 2039 1883 1704 2028 1883 1704 2028 1883 1705 1466 1251 1846 1663 1899 1725 1422 1245 1631 1432 2056 1810 1559 1433 2255 2259 2100 2033 1903 1	2820 23 2872 24 2877 23 2877 23 2877 23 2974 24 2957 22 3913 24 2913 25 2913 24 2913 24 2913 24 2913 25 2913 24 2913 25 2913 24 2913 25 2913 24 2913 25 2913 24 2913 25 2913 24 2913 24 2913 25 2913 24 2913 25 2913 24 2913 2	05 1868 1 88 2012 1 70 2115 1 70 2115 5 152 1909 1 18 1984 1 76 2225 1 2020 1 16 1708 1 16 1708 1 16 1708 1 16 1708 1 17 2050 1	98 1188 9 30 1397 51 300 1522 12 304 1220 9 315 1299 11 310 1527 12 311 151 12 312 152 12 313 1415 1 310 1544 1 310 1564 1 310 988 7 43 886 6 323 1420 11 333 1495 1 343 886 6 352 140 11 353 1495 1 364 155 1 364 155 1 365 156 1 366 1 367 1 368 1	33 02 52 01 38 02 63 03 137 03 138 02 63 03 137 03 138 00 138 00 139 00 130 00 130 00 130 00 130 00 130 00 130 00 130 00 130 00 130	0.7 zero 1. 200 200 200 200 200 200 200 200 200 20	0 20 2 21 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	56 - 100 - 1	8 1.7 2 1.8 4 5 1.7 5 1.8 1.1 2.1 1.1 1	1.5 1.6 1.5 1.8 1.7 1.7 20 1.8 1.8 1.8 1.8 1.8 1.8 1.8 1.2 1.2 1.2 1.2 1.2 1.2 1.2 1.2 1.2 1.2	200 30 30 20 20 30 30 30 30 30 30 30 30 30 30 30 30 30	-7.7 -8.0 -7.4 -8.2 -8.7 -8.5 -8.5 -8.7 -8.5 -8.7 -8.5 -8.7 -8.5 -8.7 -8.8 -11.0 -9.0 -8.8 -18.4 -10.4 -6.3 -6.3 -6.3 -6.3 -6.3 -6.3 -6.3 -6.3	727 456 728 493 7218 445 729 462 725 517 726 527 726 540 727 728 7	0.365 0.331 0.400 0.447 0.339 0.356 0.263 0.272 10.500 0.248 0.313 0.412 0.294 0.314 0.310

Note: These ballistics reflected a test barrel length of 24" except those for 30 Carbine and 44 Remington Magnum which are 20" barrels. Specifications are nominal. Ballistics figures established in test barrels. Individual rifles may vary from tast barrel results. "zero" indicates yardage at which rifle was sighted in.

numnutariums more or below line of sight. Hold low he positive numbers, high for negative numbers.

1 200 Remington and Timm Express, Remington are interchangeable.

5 Gmm Remington and 244 Remington are interchangeable.

5 Gmm Remington and 244 Remington are interchangeable.

5 Builtet does not rise more than 1° above line of sight from muzzle to sighting-in range.

2 Builtet does not rise more than 3° above line of sight from muzzle to sighting-in range.

Managed-Recoil (pages 62-63)

Premier Copper Solid (page 57)

Premier * Core-Lokt * Ultra Bonded (page 52)

Premier® Disintegrator® Varmint (page 55)

Premier Match (pages 57)

Premier * AccuTip (pages 54-55)

Premier® Scirocco® Bonded (page 54)

Swift A-Frame PSP

UMC® (page 65)

Core-Lokt® (pages 60)

RIFARE ER 1903 AFTIRE BALLISTICS (300 WIN MAG - 450 BUSHMASTER)

5																	
CALEDR	COLONER COLOR	Nī.	BUILET STATE	PECSER	E221 100	VELOCETY (fps.) 200 300	400 500	MUZZLE 100 200	(n-to) 300 400 500	50	SHORT-RANGET 100 150	TRAJECTORY 200 300	100. 1	10NG-RAN 50 200 2	Œ' TEXTECTORY*. 550 200	OO 500	EXILISING .
300 Win Mag (cont.)	R300W2	180	Core-Lokt® Pointed Soft Point	91/2M	2960 2715			3501 2945 2463				-1.9 -5.3 -10.2	1.J· 1		29 74 -2	_	0.383
	RS300WA	200	Swift Al-Frame (PSP)	9.///	2825 2595	2377 (2169	1971 1786	3544 2990 2501	2038 1726 1416	02 (B 200	-202 -409 -4112	113 -1	6 E 4	 		0333
300 WSM	R300WSM1	150	Core-Lokt* Pointed Soft Point	91/2M	3320 2977	2660 2364	2087 1830	3671 2952 2356		-0.1).4 zero -	-1.5 -4.3 -8.5	12 - 1	2 zero -		8.6 -39.0	. 0.294
	(RASONS)	180	Accilip Book (a)	-9 <i>a</i> n	3010 2312	an an	265 2097	3521 3153 2745	2318 2030 1751	a (lj en	4B 4B 4B	23 2	9 24 6	D 488 4	48 820	0433 -
	PRSCOOMSYS	180	Swift Scirocco Bornied	920	233) 233	2610 2142	2 223 2115	3839 3113 723	2122 2070 1720	00 (B @	408 408 409	16 1	8 E 4	26 -66 d	90 - 30	.0507
308 Marlin Express	R308ME1	150	Soft Point	91/2	2725 2215	1871 1519	1239 1057	2473 1724 1166	768 511 372	0.0 z	ero -1.6	-5.3 -11.5 -20.7	2.7 2	3 2250 -	18 -12.7 -	0.8 -91.5	0.193
308 Win.	(d.808V))	123	Dest Plante (Inc.)	900	ZEO (EE	212 W	i i i i i i i i i i i i i i i i i i i	EE IS IE	973 750 555	4 0 0 8	16	48 48 48	ID &	® 4 ∰ -≨	e and a	36 36	000
	(L308W4)	150	UMC Metal Case	9/2	2820 2533	2263 2010	1113 (133)	2648 2137 1765	BES BES CO	-OO E	10 d 1 2	399 400 4000 i	200 1	<i>i)</i> En 4	30 - 433 4	32 4518	(GIK)
	PRSC308WA	150	Swift Scincero Bonded	9.6	2820 2611	2410 2219	0 2007 1650	2648 2269 1933	1640 (1381 (1156)	000 E	30 4 11	-36 -36 -482	18 1	მ⊹ლი, ≈₹	10 · 403 · 4	<i>201 (</i> 430)	0.435
	PRC308WA	150	Core-Lokt* Ultra Bonded:**	91/2			\$ 1819, 1611 _{3,}	2648 2159 1744	20.00	0.2 - 2		-39 -82 -14.4	3 - 5 - 5	J zero .		5.5 -53.1	0.331
	R308W1	150	Core-Lokt* Pointed Soft Point	91/2	2820 2533			2648 2137 1705	1344 1048 810	1	ero -1.2	-39 -84 -14.7	20 1		E 27 1 2 2 20	6.2 -54.8	0.314
	PCS308WA	150	Copper Solid Tipped	91/2				2648 ZZ38 1881		E CONTRACTOR OF THE PARTY OF TH		-224: 5987-113			25 80		100000
	PRA308WB		According Boat Tail	9/2			1 11935 11792		1661 1401 1176			रता का का					(1447)
	RM308W7	168	MatchKing® BTHP	91/2		2314 2143	*	2678 2318 1998		+		-41 -85 -14.7	21 1			4.7 -49.9	0.475
	RM308W8	175	MatchKing® BTHP	91/2	2609 · 2433				1716 1472 1256	-		-25 -6.7 -12.8				5.9 -51.9	0.496
	PRC308WC	180	Core-Lokt* Ultra Bonded**	91/2	2620 2404	·	· • <u> </u>	2743 2309 1930		1	ero -1.4	-4.5 -9.4 -16.3				7.7 -56.4	0.402
	R308W2	180	Core-Lold* Soft Point	91/2	2620 2274			2743 2066 1527				-5.3 -11.2 -19.7	2.6 2			6.3 -78.2	0.248~
200115 14	R308W3	180	Core-Lokt* Pointed Soft Point	91/2	2620 2393			2743 2288 1896				-4.6 -9.5 -16.5	2.3 2			8.3 -57.8	0.383
300 Wby. Mag. 303 British	R300WBi	180	Core-Lokt* Pointed Soft Point UMC: Metal Case	91/2 M	3120 2866			3890 3282 2755				-1.7 -4.6 -9.0			o de trons como	18.9 -38.7	0.383
SOS BILIESTI	L30381 R30381	1743	Core-Lold* Soft Point	91/2	2460 2124	24.00	9 1520 1338 2 1311 1137	2418 1803 1319	950 687 517	-	Princip Division	-5.9 -122 -214 - -63 -132 -23.1			4.7.411.915 9.8 -19.1 -	9.4 99.9	0.247
7.62x39mm	\$1762391	123	LINC Metal Case	291/2			9 1315 1150	2416 1803 1319				-6.3 -13.2 -23.1 -6.8 -14.1 -24.5			04 202		0.266
7.0000	R762391	125	Pointed Soft Point	91/2	2365 2062		-	1552 1180 882	652 483 370	-		-6.7 -14.0 -24.5	1.5 : Zt	44.547.44	227 Th COL 1872	51.3 -102.5	0.267
300 Remington	PR300SMI	150	Core-Lold* Ultra Bonded***	9½ M		2622 2359	·	3410 2803 2290	1854 1485 1177			-1.6 -4.6 -8.9	1.3 - 4			19.1 -39.6	0.330
Short Action Ultra Mag	PR300SM2	165	Core-Lokt* Pained Soft Point	91/2 M		2527 2276		3464 2856 2339		,		-1.8 -5.0 -9.7	1.5 1		1.7	20.7 -42.1	0.339
Olda Iridg	PR30QSM4	180	Core-Lold* Ultra Bonded**	9½M	2960 2727			3501 2972 2509				-1.9 -5.2 -10.0	-			20.9 -42.6	0.403
	RM300SM7	190	MatchKing* BTHP	91/2 M	2900 2725		5 2239 2089	3547 3133 2758				-1.9 -5.1 -9.8	1.6 1			19.9 -39.8	0.533
300 Remington	PR300UM5	150	Swift Scirocca "Bonded	91/2M	3450 3208	2980 2762	2 - 2556 2358	3964 3427 2956	2541 2175 1852	0.0).3 zero	-1.2 -3.46.7	∈1.7 € 2	1 * 1.5 z	ero -2.6 -	11.2 -25.3	0.435
Ultra Mag	PR300UM3	180	Swift Scirocca" Bonded	9½M	3250; 3048	2856 2672	2 2495 2325	4221 3714 3260	2853 2487 2160	0.0)4 zero *	14: -39 - 75	20 + 2	3: .1.7 z	eno -2.8	12.3 27.3	0.500
POWER LEVEL III	PCS300UMB	165	Copper Solid Tipped	91/2 M	3260 3035	28217 2617	7 2422 2235	3893 3373 2915	2617 * 2422 2235	0.0 z	ero:0.9*	-29/2-59 \-101	- 14	2 s zero -	2.3 - 5.8	16.7 31.6	0.447
Little III	PR300UM4	180	Core-Lold* Ultra Bonded**	91/2 M	3250 2988	2742 2508	8 2287 2076	4221 3568 3003	2513 2088 1721	0.0).4 zero	-1.5 -4.2 -8.1	2.1 2	5 1.8 z	ero -3.1 -	13.6 -30.7	0.382
	RS300UM2	200	Swift A-Frame PSP	9½ M	3032 2791	2562: 2345	2138 1942	4083 3459 2916	2442 2030 1675	0.1).6 × zero	-1849", -9.5	7,15\$ l	4 zero -	27 68 :	19.9 -40.7	0.395
POWER	PR300UM2-P2	180	Core-Lold* Ultra Bonded**	9½ M	2980 2742	2515 2300	2096 1902	3549 3004 2528	2114 1755 1445	0.1).6 zero	-1.9 -5.1 -9.9	1.6 1	4 zero -	2.8 7.1 -2	20.7 -42.4	0.395
LEAST U	PR300UM3-P2	180_	Swift Scirocca Bonded	91/2 M	2980 2793	2614 2442	2, 2276 2116,	3549 3118 2730	2382 , 2070 1790	01).6 zero "	-18 -48 92	[15 -]	3 h 2870 -	26 - 6.6	9.0 38.1	0.507
POWER	SPRA300LIMI PI	150	Acculin Boat Tail	59 /2 ME			2077 (1893)	Service Street Services	1716 01436 41193	CANCOLOG	Water Street, or other Persons	-200, -800 (400B)	111111111111111111111111111111111111111		29 - 270 = 4		0.415
LEVEL	R300UM1-P1	150	Core-Lokt* Pointed Soft Point	9½ M	2910 2617		M-M K / M /	2820 2281 1827	- Section 2011 and address department	· Commercial Commercia	CONTRACTOR OF THE PARTY OF THE	-22 -5.9 -11.4			er til ble et er er er	24.4 -50.9	0.314
22 20 115-	FR13000M1 7	150	Core-Loke Pointed Soft Point	9/2			5 1770 1555	2639 (2127) 1698	The same of the sa			£25 . (30 · £25).			35 -83° *		0.314.54
32-20 Win. 32 Win. Special	R32201 R32WS2	170	Lead Core-Lokt* Soft Point	6½ 9½	1210 1021 2250 1921			325 231 185 1911 1393 998	710 521 411			-43.1 -76.9 -122.2 -8.0 -16.7 -29.3			2.7 -105.2 -2 2.4 -24.1 -6	28.5 -410.8 52.1 -125.3	0.166
8mm Rem. Magnum	RS8MMRA	200	- Swift A-Frame PSP	91/2 M			5 1885 1672	3734 3054 2476				-2.0 -10.7 -23.3 -2.1 -5.8 -11.2.	1.7 z		3.1 -8.0 - 2		0.332
8mm Mauser	RSMSR	170	Core-Lokt* Soft Point	91/2	2360 1969			2102 1463 993	671 476 375	100		-7.6 -16.1 -28.6	1.6 z			2.8 -128.9	0.205
338 Marlin Express	R338ME1	250	Soft Point	91/2	2189 1922			2659 2049 1560				-8.6 -17.3 -29.6	ļ				0.291
338 Win, Mag	* RS338WA	225	Swift A-Frame* PSP	91/2 M		2266 2029		3871 3165 2565							.24 -23.1 -3	39.2 -116.2	
J	R338W1	225	Core-Loid* Pointed Soft Point	91/2 M	2780 2572		 			0.0 z	ero -1.2.	-40 -85 -14.8	20. 1	8 zero -		59.2 -116.2 26.1 -54.1	
	PRC338WA	225	Core-Loid* Ultra Bonded**				1 2000 1002	3860 3305 2815		1	ero .1.2.	-40 -85 -148 -22 -59 -11.4	2.0, 1 1.9 1		35 -88 -2	39.2 -116.2 36.1 -54.1 23.4 -47.5	0.337
	R338W2			9½M	2780 2582	2392 2210		3860 3305 2815 3860 3329 2858	2383 2004 1676	0.0)8 zero		1.9 1	.7 дея о-	3.5 -8.8 -2 3.2 -8.1 -2	26.1 -54.1	0.337
	1.000	250		9½M	2780 2582 2660 2456		D 2036 1871	3860 3329 2858	2383 2004 1676	0.0)8 zero	-22 -5.9 -11.4	1.9 1	7 zeso -	35 -8.8 -2 3.2 -8.1 -2 3.2 -7.9 -2	3.4 -47.5	0.337
338 Remington	PR338UM2	250 250				2261 2075	D 2036 1871 5 1898 1731	3860 3329 2858	2383 2004 1676 2440 2071 1748 2389 1999 1663	0.0 (0.2 (0.0 z	0.8 zero 0.8 zero ero -1.4	-22 -5.9 -11.4 -22 -5.9 -11.2	1.9 1 1.9 1 2.1 1	7 zero - 6 zero - 9 zero -	35 88 -2 32 -8.1 -2 32 -7.9 -2 35 -8.9 -2	26.1 -54.1 23.4 -47.5 23.0 -46.5	0.337 0.435 0.456
338 Remington Ultra Mag			Core-Lokt* Pointed Soft Point	91/2 M	2660 2456	2261 2075 2443 2249	D 2036 1871 5 1898 1731 9 2064 1887	3860 3329 2858 3927 3348 2837	2383 2004 1676 2440 2071 1748 2389 1999 1663 2807 2363 1977	0.0 0.2 0.0 2 0.2 0.2 0.2 0.2 0.2 0.2 0.	0.8 zero 0.8 zero ero -1.4	-22 -5.9 -11.4 -22 -5.9 -11.2 -4.3 -8.9 -15.4	1.9 1 1.9 1 2.1 1 1.7 1	.7 zero - .6 zero - .9 zero - .5 zero -	35 8.8 -2 32 -8.1 -2 32 -7.9 -2 35 -8.9 -2 30 -7.6 -2	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7	0.337 ° 0.435 ° 0.456 ° 0.431
	PR338UM2	250	Core-Lolds Pointed Soft Point Core-Lolds Pointed Soft Point	9 ¹ / ₂ M 9 ¹ / ₂ M	2660 2456 2860 2647 2860 2645	2261 2075 2443 2249	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879	3850 3329 2858 3927 3348 2837 4540 3888 3314	2383 2004 1676 2440 2071 1748 2389 1999 1663 2807 2363 1977 2794 2347 1960	0.0 0.2 0.0 2 0.2 0.2 0.2 0.2 0.2 0.2 0.	0.8 zero 0.8 zero ero -1.4 0.7 zero	-22 -5.9 -11.4 -22 -5.9 -11.2 -43 -8.9 -15.4 -2.1 -5.6 -10.6	1.9 1 1.9 1 2.1 1 1.7 1	7 zero5 zero5 zero5 zero5 zero -	35 88 -2 32 -8.1 -2 32 -7.9 -2 35 -8.9 -2 30 -7.6 -2	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7	0.337 · · · · · · · · · · · · · · · · · ·
Ultra Mag	PR338UM2 PR338UM1	250 250	Core-Loitt* Pointed Soft Point Core-Loitt* Pointed Soft Point Swift A-Frame* PSP	9½ M 9½ M 9½ M 9½ M 9½ M	2660 2456 2860 2647 2860 2645 2960 2820	2261 2075 2443 2249 2440 2244	D 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299	3860 3329 2858 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3996 1762 1169 755	2383 2004 1676 2440 2071 1748 2389 1999 1663 2807 2363 1977 2794 2347 1960 3613 3259 2932 494 359 291	0.0 0.2 0.0 2 0.2 0.2 0.2 0.1 0.1 0.1 0.1 0.1 0.1 0.1 0.1 0.1 0.1	08 zero 08 zero 08 zero 00 -1.4 00.7 zero 00.6 zero 00.6 zero 00.7 zero	-22 -5.9 -11.4 -22 -5.9 -11.2 -43 -8.9 -15.4 -21 -5.6 -10.5 -20 -5.6 -10.7 -1.7 -4.7 -8.9 -8.6 -18.2 -3.2.6	1.9 1 1.9 1 2.1 1 1.7 1	7 zero - 5 zero - 5 zero - 5 zero - 3 zero -	35 -88 -2 32 -8.1 -2 32 -79 -2 35 -89 -2 30 -7.6 -2 25 -63 -1	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9	0.337 0.435 0.456 0.431 0.431
Ultra Mag 338 Lapua Magnum 35 Remington	PR338UM2 PR338UM1 RM338LMR1	250 250 250	Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Swift A-Frame* PSP Scenar	9½ M 9½ M 9½ M 9½ M	2660 2456 2860 2647 2860 2645 2960 2820 2300 1874	2261 2075 2443 2249 2440 2244 2683 2551	D 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911	3860 3329 2854 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3996 1762 1169 755 1921 1280 841	2383 2004 1676 2440 2071 1748 2389 1999 1663 2807 2363 1977 2794 2347 1960 3613 3259 2932 494 359 291 577 445 369	0.0 (0.2 (0.2 (0.2 (0.2 (0.2 (0.2 (0.2 (08 zero 08 zero 08 zero 00 -1.4 00.7 zero 00.6 zero 00.6 zero 00.7 zero	-22 -5.9 -11.4 -22 -5.9 -11.2 -43 -8.9 -15.4 -21 -5.6 -10.5 -20 -5.6 -10.7 -1.7 -4.7 -8.9	1.9 1 1.9 1 2.1 1 1.7 1 1.7 1 1.4 1 1.8 zz	7 zero5 zero5 zero5 zero5 zero3 zero10 4.9 -1	35 -88 -2 32 -8.1 -2 32 -7.9 -2 35 -8.9 -2 30 -7.6 -2 25 -6.3 -1 3.7 -27.1 -2 6.7 -33.0 -8	28.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 17.9 -35.4	0.337 0.435 0.456 0.431 0.431 0.427 0.675
Ultra Mag 338 Lapua Magnum	PR338UM2 PR338UM1 RM338LMR1 R35R1 R35R2 R35WH1	250 250 250 150 200 200	Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lold* Pointed Soft Point Core-Lold* Soft Point Core-Lold* Soft Point Core-Lold* Pointed Soft Point Core-Lold* Pointed Soft Point	9½M 9½M 9½M 9½M 9½M 9½ 9½	2660 2456 2860 2647 2860 2645 2960 2820 2300 1874 2080 1698 2675 2378	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1140 2100 1842	D 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 334 0 1001 911 2 1606 1399	3860 3329 2854 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3996 1762 1169 755 1921 1280 841 3177 2510 1958	2383 2004 1676 2440 2071 1748 2389 1999 1663 2807 2363 1977 2794 2347 1960 3613 3259 2932 494 359 291 577 445 369 1506 1145 869	0.0 0.0 2 0.0 2 0.2 0.1 0.1 0.3 2 0.5 2 0.0 0.0	08 zero 08 zero ero -1.4 0.7 zero 0.6 zero ero -2.7 ero -3.5 ero -1.5	-22 5.9 1.12 -22 5.9 1.12 -3. 8.9 1.54 -2. 5.6 1.05 -2. 5.6 1.07 -1.7 4.7 8.9 -8.6 1.82 3.25 -1.07 2.26 4.01 -4.7 9.9 1.73	1.9 1 1.9 1 2.1 1 1.7 1 1.7 1 1.4 1 1.8 2 2.3 2 2.3 2	7 zero6 zero9 zero5 zero5 zero3 zero3 zero50 4.9 -1 .00 zero -1	35	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 37.0 -150.8 36.6 -174.8 36.9 -175.4	0.337 0.435 0.456 0.431 0.431 0.427 0.675 0.184 0.192 0.294
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen	PR338UM2 PR338UM1 RM338LMR1 R35R1 R35R2 R35WH1 R35WH3	250 250 250 150 200 200 250	Core-Lott* Pointed Soft Point Core-Lott* Pointed Soft Point Swift A-Frame* PSP Scenar Core-Lott* Pointed Soft Point Core-Lott* Soft Point Core-Lott* Pointed Soft Point Core-Lott* Pointed Soft Point Pointed Soft Point	9½ M 9½ M 9½ M 9½ M 9½ M 9½ 9½	2660 2456 2860 2647 2860 2645 2960 2820 2300 1874 2080 1698 2675 2378 2400 2197	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1140 2100 1842 2005 1823	D 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1496	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3996 1762 1169 755 1921 1280 841 3177 2510 1958 3197 2680 2230	2383 2004 1676 2440 2011 1748 2383 1959 1663 2807 2363 1977 2794 2437 1960 3613 3292 2932 494 359 291 577 445 369 1506 1145 869 1844 1515 1242	0.0 0.0 2 0.0 2 0.1 0.3 2 0.0 2 0.1	28 zero 28 zero 20 -1.4 27 zero 20 zero 20 zero 27 zero 3.5 28 zero 3.5 3.6 zero 4.1 zero	.22 5.9 11.4 .22 5.9 11.2 .43 8.9 15.4 .21 5.6 10.6 .20 5.6 10.7 .17 4.7 8.9 .86 18.2 32.6 .10.7 22.6 40.1 .47 9.9 17.3 .57 11.8 20.4	1.9 1 1.9 1 2.1 1 1.7 1 1.7 1 1.8 2 2.3 2 1.3 2	7 2810	335	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 23.0 -150.8 23.0 -150.8 24.7 25.1 -17.8 26.0 -17.8 27.1 -17.8	0.337 0.435 0.435 0.456 0.431 0.427 0.675 0.184 0.192 0.294 0.409
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag	PR338UM2 PR338UM1 RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R35WH3	250 250 250 150 200 200 250 200	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Swift A-Frame* PSP Scenar Core-Lokt* Pointed Soft Point Core-Lokt* Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point	9½ M 9½ M 9½ M 9½ M 9½ M 9½ 9½ 9½ 9½	2660 2456 2860 2647 2860 2645 2960 2820 2300 1874 2080 1698 2675 2378 2400 2197 2775 2471	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1140 2100 1842 2005 1823 2186 1921	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1496 1 1678 1461	3860 3329 2853 3927 3348 2837 4540 3688 3314 4540 3882 3303 4863 4412 3996 1762 1169 755 1921 1280 841 3177 2510 1958 3197 2680 2230 3449 2711 2122	233 2004 1676 2440 2011 1748 2339 1959 1663 2807 2363 1977 2794 2347 1960 3613 329 2932 494 359 291 557 445 369 1506 1145 869 1844 1515 1242 1639 1250 497	0.0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	18 zero 18 zero 18 zero 10 -1.4 10.7 zero 10 zero 10 zero 10 zero 10 -2.7 10 -3.5 10 -1.9 10 -1.3	.22 5.9 11.4 .22 5.9 11.2 .43 8.9 15.4 .21 5.6 10.6 .20 5.6 10.7 .17 4.7 8.9 .86 18.2 32.6 .10.7 22.6 40.1 .47 9.9 17.3 .57 11.8 20.4	1.9 1 1.9 1 2.1 1 1.7 1 1.7 1 1.4 1 1.8 23 2.3 2 2.3 2 1.3 28 2.1 1	7 2810	35 88 4 32 81 4 32 79 4 35 89 4 30 76 4 30 76 4 30 76 4 30 77 4 30	28.1 -54.1 23.4 -47.5 23.0 -45.5 25.0 -45.5 22.0 -44.7 22.1 -44.9 17.9 -35.4 23.0 -150.8 36.6 -174.8 36.9 -175.4 30.0 -76.3 28.3 -59.7	0.337 0.435 0.435 0.436 0.431 0.431 0.427 0.675 0.184 0.192 0.294 0.409 0.293
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen	PR338UM2 PR338UM1 RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R35WH3 R35WH3 R35WH3	250 250 250 150 200 200 250 200 270	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lokt* Pointed Soft Point Core-Lokt* Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Soft Point	9½ M 9½ M 9½ M 9½ M 9½ 9½ 9½ M 9½ M 9½ M	2660 2456 2860 2647 2860 2645 2960 2820 2300 1874 2080 1698 2675 2378 2400 2197 2775 2471 2690 2363	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1140 2100 1842 2005 1823 2186 1921 2060 1780	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1496 1 1678 1461 0 1530 1317	3860 3329 2853 3927 3348 2837 4540 3688 3314 4540 3882 3303 4863 4412 3996 1762 1169 755 1921 1280 841 3177 2510 1958 3197 2680 2230 3419 2711 2122 4338 3347 2541	233 2004 1676 2440 2011 1748 2339 1959 1663 2807 2363 1977 2794 2347 1960 3613 3259 2932 494 359 291 557 445 369 1506 1145 869 1844 1515 1242 1639 1250 437 1900 1403 1039	0.0 (0.0 (0.0 (0.0 (0.0 (0.0 (0.0 (0.0	08 zero 08 zero 08 zero 1.4 0.7 zero 0.6 zero 0.6 zero -2.7 ero -3.5 ero -1.5 ero -1.9 ero -1.3 1.0 zero	.22 5.9 11.4 .22 5.9 11.2 .43 8.9 15.4 .21 5.6 10.6 .20 5.6 10.7 .17 4.7 8.9 .86 18.2 12.6 .107 22.6 40.1 .47 9.9 17.3 .57 11.8 20.4 .42 9.0 15.8 .28 7.6 14.8	1.9 1 1.9 1 1.7 1 1.7 1 1.8 23 24 23 24 2 24 2	7 2810	35 88 4 32 81 4 332 79 4 35 89 4 35 89 4 30 76 4 30 76 4 30 76 4 30 76 4 30 76 4 30 76 4 40 8 31 8 40 8 41 8 41 106 4	28.1 -54.1 23.4 -47.5 23.0 -45.5 25.0 -45.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 17.9 -35.4 23.0 -150.8 36.6 -174.8 36.9 -175.4 36.0 -76.3 28.3 -59.7 22.3 -69.0	0.437 0.435 0.445 0.445 0.4431 0.447 0.675 0.184 0.192 0.294 0.409 0.293 0.267
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag	PR338UM2 PR338UM1 RM338UM1 RM338UM1 R3581 R3582 RG5WH1 R35WH3 R35WH3 R35MM1 R375MM1 R3375MA	250 250 250 150 200 200 250 200 270 300	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lokt* Pointed Soft Point Core-Lokt* Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Soft Point Soft Point Soft Point Soft Point Soft Point	9½ M 9½ M 9½ M 9½ M 9½ 9 9½ 9½ 9 9½ M 9½ M	2660 2456 2860 2647 2860 2645 2960 2820 2300 1874 2080 1698 2675 2378 2400 2197 2775 2471 2690 2363 2522 2280	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1140 2100 1842 2005 1823 2185 1921 2061 1780 2061 1838	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1496 1 1678 1461 0 1530 1317 6 1637 1458	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 303 4863 4412 3996 1762 1169 755 1921 1280 841 3317 2510 1958 3319 2880 2230 3419 2711 2122 4338 3347 2543 4238 3462 2802	2333 2004 1676 2440 2071 1748 2389 1999 1663 2807 2343 1977 2794 2347 1960 3613 3299 2932 494 359 291 1506 1145 369 1844 1515 1242 1639 1250 947 1900 1403 1039 245 1786 1415	0.0 (0.0 (0.0 (0.0 (0.0 (0.0 (0.0 (0.0	08 zero 08 zero ero -1.4 0.7 zero 0.6 zero ero -2.7 ero -3.5 ero -1.9 ero -1.3 1.0 zero 0.17	.22 .59 .11.4 .22 .59 .11.2 .43 .89 .15.4 .21 .56 .10.5 .20 .55 .10.7 .17 .47 .89 .86 .182 .26 .101 .26 .40 .47 .99 .17.3 .57 .11.8 .20.4 .42 .90 .15.8 .28 .76 .14.8 .52 .14.8	1.9 1.1 1.7 1.1 1.7 1.1 1.8 2.3 2.3 2.2 1.3 2.4 2.2 2.6 2.2 2.6 2.2 1.3 2.4 2.5 2.6 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5	7 280	35	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 17.9 -35.4 23.0 -150.8 36.6 -174.8 36.9 -175.4 100 -76.3 28.3 -59.7 22.3 -69.0 22.4 -65.5	0.437 0.435 0.445 0.445 0.4431 0.4427 0.675 0.184 0.192 0.294 0.409 0.293 0.267 0.350
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag	PR338UM2 PR338UM1 RM338UM1 RM338UM1 R3581 R3582 R35W11 R35W13 R35W13 R35W1 R375M1 R375M1 R375MA	250 250 250 150 200 200 250 270 300 270	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lokt* Pointed Soft Point Core-Lokt* Soft Point Core-Lokt* Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point	9½ M 9½ M 9½ M 9½ M 9½ 9½ 9½ M 9½ M 9½ M	2660 2456 2647 2860 2645 2960 2820 2820 1638 2615 2318 2400 2197 2775 2471 2690 2558 2900 2558	2261 2075 2443 2244 2440 2244 2683 2551 1506 1218 1376 1140 2100 1842 2005 1823 2185 1921 2060 1780 2061 1838 2241 1947	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1496 1 1678 1461 0 1530 1317 6 1637 1458	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3996 1762 1169 755 1921 1280 841 3177 2510 1958 3197 2860 2230 3419 2711 2122 4338 3347 2541 4238 3462 2802 5041 3922 3010	2333 2004 1676 2440 2071 1748 2389 1999 1663 2807 2363 1977 2794 2347 1960 3613 3299 2932 494 359 291 577 485 369 1844 1515 1242 1639 1250 947 1900 1431 1039 2745 1786 1415 2772 1689 1246	0.0 (0.0 (2.0 (2.0 (2.0 (2.0 (2.0 (2.0 (08 zero 08 zero 09 zero 007 zero 006 zero 006 zero 007 zero 007 zero 007 zero 007 zero 008 zero 009 -2.7 009 -3.5 009 -1.5 009 zero 0.100 zero 0.17 009 zero 0.17	.22 5.9 11.4 .22 5.9 11.2 .43 8.9 15.4 .21 5.6 10.6 .20 5.6 10.7 .17 47 -8.9 .86 182 22.6 .107 2.96 40.1 .47 9.9 17.3 .47 2.90 15.8 .28 7.6 14.8 .29 1.43 .20 1.48 .20 1.48 .21 1.48	1.9 1 1.9 1 1.9 1 1.7 1 1.7 1 1.7 1 1.8 2 2.3 2 2.3 2 1.3 2 2.1 1 2.4 2 2.6 2 1.9 1	7 250	35	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 17.9 -35.4 23.0 -150.8 36.6 -174.8 36.9 -175.4 100 -76.3 28.3 -59.7 22.2 -66.5 27.0 -57.6	0.337 0.435 0.436 0.431 0.431 0.427 0.675 0.184 0.192 0.294 0.409 0.293 0.267 0.350 0.267
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Ultra Mag	PR338UM2 PR338UM1 RM338LMR1 R35R1 R35R2 FG5WH1 R35WH3 R35WH3 R35WH1 R375MH1 R375MA PR375UM2 PR375UM3	250 250 250 150 200 200 250 200 270 300 270 300	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lokt* Pointed Soft Point Core-Lokt* Soft Point Core-Lokt* Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Soft Point Soft Point Swift A-Frame* PSP Soft Foint Swift A-Frame* PSP	9½ M 9½ M 9½ M 9½ M 9½ 9½ 9½ 9½ M 9½ M 9	2650 2456 2860 2647 2860 2645 2960 2820 2300 1874 2080 1698 2615 2378 2400 2197 2775 2471 2690 2363 2522 2280 2900 2558 2760 2646	2261 2075 2443 2244 2440 2244 2683 2551 1506 1218 1376 1140 2005 1823 2185 1921 2060 1780 2061 1836 2241 1947 2263 2035	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 7423 2299 8 1039 934 0 1001 911 2 1606 1396 1 1652 1496 1 1653 1458 7 1653 1458 7 1654 1452	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4853 4412 3996 1762 1169 755 1921 1280 841 3177 2510 1958 3197 2860 2230 3419 2711 2122 4333 3347 2541 4233 3462 2802 5041 3922 3010 5073 4178 3412	2333 2004 1676 2440 2071 1748 2889 1999 1663 2807 2363 1977 2794 2347 1960 3613 3799 2932 494 359 291 577 484 369 1844 1515 1242 1639 1250 947 1900 1403 1039 2745 1758 1245 2772 1689 1246 2775 2818 1245 2775 2818 1245 2775 2818 1246	0.0 0.0	08 zero 08 zero 09 zero 007 zero 006 zero 006 zero 007 zero 007 zero 007 zero 007 zero 008 zero 009 -2.7 009 -1.5 009 -1.5 009 -1.3 009 zero 009 -1.7 009 zero 009 -1.7 009 zero 009 209 209 209 209 209 209 209 209 209	.22 .59 .11.4 .22 .59 .11.2 .43 .89 .15.4 .20 .56 .10.7 .17 .47 .89 .86 .182 .26.5 .107 .226 .40.1 .47 .99 .17.3 .47 .90 .15.8 .28 .76 .14.8 .29 .15.8 .28 .76 .14.8 .29 .13.7 .24 .64 .12.4	1.9 1.1 1.9 1.1 1.7 1.1 1.7 1.1 1.8 2.3 2.3 2.2 1.3 2.1 1.2 2.6 2.2 1.9 1.2 2.0 1.5 1.5 1.5 1.5 1.5 1.5 1.5 1.5 1.5 1.5	7 250	35 88 4 32 81 4 32 79 4 35 89 7 30 76 7 30 76 7 30 77 7 4 41 106 7 35 89 4 41 106 7 35 89 4	28.1 -54.1 23.4 -47.5 23.0 -46.5 28.0 -52.7 22.0 -44.7 22.1 -44.9 17.9 -35.4 17.0 -150.8 36.6 -175.4 36.0 -75.3 36.0 -75.4 36.0 -76.3 36.0 -75.4 36.0	0.337 0.435 0.436 0.431 0.431 0.427 0.675 0.184 0.192 0.294 0.409 0.293 0.267 0.350 0.267 0.350
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Ultra Mag 416 Rem. Magnum	PR38UM2 PR38UM1 PR338UM1 RR338L MR1 R35R1 R35R2 R35W11 R35W13 R35W13 R35W13 R375MA PR375MA PR375UM2 PR375UM3 RS416RA	250 250 250 150 200 200 250 270 300 270 300 400	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lokt* Pointed Soft Point Core-Lokt* Soft Point Core-Lokt* Soft Point Core-Lokt* Pointed Soft Point Pointed Soft Point Soft Point Swift A-Frame* PSP Swift A-Frame* PSP Swift A-Frame* PSP Swift A-Frame* PSP	9½ M 9½ M 9½ M 9½ M 9½ 9½ 9½ 9½ M 9½ M 9	2650 2456 2860 2647 2860 2645 2960 2820 2300 1874 2080 1698 2615 2318 2400 2197 2775 2471 2690 2353 2522 2280 2900 2558 2760 2505 2400 2175	2261 2075 2443 2244 2683 2551 1506 1218 1376 1140 2100 1842 2005 1823 2185 1921 2060 1780 2061 1838 2241 1947 2263 2035 1962 1763	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1939 3 1652 1496 1 1678 1496 1 1678 1450 0 1530 1317 6 1637 1458 7 1678 1442 5 1822 1624	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4853 4412 3995 1762 1169 755 1921 1220 841 3177 2510 1958 3197 2880 2230 4233 3347 2541 4233 3462 2802 5041 3922 3010 5073 4178 3412 5115 4201 3439	233 2004 1676 2440 2071 1748 2389 1999 1663 2807 2333 1977 2794 2347 1960 3613 3299 2932 494 359 291 1506 145 869 1844 1515 1242 1930 1403 1039 2745 1435 1039 2745 145 1415 2772 1629 1246 2759 2210 1757 2760 2214 1757	0.0 0.0 2 0.0 2 0.0 2 0.0 2 0.0 2 0.0 2 0.0 2 0.0 2 0.0 2 0.0 2 0.0 2 0.0 2 0.0	188 zero 188 zero 189 zero 199 zero	-22 5.9 1:14 -22 5.9 1:12 -43 -8.9 1:54 -2.1 -5.6 10:0 -2.0 -5.6 1:0.7 -1.7 -4.7 -8.9 -8.6 -18.2 -2.6 -10.7 -22.6 -40.1 -4.7 -9.9 -17.3 -4.2 -9.0 -15.8 -2.8 -7.6 -14.8 -2.2 -14.8 -18.7 -2.3 -6.3 -12.3 -2.4 -6.9 -12.4 -2.9 -12.4 -5.9 -2.8 -12.4 -12.4 -2.9 -12.1 -20.8	1.9 1.1 1.9 1.1 1.7 1.1 1.7 1.1 1.8 2.3 2.3 2.2 1.3 2.1 1.2 2.6 2.2 1.9 1.2 1.3 2.3 2.3 2.3 2.3 2.3 2.3 2.3 2.3 2.3 2	7 250	35	28.1 -54.1 23.4 -47.5 23.0 -46.5 28.0 -52.7 22.0 -44.7 22.1 -44.9 17.9 -35.4 17.9 -35.4 17.9 -17.5 23.3 -69.0 24.2 -66.5 27.0 -57.6 26.1 -53.9 11.9 -80.8	0.337 0.435 0.4456 0.431 0.431 0.427 0.575 0.184 0.192 0.294 0.293 0.267 0.350 0.267 0.350 0.367
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Ultra Mag	PR338UM2 PR338UM1 RM338LMR1 RB35R1 RB3FR1 RB3FR2 RB3FM13 RB35M13 RB35M13 RB35M14 RB4M62	250 250 150 200 200 200 250 200 270 300 270 300 400 240	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lokt* Pointed Soft Point Core-Lokt* Soft Point Core-Lokt* Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Soft Point Swift A-Frame* PSP Soft Point Swift A-Frame* PSP Soft Point Swift A-Frame* PSP Soft Point	9½ M 9½ M 9½ M 9½ M 9½ 9½ 9½ 9 9½ M 9½ M	2660 2456 2860 2647 2860 2645 2960 2820 28200 18374 2080 1638 2615 2318 2400 2197 2775 2471 2690 2558 2760 2505 2400 2115 2400 2115	2261 2075 2443 2244 2683 2551 1506 1218 1376 1140 2100 1842 2005 1823 2185 1921 2060 1780 2061 1838 2241 1947 2263 2035 1962 1763 1114 970	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 7423 2299 8 1039 934 0 1001 911 2 1605 1939 3 1652 1496 1 1678 1461 0 1530 1317 6 1637 1458 7 1678 1442 5 1822 1624 3 1579 1414	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3995 1762 1169 755 1921 1280 841 3177 2510 1958 3197 2680 2201 3419 2711 2121 4233 33462 2802 5041 3922 3010 5073 4178 3412 5115 4201 3419 1650 1015 661	2333 2004 1676 2440 2071 1748 2389 1999 1663 2807 2333 1977 2794 2347 1960 3613 3299 2932 494 359 291 577 445 369 1306 1145 869 1844 155 1242 1990 1443 303 2245 1786 1415 2277 1628 1246 2759 2210 1757 2760 2214 1775 501 411 345	0.0 0.2 0.0 2 0.0 2 0.0 2 0.0 0.0 2 0.0 0.0 2 0.0	188 zero 188 zero 189 zero 190 -1.4 10.7 zero 10.6 zero 10.6 zero 10.6 zero 10.7 zero 10.6 zero 10.7 zero 10.8 zero 10.8 zero 10.8 zero 10.8 zero 10.9 zero 10.8 zero 10.9 zero 10.9 zero 10.8 zero 10.9 zero 10.9 zero 10.8 zero 10.9 zero	-22 5.9 11.12 -22 5.9 11.52 -3 1.54 1.54 -2.1 5.5 10.6 -2.0 5.6 10.7 -1.7 4.7 48 -8.6 18.2 32.5 -10.7 -2.5 40.1 4.7 -9.9 17.3 -5.7 -11.8 20.4 -2.8 -7.6 14.8 -5.2 -10.8 18.7 -2.3 -6.3 12.3 -2.4 -6.4 12.4 -5.9 -12.1 20.8 -1.1 -12.4 20.8	1.9 1 1.9 1 1.9 1 1.7 1 1.7 1 1.8 2 2.3 2 2.3 2 1.3 2 2.1 1 2.4 2 2.6 2 1.9 1 2.0 1 1.3 22 2.80 5	7 280	35	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 23.0 -150.8 25.6 -174.8 25.9 -175.4 25.3 -59.0 25.2 -66.5 27.0 -57.6 26.1 -53.9 27.9 -57.6 28.3 -59.7 29.7 29.7 29.7 29.7 29.7 29.7 29.7 2	0.337 . 0.435 . 0.436 . 0.431 . 0.431 . 0.427 . 0.575 . 0.184 . 0.192 . 0.294 . 0.409 . 0.293 . 0.267 . 0.350 . 0.267 . 0.350 . 0.367 . 0.166
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Ultra Mag 416 Rem. Magnum	PR338UM2 PR338UM1 RM338LMR1 RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R	250 250 150 200 200 200 270 300 270 300 400 240 240	Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lokt* Pointed Soft Point Core-Lokt* Soft Point Core-Lokt* Soft Point Core-Lokt* Pointed Soft Point Core-Lokt* Pointed Soft Point Swift A-Frame* PSP Soft Point Swift A-Frame* PSP Soft Point Swift A-Frame* PSP Soft Point Soft Frame* PSP Soft Point Soft Foint Semi-lacketed Hollow Point	9½ M 9½ M 9½ M 9½ M 9½ M 9½ M 9½ M 9½ M	2660 2456 2860 2647 2860 2645 2960 2820 2800 1688 2615 2318 2400 2197 2775 2471 2890 2558 2760 2505 2400 2115 1760 1380 1760 1380	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1142 2005 1823 2185 1921 2060 1780 2241 1947 2263 2035 11962 1763 1114 970	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1496 1 1678 1461 0 1530 1317 6 1637 1452 5 1822 1624 3 1579 1414 1 378 306	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3996 1762 1169 755 1921 1280 841 3177 2510 1953 3197 2680 2230 3419 2711 2122 4343 33462 2802 5041 3922 3010 5073 4178 3412 5115 4201 3419 1650 1015 661	2333 2004 1676 2440 2071 1748 2887 1999 1663 2807 2333 1977 2794 2347 1960 3613 3799 2932 494 359 291 577 445 369 1906 1145 869 1844 1515 1242 1639 2430 303 2745 1786 1415 2772 1629 1246 2775 2410 1757 2760 2211 1775 501 411 345 501 411 345	0.0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0.8 zero 0.18 zero 0.18 zero 0.17 zero 0.17 zero 0.16 zero 0.15 zero 0.17 zero 0.18 zero 0.19 zero 0.17 zero 0.18 zero 0.17 zero 0.18 zero 0.19 zero 0.17 zero	-22 5.9 1:14 -22 5.9 1:12 -3 -1.54 1:54 -2.1 -5.6 1:06 -2.0 -5.6 1:07 -1.7 -4.7 -8.9 -8.6 -18.2 -22.6 -10.7 -22.6 -40.1 -4.7 -9.9 -17.3 -5.7 -11.8 -20.4 -5.2 -10.8 -18.7 -5.2 -10.8 -18.7 -2.3 -5.2 -18.8 -5.2 -10.8 -18.7 -2.3 -6.3 -12.3 -2.4 -6.4 -12.4 -5.9 -12.1 -20.8 -2.1 -40.6 -68.2 -2.1 -40.6 -68.2 -2.1 -40.6 -68.2	1.9 1 1.9 1 1.9 1 1.7 1 1.7 1 1.8 23 23 2 2.3 2 1.3 23 2 1.3 24 2 2.6 2 1.9 1 2.0 1 1.3 22 2.0 1	.7 2800	35	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 27.1 -35.4 27.0 -150.8 26.6 -174.8 26.9 -175.4 27.1 -46.9 27.2 -66.5 27.0 -57.6 26.1 -53.9 27.9 -38.8 27.0 -38	0.337 . 0.435 . 0.436 . 0.431 . 0.431 . 0.427 . 0.575 . 0.184 . 0.192 . 0.294 . 0.409 . 0.267 . 0.350 . 0.267 . 0.350 . 0.367 . 0.166 . 0.166 . 0.166
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Ultra Mag 416 Rem. Magnum 44 Rem. Magnum	PR338UM2 PR338UM1 RM338LMR1 RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R35WH3 R35WH3 R35WH3 R35WH3 R375MA PR375MA PR375MA R44MG2 R44MG3 R44MG3 R44MM	250 250 250 150 200 200 270 270 300 400 240 240 240	Core-Lott* Pointed Soft Point Core-Lott* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lott* Pointed Soft Point Soft Point Soft Point Swift A-Frame* PSP Soft Point Swift A-Frame* PSP Soft Point	9½ M 9½ M 9½ M 9½ M 9½ 9 9½ M 9½ M 9½ M	2660 2456 2860 2647 2860 2645 2960 2620 2800 1874 2080 1688 2615 2318 2400 2197 2775 2471 2690 2363 2522 2280 2760 2905 2400 2115 1760 1380 2350 1815	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1140 2005 1823 2185 1921 2060 1780 2061 1834 2241 1947 2263 2035 1962 1763 1114 970 1114 970 1377 1087	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1495 1 1678 1461 0 1530 1378 7 1678 1442 5 1822 1624 3 1579 1414 1 378 206 1 378 206	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3996 1762 1169 755 1921 1280 841 3177 2510 1953 3197 2680 2230 3419 2711 2122 4338 3347 2543 4338 3347 2543 4358 3492 2802 5041 3922 3010 5073 4178 3412 5115 420 3419 1650 1015 661 1650 1015 661 2942 1755 1018	2333 2004 1676 2440 2071 1748 2389 1999 1663 2807 2333 1977 2794 2347 1960 3613 3799 2932 494 359 291 577 445 369 1506 1145 869 1844 1515 1242 1639 1245 437 2725 1785 1415 2727 1628 1246 2739 2241 1757 2760 2211 1757 2761 411 345 501 411 345 501 411 345 503 472 381	00 00 02 00 02 00 00 00 00 00 00 00 00 0	0.8 zero 0.8 zero 0.8 zero 0.1.4 0.7 zero 0.7 zero 0.6 zero 0.6 zero 0.7 - 2.7 ero 0.7 - 2.7 ero 0.8 zero 0.9 - 1.5 ero 0.9 - 1.9 ero 0.17 0.8 zero 0.8 zero 0.9 zero 0.9 zero 0.9 zero 0.9 zero 0.9 zero 0.9 zero 0.1 zero 0.1 zero 0.1 zero 0.2 zero 0.3 zero 0.3 zero 0.3 zero 0.4 zero 0.8 zero 0.9 zero	-22 5.9 -11.4 -22 5.9 -11.2 -3 -15.4 -15.6 -2.1 -5.5 -10.6 -2.0 -5.6 -10.7 -1.7 -4.7 -8.9 -8.6 -18.2 -22.6 -10.7 -2.5 -40.1 -4.7 -9.9 -17.3 -5.7 -11.8 -20.4 -4.2 -9.0 -15.8 -2.2 -0.8 -18.7 -2.3 -6.3 -12.3 -2.4 -6.4 -12.4 -5.9 -12.1 -20.8 -2.1 -20.8 -8.2 -2.1 -20.8 -8.2 -2.1 -20.8 -8.2 -2.1 -20.8 -8.2 -2.1 -20.8 -8.2 -2.1 -20.8 -20.2 -2.2 -20.8 -20.2 -2.3 -20.3 -20.2 -2.2 -20.8 <td< td=""><td>1.9 1 1.9 1 1.9 1 1.7 1 1.7 1 1.7 1 1.8 22 2.3 22 1.3 22 1.3 22 1.1 1 2.4 2 2.6 2 1.9 1 2.0 1 1.3 22 2.5 2 1.9 1 2.0 1 1.3 22 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 2.6 2 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 2.6 2 1.9 2.6 2 1.9 3.6 2 1.9 2.6 2 1.9 3.6 2 1.9 2.6 2 1.9 2.6 2 1.9 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0</td><td>.7 230</td><td>35</td><td>26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 23.0 -150.8 25.6 -174.8 25.9 -175.4 26.0 -76.3 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 27.0 -57.6 28.1 -53.9 28.8 -27.0 28.8 -27</td><td>0.337 . 0.435 . 0.435 . 0.436 . 0.431 . 0.431 . 0.427 . 0.675 . 0.184 . 0.192 . 0.294 . 0.409 . 0.293 . 0.267 . 0.350 . 0.267 . 0.350 . 0.367 . 0.166 . 0.166 . 0.146</td></td<>	1.9 1 1.9 1 1.9 1 1.7 1 1.7 1 1.7 1 1.8 22 2.3 22 1.3 22 1.3 22 1.1 1 2.4 2 2.6 2 1.9 1 2.0 1 1.3 22 2.5 2 1.9 1 2.0 1 1.3 22 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 2.6 2 1.9 2.6 2 1.9 1 1.9 2.6 2 1.9 2.6 2 1.9 2.6 2 1.9 3.6 2 1.9 2.6 2 1.9 3.6 2 1.9 2.6 2 1.9 2.6 2 1.9 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0 3.6 2 1.0	.7 230	35	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 23.0 -150.8 25.6 -174.8 25.9 -175.4 26.0 -76.3 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 27.0 -57.6 28.1 -53.9 28.8 -27.0 28.8 -27	0.337 . 0.435 . 0.435 . 0.436 . 0.431 . 0.431 . 0.427 . 0.675 . 0.184 . 0.192 . 0.294 . 0.409 . 0.293 . 0.267 . 0.350 . 0.267 . 0.350 . 0.367 . 0.166 . 0.166 . 0.146
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Ultra Mag 416 Rem. Magnum	PR338UM2 PR338UM1 RM338LMR1 RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R	250 250 250 150 200 200 270 300 270 300 400 240 240 240 300	Core-Lott* Pointed Soft Point Core-Lott* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lott* Pointed Soft Point Soft Point Soft Foint Swift A-Frame* PSP Soft Point Swift A-Frame* PSP Soft Point Semi-Lacketed Hollow Point Soft Point Soft Point Semi-Lacketed Hollow Point Soft Point	9½ M 9½ M 9½ M 9½ M 9½ 9 9½ M 9½ M	2660 2456 2860 2647 2860 2645 2960 2620 2800 1874 2080 1688 2675 2378 2400 2197 2775 2471 2690 2363 2522 2280 2760 2365 2400 2175 1760 1380 1350 1315 1810 1857	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1144 2005 1823 2185 1921 2060 1780 2061 1894 2263 2035 1114 970 1114 970 11377 1087 1244 1073	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1496 1 1678 1461 0 1530 13178 6 1678 1442 5 1822 1624 3 1579 1414 1 378 306 1 378 306 1 378 306 1 378 306	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3996 1752 1169 755 1921 1280 841 3177 2510 1953 3197 2680 2230 3419 2711 2124 4338 3462 2802 5041 3922 3019 5073 4178 3412 5115 4201 3419 1650 1015 661 1650 1015 661 2942 1755 1010 2182 1492 1031	2333 2004 1676 2440 2071 1748 2389 1999 1663 2807 2333 1977 2794 2347 1960 3613 3799 2932 494 359 291 577 445 369 1506 1145 869 1844 1515 1242 1639 1245 1415 2772 1628 1245 2775 210 1757 2760 2214 1775 2761 411 345 501 411 345 501 411 345 503 472 381 767 625 333	00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0.8 zero 0.8 zero 0.8 zero 0.1.4 0.7 zero 0.7 zero 0.6 zero 0.7 -2.7 0.6 zero 0.7 -2.7 0.7 -2.7 0.8 zero 0.1.5 0.9 zero 0.1.5 0.9 zero 0.1.3 0.0 zero 0.1.3		1.9 1 1.9 1 1.7 1 1.7 1 1.7 1 1.8 2 2 3 2 2 3 2 2 1.3 2 2 1 1.3 2 2 1 1.3 2 2 2 2 6 5 2 1.9 1 1.3 2 2 2 2 5 6 5 7 1.9 1 1.9 1 1.3 2 2 2 2 5 6 7 1.9 1	.7 2800	35	26.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 23.0 -150.8 25.6 -174.8 25.9 -175.4 26.0 -76.3 26.2 -56.5 27.0 -57.6 26.1 -53.9 27.0 -57.6 26.1 -53.9 27.0 -57.6 27.0 -57.6 27.0 -57.6 28.3 -27.0 29.8 -27.0 20.8 -27	0.337 . 0.435 . 0.435 . 0.436 . 0.431 . 0.431 . 0.427 . 0.675 . 0.184 . 0.192 . 0.294 . 0.409 . 0.293 . 0.267 . 0.350 . 0.267 . 0.350 . 0.367 . 0.166 . 0.166 . 0.146 . 0.213
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 H&H Mag 416 Rem. Magnum 44 Rem. Magnum 444 Mar. 45-70 Government	PR338UM2 PR338UM1 RM338UM7 RM338UM7 R3581 R3581 R3582 R359H1 R359H3 R359H3 R359H3 R359H3 R359H3 R359H3 R359H3 R359H3 R359H3 R44H62 R44H62 R44H63 R44H6 R4570L R4570C	250 250 250 150 200 200 200 270 300 270 300 400 240 240 240 300 405	Core-Lott* Pointed Soft Point Core-Lott* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lott* Pointed Soft Point Soft Point Soft Point Swift A-Frame* PSP Swift A-Frame* PSP Swift A-Frame* PSP Swift A-Frame* PSP Soft Point Semi-Lacketed Hollow Point Soft Point Soft Point Soft Point Soft Point Soft Point	9½ M 9½ M 9½ M 9½ M 9½ M 9½ M 9½ M 9½ M	2660 2456 2860 2647 2860 2647 2860 2645 2960 2820 2800 1874 2080 1688 2615 2318 2400 2157 2775 2471 2690 2353 2522 2250 2400 2155 2400 2155 1760 1380 1760 1380 2350 1815 1810 1497	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1140 2005 1823 2185 1921 2060 1780 2061 1834 2263 2035 1114 970 1114 970 11377 1087 1244 1073 1055 977	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1495 1 1673 1461 0 1530 13478 6 1637 1442 5 1822 1624 3 1579 1414 1 878 306 1 378 306 1 378 306 1 378 306 1 378 306 1 389	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3995 1752 1169 755 1921 1280 841 3177 2510 1953 3197 2680 2230 3419 2711 2122 4338 3347 2543 4738 362 2802 5073 4178 3412 5115 4201 3419 1650 1015 661 1650 1015 661 2942 1755 1010 2182 1492 1031	2333 2004 1676 2440 2071 1748 2389 1999 1663 2807 2363 1977 2794 2347 1960 3613 3299 291 577 445 369 1956 1145 869 1844 1515 1242 1639 1230 97 1900 143 103 2772 1683 1245 2775 1263 1245 2772 1623 1245 2775 1240 1757 2760 2210 1757 2761 411 345 501 411 345 501 412 331 563 452 533 858 758 679	00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	188 zero 188 zero 188 zero 198 zero 197 zero 196 zero 196 zero 197 zero 198 zero 199 zero 198 zero 199 zero	-22 5.9 +il.4 -22 5.9 +il.2 -3 -15.4 -15.4 -2.1 -5.6 -10.6 -2.0 -5.6 -10.7 -1.7 -4.7 -8.9 -8.6 -18.2 -32.6 -10.7 -22.6 -40.1 -4.7 -9.9 -17.3 -5.7 -11.8 -20.4 -4.2 -9.0 -15.8 -2.2 -9.0 -15.8 -2.3 -6.3 -12.4 -5.9 -12.8 -12.4 -5.9 -12.1 -20.8 -2.1 -20.8 -8.2 -2.1 -20.8 -8.2 -2.1 -20.8 -8.2 -2.1 -20.8 -8.2 -2.2 -40.5 -68.2 -2.3 -2.3 -3.3 -2.1 -20.8 -8.2 -2.2 -40.5 -68.2 -2.2 -40.6 <td< td=""><td> 1.9 1 1.7 1 1.7 1 1.7 1 1.8 2.3 2.3 2.3 2.3 2.3 2.4 2.4 2.5 2.6 2.5 </td><td>7 280</td><td>35</td><td>28.1 -54.1 23.4 -47.5 23.0 -46.5 28.0 -52.7 22.0 -44.7 22.1 -44.9 23.0 -154.8 23.0 -154.8 23.0 -154.8 23.0 -175.4 23.0 -76.3 22.3 -69.0 22.2 -66.5 27.0 -57.6 27.0 -57.6 28.3 -70.9 28.8 -7</td><td>0.337 0.435 0.445 0.431 0.431 0.427 0.675 0.184 0.192 0.294 0.409 0.293 0.267 0.350 0.267 0.350 0.166 0.166 0.166 0.146</td></td<>	1.9 1 1.7 1 1.7 1 1.7 1 1.8 2.3 2.3 2.3 2.3 2.3 2.4 2.4 2.5 2.6 2.5	7 280	35	28.1 -54.1 23.4 -47.5 23.0 -46.5 28.0 -52.7 22.0 -44.7 22.1 -44.9 23.0 -154.8 23.0 -154.8 23.0 -154.8 23.0 -175.4 23.0 -76.3 22.3 -69.0 22.2 -66.5 27.0 -57.6 27.0 -57.6 28.3 -70.9 28.8 -7	0.337 0.435 0.445 0.431 0.431 0.427 0.675 0.184 0.192 0.294 0.409 0.293 0.267 0.350 0.267 0.350 0.166 0.166 0.166 0.146
Ultra Mag 338 Lapua Magnum 35 Remington 35 Whelen 350 Remington Mag 375 H&H Mag 375 Remington Ultra Mag 416 Rem. Magnum 44 Rem. Magnum	PR338UM2 PR338UM1 RM338LMR1 RM338LMR1 R35R1 R35R2 R35WH1 R35WH3 R	250 250 250 150 200 200 270 300 270 300 400 240 240 240 300	Core-Lott* Pointed Soft Point Core-Lott* Pointed Soft Point Swift A-Frame* PSP* Scenar Core-Lott* Pointed Soft Point Soft Point Soft Foint Swift A-Frame* PSP Soft Point Swift A-Frame* PSP Soft Point Semi-Lacketed Hollow Point Soft Point Soft Point Semi-Lacketed Hollow Point Soft Point	9½ M 9½ M 9½ M 9½ M 9½ 9 9½ M 9½ M	2660 2456 2860 2647 2860 2645 2960 2620 2800 1874 2080 1688 2615 2318 2400 2197 2775 2471 2690 2353 2522 2280 2400 2115 1760 1380 1760 1380 2350 1815 1810 1497 1330 1168 2200 1831	2261 2075 2443 2249 2440 2244 2683 2551 1506 1218 1376 1140 2005 1823 2186 1921 2060 1780 2061 1836 2241 1947 2263 2035 1114 970 1114 970 1177 1087 1055 977 1508 148	0 2036 1871 5 1898 1731 9 2064 1887 4 2057 1879 1 2423 2299 8 1039 934 0 1001 911 2 1606 1399 3 1652 1496 1 1678 1461 0 1530 13178 6 1637 1442 5 1822 1624 3 1579 1414 1 878 206 1 378 206 1 378 206 1 378 206 1 378 269	3860 3329 2853 3927 3348 2837 4540 3888 3314 4540 3882 3303 4863 4412 3996 1752 1169 755 1921 1280 841 3177 2510 1953 3197 2680 2230 3419 2711 2124 4338 3462 2802 5041 3922 3019 5073 4178 3412 5115 4201 3419 1650 1015 661 1650 1015 661 2942 1755 1010 2182 1492 1031	2333 2004 1676 2440 2071 1748 2389 1999 1663 2807 2333 1977 2794 2347 1960 3613 3799 2932 494 359 291 577 445 369 1506 1145 869 1844 1515 1242 1639 1245 1415 2772 1628 1245 2775 210 1757 2760 2214 1775 2761 411 345 501 411 345 501 411 345 503 472 381 767 625 333	00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0.8 zero 0.8 zero 0.1.4 0.7 zero 0.1.6 zero 0.6 zero 0.6 zero 0.7 zero 0.6 zero 0.7 zero 0.7 zero 0.8 zero 0.1.5 0.9 zero 0.1.5 0.9 zero 0.1.7 0.8 zero 0.8 zero 0.8 zero 0.8 zero 0.8 zero 0.1 zero 0.8 zero 0.1 zero 0.8 zero 0.1 zero 0.8 zero 0.8 zero 0.9 zero 0.1 zero 0.1 zero 0.1 zero 0.1 zero 0.1 zero 0.2 zero 0.3 zero 0.4 zero 0.8 zero 0.8 zero 0.9 zero 0.1 zero 0.1 zero 0.1 zero 0.1 zero 0.1 zero 0.2 zero 0.3 zero 0.4 zero 0.5 zero 0.7 zero 0.8 zero 0.8 zero 0.9 zero 0.1 zero 0.9 zero 0.1		1.9 1 1.7 1 1.7 1 1.7 1 1.7 1 1.7 1 1.8 1 1.7 1 1.8 1.8	.7 asso5 zero5 zero5 zero5 zero5 zero3 zero3 zero3 zero3 zero3 zero4444 zero7 zero7 zero8 zero8 zero7 zero8 zero617 03 zero617 03 zero617 03 zero1	35	28.1 -54.1 23.4 -47.5 23.0 -46.5 26.0 -52.7 22.0 -44.7 22.1 -44.9 17.9 -35.4 17.9 -35.4 17.9 -35.8 25.6 -174.8 18.6 -175.4 18.6 -175.4 18.6 -175.4 18.6 -175.4 18.6 -175.6 18.	0.337 0.435 0.4456 0.431 0.431 0.427 0.675 0.184 0.192 0.294 0.409 0.293 0.267 0.350 0.267 0.350 0.367 0.166 0.166 0.146

Note: These ballistics reflected a test barrel length of 24" except those for 30 Carbine and 44 Remington Magnum which are 20't barrels. Specifications are nominal. Ballistics figures established in test barrels. Individual rifles may vary from test barrel results. "zero" indicates yardage at which rifle was sighted in. * Inches above or below line of sight. Hold low for positive numbers, high for negative numbers.

Managed-Recoil (pages 62-63)	Premier AccuTip (pages 54-55)
Premier® Copper Solid (page 57)	Premier ² Scirocco Bonded (page 54)
Premier * Core-Lokt * Ultra Bonded* (page 52)	Swift A-Frame PSP
Premier® Disintegrator® Varmint (page 55)	UMC® (page 65)
Premier Match (pages 57)	Core-Lokt* (pages 60)

^{*} Inches above of below line or sight, must limit of pusine transitions, lagorium inequalities.

† 280 Reminigition and 7mm Express, Reminigition are interchangeable.

† Gram Reminigition and 244 Reminigition are interchangeable.

† Bullet does not rise more than 1° above time of sight from muzzle to sighting-in range.

† Bullet does not rise more than 3° above time of sight from muzzle to sighting-in range.

SHOTGUNARE REGISTRATIONS

Modes et 7 Mino	W.G.M.	neriox	anixidi <u>ya</u>	SIONS//AVERA	da Walerija								
MODEL	GAUGE	MAG. Capacity	BEL LENGTH/ ORDER NO.	BARREL TYPE	· SIGHTS	METAL FLAISH	OVERALL Length	LEXCTR OF PULL	DROP (COMB)	DROF (HEEL)	STOCK Material	STOCK FINISH	(UBS.)
887 Nitro Magnum SPS	12 (3 ½°)	4	26"/ 82501	Solid Stepped Rib Rem® Chake	HiViz®	Armor Lokt '**	46 ½*	14"	13%*	21/2"	Synthetic	Matte Black	7 1/4
887 Nitro Magnum SPS	12 (3 ½*)	4	28"/ 82500	Solid Stepped Rib RC ** Mod Choke	HiViz®	ArmorLokt ™	48*	14*	11/2*	21/2*	Synthetic	Matte Black	73%
387 Nitro Magnum SPS Naterfowl Camo	12	4	28"/ 82502	Solid Rib RC™ WF Choke	HiViz♥	ArmorLokt "	48*	14"	11/2"	21/2*	Synthetic	Realtree* Advantage* Max-4 HD	7 1/2
387" Nitro Magnum SPS Came Combo (22" Turkey Barrel)	12	4	28" / 22" 82530	Solid Rib Rifle Sight Rem™ Chake	HiViz®	ArmorLokt™	48" / 42"	14*	11/2*	21/2*	Synthetic	Mossy Oak* Break-Up* Infinity	7 - 71/4
387 Nitro Magnum Camo 3one Collector Edition	12	4	26"/ 82503	Solid Rib Rem™ Choke	TruGlo®	ArmorLokt™	46*	14"	11/2*	21/2*	Synthetic	Realtree*	71/4
187 Nitro Magnum Tactical !-Shot Ext. w/Picatinny Rail	12 (3 ½7)	4	18 ½"/82540	Solid Stepped Rib Rem™ Choke	HiViz®	ArmorLokt™	39"	14"	11/5"	21/2"	Synthetic	Matte Black	61/1

MODELY DEBY SPORTS	MAN M	(d)(U)	istioieni	DIMENSIONS /	AVERAGE WEIGHT	3 * 3 * *					41.00		
COEL	GNICE	MAG. CAPACITY	BBL LENGTH/ CRIDER NO.	BARREL TYPE 3	SHENS	METAL FIXISH	OVERALL Length	LENGTH OF PULL	COMB)	BROP (HEEL)	STOCK Naterial	STOCK FINISH	AVE. WI. (LBS.)
1-87 Sportsman Field Walnut /Fleur-Di-Lis Checkering	12 20	4	28*/ 83700 26*/ 83704	Vent Rib Rem * Choke Mod ²	Dual Bead	Matte Black, Non-Reflective	48 1/4"	14"	11//	21/2*	Satin American Walnut	Satin	8¼ 7¼
1-87 Sportsman Synthetic	12 12 20 20	4	28"/ 29879 26"/ 29881 28"/ 29825 26"/ 29827	Vent Rib Rem Choke Mod ^Z	Single Bead	Matte Black, Non-Reflective	48" 46" 48" 46"	14"	11/4"	2 1/2*	Synthetic	Matte Black	81/4 81/8 71/4 71/8
1-87 Sportsman Camo	- i2 20	4	287/ 29895 267/ 29917	Vent Rib Rem ⁻ Choke Mod ²	Single Bead	Mossy Oak* New-Breakup*	46"	14"	11/1/2*	11/4"	Synthetic	Mossy Oak* New-Breakup*	8¼ 7¼
1-87 Sportsman Super Mag ynthetic w/Overmolded Grips	12	4	28"/ 83620	Vent Rib Rem * Choke	HiViz [®] Bead Sight	Matte Black, Non-Reflective	48"	14"	11/2"	2 1/2*	Synthetic	Matte Black	81/4
1-87 - Sportsman - Super Mag 'aterfowl w/Overmolded Grips	12	4	287 83617	Vent Rib Rem * Choke	HiViz® Bead Sight	Mossy Oak* Duck Blind*	48	14"	1 1/2"	21/2"	Synthetic	Mossy Oak* Duck Blind*	8¼
t-87 Sportsman Super Mag ShurShot urkey Camp w/Overmolded Grips	12	4	23*/ 83616	Fully Rifled Rem* Choke	TruGlo® Rifle Sights	Realtree*	43"	133/4"	11/2"	2"	Synthetic	Realtree* APG~ HD~	7%
l-87 "Sportsman "Synthetic /ShurShot "Stock	12	4	217/83602	Fully Rifled	Cantilever Scope Mount	Realtree* Hardwoods HD	43"	13 ¾*	11//	2"	Synthetic	Realtree* Hardwoods HD	8
-87" Sportsman" Synthetic Deer	12 20	4	21"/ 29858 ¹ 21"/ 29877 ¹	Fully Rifled	Cantilever Scope Mount	Matte Black, Non-Reflective	41"	14*	11//*	1%*	Synthetic	Matte Black	8½ 7½
87 - Sportsman - Compact Synthetic ⁵	.20	4	21"/ 83626	Vent Rib Rem * Choke Mod ²	Single Bead	Matte Black, Non-Reflective	40 1/4"	Adj.	11/4*	2 1/2"	Synthetic	Matte Black	61/2
-87" Sportsman" Compact Camo ⁵	~ 20	4	21"/83630	Vent Rib Rem Chake Mod ²	Single Bead	Mossy Oak® New Break-Up®	40 1/4"	Adj.	11/2"	21/2"	Synthetic :	Mossy Oak® New Break-Up®	61/2
Model 11 97: Door barrole are not assistant u	rith a processor con	monacoting as	s sustam and will not fu	action with tarmet as light field	loads 2 NOTE, All Model 11 97	Coartemant chotmus	with a Pam' Chaka I	arrel como o	wioned with	Modified Dom	- Chake tubes		

Model 11-87* Deer barrels are not equipped with a pressure-compensating gas system, and will not function with target or light field loads. 2 MOTE: All Model 11-87* Sportsman* shotgums with a Rem* Choke barrel come equipped with Modified Rem* Choke tubes.

Model 11-87* Sportsman* shotgums with a Rem* Choke barrel come equipped with Modified Rem* Choke tubes.

Model 11-87* Sportsman* shotgums with a Rem* Choke barrel come equipped with Modified Rem* Choke tubes.

Socialized Rem* Choke tubes.

e.	GAUGE	٠. 	MAG. Capacity	BBL LENGTH/ ORDER NO.	BARREL TYPE	SIGHTS	METAL Fixish	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	(HEEL)	STOCK MATERIAL	STOCK STOCK	AYG. WI. (LBS.)
Express® Tactical Camo 2 Shot Extension)	· . 12		6	18 1/2/ 81204	Clean Barrel Rifle Sight Rem™ Choke	XS-Blade (Dove-tailed)	A-TACS® Camo	38 ½ 40 ½" (chake)	13 1/4"	1 1/2"	2"	Synthetic	A-TACS® Camo	7 1/2
Express® Tactical Grey Powder Coat Finish)	- 12	:	7:	18 1/. / 81202	Rem™ Choke ²	Single Bead	Grey Powder Coat	38 1/7	14"	1 1/1	2 <i>\t</i> 7	Synthetic	Matte Black	71/2
Express® Tactical (\$® Ghost Ring Sights)	: 12 -:		7	18 1/2/ 81198	Rem™ Choke ²	XS® Ghost Ring	Blasted Black Oxide	38 1/7	14"	1 1/2"	2 1/1	Synthetic	Matte Black	71/2
Express* Synthetic Tactical	.12	<u>.</u>	7	18 1/2/ 25549	Rem™ Choke	7 Single Bead	Blasted Black Oxide	381/2	13 ¾*	1 1/2	21/2	Synthetic	Matte Black	.71/2
Express® Synthetic Tactical ound Capacity)	12		7	18 1/./ 25077	Rem'" Choke	Single Bead	Blasted Black Oxide	38 1/2	13 ¾*	l 1/2"	2 1/7	Synthetic	Matte Black	71/2
Express® Synthetic Tactical Round w/Knoxx Spec-Ops Stock)	20	.1	7	18 1/2/ 81180	Rem** Choke	Single Bead	Blasted Black Oxide	38 1/7	Adj.	11/2	2"	Synthetic	Matte Black	. 6
Express® Synthetic Tactical Round Capacity)	20	71	- 7	i : 18 W.Y 81100	Rem™ Choke	Single Bead	Blasted Black Oxide	38 1/7	13 1/4"	1 1/7	2 1/2	Synthetic	Matte Black	. 6
TAC-2 SpecOps ** Stock	12	::1	6	18"/81400	Fixed Cylinder	Single Bead	Blasted Black Oxide	Adj	Adj.	11/2	2 1/2	Synthetic :	Matte Black	,7,
TAC-2 Folding Stock	12		6	18"/81402	Fixed Cylinder	Single Bead	Blasted Black Oxide	Ādj	Adj.	. –	_	Synthetic	Matte Black	61/6
TAC-2 SFIV Stock	1. 17.12	: i	6	18"/82800	Fixed Imp. Cylinder	Single Bead	Blasted Black Oxide	381/1	14"	11/2	21/7	Synthetic Synthetic	. Matte Black	7.75
OT TAC-4	12	4.	8 -	22 / 82801	Rem Choke1	HiViz*	Blasted Black Oxide	42 1/2 -5-1	14"	-11/7	21/2	Synthetic 1	Matte Black	7.74

	_			(HEEL) ?	(COMES)	OF PULL	TR	LEN	METAL FOOISH	2 SIGHTS	BARREL TYPE	ORDER NO.	MAG, CAPACITY	GAUGE	1
Satin		n Walnut	atin American V	21/1 3	11/2	14"	6	51	Matte Black Non Reflec	Twin Bead	Vent Rib Rem Choke1	30"/24808	2	10	0" Magnum ²
ossy Oak? Obsession*	. Mossy (ite .	Laminate	170	. 1%*	14 1/2"	4 -	44	Mossy Oak* Obsession	FireSights	Rifle Sight Rem Choke 4	237/81000	. 2	10	* Thumbhole Camo ²
ssy Oak* Duck Blind **	Mossy O	fic	Synthetic	21/2	11//	14"	(f.)	47	Mossy Oak* Duck Blind	HIVIZ	Vent Rib Rem Choke 3	26 / 81001	2	10	Waterfowl Camo ²
_	M	ε	Synthetic Synthetic	21/2	11/1	14"	- 4	N 10	Mossy Oak* Duck Blind Mossy Oak* Obsession	Twin Bead	Vent Rib Rem Choke 3 Vent Rib Rem Choke 1	26"/81001	2	10	10 Waterfowl Camo ² 10 Camo RC/VT ²

updaced with Full and Med Rem." Choke tudes. 2 IMPORTANT NOTE: Critical components - including the barret, both assembly and trigger plate assembly at the Reminington Model SP-10" and other manufacturers' 10-gauge shorigins - are not interchangeable.

OTE: Supplied with (3) Birley Rem." choke waterfowl tubes - decoying, intermediate and pass shorting (ported) non-tonic approved. 4 NOTE: Supplied with Birley Straight Rifled Turkey Tube.

SHOTGUN SPECIFICATIONS

MODEL	GAUGE/BURE ²	CAPACITY	BEL LONGTH	BARREL TOPE	SIGHTS C	METAL FIXESH	OVERALL COM	OF PULL	(COME)	- (HEEL)	TOTAL MATERIAL CONTRACTOR	STOCK.	AVS. WT. (LBS.)
Wingmaster*	12	4 %	28 / 26927 26 / 26929	Light Contour Vent Rib Rem- Choke ¹	Twin Bead	High Polish Blued	48 // 46 //	14 %	11/1	21/2	American Walnut	Hi-Gloss	此旅
Wingmaster*	20	4	28 / 26947 26 / 26949	Vent Rib Rem Choke 1	Iwin Bead	High Polish Blued	48 Vt.	14"	11//	2 1/2"	American Walnut	Satin (28") Hi-Gloss (26")	6 VA
Vingmaster*	28 (2 1/4")	4	25 / 24983	Vent Rib Rem Choke 1	Iwin Bead	High Polish Blued	数 15 光文	-14"	1 W.	21/2	American Walnut	Satin	(a) 66°
Vingmaster*	410 Bore (3")	. 4	257/24991	Vent Rib Modified	Twin Bead	High Polish Blued	4510	14"	11/2	21/2"	American Walnut	Satin	54

			- 12"		<u> </u>	<u> </u>	1 .	· .					
MODEL 870 EXPRI	ESS" SI	IOTGUI		NS / AVERAGE WEI	GḤĴS-								
IODEL .	GAUGE 1.5)	MAG. CAPACITY	BBILLENGTH/ ORDER NO.	BARREL TYPE	SACRETS	METAL FINISH	OVERALL LENGTH	LEMGTH OF POLL	DROP (DOMB)	DROP . (HEEL)	STOCK	STOCK FUNISH	. W
70⁻ Express*	12	4	28"/ 25568 26"/ 25569	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	48 1/2 46 1/2	14"	11//	21/1	Laminate	Satin	11/2. 11/4.
70" Express* Magnum //ShurShot"	12 (3")	4 (2 ³ /4° & 3°)	21 / 81114	Vent Rib Rem* Choke - (Turkey Extra Full)	, Twin Bead	Mossy Oak* Obsession*	42 1/2	133/4"	11/2	2*	Synthetic	Mossy Oak* Obsession*	7.7
70° Express* Magnum /ShurShot	12	4	23 / 81118	Fully Rifled	Single Bead	Matte Black Non-Reflect	441/2	13 3/4"	11/1	27	Synthetic	Matte Black	73/4
70 Express•	20	4	. 28"/ 25583 26"/ 25582	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	48 1/1 46 1/1	14"	11/1	21/2	Laminate	Satin	6 ½ 6 ¼
70" Express* Lami. Compact	. 20	4	217/255615	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	40 1/2	13°	11/2	21/4"	Laminate	Satin	61/2
70" Express* Synthetic	12	4	287/25587- 267/25589	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	48 1/2" 46 1/2	14"	11/7	21/2	Synthetic	Matte Black	11/2-
70" Express* Turkey Camo	12	4 (2 ³ /4° & 3°)	217/81115	Vent Rib Rem Choke (Mod)	Single Bead w/HiViz®	Mossy Oak [®] New Break-Up [®]	42 1/1	14"	11//2*	21/2"	Synthetic	Mossy Oak ^e New Break-Up ^e	71/4
10 Express* Compact	. 20 ;	4	21 / 81148	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	40 1/2	13° Adj.	11/2"	21/2"	Synthetic	Matte Black	6
O" Express* Compact Came	20	4	21 / 81166	Vent Rib Rem Choke (Mod)	Single Bead	Realtree® Hardwoods HD™	401/7	13" Adj.	11/2	2 1⁄2"	Synthetic-	Realtree® Hardwoods HD	™ · 6.
70" Express* Compact Ir.4	20.	4	18 1/4/81161	Vent Rib Rem* Choke (Mod)	Single Bead	Matte Black Non-Reflect	37 1/4	12 ° Adj.	11/2"	2*	Synthetic	Matte Black	51/4
70° Express® Compact ink Blaze Camo	20	4	21781150	Vent Rib Rem ⁻ Choke (Mod)	Single Bead	Matte Black Non-Reflect	40 1/2	13 * Adj.	11/2.	2 1/2"	Synthetic	Mossy Oak® Blaze Pink Carno	. 6
70" Express* Synthetic ully Riffed Deer	12 -	4	20 / 25097	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	40 ½r.	14"	11/2	1 1/8	Monte Carlo Synthetic	Matte Black	, 1
70" Express* Deer	12	4	207/25565	Fixed Imp. Cyl. Choke	Rifle Sights	Matte Black Non-Reflect	40 1/7	14"	1 1/2*	17/8	Monte Carlo Laminate	Satin	11/4
70" Express* Fully Rifled Deer	12	4	207/25575	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	40 1/2	14"	1 1/2	11/8	Monte Carlo Laminate	Satin	714
70" Express* Synthetic ully Rifled Cantilever	12 20	4	23"/ 25090 18 '/;"/ 25183	Fully Rifled Heavy Contour Fully Rifled	Cantilever Scope Mount	Matte Black Non-Reflect	43 ¼* 38 ³/4*	14"	11/7	1 1/2	Monte Carlo Synthetic	Matte Black	: 8 71/4
70" Express* Synthetic hurShot Cantilever Slug	20	4	18 1/1/81120	Fully Rifled Heavy Contour Fully Rifled	Cantilever Scope Mount	Matte Black Non-Reflect	43 1/47	13 3/4"	11/7	2*	Synthetic	Matte Black	7.3/4
70" Express* Left Hand	12	4	287/25577	Vent Rib Rem* Choke (Mod)	' Single Bead	Matte Black Non-Reflect	48 Vz	14"	1 1/2"	2 1/2"	Laminate	Satin	7 1/2
70" Express* Synthetic 18*	12	4.	18*/25549	Fixed Cyfinder Choke	Single Bead	Matte Black Non-Reflect	38 √2"	14"	1 1/2"	247	Synthetic	Matte Black	7 V4
70" Express* Synthetic -Shot w/Knoxx SpeeOps Stock	20	6	18 / 81180	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	Adj.	Adj.	11/7	2 1/2*	Synthetic	Matte Black	71/2
70" Express* Synthetic ith 7-Round Capacity ²	12 20	6 6	18 / 25077 18 / 81100	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	38 1/2	14"	11/2"	21/1	Synthetic	Matte Black	7 ½ 6 ½
Model 870" Express* shotguns have Wood faminate stock model does not			e nated, and will cycle 2	"/;" and 3" shotshells. 2 Supplied w	vith sling swivel studs. 3	Supplied with special ported "Tac	tical" Extended Rei	n" choke tub	be. 4 Inclu	des new adju	stable LOP kit for up to .	l* of extra adjustment.	

MODEL		GAUGE 2	MAG. CAPACITY	BELLENGTH/ Order No.	BARREL TYPE	ZIKBNZ	METAL FINISH	OVERALL LENGTH	CF PULL	(COMB)	(HEIL)	STOCK MATERIAL	210CK	AVG.WT
	xpress ^e Super Mag Waterfowl Camo	12 (3 1/2)	3 (3 ½") 4 (2 ³/ɛ & 3")	26"/81125	Vent Rib Rem - Choke 4.5	HiViz€	Mossy Oak* Bottomland	46"	14*	11/2"	2 1/2*	Synthetic	Mossy Dak ² Bottomland	71/4
870 E Super M	xpress* Mag Waterfowl Camo ³	12 (3 1/7)	3 (3 ½°) 4 (2 ³/c & 3°)	28*/81111	Vent Rib Rem [™] Choke ⁴	HiViz®	Mossy Oak* Duck Blind	48"	14"	11/2"	21/2*	Synthetic	Mossy Dak ² Duck Blind	7 1/2
870" Ex	press* Super Mag	12 (3 1/2")	3 (3 1/2) 4 (2 3/4 & 3")	28"/ 25100	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	48"	14"	11//2*	2 1/2"	Laminate	Satin	7 V2
870° Es Super l	xpress* Mag Synthetic	12 (3 1/2)	3 (3 ½°) 4 (2 ³/¢ & 3°)	26°/25102 28°/25103	Vent Rib Rem ⁻ Choke (Mod)	Single Bead	Matte Black Non-Reflect	46° 48°	14"	11/2	21/7"	Synthetic	Matte Black	7 1/4 7 1/2
870° E	xpress* Mag Combo	12 (3 1/2")1	3 (3 ½") 4 (2 ¾" & 3")	26*/ ₂₅₁₁₄	Vent Rib Rem Choke (Mod) Fully Rifled (Deer)	Single Bead (Vent Rib) Rifle Sights (Deer)	Matte Black Non-Reflect	46" (VR) 40 ½" (Deer)	14*	11/2"	2 1/2*	Laminate	Satin	7 1/4

			CINE WAGK		DIMENSION	S/AVERÄGE WEIGHT							
M00E1.	GAUGE	MAG. CAPACITY	ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	CYERALL LENGTH	LENGTH OF PULL	(COMB)	OROP (HEEL)	STOCK MATERIAL	STOCK FINISH	engunt. (Les.)
870° Marine Magnum ^{e Z}	121	6	18"/ 25012	Cylinder Choke	Single Bead	Electroless Nickel-Plated	38 V/*	14*	11/1	21/:	Synthetic	Matte Black	71/2
870" XCS Marine Magnum*	121	6	18"/ 81308	Cylinder Choke	Single Bead	Black TriNyte	38 1/2"	13¾'	11//	21/2*	Synthetic	Matte Black	71/2

NEW

HOTGUN SPECIFICATIONS

MODEL 870) EXP	RESS	COMBO SHOTGUN DIMEN	ISIONS / AVERAGE V	VEIGHTS:								
NOEL	GAUGE ¹	MAG. CAPACITY	BRE LENGTH/ORDER NO.	BARBEL TYPE	SIGHTS	METAL FIXISH	OVERALL LENGTH	LENCTH OF PULL	DROP (CGMS)	OROP (HEEL)	STOCK MATERIAL	STOCK FIXISH	ANG. WT. (LBS.)
'0 Express*	12	4	26"(Vent Rib)/20" (Fully Rifled Deerl/25578	Vent Rib Rem Choke (Mod.) Futly Rifled Deer	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	48 1/4 " (Vent Rib)	14"	177	2 1/1	Laminate	Satin	7 1/4 (Deer BBL)
O Express*	20	4	26"(Vent Rib)/20" (Fully Rifled Deeri/25597	Vent Rib Rem Choke (Mod.) Futly Ritled Deer	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	46 1/2" (Vent Rib)	14"	11/2	21/2	Laminate	Satin	6 V2 (Deer BBL)
'0" Express ' Syn. impact Combo	20	4	21*(Vent Rib)/25659 20*(Fufly Rifled)/25659	Vent Rib Rem Chake (Mad.) Fully Rifled Deer	Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	40 1/2" (Vent Rib) 39 1/2" (Deer BBL)	13"	1 <i>Vž</i>	2 ½·	Synthetic	Matte Black	6 (Vent Rib) 6 (Deer BBL)
Model 870 Express	shotguns ha	sve 3" chambe	ers, unless otherwise noted, and will cycle ? 1/1" and :	r shotshelfs.									

051	CAUGE	NAEL CAPACITY	BBL LENGTH/ Brder #0.	BARREL TYPE	SIGHTS	METAL FIXISH	OVERALL LENGTH	OF PULL	OROP (COMB)	DROP (HEEL)	STOCK MATERIAL	STOCK FLICISH	TW. DVA (LZSJ)
10 SP-T Super Mag	12 (3 ½*)	3(31/2"), 4(21/2"& 3")	23"/ 25189	Rifle Sight Rem ⁻ Chake ²	TruGlo®	Mossy Oak? Obsession?	44 1/2"	14 1/2"	1 1/3"	2¾•	Laminate	Mossy Oak* Obsession*	81/4
'Q" SPS Super Slug	12 (3°) ¹	4(2¾" & 3")	251/2*/82101	Fully Rifled Extra Heavy (Fluted)	Drilled & Tapped	Black	47	13 1/1"	1 1/2"	2"	Synthetic	Mossy Oak* Treestand	11/1
'0" SPS" Super Mag Turkey/Predator Scope w/Overmolded Grips	12 (3 ½")1	3 (3 ½") 4(2¾"& 3")	20"/ 81062	Clean Barrel Bead Sight Rem ⁻ Choke	TruGlo® Red Dot	Mossy Oak* Obsession*	40 ½	13 %*	1 1/2"	2*	Synthetic	Mossy Oak* Obsession*	7%
0 SPS Super Mag Turkey ShurShot Stock	12 (3 ½") 1	4(2¾"&3")	23"/ 81061	Wingmaster HD Extended Rem* Choke	TruGlo®	Realtree* APG* HD*	44 %	13 ¾"	1 1/2"	2ª	Synthetic	Realtree* APG * HD **	71/2
0" SPS Super Mag Camo ³ & Gobbler	12 (3 1/1)1	3(3½"), 4(2¾"&3")	23"/ 81060	Rifle Sight Rem ⁻ Choke ²	Fire Sights	Realtree* APG" HD"	44 1/2"	Adj.	1 1/2"	21/2"	Synthetic	Realtree* APG HD	7%
0" SPS-T Super Mag Camo ³	12 (3 ½)1	3(31/2"), 4(23/4"&3")	23"/ 25007	Vent Rib Rem Chake 2	Twin Bead	Mossy Oak® Obsession®	44 1/1	14"	1 1/2"	21/2"	Synthetic	Mossy Oak* Obsession*	7%
0" XCS (Xtreme Conditions)	12 (3 ½*)	3(3 ½"), 4(2¾"&3")	28/81309	Vent Rib Rem Choke 4	Twin Bead	Matte Black	48 1/1	133//	11/2"	21/2	Synthetic	Matte Black	7%

43" and 31% chambers also handle 21% shells. 2 Note: Supplied with Turkey Super Full choke tube. 3 Note: All Model 870" Super Magnums have 31% chambers except Deer barrel which has 3" chamber. Super Magnums can shoot 21%, 3" and 31% shells interchangeably.

Note: Super Magnums have 31% chambers also handle 21% shells. 2 Note: Supplied with Modeled Immorred Officiates and Full Rem" Choke Tubes.

DEL .	GAUGE/BORE	MAG. CAPACITY	DRIER NO.	BARREL TYPE ⁵	SIGHTS	RECEIVER FINISH	DVEBALL	LENGTK OF PULL	DROP (COMB)	DROP (MEEL)	STOCK MATERIAL	STOCK	(L8S.)
10° Competition	12	4	30"/26919	Vent Rib ProBore® Choke	Twin Bead	Nickel	50 V	14 1/4"	11/2	21/4"	Semi-Fancy Amer. Walnut	Hi-Gloss	.81/s
) Wingmaster Classic Trap	12	4	30 / 24857	Lt. Contour Vent Rib Rem* Chake 1	Twin Bead	High Polish Blued	50 1/2	14 1/2"	1 1/16"	2*	Senn-Fancy Amer. Walnut	Hi-Gloss	814
10" Classic Trap	12	4	30 / 25333	Lt. Contour Vent Rib Rem* Chake ¹	Twin Bead	High Polish Blued	50 1/2	14 1/2"	1 1/16"	2"	Semi-Fancy Amer. Walnut	Hi-Gloss	8 14
10" Premier Sporting 12	12	4	28"/82842	Lt. Contour Vent Rib Rem * Chake 2	Twin Bead	High Polish Blued	-49*	143/16"	11/2	21/4"	Semi-Fancy Amer. Walnut	Hi-Gloss	8 1
10 Premier Sporting 20	20	4	28 / 82846	Lt. Contour Vent Rib Rem - Chake 2	Twin Bead	High Polish Blued	. 49"	14"	11/2"	21/2"	Semi-Fancy Amer, Walnut	Hi-Gloss	7.
10" Premier Sporting 28	÷~ - 28	4	27"/82854	Vent Rib Rem Choke 2	Twin Bead	High Polish Blued	47 1/4	14"	11/2"	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	614
10" Premier Sporting 410	410 bore	4	27 / 82858	Vent Rib Rem Choke 2,6	Twm Bead	High Polish Blued	47 1/4" .	14"	1 1/2"	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	614
10" Sporting 12	12	4	28 / 25315	Lt. Contour Vent Rib Rem * Choke 2	Twin Bead	High Polish Blued	49"	14 1/16"	1 1/2"	21/4"	Semi-Fancy Amer. Walnut	Hi-Glass	, 8
10" Sporting 20 (LT)	20	4	28"/ 25399	Lt. Contour Vent Rib Rem * Choke 2	Twin Bead	High Patish Blued	49"	14"	1 1/2"	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	, 7
10" Sporting 28	28:	4 :	27"/ 29583	Vent Rib Rem* Choke 2	Twin Bead	High Palish Blued	47 1/4	14"	11/5	21/2"	Semi-Fancy Amer. Walnut	Hi-Glass	61/2
10" Sporting 410	410 bore	4	27"/ 29549	Vent Rib Rem Choke 2,6	Twin Bead	High Polish Blued	47 1/4	14"	11/7	21/2	Serm-Fancy Amer. Walnut	Hi-Gloss	61/4

ness gars are supplied having special Ham Dear Chakes, Med Handicap (LU47), Amples (LUG7), and Long Handicap (LU47), and L

RIFATESPECTF1CATIONS

	MODEL	700" XCR" II										
	ORDER NO.	CALIBER	NAG	BARREL TWIST - R-H LENGTH - 1 TURN DI	OVERALL S.	LEHETH OF PULL	ORDP DROP (COMS) (HEEL)	BARREL BARREL	BARREL FINISB	ASS. SECT MATERIAL SECTION	STOCK FDUSE -	INC WI
NEW	84520	25-06 Remington	-4	24 10	AW.	- 13 M* -	1% 1%	Stainless w/Inityta	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	** 131
NEW	84521	270 Win . 5	4 .	. 24* 10"	能 4WA	13 1/4	1% 1%	Stainless w/Trillyte	- Black TriNyte* -	- S OD Green Synthetic W/Overmold	- Matte	736
NEW	84522	280 Remington	3	. 24° 10°	美 44 / 3 年	13 14	11/1 13/1	Stainless w/Inllyte	Black TriNyte*	OD Green Synthetic W/Overmold	Matte	P 27453
NEW	84524	7mm Remington Mag	3	26° 9 W°	46 14	13 1/8"	11/1" 13/1"	Stainless w/Trillyte	Black Trillyte®	OD Green Synthetic w/Overmold 🕙	Matte	7.4
NEW	84527	7mm Remington Ultra Mag	3	26" 9 W".	46 Vz - 14	13 1/4"	11/4" 11/4"	Stainless w/Trityte	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	734 X
NEW	84523 (B)	→ 30-06 Springfield	4	24" 10"	44 97	13 1/4"	1%" 1%"	Stainless w/Trillyte	"Black TriNyte"	OD Green Synthetic w/Overmold	lealtree® AP™ HD	- hr # 716
NEW	84523	30-06 Springfield	4	24" 10"	44 1/2	13 1/4"	11/1 11/1	Stainless w/TriNyte	Black TriNyte*	00 Green Synthetic w/Overmold	Matte	774
NEW	84525	300 WSM	_ 3	24" 10"	44 97	13 1/2	1 1/8" 1 1/8"	Stainless w/Trillyte*	Black TriNyte*	OD Green Synthetic w/Overmold	Matte '	736
NEW	84526	300 Win Mag	3	26* 10"	46 1/1	13 34"	11/1" 11/1"	Stainless w/TriNyte* -	Black TriNyte*	Oll Green Synthetic w/Overmold	Matte	7%
NEW	84540 (R).	300 Remington Ultra Mag	3 ,-	26" 10"	46 VF	13 1/6" -	11/6 13/6	Stainless w/TriNyte*	Black TriNyte® .	5 00 Green Synthetic w/Overmold 4	Realtree® AP™ HD	
NEW	84528	300 Remington Ultra Mag	3	26" 10"	€ 45 VY	13 1/4"	1 1/2" 1 1/4"	Stainless w/TriNyte* :	Black TriNyte®	00 Green Synthetic w/Overmold	Matte	1. 7%
NEW	84530 ·	338 Remington Liltra Mag	3	26 10	46 W	13 34	1 W 1 W	Stainless w/TriNyte	Black TriNyte*	00 Green Synthetic w/Overmold	Matte	₹ 7%
NEW	84529	338 Win Mag	3	26* 10*	46 14	13 36"	11/1" 11/1"	Stainless w/TriNyte*	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	P: 77%° ₹
NEW	84531.†	375 H&H	3 .	24" 12"	46 1/1	13 1/4"	11/8 13/8	Stainless w/TriNyte*	Black TriNyte®	Of Green Synthetic w/Overmold	Matte	7%
NEW	84532 [†]	375 Remington Ultra Mag	3	24 12	46 1/2	13 1/4"	11/6" 13/6"	Stainless w/TriNyte*	Black TriNyte*	OD Green Synthetic w/Overmold	Matte	756
İ	† Equipped w	th Iron Sights. (R) RMEF Rocky Mountain	Elk Foundation	(B) Bone Collector Edition								

MODE	L 700 BDL																		
ORDER NO.	CAURER	10 4 4 %	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn in		VERALL		LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREI		BARREL FINISH	F.,	STOCK MATERIAL		STOCK FIXISH	IVG. WT.
25787	243 Win	0	4 .	22"	9 1/1	13.	156	毎 1	13 34"	1	1 9/1"	Carbon S	teel	Polished Blue		American Walnu	ıt i	Gloss	× 714 3
25791	270 Win		4	22	10"	1	21/2	. 1	13 34"	1*	1 1/4"	Carbon S	teel	Polished Blue	٠.	American Walm	d	Gloss	71/8
25803	- 7mm Remington Mag		3	24*	9 N.	. 7	4 1/2	;]	13 1/1"	i*	154	Carbon S	teel	Polished Blue		American Walnu	nt .	Gloss	71/2
25793	30-06 Springfield	÷	4	22*	10	3 4 1	2 1/2"		13 3/1"	ì"	154	- Carbon S	teel	Polished Blue	174	American Walnu	rt · · :	Gloss	7.34
26410	300 Remington Ultra Mag	- 1	3	26"	10"	17.4	61/2	. :	13 ¾	1*	1 1/2	. Cartion S	teél.	Polished Blue	1-	American Walnu	it. 🚉	Gloss	7%

MODEL	700/ CDL													
ORDER NO.	CAUBER	MAG. Capacity	BARREL: LENGTH	TWIST — R-H 1 TURN IN	OVERALL LENGTH	LENGTH OF PULL	DROP (COME)	DROP (HEEL)	BARREL Material	BARREL Finish		STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
27101 (L)	223 Remington	5 ·	24" -	12*	43 1/6"	13 1/2"	1 1/8"	1 34*	Cartion Steel	Satin Blue	2	American Walnut	Satin	73%
27007	243 Win	4	24"	9 1/1"	43 5/8".	13 1/2"	1 1/8*	1 3/4"	Carbon Steel	Satin Blue	}:::	American Walnut	Satin	7%;
27103 (L)	243 Win	4	24"	9 1/4"	43 5%	13 1/2"	1 1/4*	1 3/6"	Carbon Steel	Satin Blue		American Walnut	Satin	73/4
27009	25-06 Remington	4	24"	10"	44 1/2"	13 1/2"	1 1/6"	1 3/1°	Carbon Steel	Satin Blue	,	American Walnut	Satin	71/2
84080	270 Win	4	24"	10*	44 1/7	13 1/2"	1 1/8"	1 3/8"	. Carbon Steel	Polished Blue		American Walnut	Satin	71/2
27011	270 Win	4 .	24"	10*	44 1/2	13 1/2"	1 1/8"	1 3/8"	Carbon Steel	Satin Blue		American Walnut	Satin	71/2
27105 (L)	270 Win	4	24*	10*	44 1/2	13 1/2"	1 1/11*	1 3/8"	Carbon Steel	Satin Blue	\$ 1.	American Walnut	Satin	71/2
27015	7mm-08 Remington	4	24*	9 1/4*	43 1/1	13 1/5"	11/4	1 34"	Carbon Steel	Satin Blue	:	American Walnut	Satin	71/4
84082	7mm Remington Mag	3	26*	9 1/1"	46 1/2"	13 1/2"	1 1/2"	1 3%*	Carbon Steel	Polished Blue	1.	American Walnut	Satin	7%
27047	7mm Remington Mag	3	26"	9 1/0	46 1/2	13 1/2"	1 1/8*	1 3/5"	Carbon Steel	Satin Blue		American Walnut	Satin	7%
27109 (L)	7mm Remington Mag	3	26*	9 1/1"	46 1/2"	13 1/2"	1 1/2"	1 3/1"	Carbon Steel	Satin Blue		American Walnut	Satin	71/1
27051	7mm Remington Ultra Mag	3	26"	9 1/2"	46 1/7	13 1/2"	1 1/2"	1 1/1	Carbon Steel	Satin Blue		American Walnut	Satin	7%
27017	30-06 Springfield .	4	24°	10*	. 44 1/2	13 1/5"	1 1/8	1 34"	Carbon Steel	Satin Blue		American Walnut	Satin	71/2
84081	30-06 Springfield	4	24"	10"	44 1/2"	13 1/2"	1 1/2*	1 1/1"	Carbon Steel	Polished Blue		American Walnut	Satin	71/2
27107 (L)	30-06 Springfield	4	24"	10"	44 1/2"	13 1/2*	1 1/4"	134	Carbon Steel	Satin Blue		American Walnut	Satin	71/2
27049	300 Win Mag	3	26*	10	46 3/2"	13 1/2"	1 1/8"	1 3/1"	Carbon Steel	Satin Blue		American Walnut	Satin	7%
27053	300 Remington Ultra Mag	3	26*	10"	46 1/2"	13 1/2"	1 1/4*	1 3/1"	Carbon Steel	Satin Blue		American Walnut	Satin	7%
27111 (L)	300 Remington Ultra Mag	3	26*	10	46 1/2"	13 1/2"	1 1/2"	1 3/6"	Carbon Steel	Satin Blue		American Walmit	Satin	7 %t
27019	35 Whelen **	4	24"	16'	44 1/2"	13 1/2"	1 1/2"	1 34"	Carbon Steel	Satin Blue		American Walnut	Satin	71/2
(L) Left-trand me	odel													

		MIL.	BARREL	Profession Co.	OVERALL	ACCORDING TO SERVICE	OROP		BARREL	x 72		Contract Con	-
GRIDER NO.	CALBER	CAPACITY	LENGTH	TWEST — 8+R 1 TURN IN	LENGTH	OF PULL	(COMB)	(HEEL)	MATERIAL	BARREL Funish	STOCK MATERIAL	STOCK FORISH	AVG. WT.
84019	257 Weatherby Mag	3	26*	10	46 1/7	13 1/7	1 1/5"	1 1/1	416 Stainless	Satin Stainless	American Walnut	Satin	71/2
84014	270 Win	4	24'	10"	45 1/2	13 1/2	11/4"	1 3/2"	416 Stainless	Satin Stainless	American Walnut	Satin	71/2
84013	270 WSM	3	24*	10	43 ½°	13 1/2"	1 1/2"	1 1/1.	416 Stainless	Satin Stainless	American Walnut	Satin	734
84012	7mm-08 Remington	4	24*	9 1/1"	43 1/1"	13 1/2"	1 1/4"	1 3/1°	416 Stainless	Satin Staintess	American Walnut	Satin	7 1/2
84021*	280 Remington	3	24"	9 1/1"	46 1/2*	13 1/2"	1 1/6"	1 1/4"	416 Stainless	Satin Stainless	American Walnut	Satin	7%
84016	· 7mm Remington Mag	3	26*	9 1/1"	46 1/1"	13 1/2"	1 1/4*	1 1/1"	416 Stzinless	Satin Stainless	American Walnut	Satin	7%
84015	30-06 Springfield	4	24"	10	44 1/2"	13 1/7"	1 1/4*	1 3/1"	416 Stzinless	Satin Stainless	American Walnut	Satin	71/2
84017	300 WSM	3	24"	10	43 1/8"	13 1/2"	11/6"	13/	416 Stainless	Satin Stainless	American Walnut	Satin	736

RIFLE SPECIFICATIONS BARBER-R 0003348

MODEL	700 SPS											12.52	
KIDER NO.	CALIBER	MAG. CAPACITY	BARREL LEKETH	TWIST R-H 1 furn (14	OVERULL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (KEEL)	BARREL Material	BARREL Fuosh	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LBS.)
4200	17 Remington Fireball	5	24*	9"	43 1/6"	13 1/3"	i 1/3"	1 1/3"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/4
27351	223 Remington	5	24*	12"	43 1/4"	13 ₹	l 1/3"	1 1/5"	Carbon Steef	Matte Blue	Black Synthetic	Matte	7
7475 (C)	243 Win	4	20"	9 1/3"	39 ₩*	12 1/1	1 1/4"	1 %"	Carbon Steel	Matte Blue	Black Synthetic	Matte	1
4150 (C) (L)	243 Win	4	20*	9 1/3"	39 ₩	12 35*	1 1/3"	1 1/3"	Carbon Steel	Matte Blue	Black Synthetic	Matte	1
:7355	243 Win	4	24*	9 <i>V</i> i"	43 1/8"	13 1/3"	1 1/1	1 35	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/4
7351	270 Win	4	24"	10*	44 1/2"	13 1/1"	1 1/8"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7 1/8
:4177 (L)	270 Win	4	24"	10-	44 1/7	13 1/1 *	1 1/4"	1 1/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/4
:7331	270 WSM	3	24"	10"	43 1/4"	13 1/3"	1 1/3*	1 1/3"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71%
:7391 (C)	7mm-08 Remington	4	20"	9 1/4"	39 5/*	12 1/1"	1 1/3"	1 ₩*	Carbon Steel	Matte Blue	Black Synthetic	Matte	7
:4151 (C) (L)	7mm-08 Remington	4	20*	91/1	39 1/4"	12 1/8"	1 W*	1 1/3"	Carbon Steef	Matte Blue	Black Synthetic	Matte	1
:7357	7mm-08 Remington	4	24	9 Vi*	43 1/6"	13 1/1	1 1/3"	1 1/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/4
7385	7mm Remington Mag	3	26"	9 1/4"	45 1/2*	13 1/3"	1 1/3*	1 1/3"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/1
:4179 (L)	7mm Remington Mag	3	26"	9 1/1"	46 V/"	13 ¾	1 1/3*	1 14"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7⅓
:4152	7mm Remington Ultra Mag	3	26*	9 1/1"	46 1/2"	13 14	1 1/8"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
:7363	30-06 Springfield	4	24"	10*	44 1/2"	13 1/5"	1 1/9"	1 1/1 "	Carbon Steel	Matte Blue	Black Synthetic	Matte	71%
:4178 (L)	30-06 Springfield	4	24*	10*	44 1/2	13 1/8"	1 1/3"	1 35*	. Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
:7333	300 WSM	3	24*	10"	43 5%	13 ₩*	1 1/3*	1 1/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
:7387	300 Win Mag	3	26°	10"	46 <i>\/</i> *	13 1/8"	1 1/3"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
:4180 (L)	300 Win Mag	3	26*	10"	46 1/2"	13 1/1	1 1/2"	1 3%*	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
:7359	308 Win	4	24*	10"	43 1/4"	13 ¾⁴	1 1/8"	1 1/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	11/4
:7389	300 Remington Ultra Mag	3	26*	10"	46 1/t	13 1/4"	1 1/5"	1 1/3"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
C) Compact mod	el (L) Left-hand model												

RUER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST R-H 1 TURN IX	OVERALL	LENGTH OF PULL	OROP (COMB)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FIXISH	AYG. WT. (LRS.)
14170	243 Win	4	24"	9 1/8"	43 91	13 3/8"	1 1/8"	1 3/2"	Carbon Steel	Matte Blue	Synthetic	Realtree* Hardwoods* HD™	714
:4176 (C)	243 Win	4	20"	9 1/4*	39 1/8"	12 1/8*	1 1/4"	1 1/8"	Carbon Steel	Matte Blue	Synthetic	Realtree* Hardwoods* HD™	7
:4172	270 Win	4	24"	10*	.44 1/2	13 3/8"	1 1/4"	1 3/1*	Carbon Steel	Matte Blue	Synthetic	Realtree* Hardwoods* HD™	. 734
4171	7mm-08 Remington	4	24"	9 W*	43 %	13 1/8"	1 1/1	1 1/4"	Carbon Steel	Matte Blue	Synthetic	Realtree* Hardwoods* HD**	71/4
14174	7mm Remington Mag	4	26"	9 1/4"	46 1/2	13 3/8"	1 1/1"	1 3/8"	Carbon Steel	Matte Blue	. Synthetic	Realtree® Hardwoods® HD™	. 754
14173	30-06 Springfield	4	24"	10"	44 1/2	13 3/8"	1 1/1	1 3/1"	Carbon Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD™	73%
:4175	300 Win Mag	3	26*	10°	46 1/2	13 3/8"	1 1/1"	1 1/1"	, Carbon Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD™	7%

IDER NO.	CALIBER		MAG. CAPACITY	BARREL LENGTH	TWEST — R-H 1 TURK IN	OVERALL LENGTH	LENGTH OF PULL	(COME)	DROP (HEEL)	BARREL Material	BARREL FIXISH	STOCK MATERIAL	STOCK FIXISH	AVG. WT. (LRS.)
131	204 Ruger		5	24"	12	43 9	13 ¾	1 1/8"	1₩*	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/4
133	223 Remington	্র	5 :	. 24"	12"	43 1/4"	13 ¾	1 1/4"	1 3/8"	416 Stainless	Matte Stainless	- Black Synthetic	Matte	, 714
135	22-250 Remington	e	4 .	24"	14"	43 1/8"	13 1/8"	1 1/4"	1 3/4*	416 Stainless	Matte Staintess	Black Synthetic	Matte	714
263	243 Win	4	4	24*	9 1/8"	43 1/4	13 1/8"	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/4
251	25-06 Remington	*1	4 .	24"	10"	44 1/2 06.0	13 1/8"	1 1/8"	1 3/4"	- 416 Stainless	Matte Stainless	Black Synthetic	Matte	714:
267	270 Win (1)	6.	4 -	24"	10"	44 1/7	I3 ¾	1 1/8"	. 13/	416 Stainless	Matte Stainless	Black Synthetic	Matte	7.7 %
253	270 WSM	1	3	24*	10"	44 1/2"	13 1/8	1 1/18"	1 1/2"	416 Stainless	Matte Stainless	Black Synthetic	Matte	734
265 .	🛴 7mm-08 Remington 💥	<u> </u>	4 .	24".	9 1/1*	43 5%	13 1/8"	1 1/6*	1 3/4"	, 416 Stainless	Matte Stainless	Black Synthetic	Matte	714
271 .	7mm Remington Mag	77	3 .	26"	9 1/1	46 1/2	13 1/8"	1 1/1	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	71%.
300	7mm Remington Ultra Ma	建	3	Z6"	91/1	46 1/2	13 1/	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	71%
269	30-06 Springfield 💢	ā[]	.* 4	24"	10	44 1/2	13 3/1°	1 1/8"	1 3/6"	2 416 Stainless	Matte Stainless	Black Synthetic 1	Matte	71/2
255	300 WSM		3	24*	10*	, 44 VŽ	13 1/8	1 1/8"	i 1/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	736
273	300 Wm Mag .7	¥.	3	26"	10	46 1/2	13 3/4	1 1/4"	1 1/4"	416 Stainless	Matte Stainless	Black Synthetic	Matte	-: 7%
136	308 Win		. 4	24"	10"	43 58	13 14	I 1/4"	1 3/4"	416 Stainless	Matte Stainless	Black Synthetic	Matte	714
140	300 Remington Ultra Mag	17	3 .	26"	10"	46 1/2	13 1/6"	11/1	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7%
										* * * * * * * * * * * * * * * * * * * *				

3 NO.	Coulines (2005)	MAG. CAPACITY		EARREL Length	TWIST — R-H 1 TURN DI		OVERALL	OF PULL	DROP (COMB)	OROP (REEL)	RAPREL MATERIAL	BARREL Finish	STOCK MATERIAL	STOCK FINISH	(LES.)
38	243 Win	4		24°	9 1/8"	Ç.	43 14 💢	13 3/4"	11/8"	13/1	Carbon Steel	Matte Blue	Black Synthetic	Matte	714
5 -	270.Win	- 4		24"	10"	·	44 //	13 1/4	11/1	137	Carbon Steel	.Matte Blue	Black Synthetic	Matte	71/2
1	7mm-08 Remington	4		24"	9 1/4		43 W	13 1/1	11/	1 1/4	Carbon Steel	Matte Blue	Black Synthetic	Matte	₹ \$7.14 £
3	Zoro Remington Mag	3		26° ·	9 1/4"	· [46 1/2	13 1/8"	11/8"	137	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
1	30-06 Springfield	4		24*	10"		744 17 574	13 14	11/2	1 3/8"	Carbon Steel 2	Matte Blue	Black Synthetic	Matte	7%
3	800 With (X23)	3	٠.	26"	10"		46 Vr 3	13 34	**************************************	134	Carbon Steel	Matte Blue	Black Synthetic	Matte:	5747 W Z

RIFEE SPECIFICATIONS

DROER MO.	Vening William	MAG. CAPACITY	BANKEL LENGTH	TWIST — R-H . 1 Turn is	OVERALL OF	LENGTH OF PULL	DROP (COMB)	OROP (HEEL)	BAIRE	BARREL .	STOCK MATERIAL	STOCK \ FROSH	(2017) (111, 2017)
84400 °	243 Wm	4	24*	91/8"	4186	13 34"	11/1"	134"	Carbon Slee	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	7/0
4401	25-06 Remington	4 🖫	24"	10°· ·	42 1/2	13 34	1 1/1"	13%	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	Wa
14402	270 Vin 200	4	24"	10"	421/2	13 3/4"	134"	11/4"	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	11/1
4403	7mm-08 Remington 1 3 3 4	4	24"	9 1/4"	417	13 34	11/1"	134"	Carbon Steel	Matte Blue .	Synthetic w/Overmold	Realtree® AP™ HD™	建 7 以
4404	30-06 Springfield	4 .	24°	10°	42 1/2	13 34"	11/4"	11/1	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	11/2
4405	/mm Remington Mag	3 .	24°	9 1/4"	44 Vt	13 34	11%*	1340	Carbon Steel	Matte Blue .	Synthetic W/Overmold	Realtree* AP** HD**	7.1
4406	300 Win Mag	3	· 24°	10"	44 1/2	13 34"	1 1/1*	11%	S Carbon Steel	Matte Blue	Synthetic w/Overmold e	Realtree® AP** HD**	1/9
4407	7mm Remington Ultra Mag	· 3	26"	91/2"	46 H	· 13 1/1	1 1/1°	136	Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	**7910
84408	300 Remington Ultra Mag	3	26*	10*	46 14	13 3/1"	11/1	1 3/4"	se Carbon Steel	Matte Blue	Synthetic w/Overmold	Realtree® AP™ HD™	(報)強

MODEL	700 MOUNTAIN RI	FLE LSS				V.								
ORDER NO.	CALIBOR	MAG. Capacity	RARRET. LENGTH	TWIST — R-H 1 Turn di	DVERMIL!	LENGTH OF PULL	- DROP (COMB)	OROP (HEEL)	BARRE	BARREL . Finish		STOCK MATERIAL	STOCK FDRSH	EPE. WI.
26281	270 Win	4	22°	10*	42 1/2 ×	13 14	1 1/8*	1 1/4"	416 Stainless	Satin Stainless	15.	Brown Laminated	Satin	671-6
84270	280 Remington	4	22*	10*	1 42 V2 1 = 4	13 3/4"	1 1/8"	1 1/1"	416 Stainless	Satin Stainless	* 3	Brown Laminated [**, * 5-)	Satin	t - 6 Mr.
26285	7mm-08 Remington	4	22*	9 1/1"	41 😾	13 3/4"	1 1/6"	1 1/4"	416 Stainless	Satin Stainless	1,78	Brown Laminated	Satin	61/2
26287	30-06 Springfield	4.	22*	10	42 1/2"	13 3/4"	1 1/4"	13%	416 Stainless	Satin Stainless	1 44 2 4 2 18 6	Brown Laminated	Satin	6%

MOD	EL 700 TARGET TAG	TICAL									
ORDER NO.	CAUBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Tern in	OVERALL LENGTH	LENGTH DROS OF PULL (COM	DROP (HEEL)	BARRET MATERIAL	BARREL Finish	STOCK MATERIAL	STOCK AND WT.
84456	308 Win	4 4	26"	111/4"	47 1/2	13 34"-15 34" 1 1/2		Carbon Steel	Matte Blue	Aramid Fiber Reinf.	OD Green 11 34
Adjustable	Length of Pull and Comb										

MODE	L 700 XCR II COMP	ACT, TA	CTICAL	RIFLE									
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL Length	TWIST — R-H 1 TURN III	OVERALL /	LENGTH OF POLL	DROP (COMB)	DROP (HEEL)	BARREL	BARREL - FINISH	STOCK MATERIAL	STOCK FINISH	ANG. WT.
84466	223 Remington	5	20°	9"	39 7/	13 3/8"	1 1/4"	1 1/2"	Stainless w/TriNyte®	Black TriNyte*	Aramid Fiber Reinf.	OD Green	71/2
84467	308 Win	4	20"	12"	39 %	13 3/8"	1 1/4"	11/4*	Stainless w/TriNyte*	Black TriNyte*	Aramid Fiber Reinf.	OD Green	71/2

MODE	EL 700 XCR TACTICA	IL LON	G RANGE	RIFLE									
ORDER NO.	CNLIBER	MAG. CAPACITY	BARRET. Length	TWIST — R-H 1 Turk of	CVERALL (LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BARREL FINISH	STOCK MATERIAL	STOCK FINISH	ANG. WT. (LRS.)
84460	223 Remington	5	26"	9=	45 %	13 1/1"	1 1/4*	1 1/2"	Stainless w/TriNyte*	Black TriNyte®	Aramid Fiber Reinf.	OD Green	81/2
84461	308 Win	4	26	12"	45 ¥r	13 3/2"	1 1/4"	1 1/2"	Stainless w/TriNyte®	Black TriNyte®	Aramid Fiber Reinf.	OD Green	81/2
84462	300 Win Mag	3	26"	10"	45 14	13 1/2"	1 1/4"	11/	Staintess w/TriNyte*	Black Triffyte*	Aramid Fiber Reinf.	OD Green	81/2

APRIL 140	041	MAG.	BARREL	WIST R-H	OVERALL	LENGTH	DROP	DROP (HEEL)	BARREL	BARREL		STOCK	AYE. WT.
ORDER NO.	CAURER 17 Control of the Control of the Caurer 17 Control of the Caurer	CAPACITY	LEMETH 26"	1 TURN IN	LENGTH .	OF PULL	(COMB)		MATERIAL	FEMISH	STOCK MATERIAL	FEXISH	(IBS.)
84213	17 Remington Fireball			<u>, , , , , , , , , , , , , , , , , , , </u>	46 1/2"	13 1/1	1 1/15"	1 1/1"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
84225 (L)	17 Remington Fireball	5	26"	9-	46 1/2"	13 1/2"	1 1/2"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
84214	204 Ruger	5	26"	12*	46 1/2"	13 3/4"	1 W*	1 34"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
84216	22-250 Remington	4	26"	14"	46 1/2"	13 14"	1 %*	1 1/1"	Carbon Steel	Matte Blue	Black Synthetic	Matte	83/2
84226 (L)	22-250 Remington	4	26"	14"	46 <i>\H</i> *	13 1/1"	1 1/2"	1 1/1"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
84215	223 Remington	5	26*	12"	46 1/2"	13 34"	1 1/4"	1 %*	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
84227 (L)	223 Remington	5	26*	12*	46 1/1"	13 1/2"	1 1/4"	1 34"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
84217	243 Win	4	26°	9 1/2"	46 1/7	13 14"	1 1/4"	1 %*	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
84228 (L)	243 Win	4	26*	9 W*	45 1/2"	13 14*	1 1/4*	1 %*	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
84218	308 Win	4	26"	12"	46 1/2"	13 1/1"	1 1/4"	1 %*	Carbon Steet	Matte Blue	Black Synthetic	Matte	81/2
84229 (L)	308 Win	4	26*	12*	46 1/2	13 1/4"	1 1/2"	1 3/2"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2

MODE	700 VLSS THU	MBHOLE											
ORDER NO.	CALISTR	MAG. CAPACITY	BARREL LEMETH	TWIST — R-H 1 TURK IN	(WERALL Length	LENGTH OF PULL	OROP (COMS)	(HEEL)	BARREL MATERIAL	BARREE Foresh	STOCK MATERIAL	STOCK FINISH	KHE, WT. (1RS.)
27443	204 Ruger	5	26*	12"	45 ¾°	13 1/2"	1 1/4"	2 1/2*	416 Stainless	Patished Stainless	Brown Larrinated	Satin	91/8
27447	22-250 Remington	4	26*	14"	45 ¾*	13 1/4"	1 1/4"	2 3/2	416 Stainless	Polished Stainless	Brown Larminated	Satin	91/1
27445	223 Remington	5	26*	12"	45 ¾*	13 1/2"	1 1/4"	2 1/2*	416 Stainless	Polished Stainless	Brown Laminated	Satin	91/1

RIFLE SPECIFICATIONS BARBER-R0003350

MODEL	700 VTR (VARM	INT TARG	ET RIF	LE)	7 P. F								
WOER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-II 1 Turn in	OVERULL LEXCIH	LENGTH OF PULL	DROP (COMB)	OROP (HEEL)	BARREL Material	BARTTEL Finish	STOCK MATERIAL	STOCK FIXISH	AVG. WT. (LBS.)
34367	17 Remington Fireball	5	22"	9*	41 1/8"	13 14	1 1/4"	1 3/5"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	71/1
34369	204 Ruger	5	22*	12*	41 1/6"	13 1/1	1 1/5"	1 1/1"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	71/2
34362	223 Remington	5	2 2°	9"	41 1/8"	13 1/4"	1 1/3"	1 1/4"	Carbon Steel	Matte Blue	A-TACS® Digital Camo	Camo	71/2
34370	223 Remington	5	22"	9"	41 56"	13 1/3"	1 1/3"	1 1/4°	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	11/2
34373	22-250 Remington	4	22"	14*	41 1/1"	13 1/1"	11/5	1 34"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	71/2
34368	243 Win	4	22"	9 1/4°	41 56*	13 1/1"	1 1/4"	1 3/3"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	11/2
34364	308 Win	. 5	22°	12"	41 1/6"	13 1/4"	11/4"	1 1/1"	Carbon Steel	Matte Blue	A-TACS® Digital Camo	Came	71/2
34371	308 Win	4	22*	12"	41 1%"	13 1/2	1 1/3"	1 1/3"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	71/2

MODE	700 VLS (LAM	M	ED ST	DĆK)										
IRDER KO.	CALIBER	55,6 7	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 TURN W	OVERAL1 Length	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BARREL FUNISH	STOCK MATERIAL	STOCK FIXISH	AVG. WT. (LBS.)
27467	204 Ruger		5	26"	12"	45 1/4"	13 1/2"	i*	1 3/8"	Carbon Steel	Satin Blue	Brown Laminated	Satin	91/8
27491	223 Remington		5	26"	12*	45 1/4"	13 1/2"	l'	1 1/4"	Carbon Steel	Satin Blue	Brown Laminated	Satin	91/8
?7489	22-250 Remington	:	4	26"	14"	45 1 /4"	13 1/2"	l*	1 1/4"	Carbon Steel	Satin Blue	Brown Laminated	Satin	91%
27495	243 Win	.;	4	26"	9 1/8"	45 %"	13 1/2"	l'	1 1/4"	Carbon Steel	Satin Blue	Brown Laminated	Satin	91/8
27499	308 Win		4	26"	12"	45 ¾*	13 1/5°	1*	1 1/4"	Carbon Steel	Satin Blue	Brown Laminated	Satin	- 91/8 ·

(Section)			a Page a							Market Committee			COMPLETE	
MODE	L 700 VS:SF II							$\mathcal{H}_{i,n}$						
HOER KO.	CALIFER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn ur	OVERALL LENGTH	i	LENGTH OF POLL	OROP (EMOS)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
34352	- 17 Remington Fireball	5	26	9-	45 ¾°	Ÿ	13 1/2"	1 1/4"	1 1/2°	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2
26333	204 Ruger	5	26	12"	45 1/4	.]	13 1/2"	1 1/4*	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81⁄2
26339	220 Swift	4	26°	14"	45 1/4"	,	13 1/2"	1 14"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	. 81/2
26337	~ 223 Remington	5	26"	12"	45 W	, !	13 1/2"	1 W*	1 1/2"	416 Stainless "	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2
26335	22-250 Remington	4	26"	14*	45 1/4"		13 1/2"	1 1/4"	1 1/2"	416 Stainless	Polished Stainless	.H.S. Precision Black Aramid Fiber Reinf	Matte	81/2

7		A COLO			- 11 A 10 A 10 A 10 A 10 A 10 A 10 A 10	10 Tel						550	
MODE	L'700" SENDERO SF	世科						14					
IRDER MO.	CALBER	MAG. CAPACITY	BARREL LENGTS	TWIST R-H 1 TURN IN	GYERALL	OF PULL	(COMB)	DROP (HEEL)	BARREL Material	BARREL FIXISH	STOCK MATERIAL	STOCK FINISH	AVG. WT. (LRS.)
27307	264 Win Mag.	3	26°	g•	45 3/	13 1/2"	1 W*	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2
27311	7mm Remington Mag	3	26"	914"	45 14	13 3/4"	1 1/4"	1 1/2"	416 Staintess	Polished Stainless	'H.S. Precision Black Aramid Fiber Reinf.	Matte	⇒ 81⁄2 ·
27315	7 7mm Rem Ultra Mag	3	26*	9 1/2"	45 1/1"	13 1/1"	1 1/4"	1 1/2"	416 Stainless	Pelished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2
27313	300 Win Mag	3	26*	10"	45 ¾"	13 1/4"	1 1/4"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf	Matte	.81/2
27318	300 Rem Ultra Mag	3	26*	10"	45 Ýr	13 1/1	1 1/4"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Aramid Fiber Reinf.	Matte	81/2

MODE	L'700 VARMINT SE												
IRDER NO.	CALIBER	MAG. CAPACITY	SARREL LENGTH	TMIST — R-H 1 TURN IN	COVERALL LENGTH	LENGTR OF PULL	DROP (COMB)	OROP (HEEL)	BARREL MATERIAL	BARREL Finish	STOCK MATERIAL	STOCK Fanish	AVS. WT.
34340	17 Remington Fireball	5	. 26"	.9"	45 Vr	13 1/4"	1 1/1"	11/1	416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels	Matte	81/2
34341	204 Ruger	5	26"	12"	45 1/1	13 1/2"	1 1/1"	1 3/2	1 × 416 Stainless ✓	Polished Stainless	Synthetic w/Overmolded Grip Panels ?	Matte	1.4:812
34342	22-250 Remington	5	26"	14*	45 3/7	13 1/4	1 W	1 1/1	416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels	Matte	81/2
34343	223 Remington	- 5	26	12"	45 1/7	13 1/8"	1 1/1	1 3/4"	416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels	Matte	81/2
34344	\$ 220 Swift ***	4	26	14"	45 V	13 1/8"	1 1/1	1 1/1	416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels	Matte	81/2-2.
34344	308 Win Mag	4	26".	14"	745 VC 47	13 14	1 1/1	1 1/	416 Stainless	Polished Stainless	Synthetic w/Overmolded Grip Panels 🔀 g	Matte	81/2

ODE	L SEVEN CDL		100		7. **			建多次				蒙古兴	
2 MO.	CIES LA CALLE	MAG. CAPACITY	EARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL	LENGTH OF PULL	(COMB)	DROP (REEL)	DATE OF THE PARTY	BARREL FROSH	STOCK DATE OF THE STOCK OF	STOCK FIXISH	ANC WI.
00	IV Remington Fireball	5	20"	· - · g ·	39 V 3	13 34	1 W	··· 1 1/1" ·-	Carbon Steel	Satin	Walnut Walnut	- Satin -	- 6 h
17	243 Win 12 14 14 14 14 14 14 14 14 14 14 14 14 14	4	20"	91/4"	39 W 37	13 3/4"	1 W	11/#	Carbon Steel	Satin	Walnut Walnut	Satin	612
9 .	260 Remington	4	- 20" -	9" -	39 Vi	. 13 1/8"	. 17	-11/1	Carbon Steel	- Satin -	Walnut Assessment	Satin	614
51 .	270 WSM	3 .	22	10"	39 V?	13 %	1 1/1	11/1	Carbon Steel	Satin	Walnut	Satin	61/1
21 /	Zindi-03 Remington	` 4	20	9 1/4"	39 VC	13 3/4"	1 1/1	1 1/2	Carbon Steel	Satin ·	Walnut	Satin	64.
7	300,WSM)	3-	· · 22°	10"	39 V	- 13 ¾	11/	11/2	Carbon Steel	Satin	Walnut	Satin	- 6N
23	808 With 17 4 4 5 5	4	-20"	10"	39 W	- 13 1/2	.1 W	11//	Carbon Steel	Satin	Walnut Service Walnut	Satin	646
S9 =	350 Remington Magning	4	20	16	4100	1334 -	11/	11/2	Carbon Steel	- Satin	Walnut	Satin	· 2007

RIPARES PERCENTIONS

ORDER NO.	CALIFFE SPACE TO SECURE SPACE	MAG: CAPACITY	BARREL LENGTH	TWIST — R-19 1 TURN DI	COVERALL CARRY	LENGTH: OF PULL	DROP (COMB)	DROP	BALES AND A STATE OF THE STATE	BARREL FDIOSH	ZIOCA MATIKAN (G. 1972)	STDCX - SE.	(IEC)
85950 .	17 Remington Fireball	5 ′	22°	9"	2 391	· 13 ¾	1 W*	11/7	Carbon Steel	Mossy Oak® Brush®	b 老 Synthetic 经产工	Mossy Oak® Brush®	最长7億
85951	204 Ruger	5	: 22	12	39	13 34	1 1/4"	11/2	Carbon Steel	Mossy Oak® Brush®	Synthetic Synthetic	Mossy Oak* Brush*	· [4] [4]
85952	223 Remington	5`	22	12"	39	13 34"	1 W	11/2	Carbon Steel	Mossy Oak® Brush®	Synthetic 💮	Mossy Oak® Brush®	图1定型
85953	22-250 Remington	4	22*	14*	39 24	· ·13 ¾	1 1/0"	11/7	Carbon Steel	Mossy Oak® Brush®	Synthetic Synthetic	Mossy Oak® Brush®	D# 74
85954	= 243 Wind 2	4 -	22	9 W	39	13 1/1	1 1/4"	11/7	Carbon Steel	Mossy Oak® Brush®	Synthetic St	Mossy Oak® Brush®	1457

MODEL	770 BOLT ACTION F	RIFLE									
ORDER NO.	CALISER	MAG: CAPACITY	BARREL - Leigth	TWIST R-B 1 TURN DI	OVERALL	· LENGTH ·	DROP (COMB)	DROP (HEEL)	MATERIAL S	RARREL - FIXISH	For the case of the second of
85630	243 Win	4	22"	9 1/4"	42 1/2	13 1/1"	1 1/4"	1 3/8"	Carbon Steel	Matte	Black Synthetic Matte 8½
85637 (C)	243 Win	4	20	9 1/2	39 14:57	12 %	1 W	1 1/8	Cartion Steel	Matte	
85632	270 Win	4	22	10	42 12	13 3/2	1 1/8	136	Carbon Steel	Måtte	Black Synthetic Matte 81/2
85631	7mm-08 Remington	4	22*	9 W."	42 12	I3 ¾"	1 1/8"	1 3/8	Carton Steel	Matte	Black Synthetic Matte 81/2
85635	7mm Remington Mag	3 :	24	9 1/4"	44 1/2	_I3 1/1"	1 1/8"	1 3/8"	Carton Steel	Matte	Black Synthetic Matte 8 36
85633	30-06 Springfield	4	22"	10"	42 1/2	13 1/4	1 1/8"	1 3/2*	Carbon Steel	Matte	Black Synthetic Matte 814
85636	300 Win Mag	. 3	24"	10"	44 1/2	13 34°	1 1/8"	1 3/8"	, Carbon Steel	Matte	Black Synthetic Matte 834
85634	308 Win	4	. 22°	10"	42 1/2	I3 ¾*	1 1/8"	1 3/8"	Cartion Steel	Matte	Black Synthetic Matte 81/2
† Average wei	ght includes scope (C) Compact model			· · ·							

MODE	L 770 STAINLESS BO	LT ACT	ION RII	FLE									
ORDER NO.	CAIBER	MAG. CAPACITY	BARREL Length	TWAST — R-H I Turn in	OVERALL	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL MATERIAL	BARREL FINISH	STOCK MATERIAL	STOCK Finish	AVG. WT.
85655	270 Win	4	22"	10	42 1/2	13 3/8"	1 1/8"	1 3/1"	- 416 Stainless Steel	· Matte	Synthetic	Realtree® AP™ HD™	812
85657	7mm Remington Mag	- 3	24"	9 1/4"	44 1/2"	13 1/8"	1 1/8"	1 3/8"	416 Stainless Steel	. Matte	Synthetic	Realtree® AP™ HD™	816
85656	30-06 Springfield	4	22" -	10"	42 1/2	13 1/8"	1 1/4"	1 3/8"	416 Stainless Steel	Matte	Synthetic	Realtree® AP™ HD™	81/2
85658	300 Win Mag	3	24"	10	44 1/2"	13 1/8"	1 1/4*	1 3/8"	416 Stainless Steel	Matte	Synthetic	Realtree® AP™ HD™	81/2
† Average we	eight includes scope												

MODEL.	ORDER NO.	CALIBER	MARCI MARCIL TWIST - 9-H CAPACITT LENGTH 1 TURN IN	OVERALL Length	DROP DROP OF PULL (COMB) (HEEL)	BARREL Material	BARREL FINISH	STOCK MATERIAL	STDCX FDGSH	AVG. WT. (LBS.)
7600 -	24653	243 Win	7 4 22 9 1/8	42 54	131/2 11/16 × 21/15	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600-	24655	270 Win	1 4 22 10	42 54"	13 1/2 1 1/16 = 2 W	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600-	24667	270 Win	4 22 10	42 54"	131/2 - 11/16 2 14	Carbon Steel	Polished Blue	American Walnut	High Gloss	7 1/2
7600° Carbine	24561	30-06 Springfield	4 18 1/2" 10"	39 1/8"	13 ሃ/ 1 ዓ/ ጋ 2 ሃ/	Carbon Steel	Polished Blue	American Walnut	Satin	71/4
600-	24657	30-06 Springfield	4 22 10	42 54"	131/2 13/6 24	Carbon Steel	Polished Blue	American Walnut	Satin	7⅓:
1600-	24671	30-06 Springfield	4 3 22 3 10	42 % "	13分 13分 2分	Carbon Steel	Polished Blue	American Walnut	High Gloss	71/2
1600	24659	308 Win	4 22" 10" ;	42 ½*	7.0	Carbon Steel	Palished Blue	American Walnut	Satin	71/2
1600 Synthetic	25143	243 Win	4 22 91/	42 % "	131/2 13/6 21/4	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
1600" Synthetic	25145	270 Win	4 22" 10"	42 5%	13.1/2 1 1/6 2 1/4	Carbon Steel	Matte Blue	Black Synthetic	- Matte	71/2
1600 Synthetic	25149	30-06 Springfield	4 22" 10"	42 14	13 1/2 1 1/6 2 1/4	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
1600" Synthetic	25151	308 Win	4 22 10	42 1/1"	13 V/2" 1 3/16" 2 V/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600 Synthetic Carbine	25153	30-06 Springfield	18 ½ 10°	39 1/1*	131/2" 11/16" 21/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/4
t Equipped with iron sights										

MODEL	ORDER MO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-II 1-TURN DI	OVERALL LENGTH	DE PULL	(CDMB)	DROP (HEEL)	BARREL MATERIAL	BARREL FINISH	STOCK MATERIAL	STOCK FEIOSH	RVG. WT. (LBS.)
R-15 VTR Byron South Signature Edition	60009	223 Remington	5	18*	9*	36 1/4"	13 ***	1 1/8"	1 3/1*	Carbon Steet	Matte	Synthetic	Advantage® MAX-1 HD™	7 ¾
R-15 VTR SS Varmint	60007	223 Remington	. 5	24"	9"	42 1/4"	13 34" ·	1 1/4"	1 3/8"	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD**	7 ¾
R-15 VTR Thumbhole	60012	223 Remington	5	24"	9"	42 Yi*	13 1/4"	1 1/8"	1 3/8"	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	7 ¾
R-15 VTR Predator	60000	204 Ruger	. 5	22"	17	40 1/2*	13 1/1	11/4"	1 1/2	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	7 ¾
R-15 VTR Predator	60001	223 Remington	5	22*	9*	40 1/4"	13 1/2	11/4"	1 3/4°	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	7 1/4
R-15 VTR Predator Carbine	60003	223 Remington	5	18"	9*	36 1/4*	13 ₩	11/6"	1 3/8"	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	6 ¾
R-15 VTR Predator Carbine - CS	60005	223 Remington	5	18"	9"	33 1/4" - 36 1/4"	11 14 - 14 14	114"	1 3%	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	6 ¾
R-15	. 60100	30 Remington AR	4	22*	10"	40 1/4"	I3 14"	11/6"	1 34*	Carbon Steel	Matte	Synthetic	Realtree® AP™ HD™	7 ¾
R-15	60102	450 Bushmaster	4	18"	10*	36 1/4"	13 ¾r ·	11/8"	1 34	Carbon Steet	Matte	Synthetic	Realtree® AP™ HD™	7 1/2

MODEL R	25 MODULAR	REPEATING RIFL	E.											
MODEL	CROER NO.	CALEER	MAG, CAPACITY	BARREL Length	TWIST — R -11 1 Turn u	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BASKEL FINISH	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LES.)
R-25	60030	243 Win	4	20"	10"	38 1/4"	13 1/8"	11/8"	1 3%*	Carbon Steel	Matte	Synthetic	Mossy Oak® Treestand™	7 34
R-25	60031	7mm-08 Remington	4	20"	91/4"	38 1/4*	13 1⁄4"	11/8	138	Carbon Steel	Matte	Synthetic	Mossy Oak® Treestand™	7 ¾
R-25	60032	308 Win	4	20*	10"	38 1/1"	13 1/6"	11/8"	1 3/2"	Carbon Steel	Matte	Synthetic	Mossy Oak* Treestand**	7 1/4

RIFLE SPECIFICATIONS

MODEL 1250. UNI	केल्यग्रीह	igažnia dalija	णाज्य 🔻										
MODEL	ORDER KO.	CALIBER	TWIST — R-H 1 TURN IN	BARREL LENGTH	OVERALL LENGTH	LENGTH OF PULL	OROP (COMB)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
150" Woodsmaster"	27055	243 Win	9 1/8"	22"	42 1/3"	13 V:"	1 %*	2 V:*	Carbon Steel	Polished Blue	Walnut	Satin	7 1/2
750" Woodsmaster"	27059	270 Win	9 1/3*	22"	42 %	13 1/2"	1 35*	2 V:*	Carbon Steel	Palished Blue	Walnut	Satin	7 1/2
150 Woodsmaster	27061	30-06 Springfield	9 1/1"	22*	42 1/8"	13 1/2*	l ÿi'	2 1/5"	Carbon Steel	Polished Blue	Walnut	Satin	7 1/2
150 Woodsmaster	27057	308 Win	10"	22*	42 1/1"	13 1/2"	l ¼"	2 35*	Carbon Steel	Potished Blue	Walnut	Satin	71/2
750 * Woodsmaster *	27063	35 Wheten	16*	22"	42 1/4"	13 1/5"	1 55*	2 V:	Carbon Steel	Patished Blue	Walnut	Satin	7 1/2
750 Woodsmaster Carbine	27077	30-06 Springfield	10"	18 V:*	39 1/4"	13 1/2*	1 1/3"	2 V:*	Carbon Steel	Palished Blue	Walnut	Satin	7 1/4
750" Wood smaster " Carbine	27075	308 Win	10"	18 1/2"	39 1/s°	13 1/2"	1 99*	2 1/2"	Carbon Steel	Patished Blue	Walnut	Satin	7 1/4
750 Woodsmaster Carbine	27079	35 Whelen	16"	18 1/2"	39 1/8"	13 1/2*	1 3/3*	2 1/5"	Carbon Steel	Polished Blue	Walnut	Satin	7 1/4
750 - Synthetic	85682	243 Win	9 1/8"	22*	42 ¥s*	13 1/2"	l i /3"	2 1/2*	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/2
750 - Synthetic	85685	270 Win	9 1/1"	22"	42 1/8"	13 V:"	1 1/3"	2 V:*	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/2
750 Synthetic	85686	30-06 Springfield	9 1/8°	22*	42 3%*	13 1/2*	155"	2 1/2"	Cartion Steel	Matte Blue	Synthetic	Matte Black	7 V2
750 - Synthetic Carbine	85687	30-06 Springfield	10"	18 1/2"	39 1/6"	13 1/2"	1 ¥s*	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/4
750 Synthetic	85683	308 Win	10"	22	42 1 %"	13 1/2"	1 33"	2 V2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/2
750 - Synthetic Carbine	85684	308 Win	10	18 1/2"	39 1/8"	13 1/2"	1 %	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/4

MODELSON					3170								
MODEL	ORDER NO.	ACTION TYPE (CALIBER)	MAG. CAPACITY	BARREL LENGTH	OVERALL LENGTH	LENGTH OF PULL	DROP (COM8)	DROP (HEEL)	BARNEL Material	BARREL FUNISH	STOCK MATERIAL	STOCK FINISH	. AME M.
397 ⁻ TVP	80852	Auto (22 LR)	10	20"	40⁻	14"	1 V?"	2 1/1"	Stainless Steel	Matte	Shady Camo Laminate	Satin	51/2
197 - FLX	80864	Auto (22 LR)	10	20"	40°	14"	1 1/2"	2 Vi*	Carbon Steel	Matte	Next* Digital FLX	Camo	51/2
597 Blaze Camo	80853	Auto (22 LR)	10	20"	40°	14"	1 1/2"	2 1/1"	Carbon Steel	Matte	Mossy Oak® Blaze	Camo	51/2
i97 ° Pink Camo	80854	Auto (22 LR)	10	20"	. 40*	14"	1 V2"	2 1/1"	. Carbon Steel	Matte	Mossy Oak® Pink	Camo	51/2
i97~	26550	Auto (22 LR)	10	20"	40° .	14"	1 1/2"	2 1/1"	Carbon Steel	Matte	Gray Synthetic	Matte	51/2
i97 - Scope Combo	26513	Auto (22 LR)	10	20"	40"	14"	1 1/2"	2 V:*	Carbon Steel	Matte	Gray Synthetic	Matte	5¾
i97 Magnum	26560	Auto (22 WMR)	8	20"	40*	14"	1 1/2"	2 1/4"	Carbon Steel	Matte	Black Synthetic	Matte	51/2
i97 - HB LS Magnum	26581	Auto (22 WMR)	8	: 20"	40*	14"	1 1/2"	2 1/4"	Carbon Steel	Matte	Brown Laminate	Satin	6

MODEL SOFT WE	D Was	rains in A. F. Au	A HEALTH			4-17	N -7-6	***			water a water	10170	1 5.5
100EL	ORDER NO.	action type (caliber)	MAG. CAPACITY -	BARREL LENGTH	OVERALL LENGTR	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BARREL Finish	SIOCK MATERIAL	STOCK FINISH	AVG. WT. (185.)
197" VTR" A-TACS CS	80888	Auto (22 LR)	- 10	.; 16*	31 1/4" - 35 1/1"	14	1 1/2"	2 1/1"	Cartion Steel	Matte	A-TACS Digital Camo	Camo	51/2
i97" VTR" Quad Rail CS	80882	Auto (22 LR)	10	16"	31 1/4" - 35 1/4"	14"	1 1/2*	2 1/4"	Carbon Steel	Matte	Synthetic	Matte	51/2
97 VTR A2 Fixed Stock	80900	Auto (22 LR)	10	16"	34 34"	14"	1 1/2"	2 1/1	Carbon Steel	Matte	Synthetic	Matte	51/2
i97 - VTR - A2 Fixed Stock	80896	Auto (22 LR)	30	16"	34 ¾*	14"	1 1/2"	2 V:"	Carbon Steel	Matte	Synthetic	Matte	51/2
97 · VTR · CS	80901	Auta (22 LR)	10	: 16"	-31 ¼ - 35 ¼	14"	1 1/2"	2 Vi*	Carbon Steel	Matte	Synthetic	Matte	51/2

MODEL 552:/572			Sain A Charle	435	A STATE OF THE STA	4. 10. 3 16. 6		新原管理 化化二		10.3			1000	A 5-3
061	ORDER NO.	ACTION TYPE (CALIBER)	KAG CAPACITY	BARREL LENGTH	OVERALL	OF PULL	OROP (COMB)	DROP (KEEL)	BARREL MATERIAL	<u>.</u>	BARREL Finish	STOCK MATERIAL	STOCK FORISH	AVG. WT. (LBS.)
2" BDL Deluxe Speedmaster*	25594	Auto (22, S, L, LR)	15*	21"	40"	13 1/8"	1 3%*	2 1/2"	· Carbon Steel	•	Polished Blue	American Walnut	Gloss	. 5¾
Z BOL Dekixe Fieldmaster*	25624	Pump (22, S, L, LR)	15*	21"	40*	13 1/8"	1 1/4"	2 1/8"	Carbon Steel		Polished Blue	American Walnut	Gloss	5¾ :

NTERCHANGEABILITY CHART. Cartridges within groups shown are interchangeable. Other substitutions should not be made

ithout specific recommendation of the firearms manufacturer since improper combinations could result in firearm damage or personal injury.

RIMFIRE	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)
22 W.R.F.	6.35mm Browning	32 Short Cott in 32 Long Cott but not conversely	38 Celt Special	38 Automatic in 38 Super +P'- but not conversely
22 Remington Special	7mm Express, Remington	(SEE NOTE C)	38 S&W Special	380 Automatic
22 Win. Model 1890 in a 22 Win. Mag. Rimfire	280 Remington	32 S&W in 32 S&W Long but not conversely	38 Special Targetmaster®	9mm Browning Short (Corto Kurz)
- but not conversely	30-30 Sav.	32 S&W Long	38 S&W Special Mid-Range (SEE NOTE D)	9mm Luger (SEE NOTE E)
CENTERFIRE	30-30 Win.	32 Cott New Police	38 Special + P (SEE NOTE B)	9mm Parabellum
25-20 Remington	30-30 Win. Accelerator* (SEE NOTE A)	32 Colt Police Positive	38-44 Special + P (SEE NOTE 8)	44 S&W Special (SEE NOTE F)
25-20 W.C.F.	30-30 Martin	32 W.C.F. (SEE HOTE A)	38 Special	44 Martin
25-20 Win.	30-30 Win. High Speed	37 Win. (SEE NOTE A)	38 Special Flat Point	44 Win.
25-20 Win. High Speed	30 W.C.F.	32-20 Win. High Speed (SEE NOTE A)	38 Short Coft in 38 Long Cott but not conversely.	44 Remington
25-20 Marlin	32 Colt Automatic	32-20 Cott LM.R	Both can be used in 38 Special	44-40 Win.
25 W.C.F.	32 Auto. Colt Pistol (ACP)	32-20 W.C.F (SEE NOTE G)	38 Martin	,44 W.C.F.
6mm Remington	32 (7.65mm) Automatic	32-20 Win.	38 Win. (SEE NOTE A)	45-70 Government
244 Remington	7.65mm Automatic Pistol	32-20 Martin	38 Remington (SEE NOTE A)	45-70 Martin
25 Automatic	7.65mm Browning (not interchangeable	38 S&W	38-40 Win.	45-70 Win.
25 Auto. Cott Pistol (ACP)	with 7.65mm Luger)	. 38 Coft New Police	38 W.C.F. (SEE NOTE A)	45-70-405
25 (6.35mm) Automatic		380 Webley		

NOTE A: High-speed cartridges must not be used in revolvers. They should be used only in filles made especially for them.

NOTE B: Ammunition with "+P on the case headstamp is loaded to higher pressure. Use only in firearms designated for this catridge and so recommended by the gun manufacturer. NOTE C: Not for use in revolvers chambered for 32 S&W or 32 S&W Long.

NOTE D: All 38 Special cartridges can be used in 357 Magnum revolvers but not conversely.

NOTE E: 9mm sub machine gun cartridges should not be used in handguns.

NOTE F: 44 Russian and 44 S&W Special can be used in 44 Remington Magnum revolvers but not conversely.

NOTE G: Not to be used in Win. M-66 and M-73.

10DEL 700	" CA	LIBER	LIS	TINGS				W. K										13.75						
BOB A CO	MS. · PACITY	BARREL TWO LENGTH 1	T — R-A, Turn di	, mg	COL	COL ST	TARGET TACTICAL	SPS 632 BUCKMASTERS	SPS	STADULESS	SPS DM	ucica.	SPS Variation	THUMBHOLE	MOUNTAIN LSS	VAZNOTI :	, ris -	1250	SENDERO SF B		XXX	Am.	XCR TACTICAL	311
Remington	5 .	22" 24"	9°	((A A A A A A A A A A A A A A A A A A	_		_		.84200		_	· 35				77.	= 1				=	84367	<i>-</i>	
eball	5	26" 26"	9°.		_						_		84213 84225 (1)		· =	84340	· <u>-</u> -	843521			=		_	
(5 .	22°	12	d to.	_			3	<u> </u>	27121							_			12 TO 1	· -	84369	· ., —	
4 Riger	5	24" 26"	12" 12"			د م <u>ر</u> پيون د ماريخ	=	9=6	=	27131	- = ,	ar Janer	84214	27443		84341	27467	26333			<u> </u>		<u>· = .:</u>	
0 Swift	4	26"	9					10000		13 - 1 13 *** 3		84206		s trong		84344		26339					84466	100
	5	20"	9°				=		=		\equiv	3200	_		` =		Ξ.		=		· Ξ .	84362 (AT)	——————————————————————————————————————	
3 Remington	5	22" 24" 26"	12" 9"		27101 (c)		_	7	27351	27133	= :	1 <u>- 1</u> 247 1 - 1251	_	<u>-</u>	_		• =				=	84370		.431
	5	26" 26"	12" .	<u>.</u> .≡.	_	- : - :	_		_		_	<u> </u>	84215 84227 (1)	27445	- = -	84343	27491	26337			_	_=	_ `	17
-250	4	22*	14"		_	1	_	:	_	27125		="	_	F. = 1	-	1-6		No.	<u> </u>	1.24	-	84373 E		1
nington	4	24" 26" 26"	14" 14" 14"	ŀ	=		Ξ		Ξ	27135	.=	=	84216 (L) 84226 (L)	27447	_	84342	27489	26335	Ξ			ļ <u>S</u>	=-	
* **	4	20"	9 1/2"	<u> </u>	_			1 =	27475 (C)				_					1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	_			; ! :		17.72
	4		9 ¼°	25787	_	: <u> </u>	=	84176 (C)	; <u> </u>	=		= .	_	p = 0	_	<u> </u>	_	(=)	_		=	84368	_	1
3 Win	4	24"	9 W.		27007 27103 (L)	Ξ-	- =	84170	27355	27263	27338	三		<u>:</u> = :	_		27405		_		84400	PΞi	-Ξ	
4	4	26" 26"	9 W	<u> </u>	_=_			<u>, ; = .</u>		<u> </u>		<u>, S</u>	84217 84228 (1)	ΙΞ			27495			Ξ.				,
06 Remington	4	22" 24"	9 1/2" 10"	! <u>-</u> .	27009	Ξ.	_			27251	_		_	<u> </u>	<u>-</u>	1 = 1	_		<u> </u>	84520	84401	=	_	1
Weatherby	3	26"	10°			84019	_	; - :			_		_	- ;	_	1	_	F.3.;			_	۲ <u>.</u>		1
Remington	4	24"	10"	, <u> </u>		84018		<u> </u>				_				: -		<u>+311-00-03</u> -1-1	_			_		10
Win Mag	3	26"	9"			. — . ¹								S.— ·		- ,		(27307					1
. uid_	4 4	22" 24"	10° 10°	25791	27011	84014	_	84172	27361	27267	27335	=	_		26281	<u> </u>	_	, <u>T</u>	_	84521	84402		_	2.
) Win	4	24" 24"	10° 10°	: - :	27105 (L) 84080 (HP)		_	= :	84177 (L) —	; = <u>=</u>	=	: <u>İ</u>	=	, <u>;</u> ;	_	<u>, =</u> ;	_	=	_	Ξ.	=	=:	_	į
WSM 2.3	3	24" 24"	10" 10"	=		84013	_	= .	27331	27253	_	=-	_		_		_	, <u> </u>		\pm	_			1
Remington	4	22*	10"	-				 :	: -	,		·	_	_:,	84270			(*,- *.					_	- 3.
	4	20"	9 1/4"	-		84021 (1)	_=		27391 (C)	· —		<u> </u>				<u>/ </u>		` <i>i,;</i> — ÿ`, <i>⊆</i> •.,	_	84522		<u> </u>		
m-08 . mington	4 4	20" 22"	9 1/2	=	_		_		84151 (01)		_		_		26285		_	무플	_	. = -			_	1
3	4	24"	9 1/4"	05000	27015	84012		84171	27357	27265	27341	<u>: -</u>				 -		<u>. — </u>		01504	84403	<u></u>		- <u>-</u> -
m Remington	3	24° 26° 26°	9 ¼ 9 ¼ 9 ¼	25803	27047 27109 (t)	84016	=	; <u> </u>	27385 84179 (L)	27271	27343	=	=	Ξ	=	- - -	=	$: \exists$	27311	84524	84405 —	Ξ.	=	-
g .	3	26"	9 1/4"		84082 (HP)			84174				<u>. </u>						<u> </u>				<u>. – </u>		-:-
m Remington ra Mag	3	26" 26"	9 ½" 9 ½"	· <u>-</u>	27051	· -	=	= -	84152	84300	_	: :. =		; <u>-</u> =	_=	\equiv		<u> </u>	27315	84527	84407	<u> </u>		
	4	22° 24°	10° 10°	25793	27017	84015	_	84173	27363	27269	27337	- : <u>-</u>	_	: <u>-</u>	26287	=	_	=	_	84523	84404		_	•
06 Springfield	4	24" 24"	10" 10"		27107 (L) 84081 (HP)	. =	_	- =	84 178 (L) —	_	_		_	_	_	=	_	_	_	.84515 (BC)	_	_	_	•
Win Mag	3	24" 26"	10"	_	27049	: -		84175	27387	27273	27339		_		_			<u> </u>	27313	84526	84406	· _	_	
rriu mag	4	26"	10*	_=_			_=		84 180 (L)							_=	_=_	_=_		<u>. = .</u>				
WSM	3 4	24" 24"	10" 10"		_	84017	=		27333	27255		_							=	84525	_	=		
	4	24" 20"	10° 12°	=	=	=			27359	27136	_	84207	=	_	_	_	_	Ξ	=	_	_	=	84467	
3 Win	4	22*	12" 12"	_	_	_	_	_	_	_	_		_		_	_	_	_	_	_	_	84364 (AT) 84371	=	
	4	22" 26" 26"	11 ¼° 12"	_	_	_	84456	-	_	=	_		84218	_	_	84345	27499	- = -	_	_	_	_	_	
	3	26" 24"	12"	<u>-</u> 26410	27053				27389	27140			84229 (L)						_					_
Remington a Mag	3	26" 26"	10" 10"		27111 (U	_	_	_	_	_	_	=	_	_		_	_	=	27318	84528 84540 (R)	84408	_	_	
Win Mag	3	24*	10"				_		_	_				_		_				84530	-	_	_	_
Remington	3	26"	10"				_=_																	_
a Mag	3	26"	10"																	84529				
Whelen	3	24" 24"	16"	=	27019								-				- -			84531				_
Remington	3	24"	12"																	84532				_
ra Mag*	-	Length		13 %*	13 %*	13 1/3"	13 1/2"	13 3/1"	13 %"	13 %"	13 1/4"	13 %*	13 1/4"	13 1/3*	13 1/8"	13 1/4"	13 1/2"	13 1/4"	13 %*	13 1/2"	[3 1/2"	13 1/2"	13 %*	_
ock —		Drop at		1°	1%*	1 %.	11/4"	1%	1 %*	1 1/8	11/2	1 1/4"	11/1"	1 1/4"	1 1/4"	11/4"	1'	1 1/2	11/4"	1 1/4"	1 1/4"	1 1/2"	1%	_
nensions																							11/2"	_

BARREL SPECIFICATIONS BARBER - R 0003354

MODEL 870 LXTRA BARRELS / 3%C	HAMBERS .	1.5	
LENGTH & CHOKE	12-cu	16-ga,	20-ga,*
Field Grade, Vent Rib, Wingmaster®			
30" Rem Choke, Light Contour	26215		
30° Rem Choke	24576		
28° Rem Choke, Light Contour	26217	_	
28" Rem Choke	24580		24606
26° Rem * Choke, Light Contour	26219		
26" Rem - Choke	24582		24608
Deer Barrel, Super Slug Cantilever Scope Hount, New Contour			
23° Fully Rifled	24551		
Deer Barrel, Cantilever Scope Mount, Wingmaster*			
20° Fully Rifled	24557		
Deer Barrel, Rifle Sights			
20* Rem* Choke	24545 ²	24 4 95 ⁴	
20° Fully Rifled	24558		
20° imp. Cyl.			24578
SP* Deer Barrel, Cantilever Scope Mount			
20° Fully Rifled	26229		
20" Fully Rifled Camo	262031		
20° Rem * Choke	262271		
SP Deer, Rifle Sights			
20* Rem Choke	24549 ²		
Express® Bead Sights	24620		
Express* Vent Rib	24589		
Express* Deer, Rifle Sights (20*), Imp. Cyl.	24622	_	- -
Express* Deer, Fully Ritled, Ritle Sights (20*)	246113	_	246093
SP , Vent Rib			
30" Rem * Chake	24590		
28" Rem * Chake	26225		
26" Rem ' Chake	24592		

Model 870° extra barrels with 3° chambers used an Super Magnum * and Magnum receivers will handle beth 2 ½° and 3° shells only. Use only. 2½° shells when these barrels are used on non-Magnum receivers. *20° gauge 870° Lightweight barrels will not fit 20° gauge standard 870° gars.

Clamberer from Chole Deer barrels supplied with Improved Optimizer and Endended Riffed Optice blass. 2 Riffe sighted Rem *Chole Deer barrels supplied with riffe and Improved Optimizer and Endended Riffed Optice blass. 2 All standards with 2 ½° chambers with 2 ½° chambers with 2 ½° chambers with 2 ½° chambers with 2 ½° shells in these barrels. 4 Riffe-sighted Rem* Chole Deer barrels supplied with Improved Optimizer Chole tube. 1 Carno Mossy Dail* Brask-Up* Pattern.

LENGTH & CHOKE		12-sı.	20-ga.*
Deer Barrel, Cantilever Scope Mount**			
21" Fully Rifled		29615	
Deer Barrel, Rifle Sights			
Z1* Fully Rifled	3.00	29606	295633
21" Rem Choke ²	1,8 4 4	29623	
SP* Deer Barrel, Cantilever Scope Mount**	11.00		
21" Fully Rifled	9.12	24645	
21" Fully Rifled Camo t		29537	
21" Rem Choke1		24647	
SP * Deer Barrel, Rifle Sights**	7.0		
21" Rem Choke ²		29627	_
21° Fully Rifled	1 1 1 1	29609	
SP Magnum, Vent Rib		taria garagea	
30" Rem Choke4	1.0	24638	
28" Rem Choke*	7.5	29611	
26" Rem " Choke4		24640	
Premier* Vent Rib			
30" Rem Choke, Light Contaur		29600	_
28" Rem Choke, Light Contour		29602	
28" Rem Choke		24644	
26" Rem Choke, Light Contour		29604	
MODEL 11	-87" SUPER	MAGNUM	
SP* Super Magnum Deer Barrel, Rifle Sights	1, 1,10	\$5.8377A	
23" Fully Rifled w/Rifle Sights (3" chamber)	1 1	24629	
SP Super Magnum Deer Barrel, Cantilever Scope Mount	1000	TONE PERSON OF	· · · · · · · · · · · · · · · · · · ·
23" Fully Rifled (3" chamber)	-85.2 B.O.J.	80500	

Model 1-87: Deer tournets are not equipped with a pressure-compensating gas system, and will not function with target or light field loads. 100° C3 shotgurs. "Model 1-187: Deer barnets are compared towards will not it? On purper standard 30° gars, "Model 1-187". Deer barnets are compared to follow the current of the first part of the

1. Contilions Rem. Onote Deer barrets supplied with improved Optimer and Exercised Ritled Choice tubes. 2 Ritle-sighted Rem. Choice Deer barrets supplied with Ritled and Improved Optimer Choice tubes. 3 24% chamber. 4,34% chamber. 1 Camo Mossy Out- Break-Up- Pattern.

MODEL SP-10 MAGNUM EXTRA BARRELS / 3 1/2	СН	AMBERS
TENCTH & CHOICE		10-25-79-10-a 48-24-3-4-3-4-3-4-3-4-3-4-3-4-3-4-3-4-3-4-
SP2 Wagnum, Vent Rib		
30 Rem Choke	11	27594
26 Rem Choke		第27508 49600 27598
A second of the second second of the second	7.7	

Side Conference Library Construction in

ield Grade Deer, Cantilever Scope Mount		20-ca. LT-201
21" Fully Rifled	26595	
ield Grade Deer, Rifle Sights		
21" Fully Rifled	29570	
21" Rem * Choke2	29565	
21" lmp, Cyf.		24438
P * Deer, Rifle Sights		
21° Rem Choke²	29571	
teel Shot Barrel, Vent Rib ³ (See ammunition note below)		
30" Rem ' Choke	29505	
26" Rem * Chake	29509	
ield Grade, Vent Rib		
30" Rem ' Choke	24488	
28* Rem * Choke	24464	24484
26" Rem ' Choke	24466	24486
keet, Vent Rib		
26" Rem Choke	24490	

FOR MORE INFO, VISIT www.REMINGTON.com

as this will cause extra wear and decrease the life of the gun

OR CALL 1-800-243-9700

300 ADI. Accelerator, AWR, BDL, Bandit, BriteBore, Bronze Point, BuckHammer, Bullet, Bullet Design, CBEE 22. CDL, Classic, Conquest, Copper-Lokt, Copper Solid, Core-Lokt, Custom Carry, Cyclone, D-Series, Deer Hunter, Desert Recon, Disintegrator, DriLube, Driving Band, Drop-Dead Better, Duplex, Echo, Elite Hunter, Elite Skinner, .Elsag, E.R. Remington & Sons, Escape, ETA, EtranX, Excursion, Express, Express-Steel, EZ, F.A.S.T., Fast Action Soft Touch, Fieldmaster, Figure 8, Fireball, Flexitab, FLX, G3, Gamemaster, Genesis, Green Color, Golden, Golden Saber, Grizzly, Gun Club, Hi-Speed, Ideal, Insignia Edition, Kleanbore, Lead-Lokt, LV SF, M24, M24A2, M24A3, MAX Gobbler, M-Series, Managed-Recoil, Marine Magnum, MCS Picatinny, Model Five, Model Seven, Model 105 CTi, Model 11-87, Model 11-87P, Model 32, Model 332, Model 365, Model 40-X, Model 40-XB, Model 40-XBR, Model 40-XC Model 40-XR Model 40-XRBR, Model 40-XS Model 412 Model 504 Model 504-T, Model 552. Model 572, Model 597, Model 673, Model 700, Model 700P, Model 700P USR, Model 710, Model 750, Model 770, Model 798, Model 799, Model 830, Model 870, Model 870 MCS, Model 870P, Model 870P MAX, Model 887, Model 1100, Model 7400, Model 7600, Model 7600P, Model 7615, Model 7615P, Model SP-10, MoistureGuard, Nitro 27, Nitro CLP, Nitro Mag, Nitro Turkey, Nitro-Steel, Parker, Peters, Pheasant, Power-Lokt, Power Piston, Predator, Premier, ProBore, Quick Look, R, R-15, R-25, R-P, Rangemaster, Ready, Realwood, Rem, Rem Dri 35, Rem DriLube, RemCloth, RemGrip, Rem-Line, Rem-Lite, Rem-Tech, Remington, Remington Fieldmaster, Remington Law Enforcement, Remington Leadless, Remington Racing, Remington Shooting School and Remington Shooting School logo, Remington Targetmaster, Remington Ultra, Rescue, Rustless, S.A.S.S., Sendero, Shoot Like A Girl ... If You Can!, ShurShot, Slugger, SP, SPS, SP-T, SPS-T, Speedmaster, Sportsman, STS, Subsonic, SuperCell, Super Magnum, Super Slug, SWIFT-LOKT, TAC 8, Tango, Targetmaster, The Deadliest Mushroom in the Woods, Thunderbolt, TorchCam, TriNyte, TVP, Ultra Banded, Ultra Mag, UMC, Unibody, Viper, VLS, Vortex and Vortex logo, VS, VSF, VS SF, VTR. Weathermaster Webroof Wingmaster Wingmaster HD Woodsmaster XCR Extreme XHR XM3 X-Mark Pro. XR-100, Yellow Jacket and Zulu are trademarks of RA Brands, L.L.C., Madison, NC 27025. Palusol is a trademark of BASF. Boy Scouts of America is a registered trademark of Boy Scouts of America. Briley is a trademark of Briley Manufacturing, Bushnell and Sharpshooter are trademarks of Bushnell, TORX is a trademark of Camcar LLC. Delrin, Kevlar, Teffon and Tyvek are trademarks of DuPont. Match King is a trademark of Sierra Bullet Co., LLC. Swift, A-Frame and Scirocco are trademarks of Swift Bullet Co. Break-Up, Brush, Duck Blind, Mossy Oak, New Break-Up, Treestand, and Obsession are trademarks of Haas Outdoors, Inc. V-Max is a trademark of Hornady Manufacturing Company. Hogue is a trademark of Hogue, Inc. Advantage, Advantage Max-4, Advantage Timber, AP, APG, HD and Realtree are trademarks of Jordan Outdoor Enterprises, Ltd. SpecOps is a trademark of Knoxx Industries, LLC., HIVIZ is a trademark of North Pass, Ltd. Kraton is a trademark of Shell. Sako is a trademark of Sako, Ltd., Shilen is a trademark of Shilen, Inc., Speedfeed is a trademark of Armory Accessories, Inc. LimbSaver is a trademark of Steven Sims, Inc. Digital Tiger is a trademark of Tiger Stripe Products. TRUGLO is a trademark of Truglo, Inc. Skyline, Excel and Fall Flight are trademarks of Skyline Cover, LLC. Weaver is a trademark of Weaver Outdoor Optics. Williams and Fire Sights are trademarks of Williams Gun Sight Co. A-TACS is a trademark of Digital Concealment Systems. Judge is a trademark of Taurus International. Pardus is a trademark of DPMS Panther Arms. The Bone Collector is a trademark of Michael Waddell, LLC. XS is a trademark of XS Sight Systems, Inc.

Weights, stock dimensions, checkering pattern and wood grain may vary according to the individual firearm. Remington reserves the right to change or modify its products without notice. Pricing may vary by model, specification, color, size and availability. Follow the safety rules printed in firearms instruction books and on ammunition boxes. If you do not have an instruction book for your Remington firearm, write to Remington Arms Company, Inc., 870 Remington Drive, PO Box 700, Madison, NC 27025, for a free copy or visit our website at www.remington.com/manuals. Please specify the model and serial number. The firearms herein have been photographed with their actions closed to properly showcase their features. In actual practice, any firearm not in use must be left with ammunition removed, action open and safety on. Consumer Information, Arms Service, Parts and Repairs and Custom Shop. (800) 243-9700. Visit us on the web at: www.reminigton.com.

