

B-301382

THIS DRAWING FOR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE (0.1) - TOLERANCE ± 0.015
2 PLACE (0.01) - TOLERANCE ± 0.010
3 PLACE (0.001) - TOLERANCE ± 0.005
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS $\pm 0.5^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.

FINISH ROUGHNESS TO BE: $\sqrt{0.25}$ OR BETTER

DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE
WITH ASME Y14.5-1994.

SYNTHETIC MATERIAL DESCRIPTION

ISO 1043 MATERIAL DESCRIPTION	SRGHWRH
MATERIAL MANUFACTURER, GRADE AND COLOR CODE	FFFFB
	FBHDHDFHDHDTLFDJLJLJJ
PROCESSING REQUIREMENTS	RREH
	HHHH
ALTERNATE MATERIAL	RJHRJR
ALTERNATE MATERIAL	RJHRJR
PART MASS	DFHDTJH
PART VOLUME	FEHDFH



IF NO ALTERNATE MATERIALS ARE GIVEN, IT IS ASSUMED THAT ONLY
THE LISTED MATERIAL WILL BE USED. SUBSTITUTION OF MATERIAL
REQUIRES ENGINEERING REVIEW.

ALTERATIONS

ALT.	WAS	REF.
A	REVISED AND REDRAWN	

NOT RELEASED FOR PRODUCTION

- NOTES:
1.  DIMENSIONS ENCLOSED BY THIS SYMBOL WILL BE SUBJECT TO CONTROL AND INSPECTION AS SPECIFIED IN THE PROCESS RECORD PURCHASED PARTS INSPECTION DOCUMENTATION.
 2.  FEATURES IDENTIFIED AS STATISTICALLY TOLERANCED MAY HAVE Cpk VALUES GREATER THAN 1.33.
 3. FOR VENDED COMPONENTS ALL SAMPLE SUBMISSIONS ARE TO BE SUBMITTED IN ACCORDANCE TO THE PUBLICATION "PRODUCTION APPROVAL PROCESS" AS PUBLISHED BY THE AUTOMOTIVE INDUSTRY ACTION GROUP (AIAG), 1993, LEVEL 3.
 4. GAGE DIMENSIONS IMPLY INSPECTION FOR CONFORMANCE.

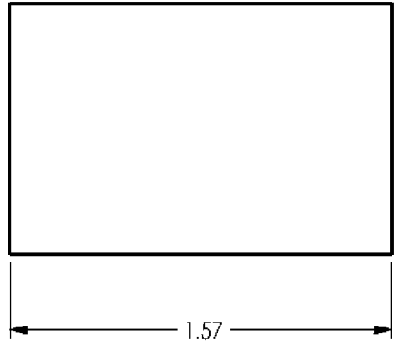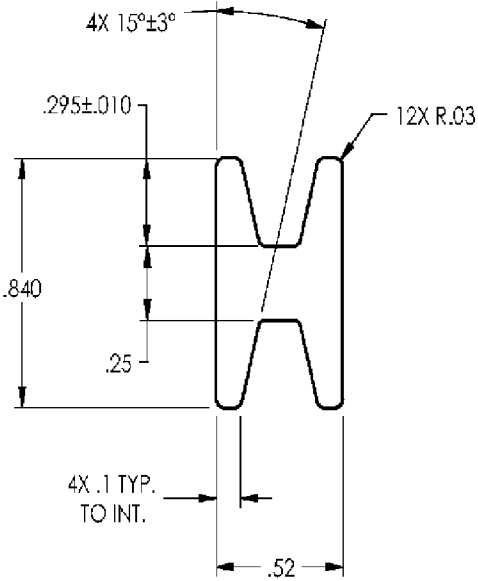

710	301382	MAGAZINE SPACER
MODEL	PART NO.	PART USE
DES. BY DATE	DRN. BY DATE	CHK.
10/10/07 04	10/10/07 04	