

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

TOLERANCES ON DECIMAL DIMENSIONS ARE:

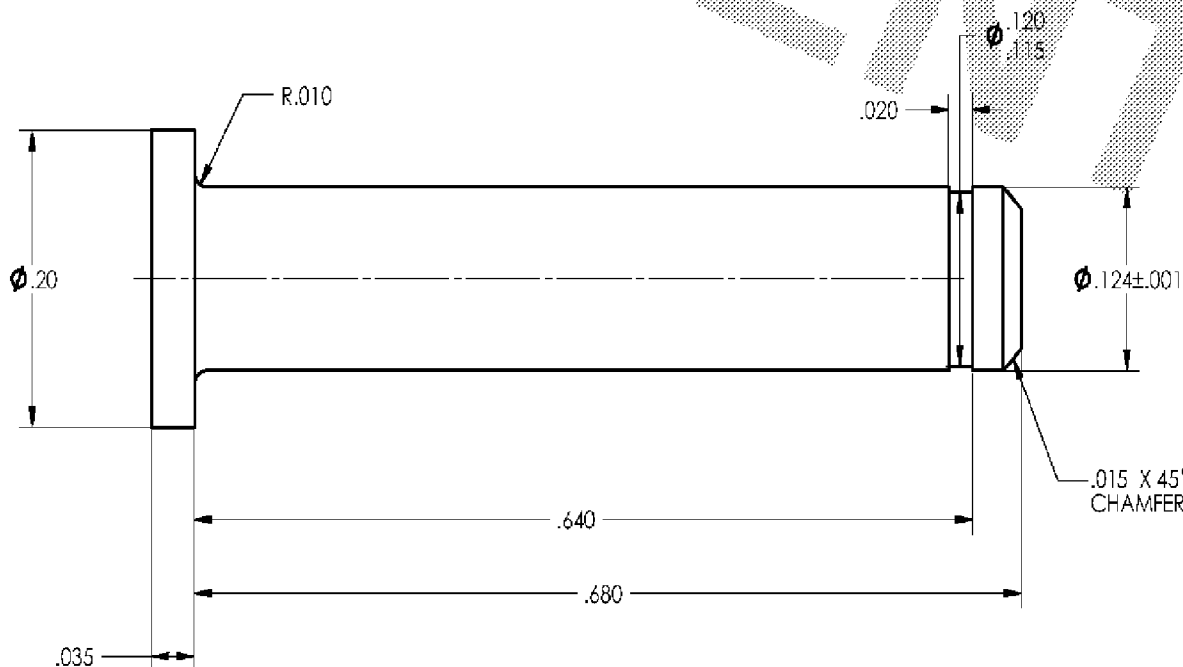
1. PLACE (1) - TOLERANCE $\pm .015$
2. PLACE (2) - TOLERANCE $\pm .010$
3. PLACE (3) - TOLERANCE $\pm .005$
4. ON FRACTIONAL DIMENSIONS $\pm .164$
5. ON ANGULAR DIMENSIONS $\pm 30^{\circ}-30'$
FINISHES ARE DESIGNATED BY ROOT MEAN SQUARE (R.M.S.) MICRO-INCH ROUGHNESS VALUES AND ARE THE MAXIMUM ROUGHNESS ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.

FINISH ROUGHNESS TO BE $125 \sqrt{\text{ }}$ OR BETTER.

ALTERATIONS

[illegible]

MATERIAL AISI 12L14 or 1022
HEAT TREAT CARBURIZE OR CARBONITRIDE
HARDNESS HRI5n 88-92 (.008 MIN EFF CASE)
FINISH BLACK OXIDE

~~HEAT TREAT AND COLOR TO BE DONE BY REMINGTON~~

710	EXP9501	SEAR RETAINING PIN
MODEL	PART NO.	PART USE
DES. BY DATE	DRN. BY DATE	CHK
ADK/AM/03/05	MD/03/03/05	

Subject to Protective Order - Williams v. Remington

BARBER 5-3000R0000299

ETEO00000298