



**Universal Bolt Disassembly Tool**

For all Remington Model 700's

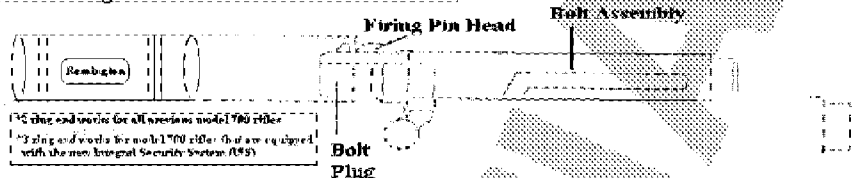

- A) Align notch in tool with bolt as shown
- B) Push tool all the way onto bolt plug.
- C) Rotate tool approximately 90 degrees while holding bolt in place with hand. Hold bolt firmly!
- D) With other hand "rock" tool downward which will slide firing pin head back out of notch in bolt assembly
- E) Unscrew firing pin assembly out of bolt assembly

\*Note: Do not remove tool from bolt until reassembled.

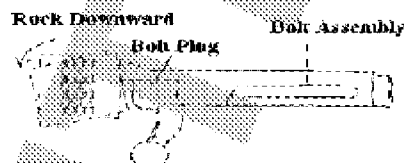

Assembly

For Information Call  
1 (800) 243-9700

- F) Unscrew firing pin assembly out of bolt assembly.

\*Note: Do not remove tool from bolt until reassembled.

For Information Call  
1 (800) 243-9700

**Instructions for Bolt Disassembly Without Using Bolt Disassembly Tool (See Diagram Below):**

Place firearm on safe, and be sure it is **unloaded**! Remove the bolt assembly. (Per instructions in your owner's manual or directions above). Put the notch on the firing pin head over a metal edge. Pull the bolt assembly away from the firing pin. Put a coin (dime) into the slot near the back edge of the firing pin head. Hold the bolt assembly and turn the bolt plug counter clockwise until the firing pin assembly can be removed from the bolt assembly. Do not remove coin from firing pin assembly.