

Part Program: BOLT BODY
Inspector: Administrator

Date/Time: 08/14/2000 13:35:12
CMM: CMM1

REAR DATUM-A DIAMETER

#1

TYPE: O.D.

NAME: DATUM A REAR

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
DI	0.6978	0.6950	0.0020	0.0020	0.0028	0.0008

DATUM-A DIAMETER AT FRONT OF BOLT BODY

#2

TYPE: O.D.

NAME: DATUM A FRONT

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
DI	0.6981	0.6950	0.0020	0.0020	0.0031	0.0011

DATUM-C

#3

TYPE: BORE

NAME: DATUM C HOLE

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
X	-0.0008	0.0000	0.0040	0.0040	-0.0008	-
Y	0.2096	0.2100	0.0040	0.0040	-0.0004	-
DI	0.2501	0.2500	0.0020	0.0020	0.0001	+
PS			0.0040		0.0018	++

OVERALL LENGTH OF BOLT BODY - ALSO DATUM-D SURFACE

OVERALL LENGTH OF PART

#4

TYPE: POINT

NAME: PART LENGTH

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
Y	5.0636	5.0650	0.0050	0.0050	-0.0014	--

STRAIGHT NOTCH SURFACE .094 FROM CENTERLINE

#5

TYPE: PLANE

NAME: RH NOTCH SURFACE

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
X	0.0894	- 0.0940	0.0050	0.0050	-0.0046	----

.094 RADIUS AT BOTTOM OF FIRING PIN HEAD CAM NOTCH

#6

TYPE: I.D.

NAME: FIRING PIN HEAD NOTCH RADIUS

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
X	-0.0028	0.0000	0.0050	0.0050	-0.0028	---
RD	0.0915	0.0940	0.0050	0.0050	-0.0025	---

MAX DEPTH OF FIRING PIN CAM RADIUS FROM DATUM-D

#7

TYPE: POINT

ET06073

NAME: RADIUS_MAX_DEPTH

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
Y	-0.2340	-0.2340	0.0050	0.0050	0.0000	-

CAM SURFACE LOCATION @Y-.0933 & Z.2649 (MATHEMATICALLY DERIVED POINT)

#8

TYPE: POINT

NAME: CAM_SURFACE_POINT_1

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
X	-0.1557	-0.1493	0.0050	0.0050	-0.0064	-0.0014

CAM SURFACE @Y-.0466 Z.2349 (MATHEMATICALLY DERIVED POINT ON HELIX OF CAM)

#9

TYPE: POINT

NAME: CAM_SURFACE_POINT_2

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
X	-0.1922	-0.1902	0.0050	0.0050	-0.0020	--

BOTTOM .125R GROOVE: X-POSITION & RADIUS

#10

TYPE: I.D.

NAME: BOTTOM_GROOVE

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
X	-0.0022	0.0000	0.0050	0.0050	-0.0022	--
RD	0.1260	0.1250	0.0050	0.0050	0.0010	+

DISTANCE OF BOTTOM GROOVE FROM A-DATUM TO EDGE OF GROOVE RADIUS

#11

TYPE: POINT

NAME: BOTTOM_GROOVE_Z

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
Z	0.3002	0.3000	0.0050	0.0050	0.0002	+

TOP .125R GROOVE X-POSITION & RADIUS

#12

TYPE: I.D.

NAME: TOP_GROOVE

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
X	0.0017	0.0000	0.0050	0.0050	0.0017	++
RD	0.1260	0.1250	0.0050	0.0050	0.0010	+

MAX. DISTANCE BETWEEN TOP & BOTTOM .125R GROOVES

#13

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
DS	0.5988	0.6000	0.0050	0.0050	-0.0012	-

REAR INSIDE DIAMETER RELATIVE TO DATUM-A


#14

TYPE: I.D.

NAME: ID_REAR

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
Z	0.0003	0.0000	0.0035	0.0035	0.0003	+
X	-0.0005	0.0000	0.0035	0.0035	-0.0005	-
DI	0.5018	0.4980	0.0030	0.0030	0.0038	0.0008

ET06074

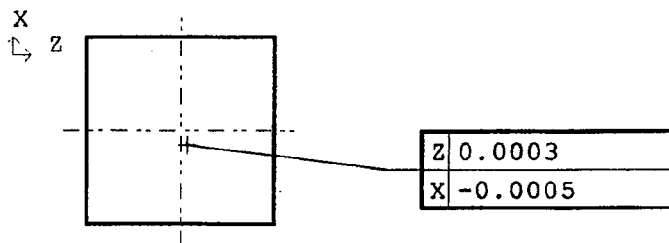

ID AT FRONT OF BOLT BODY RELATIVE TO A-DATUM

#15

TYPE: I.D.

NAME: ID_FRONT

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
Z	0.0002	0.0000	0.0035	0.0035	0.0002	+
X	-0.0004	0.0000	0.0035	0.0035	-0.0004	-
DI	0.5016	0.4980	0.0030	0.0030	0.0036	0.0006



ANSI COAXIALITY: TO DATUM A LINE

#16

FEATURE #57

TYPE: LINE

NAME: ID AXIS

	ACTUAL	NOMINAL
X	-0.0005	0.0000
Y	-2.6777	-2.5990
Z	0.0002	0.0000
I	0.0000	0.0000
J	1.0000	1.0000
K	0.0000	-0.0000

#17

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
PS			0.0100		0.0012	+

BOLT HANDLE HOLE AT 60 DEGREES FROM DATUMS A, C & FROM DATUM-D

#18


TYPE: I.D.

NAME: BOLT_HANDLE_HOLE

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
X	-0.0013	0.0000	0.0050	0.0050	-0.0013	--
Y	-0.2895	-0.2880	0.0050	0.0050	-0.0015	--


ET06075

DI	0.2580	0.2570	0.0020	0.0020	0.0010	++
PS			0.0060		0.0041	++

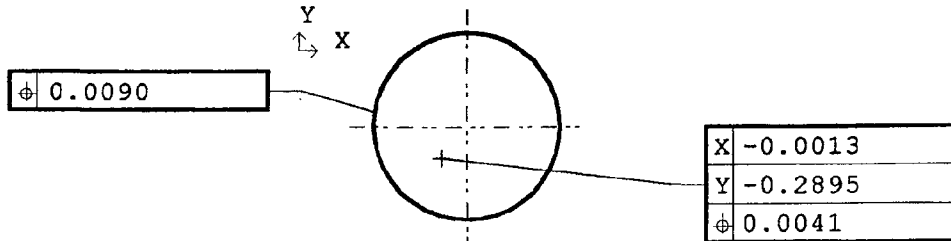

MAX GROOVE DEPTH FROM DATUM-D (.450+.130)
 DIAMETER & POSITION OF .600 DIAMETER GROOVE
 #19
 TYPE: CIRCLE
 NAME: GROOVE DIAMETER

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
X	-0.0005	0.0000	0.0080	0.0080	-0.0005	-
Z	0.0008	0.0000	0.0080	0.0080	0.0008	+
DI	0.6000	0.6000	0.0050	0.0050	0.0000	-
PS			0.0060		0.0019	++

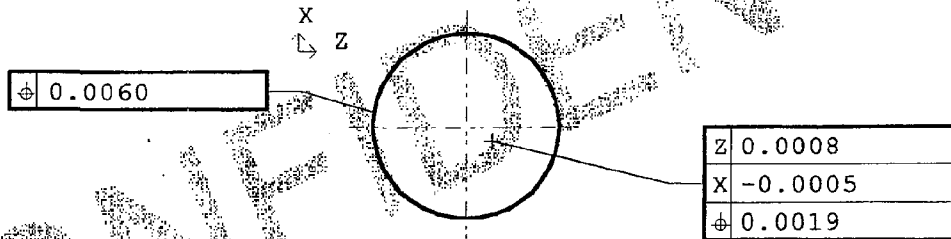

.450 DISTANCE OF GROOVE FROM DATUM-D
 #20
 TYPE: POINT
 NAME: 450 DISTANCE

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
Y	-0.4424	-0.4500	0.0050	0.0050	0.0076	0.0026

.130 GROOVE WIDTH
 #21

TYPE: DISTANCE

NAME: 130 GROOVE WIDTH

	ACTUAL	NOMINAL	+ TOL	- TOL	DEV	OUT-TOL
Y	-0.1369	-0.1300	0.0050	0.0050	-0.0069	-0.0019

ET06076