

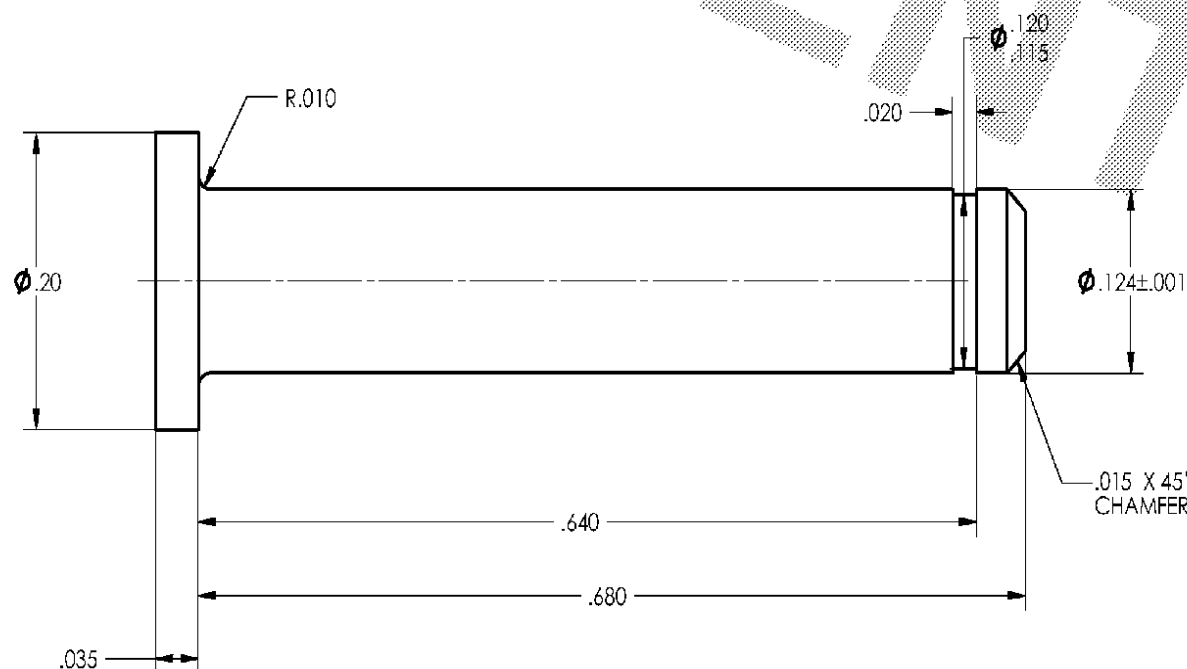
THIS DRAWING OR INFORMATION IS
 PROPRIETARY INFORMATION TO THE
 REMINGTON ARMS COMPANY, INC.

UNLESS OTHERWISE NOTED,
TOLERANCES ON DECIMAL DIMENSIONS ARE:

1 PLACE [.1] - TOLERANCE $\pm .015$
2 PLACE [.01] - TOLERANCE $\pm .010$
3 PLACE [.001] - TOLERANCE $\pm .003$
& ON FRACTIONAL DIMENSIONS $\pm .1/64$
& ON ANGULAR DIMENSIONS $\pm .00^\circ - .30^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.

FINISH ROUGHNESS TO BE $\sqrt{125}$ OR BETTER.

MATERIAL AISI 12L14 or 1022
HEAT TREAT CARBURIZE OR CARBONITRIDE
HARDNESS HRI5n 88-92 (.008 MIN EFF CASE)
FINISH BLACK OXIDE

~~HEAT TREAT AND CO. OR TO BE DONE BY REMINGTON~~[illegible]

710	EXP9501	SEAR RETAINING PIN
MODEL	PART NO.	PART USE
DES. BY DATE	DRN. BY DATE	CHK
ADDK (VRN) 03/05	VRN) 03/08/05	

Subject to Protective Order - Williams v. Remington

ETE00000298