

C6522247

MODEL 760TM H24

Model **5M5** TM

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.



Remington®

MODEL 700™ H24

UPPONT
REG. U.S. PAT. & TM. OFF.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

SERIAL NO.
C6522247

ORDER NO.
5716

Ø1

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6522247

UPC



0 47700 25716 7

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 94-18819

INITIAL CUSTOMER ORDER NO.

JJM DAAA09-92-C-0834

W/10X SCOPE M-24 SNIPER W/DEPLOYMENT KIT

ATTN FRED MARTIN

Scope 90-0469

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

06/14/94

06/15/94

C6522247

700 7.62

NATO

ACCESSORIES

HARD CASE

SCOPE MNTS

SCOPE BASE

SLING STRAP

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL
36201-5025

CUST NO: 098397 C.O.D.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Trigger Assy \$173.71
* Mag Box 2.06
Scope Rep 119.93
Clean/Insp/Rep 50.00
345.50

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400002341

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. 06522247

DATE 10/22/94

TESTER RW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.29	2.12	2.38	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.22	2.47	2.37	
PULL #3	2.46	2.71	2.43	
PULL #4	2.46	2.38	2.45	
PULL #5	2.36	2.42	2.39	
TOTAL	11.79	12.10	2.39	
AVG.	2.38	2.42	14.41	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.12	3.11		
PULL #2	3.09	3.10		
PULL #3	3.07	3.14		
PULL #4	3.10	3.12		
PULL #5	3.03	3.09		
TOTAL	15.41	15.56		
AVG.	3.12	3.11		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.09	4.16		4.01
PULL #2	4.19	4.07		4.21
PULL #3	4.03	4.09		4.22
PULL #4	4.00	4.12		4.26
PULL #5	4.10	4.16		4.18
TOTAL	20.41	20.60		20.88
AVG.	4.08	4.12		4.17

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6522247

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			11/27	WB
	G) Safety Off Force	3 1/4	3 1/4	3			11/27	WB
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.31	2.36	2.35	2.35	2.33	11/27	WB
	C) Function							
660	Pack							

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C C 522247

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		6/25/90	KJ
600	Proof		6/25/90	KJ
607	Check Headspace		6/25/90	KJ
610	Dis-assemble Gun		6/25/90	KJ
612	Magnaflux Barrel Action		7/10/90	KR
	Magnaflux Bolt		7/10/90	KR
615	Rollmark Caliber		7/10/90	J.S.
617	Drill and Tap Sight Holes		7/11/90	EB
618	Polish Barrel RB		7/13/90	WB
620	Apply Coatings (Barrel Action)		7/23/90	DH
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		8/23/90	KS
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/23/90	KS
	C) Inspect Ejector Hole for Chamfer		8/23/90	KS
	D) Oil Firing Pin Ass'y		8/23/90	KS
	E) Adjust Trigger Pull to Min Setting and Stake		8/23/90	KS

op. #	OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	5 1/2	5 1/2	5 1/2	9/4/90	WLB		
	G) Safety Off Force	7 1/2	7 1/2	7 1/2	9/4/90	WLB		
	H) Trigger Pull Test & Retainability				9-1-90	RL		
	I) Firing Pin Indent.	.024	.024	.024	9/4/90	WLB		
	J) Assemble Stock	7/4/90			7/4/90	KS		
	K) Assemble Swivel Studs	7			9/8/90	QJ		
	L) Attach Front and Rear Sight Assemblies				9/4/90	KS		
	M) Iron Sight Alignment				9/4/90	KS		
	N) Detach Front & Rear Sights & place in numbered container				9/4/90	KS		
	O) Attach Scope to Rifle				9/4/90	KS		
	P) Detach & Attach Scope 20 Times				9/4/90	KS		
640	Gallery Target & Test				9/6/90	NF		
	A) Time				9/6/90	NF		
	B) Malfunctions				9/6/90	NF		
	C) Pierced Primers				9/6/90	NF		
	D) Optical Clarity of Scope				9/6/90	NF		
645	Inspect for Live Ammo				9/6/90	NF		
655	Final Inspection							
	A) Headspace				9/8/90	QJ		
	B) Trigger Pull	258	265	271	279	269	9/8/90	QJ
	C) Function						9/8/90	QJ
660	Pack						9-18-90	QJ

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. 06522247

DATE 9-1-90

TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.36	2.40	2.35	258	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.37	2.38	2.40	265	
PULL #3	2.41	2.40	2.41	271	
PULL #4	2.42	2.40	2.40	279	
PULL #5	2.44	2.41	2.42	269	
TOTAL	12.00	11.99	11.98		
AVG.	2.4	2.398	2.396		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.37	3.50		
PULL #2	3.35	3.31		
PULL #3	3.29	3.13		
PULL #4	3.43	3.23		
PULL #5	3.34	3.30		
TOTAL	16.78	16.47		
AVG.	3.356	3.294		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.48	4.19		4.13
PULL #2	4.24	4.28		4.31
PULL #3	4.33	4.26		4.19
PULL #4	4.30	4.11		4.20
PULL #5	4.31	4.28		4.22
TOTAL	21.66	21.08		21.05
AVG.	4.332	4.216		4.21

LEN FOJAL DISTANCE CALCULATIONS
FOR RIFLE # 06522247
1 Sep 1996

LEN FOJAL DISTANCES

2 TC	1	.118406
1 TC	2	.295203
1 TC	3	.302883
1 TC	4	.208471
1 TC	5	.239008

3
5
(----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0136
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.022
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0258643
THE AMR FOR THIS RIFLE IS: .8248

34: 592

FILE:/PATTERNING/CENTERFIRE_PATT/C6522247

CENTERFIRE PATTERNS # 1

FOR

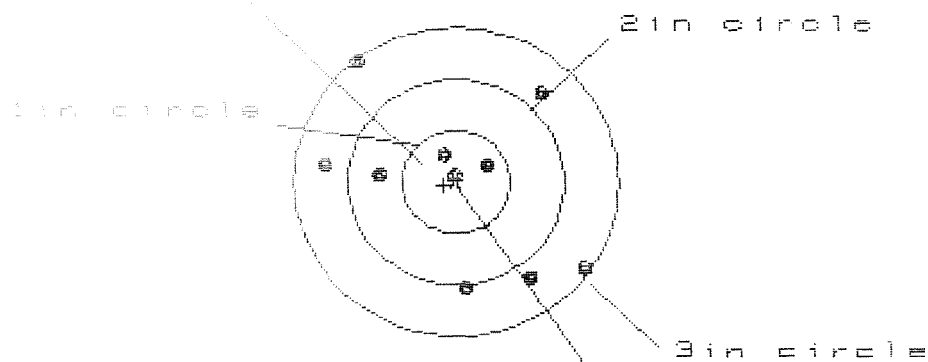

NO OF SHOTS= 10

1in = 3

2in = 4

3in = 10

HS= 2.402

VS= 2.228

CS= 2.860

CENTROID #


PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.181	1.079	.770
MINIMUM X	:	-1.221	-1.323	-1.188
MAXIMUM Y	:	1.149	1.020	.938
MINIMUM Y	:	-1.079	-.952	-1.034
CENTROID X	:	.114	.216	.081
CENTROID Y	:	.032	-.095	-.013
POA TO CENTROID in.	:	.118	.236	.082
MIN RADIUS	:	.095	.244	.144
MEAN RADIUS	:	.898	.851	.770
MAX RADIUS	:	1.473	1.358	1.213
HORIZONTAL SPREAD	:	2.402	2.402	1.958
VERTICAL SPREAD	:	2.228	1.972	1.972
EXTREME SPREAD	:	2.860	2.590	2.168
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		10	

8 Sep 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6522247

CENTERFIRE PATTERNS

2

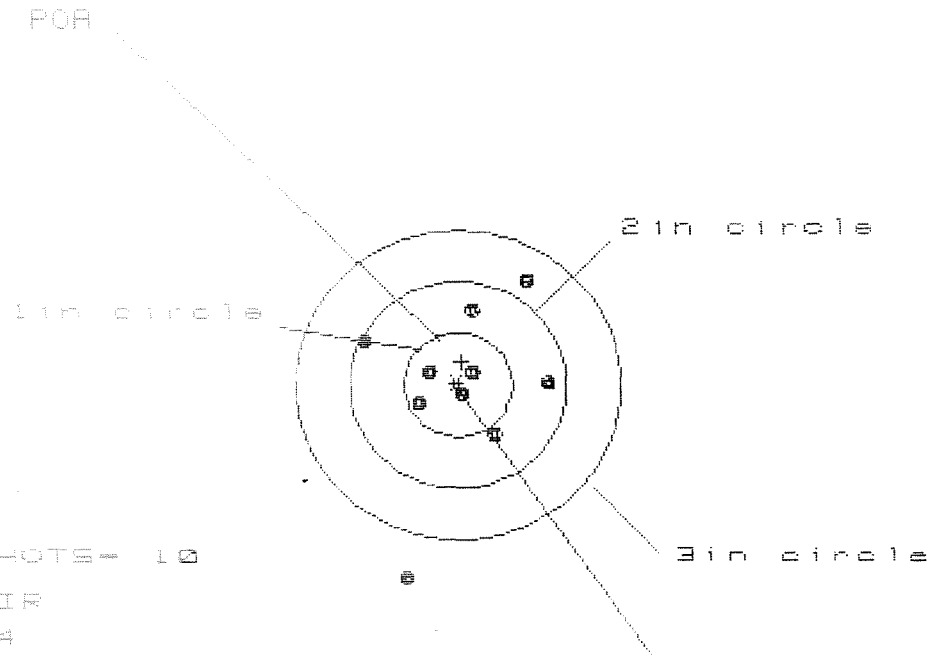

OF SHOTS= 10

IN CIR

1in = 4

2in = 8

3in = 9

HS= 1.657

VS= 2.926

GS= 3.124


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.811	.755	.823
MINIMUM X	-.846	-.982	-.834
MAXIMUM Y	1.061	.854	.607
MINIMUM Y	-1.865	-.652	-.545
CENTROID X	-.833	.023	-.045
CENTROID Y	-.224	-.017	-.124
POA TO CENTROID in.	.227	.028	.132
MIN RADIUS	.086	.127	.183
MEAN RADIUS	.721	.582	.509
MAX RADIUS	1.931	1.010	.884
HORIZONTAL SPREAD	1.657	1.657	1.657
VERTICAL SPREAD	2.926	1.506	1.152
EXTREME SPREAD	3.124	1.689	1.689
NUMBER IN ONE INCH CIRCLE =		4	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		9	

6 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6522247

CENTERFIRE PATTERNS # 3

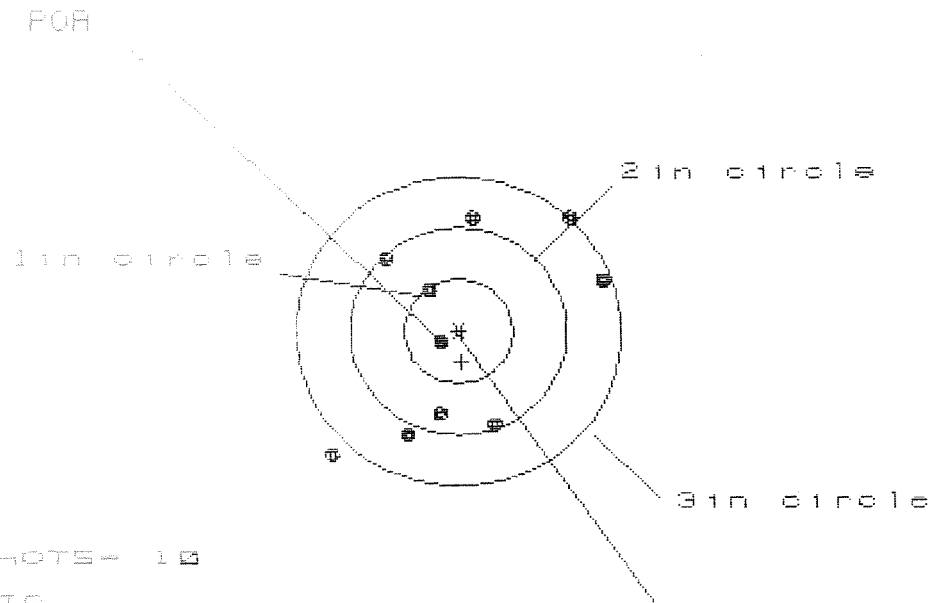

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 5

3 in = 8

HE= 2.550

VS= 2.329

GS= 3.236

CENTROID *

PATTERN #	3	3	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.368	1.237	1.352
MINIMUM X	-1.182	-.811	-.696
MAXIMUM Y	1.141	1.009	1.122
MINIMUM Y	-1.188	-1.110	-.984
CENTROID X	-.029	.102	-.013
CENTROID Y	.299	.431	.305
POA TO CENTROID in.	.301	.443	.306
MIN RADIUS	.194	.379	.210
MEAN RADIUS	1.039	.980	.897
MAX RADIUS	1.676	1.368	1.454
HORIZONTAL SPREAD	2.550	2.048	2.048
VERTICAL SPREAD	2.329	2.119	2.106
EXTREME SPREAD	3.236	2.632	2.413
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		8	

6 Sep 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8522247

CENTERFIRE PATTERNS # 4

POR

1in circle

2in circle

3in circle

CENTROID #

OF SHOTS= 10

IN CIR

1in = 2

2in = 8

3in = 10

HS= 2.199

VS= 1.934

GS= 2.264

PATTERN #

4

SHOTS (BEST OF)

10

9

8

MAXIMUM X

1.315

1.244

.575

MINIMUM X

-.884

-.955

-.799

MAXIMUM Y

1.159

.782

.800

MINIMUM Y

-.774

-.646

-.627

CENTROID X

-.044

.027

-.129

CENTROID Y

-.104

-.233

-.252

POR TO CENTROID in.

.113

.235

.282

MIN RADIUS

.277

.308

.410

MEAN RADIUS

.774

.702

.628

MAX RADIUS

1.324

1.252

.835

HORIZONTAL SPREAD

2.199

2.199

1.374

VERTICAL SPREAD

1.934

1.428

1.428

EXTREME SPREAD

2.264

2.236

1.464

NUMBER IN ONE INCH CIRCLE =

2

NUMBER IN TWO INCH CIRCLE =

8


NUMBER IN THREE INCH CIRCLE =

10

6 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8522247

CENTERFIRE PATTERNS # 5

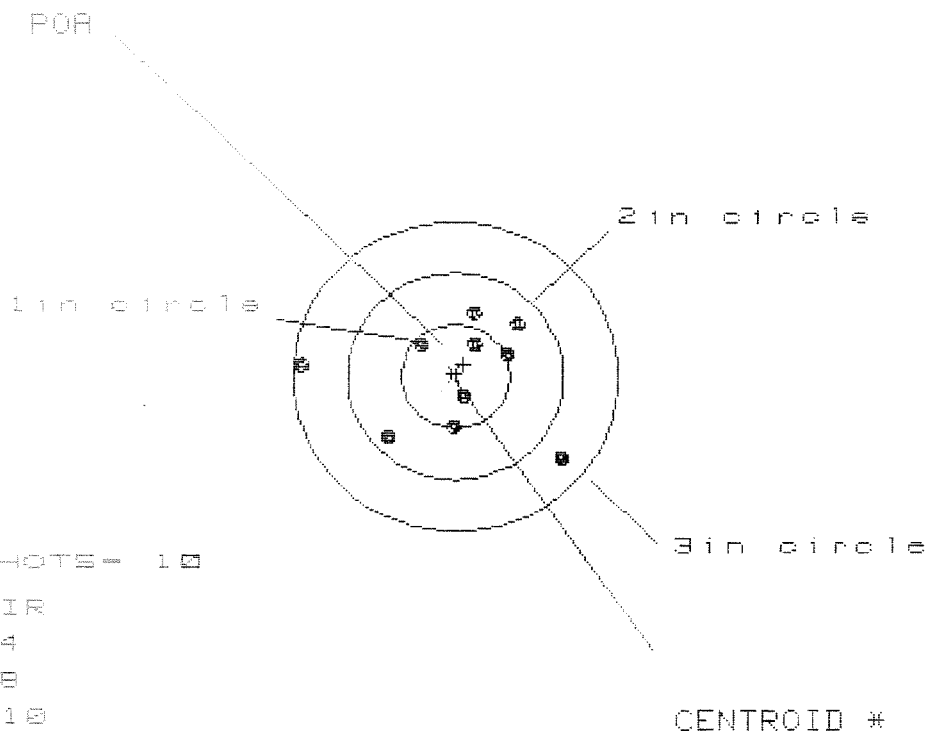

OF SHOTS= 10

IN CIR

1 in = 4

2 in = 8

3 in = 10

HS= 2.412

VS= 1.349

GS= 2.560

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.003	.846	.524
MINIMUM X	:	-1.409	-.775	-.669
MAXIMUM Y	:	.610	.623	.532
MINIMUM Y	:	-.739	-.726	-.651
CENTROID X	:	-.076	.081	-.025
CENTROID Y	:	-.113	-.126	-.035
POR TO CENTROID in.	:	.136	.150	.043
MIN RADIUS	:	.225	.225	.231
MEAN RADIUS	:	.692	.597	.517
MAX RADIUS	:	1.414	1.115	.933
HORIZONTAL SPREAD	:	2.412	1.621	1.193
VERTICAL SPREAD	:	1.349	1.349	1.183
EXTREME SPREAD	:	2.560	1.688	1.610
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		10	