

C6522172

MODEL 700™ M24

Model **SWS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Smead®

Remington®
REG. U.S. PAT. & TM. OFF.

MODEL 700™ H24

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

SERIAL NO.
C6522172

ORDER NO.
5716


MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

01



5716 C6522172

UPC



0 47700 25716 7

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00032467** Serial: C6522172 Model 700 Center Fire Caliber: 7.62 NATO M24 SW/S WOG 3 of 25 Repairman: Status: New 9/14/01 3:05:56 PM

Verify Repair

Address Information

Customer: ☒ Received From Return To: ☒ Received From

Name: DEFENCE DIST DEPOT ANNISTON DEFENCE DIST DEPOT ANNISTON

Address 1: 7 FRANKFORD AVE 7 FRANKFORD AVE

Address 2: PO Box: PO Box:

City: ANNISTON ANNISTON

State: AL Zip Code: 36201 Country: US State: AL Zip Code: 36201 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: Fax: Email: Comments:

Received Condition

Fair

Condition Notes: CSR Notes:

Accessories Received

Code	Desc	Qty
A006	Sling Strap	1
A007	With Stud	3
A008	With Swivel	2
A010	Hard Case	1
A026	Scope	1
X001	Scope Case	1
X002	Deployment Kit	1

Repair Search Refresh Close

nagletj 9/17/01 7:28 AM C&PS NUM INS SCRL

Start Arms Services Repair...

7:28 AM

Serial Number: **C6522172**

Model: **700**



RE00032467

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6522172
4 Oct 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2356
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0774
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .247988

THE AMR FOR THIS RIFLE IS: 1.003

CENTROIDAL DISTANCES

0 TO	1	.488365
1 TO	2	.835675
1 TO	3	1.11241
1 TO	4	.574172
1 TO	5	.701514


1
4 + <----POA
2 5
3

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .488
 MIN RADIUS : .282
 MEAN RADIUS : 1.068
 MAX RADIUS : 2.193
 CENTROID X : .048
 CENTROID Y : .486

4 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522172

CENTERFIRE PATTERN # 1

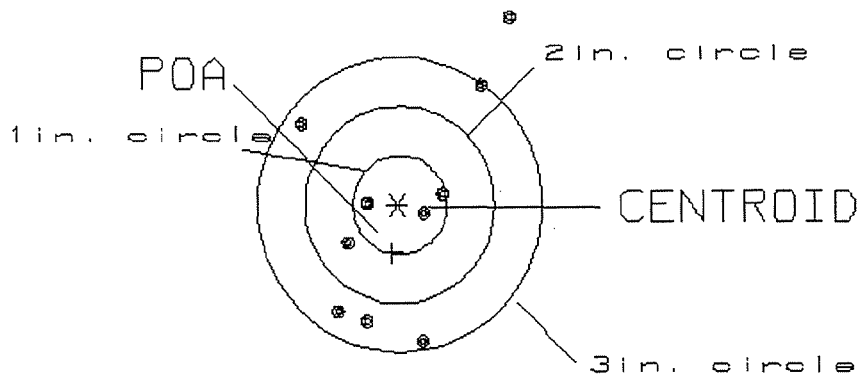

OF SHOTS= 10

IN CIRCLE

HS= 2.16
 VS= 3.24
 GS= 3.42

3
 4
 8

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .385

MIN RADIUS : .425

MEAN RADIUS : 1.208

MAX RADIUS : 2.642


CENTROID X : -.244

CENTROID Y : -.297

4 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522172

CENTERFIRE PATTERN # 2

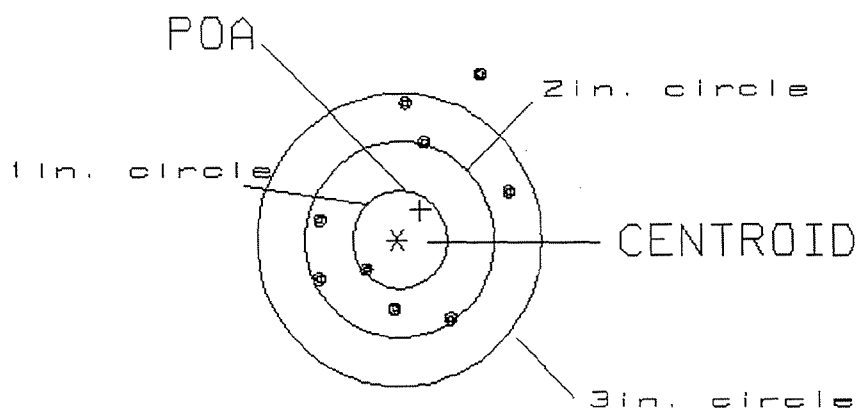

OF SHOTS= 10

IN CIRCLE

HS= 2.00

1

VS= 4.23

6

GS= 4.53

8

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .712

MIN RADIUS : .148

MEAN RADIUS : 1.306

MAX RADIUS : 2.699


CENTROID X : -.550

CENTROID Y : -.452

4 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522172

CENTERFIRE PATTERN # 3

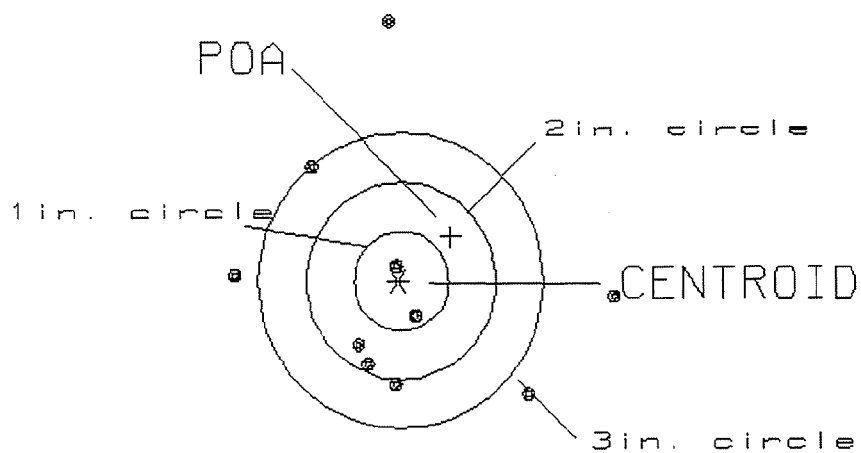

OF SHOTS= 10

IN CIRCLE

HS= 3.95

2

VS= 3.85

4

GS= 4.14

5

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .368
 MIN RADIUS : .117
 MEAN RADIUS : .815
 MAX RADIUS : 1.634
 CENTROID X : -.359
 CENTROID Y : .081

4 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522172

CENTERFIRE PATTERN # 4

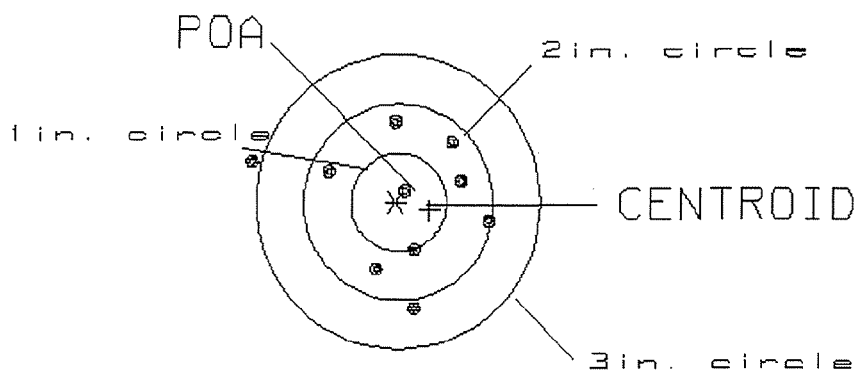

OF SHOTS= 10

IN CIRCLE

HS= 2.50

1

VS= 1.85

8

GS= 2.50

9

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 5 ☐

POA TO CENTROID: .218
 MIN RADIUS : .231
 MEAN RADIUS : .620
 MAX RADIUS : 1.439
 CENTROID X : -.073
 CENTROID Y : -.205

4 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522172

CENTERFIRE PATTERN # 5

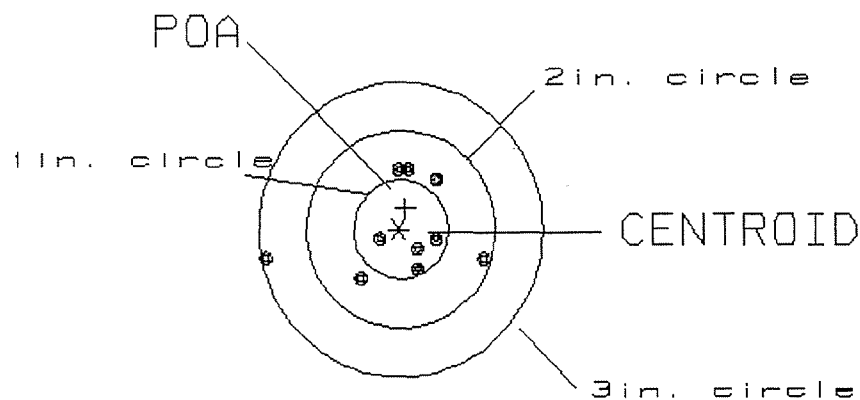

OF SHOTS= 10

IN CIRCLE

HS= 2.32

4

VS= 1.06

9

GS= 2.32

10

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER <u>32467</u>			
SERIAL NUMBER <u>C 6522172</u>			
LOG-IN DATE <u>9-13-01</u>			
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	9-19-01	RH
560 A	RE-BARREL AT CUSTOM SHOP	9/20/01	BWT
B	DRILL AND TAP	9/20/01	BWT
C	POLISH	9-20-01	CP
575	ASSEMBLE	9-20-01	RH
600	PROOF	9-21-01	RW
605	CHECK HEADSPACE	9-24-01	RH
610	DIS-ASSEMBLE GUN	9-24-01	RH
612	MAGNAFLUX	9-24-01	RH
615	ROLLMARK CALIBER	9-24-01	RH
618	ROTO-BLAST	9/25	
620	APPLY COATINGS	9/28	HP
625 A	FINAL ASSEMBLY	10-01-01	RH
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	10/3/01	RW
655	FINAL INSPECT	10-5-01	RH
660	PACK	10-5-01	RH
		SHIP DATE	
		QAR INSPECTION DATE	

Final Inspection

Sr: C6522172 DATE REC'D: 9-3-01 DATE RET'D: 10-9-01

AUDITOR: *[Signature]*

Item:

BARREL ASSY.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

SCOPE ASSY.

- ☒ SCOPE
- ☒ SCOPE RINGS
- ☒ MOUNTING SCREWS
- ☒ MOUNTING BASE
- ☒ SCREWS
- ☒ FINISH
- ☒ LOOSENESS
- ☒ CLARITY

MISC.

- ☒ DD-250
- ☒ BAR CODE
- ☒ PACKAGING

Item:

STOCK ASSY.

- ☒ STOCK
- ☒ SLING SWIVEL STUDS
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

SYSTEMS CASE

- ☒ SCOPE CASE
- ☒ IRON SIGHTS
- ☒ DEPLOYMENT KIT

TRIGGER

- ☒ SAFETY OPERATION
- ☒ SET

Comments: _____

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6522172

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	7 12	90	RW
600	Proof	7 12	90	RW
607	Check Headspace	7 12	90	RW
610	Dis-assemble Gun	7 12	90	RW
612	Magnaflux Barrel Action		7-17-90	KR
	Magnaflux Bolt		7-17-90	KR
615	Rollmark Caliber		7-17-90	JS
617	Drill and Tap Sight Holes		7/23/90	LB
618	Polish Barrel RB		7/24/90	WC
620	Apply Coatings (Barrel Action)		8-6-90	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		8/8/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/8/90	RW
	C) Inspect Ejector Hole for Chamfer		8/8/90	RW
	D) Oil Firing Pin Ass'y		8/8/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		8/27/90	JS

op. #	OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	4 1/4	4 1/2	4 1/4	8/18/90	WB		
	G) Safety Off Force	2 1/4	2 1/4	2 1/4	8/28/90	WB		
	H) Trigger Pull Test & Retainability				8/29/90	DL		
	I) Firing Pin Indent	.0235	.024	.0235	8/28/90	WB		
	J) Assemble Stock				8/28/90	RW		
	K) Assemble Swivel Studs				9/8/90	JS		
	L) Attach Front and Rear Sight Assemblies				8/28/90	RW		
	M) Iron Sight Alignment				8/28/90	RW		
	N) Detach Front & Rear Sights & place in numbered container				8/28/90	RW		
	O) Attach Scope to Rifle				8/28/90	RW		
	P) Detach & Attach Scope 20 Times				8/28/90	RW		
640	Gallery Target & Test				9-5-90	AC		
	A) Time				9-5-90	AC		
	B) Malfunctions				9-5-90	AC		
	C) Pierced Primers				9-5-90	AC		
	D) Optical Clarity of Scope				9-5-90	AC		
645	Inspect for Live Ammo				9-5-90	AC		
655	Final Inspection							
	A) Headspace				9/8/90	JS		
	B) Trigger Pull	227	236	240	243	249	9/8/90	JS
	C) Function						9/8/90	JS
660	Pack						9-9-90	DH

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. 06522172

DATE 8/27/90

TESTER JLL

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.23	2.30	2.33	2.27	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.26	2.26	2.31	2.36	
PULL #3	2.27	2.31	2.33	2.40	
PULL #4	2.26	2.33	2.30	2.43	
PULL #5	2.29	2.31	2.33	2.49	
TOTAL	11.31	11.51	11.60		
AVG.	2.262	2.302	2.32		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.23	3.19		
PULL #2	3.13	3.25		
PULL #3	3.10	3.24		
PULL #4	3.30	3.31		
PULL #5	3.22	3.28		
TOTAL	15.98	16.27		
AVG.	3.196	3.254		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.17	4.23		4.35
PULL #2	4.31	4.16		4.32
PULL #3	4.20	4.28		4.34
PULL #4	4.27	4.28		4.37
PULL #5	4.24	4.31		4.38
TOTAL	21.19	21.26		21.76
AVG.	4.238	4.252		4.352

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6522172
5 Sep 1990

CENTROIDAL DISTANCES

0 TO 1	.461213
1 TO 2	.208202
1 TO 3	.60359
1 TO 4	.916341
1 TO 5	.616192

+ 35 4
12 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .5148
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0224
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .515287
THE AMR FOR THIS RIFLE IS: .9912

3 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6522172

CENTERFIRE PATTERNS

1

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 8

3 in = 10

HS= 2.055

VS= 1.478

GS= 2.248

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.896	.767	.625
MINIMUM X	:	-1.159	-1.133	-1.020
MAXIMUM Y	:	.641	.699	.654
MINIMUM Y	:	-.837	-.779	-.824
CENTROID X	:	.274	.403	.545
CENTROID Y	:	-.371	-.429	-.384
POA TO CENTROID in.	:	.461	.589	.667
MIN RADIUS	:	.561	.426	.382
MEAN RADIUS	:	.865	.796	.717
MAX RADIUS	:	1.274	1.188	1.032
HORIZONTAL SPREAD	:	2.055	1.900	1.645
VERTICAL SPREAD	:	1.478	1.478	1.478
EXTREME SPREAD	:	2.248	2.032	1.699
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		10	

5 Sep 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C6522172

CENTERFIRE PATTERNS

2

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS= 10

IN CIR

1in = 3

2in = 8

3in = 9

HS= 1.200

VS= 2.671


GS= 2.704

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.617	.614	.664
MINIMUM X	:	-.583	-.586	-.536
MAXIMUM Y	:	1.591	.741	.628
MINIMUM Y	:	-1.080	-.904	-.818
CENTROID X	:	.452	.455	.405
CENTROID Y	:	-.479	-.655	-.542
POA TO CENTROID in.	:	.659	.798	.677
MIN RADIUS	:	.249	.224	.179
MEAN RADIUS	:	.697	.594	.522
MAX RADIUS	:	1.591	.987	.827
HORIZONTAL SPREAD	:	1.200	1.200	1.200
VERTICAL SPREAD	:	2.671	1.645	1.446
EXTREME SPREAD	:	2.704	1.650	1.513
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

3 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08522172

CENTERFIRE PATTERNS # 3

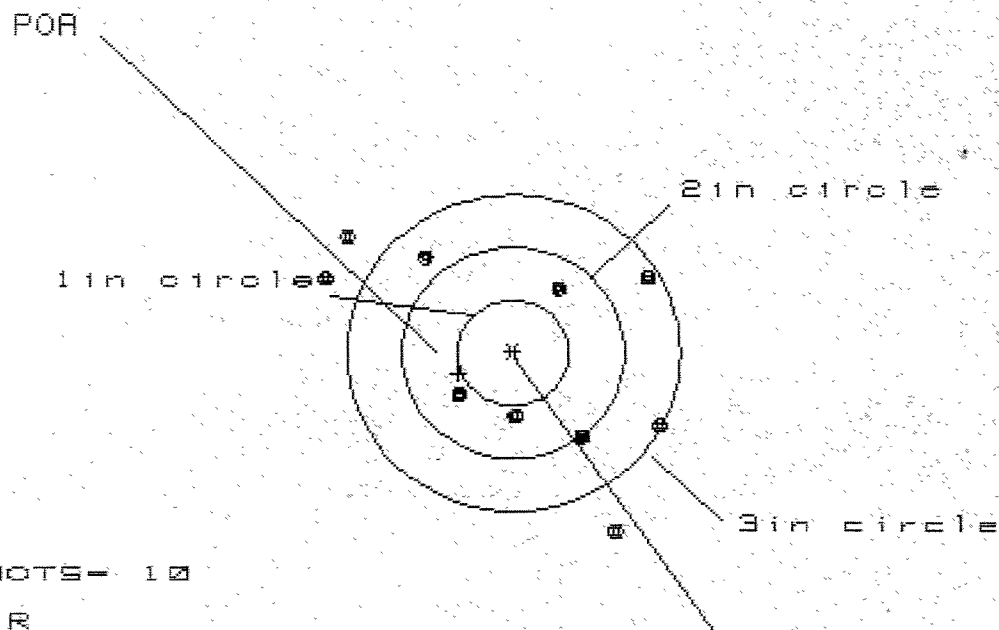

OF SHOTS= 10

IN CIR

1in = 0

2in = 3

3in = 6

HS= 3.045

VS= 2.803

GS= 3.644

CENTROID #


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.350	1.446	1.246
MINIMUM X	:	-1.695	-1.599	-1.565
MAXIMUM Y	:	1.093	.903	.965
MINIMUM Y	:	-1.710	-.967	-.905
CENTROID X	:	.489	.393	.593
CENTROID Y	:	.193	.383	.322
POA TO CENTROID in.	:	.526	.549	.674
MIN RADIUS	:	.569	.665	.590
MEAN RADIUS	:	1.259	1.187	1.105
MAX RADIUS	:	1.918	1.677	1.838
HORIZONTAL SPREAD	:	3.045	3.045	2.811
VERTICAL SPREAD	:	2.803	1.870	1.870
EXTREME SPREAD	:	3.644	3.327	3.313
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		6	

5 Sep 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C8522172

CENTERFIRE PATTERNS

4

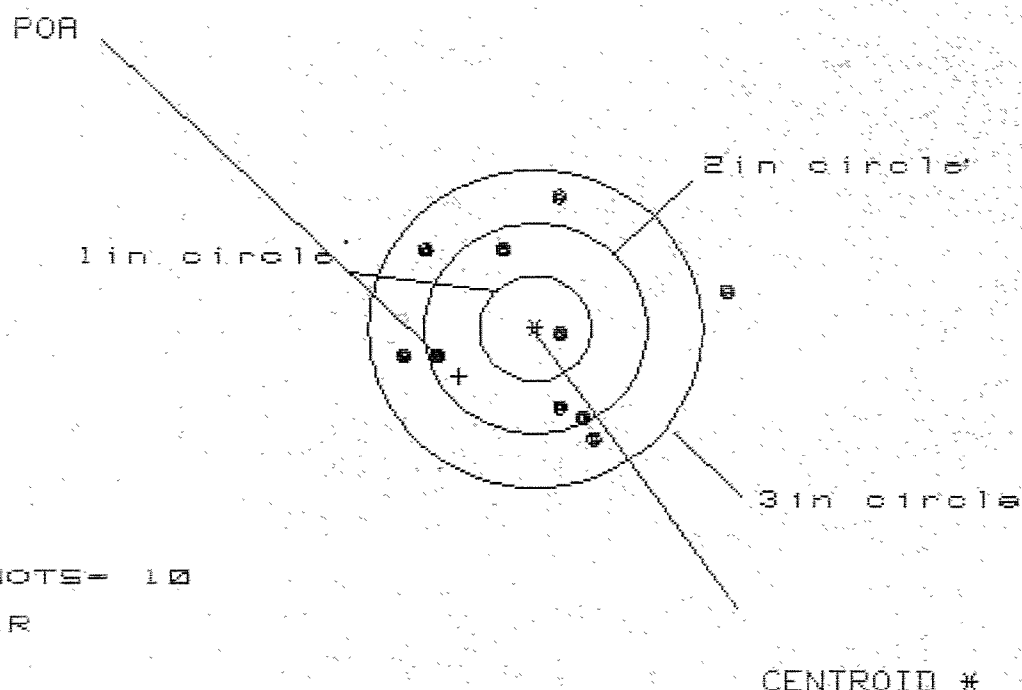

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 5

3 in = 9

HS= 2.927

VS= 2.356

GS= 2.879

PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.766	.760	.656
MINIMUM X	-1.161	-.965	-1.069
MAXIMUM Y	1.269	1.306	1.409
MINIMUM Y	-1.087	-1.050	-.948
CENTROID X	.683	.487	.591
CENTROID Y	.449	.412	.309
POA TO CENTROID in.	.817	.638	.667
MIN RADIUS	.180	.370	.283
MEAN RADIUS	1.044	.953	.906
MAX RADIUS	1.796	1.377	1.447
HORIZONTAL SPREAD	2.927	1.725	1.725
VERTICAL SPREAD	2.356	2.356	2.356
EXTREME SPREAD	2.979	2.456	2.378
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	9		


5 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08522172

CENTERFIRE PATTERNS

5

POA

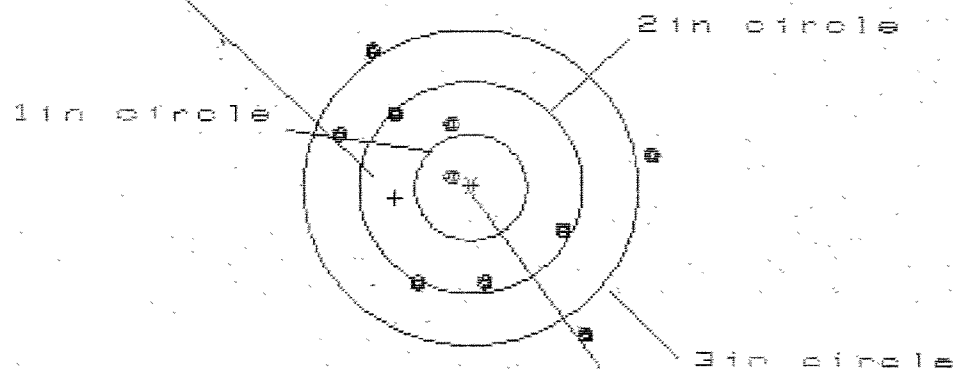

OF SHOTS= 10

IN CIR

1in = 1

2in = 4

3in = 7

HE= 2.748

VS= 2.678

GS= 3.316

CENTROID *

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.682	1.720	1.114
MINIMUM X	:	-1.146	-1.028	-.813
MAXIMUM Y	:	1.267	1.110	1.133
MINIMUM Y	:	-1.411	-1.092	-1.069
CENTROID X	:	.676	.558	.343
CENTROID Y	:	.096	.253	.231
POA TO CENTROID in.	:	.683	.613	.413
MIN RADIUS	:	.235	.102	.127
MEAN RADIUS	:	1.091	.981	.865
MAX RADIUS	:	1.766	1.729	1.263
HORIZONTAL SPREAD	:	2.748	2.748	1.927
VERTICAL SPREAD	:	2.678	2.202	2.202
EXTREME SPREAD	:	3.316	2.754	2.361
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 96-21852

INITIAL CUSTOMER ORDER NO.

JJM

W/LEUPOLD 10X SCOPE

Scope # 90 0793

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

10/03/96

10/03/96

OK 7-90

66522172

700 7.62

NATO

ACCESSORIES

W/STUDS

W/SWIVELS

SCOPE BASE

FROM:

TRANSPORTATION OFFICER
ANNISTON ARMY DEPOT
ANNISTON

AL 36201

SHIP TO:

TRANSPORTATION OFFICER
ANNISTON ARMY DEPOT
ANNISTONAL
36201

CUST NO: 150939 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

☐ NEW☐ LIGHTLY WORN☐ WORN☐ VERY WORN☐ UNREPAIRABLE☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

✓ Trigger Assy 96024
✓ Front Sight Assy 96118
✓ Rear " " 96119

Scope Sent Back To
Factory for Inspec.

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 6/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400003623

SWS. TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6522172

DATE 4-15-97

TESTER EK

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.59	2.42	2.62	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.70	2.65	2.75	
PULL #3	2.57	2.67	2.76	
PULL #4	2.64	2.64	2.66	
PULL #5	2.65	2.58	2.74	
TOTAL	13.15	12.93	13.53	
AVG.	2.63	2.59	2.71	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.10	2.96	
PULL #2	3.11	3.10	
PULL #3	3.05	3.00	
PULL #4	3.11	3.15	
PULL #5	3.16	3.15	
TOTAL	15.53	15.36	
AVG.	3.11	3.07	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.25	4.15		4.26
PULL #2	4.23	4.27		4.25
PULL #3	4.24	4.15		4.11
PULL #4	4.30	4.16		4.05
PULL #5	4.18	4.17		4.15
TOTAL	21.20	20.90		20.82
AVG.	4.24	4.18		4.16

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. C6522172

LOG IN DATE: / /

DATE

INIT.

INSPECT & VERIFY:

OP. #

OP. NAME

550

DIS-ASSEMBLE GUN

560 A

RE-BARREL AT CUSTOM SHOP

B

DRILL & TAP

C

POLISH

575

ASSEMBLE

600

PROOF

605

CHECK HEADSPACE

610

DIS-ASSEMBLE

612

MAGNAFLUX

615

ROLLMARK CALIBER

618

ROTO-BLAST

620

APPLY COATINGS

625 A

FINAL ASSEMBLY

B

TRIGGER PULL TEST

2.81

2.77

2.77

2.77

2.77

C

SAFETY ON FORCE

5

5

5

D

SAFETY OFF FORCE

2.5

2.5

2.5

E

FIRING PIN INDENT

640

TARGET

655

FINAL INSPECT

660

PACK

QAR INSPECTION

SHIP DATE

6/18/97 Ru

Final Inspection

Sn: C65 22172	DATE REC'D: 10/3/86	DATE RET'D:
---------------	---------------------	-------------

Auditor: RW

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☒ Scope
- ☒ Scope Rings
- ☒ Mounting Screws
- ☒ Mounting Base
- ☒ Screws
- ☒ FINISH
- ☒ Looseness
- ☒ CLARITY

Misc.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

Stock Assy.

- ☒ Stock
- ☒ Sling Swivel Studs
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☒ Scope Case
- ☒ Iron SIGHTS
- ☒ Deployment Kit

Trigger

- ☒ SAFETY OPERATION
- ☒ SET

Comments: _____