

C6523341

MODEL 700TM M24

Model **SMS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00136222

Verify Repair

Serial: C6523341 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status:

Closed 11/2/2007 10:16:58 AM

Address Information

Customer:

Received From

Return To:

Received From

Name: BARRY MOBERLY

BARRY MOBERLY

Address 1: L-3 COMMUNICATIONS

L-3 COMMUNICATIONS

Address 2: 5749 BRIAR HILL RD BLDG 221

PO Box:

5749 BRIAR HILL RD BLDG 221

PO Box:

City: LEXINGTON

LEXINGTON

State: KY

Zip Code: 40516

Country: US

State: KY

Zip Code: 40516

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A008	With Swivel	3
A010	Hard Case	1
A026	Scope	1
A055	Deployment Kit	1
D000	SCOPE CASE	1

Repair Search

Refresh

Close

naglej

11/2/2007

1:12 PM

CAPS

NUM


INS

SCRL



Serial Number: C6523341

Model: M24 SWS



RE00136222

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

P & E NUMBER 136222
SERIAL NUMBER C6523341
LOG-IN DATE 11-2-07

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	7-10-08	RTZ
505	RE-BARREL	7-18-08	KE
560	ASSEMBLE	7-15-08	ESN
600	PROOF	7-16-08	TRW
605	CHECK HEADSPACE	7-16-08	TRW
610	DIS-ASSEMBLE GUN	7-18-08	RTZ
612	MAGNAFLUX	7/25/08	RT
510	DRILL AND TAP	7-19-08	SP
615	ROLLMARK CALIBER	7/25/08	RT
618	ROTO-BLAST	7/25/08	DC
620	APPLY COATINGS	8-1	W
625	FINAL ASSEMBLY	8-5-08	RTZ
640	FUNCTION TEST AND	9-2-08	FM
650	TARGET	9-2-08	FM
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION A) HEADSPACE	9-2-08 9-8-08 9-8-08	TRW RTZ RTZ
	B) TRIGGER PULL MIN 2.50 LBS MAX 4.0 LBS	230 244 241 246 246 9-8-08	ESN
	C) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	60 60 60 9-8-08	RTZ
	D) SAFETY OFF FORCE 2 LBS MAX	30 30 30 9-8-08	RTZ
	E) FIRING PIN INDENT .020	024 024 024 9-8-08	RTZ
690	PACK	14/9/08	FM

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6523341.___0
FILE DATE AND TIME: 09/02/2008 09:55

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.024
The Average Y Centroid of the Five Target Set:	-0.089
The Average Point of Impact of the Five Target Set:	0.092
The Average Mean Radius of the Five Target Set:	0.570
The Distance from POA to Centroid Target #1:	0.139
The Distance from Centroid Target #2 to Centroid Target #1:	0.071
The Distance from Centroid Target #3 to Centroid Target #1:	0.146
The Distance from Centroid Target #4 to Centroid Target #1:	0.090
The Distance from Centroid Target #5 to Centroid Target #1:	0.053

SERIAL NUMBER: C6523341. 0

TARGET NUMBER: 1

FILE DATE: 09/02/2008

FILE TIME: 09:55

POINT#	X	Y
1:	0.799	-0.987
2:	0.482	-0.555
3:	0.134	-0.662
4:	0.015	-0.386
5:	0.118	-0.188
6:	0.321	0.065
7:	-0.178	0.485
8:	-0.657	0.587
9:	-0.939	0.579
10:	0.033	-0.327

X CENTROID: 0.013

Y CENTROID: -0.139

POA TO CENTROID: 0.139

HORZ SPREAD: 1.738

VERT SPREAD: 1.574

GROUP SPREAD: 2.339

MIN RADIUS: 0.116


MAX RADIUS: 1.192

MEAN RADIUS: 0.607

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

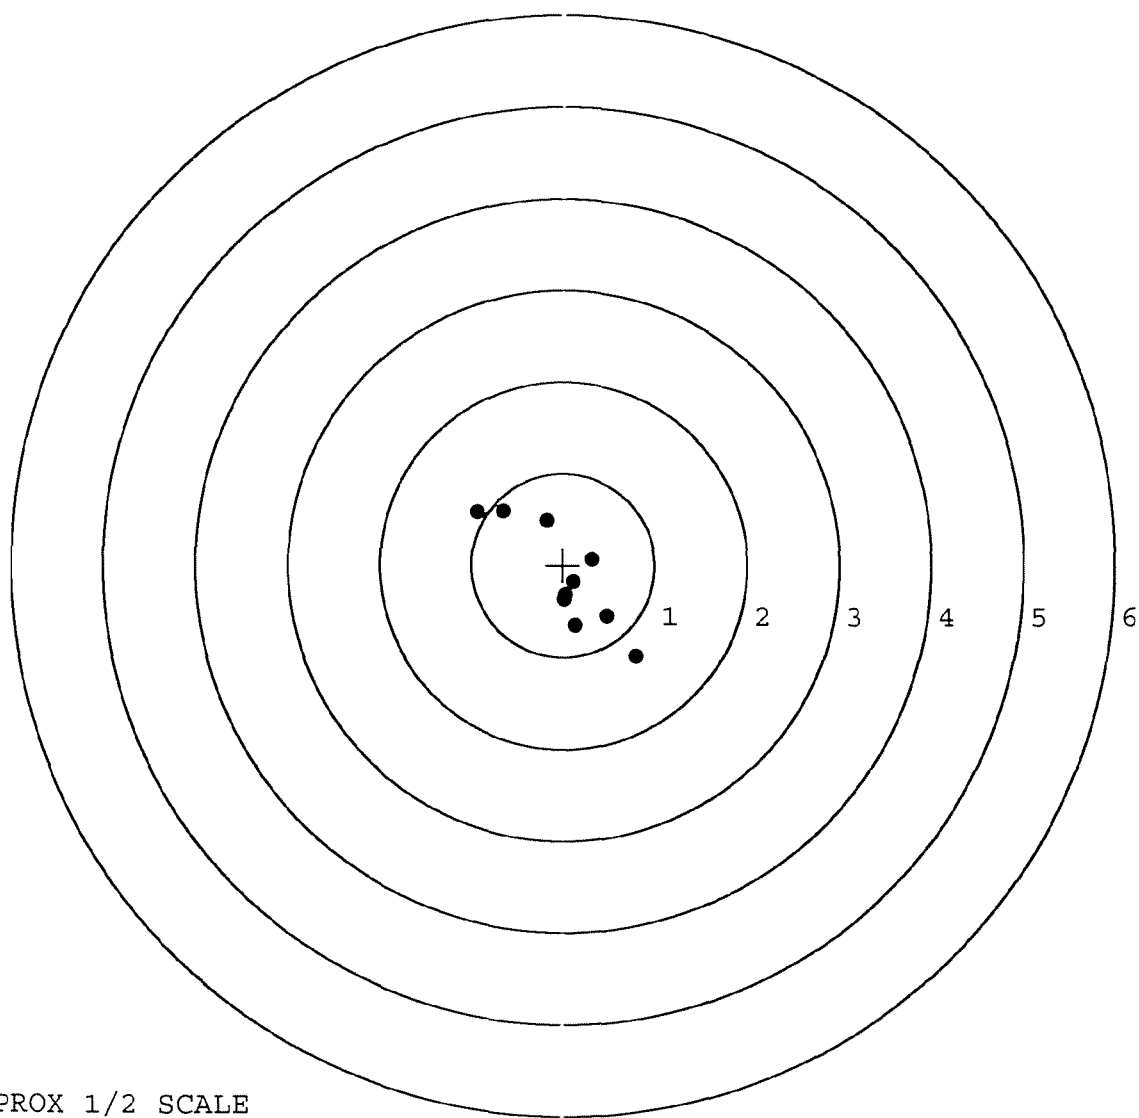

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523341. __0

TARGET NUMBER: 2

FILE DATE: 09/02/2008

FILE TIME: 09:55

POINT#	X	Y
1:	0.629	-0.875
2:	0.043	-0.830
3:	-0.349	-0.432
4:	0.084	-0.352
5:	0.323	-0.081
6:	0.293	0.044
7:	0.233	0.222
8:	0.632	0.686
9:	-0.326	0.143
10:	-0.724	0.149

X CENTROID: 0.084

Y CENTROID: -0.133

POA TO CENTROID: 0.157

HORZ SPREAD: 1.356

VERT SPREAD: 1.561

GROUP SPREAD: 1.626

MIN RADIUS: 0.219


MAX RADIUS: 0.985

MEAN RADIUS: 0.560

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

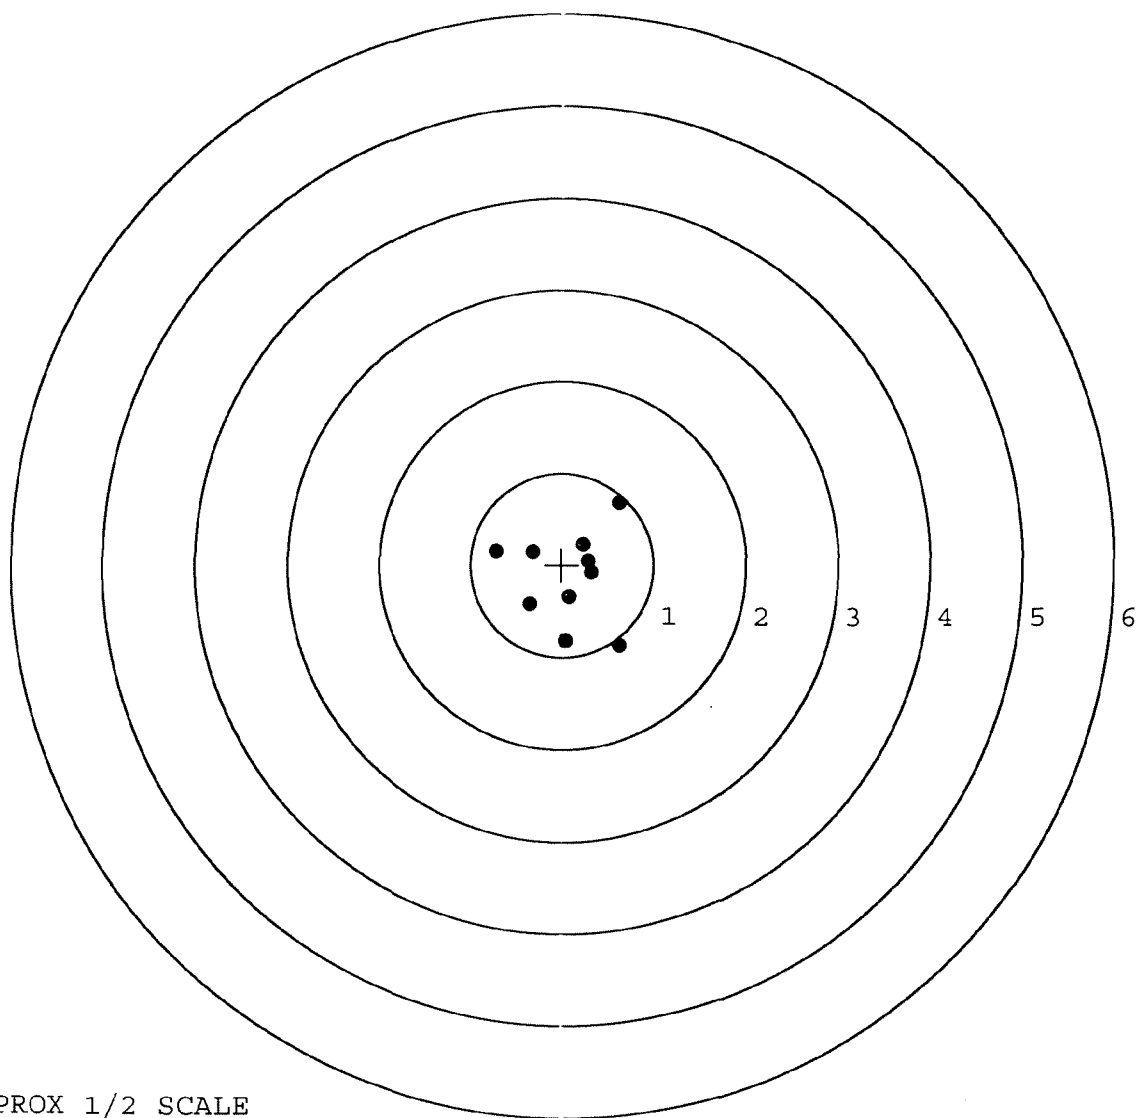

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523341. 0

TARGET NUMBER: 3

FILE DATE: 09/02/2008

FILE TIME: 09:55

POINT#	X	Y
1:	-0.215	-0.834
2:	-0.293	-0.279
3:	-0.382	-0.002
4:	0.152	-0.088
5:	0.393	-0.097
6:	0.564	-0.116
7:	0.888	-0.011
8:	0.323	0.543
9:	-0.198	0.372
10:	-0.645	0.504

X CENTROID: 0.059

Y CENTROID: -0.001

POA TO CENTROID: 0.059

HORZ SPREAD: 1.533

VERT SPREAD: 1.377

GROUP SPREAD: 1.478

MIN RADIUS: 0.128


MAX RADIUS: 0.877

MEAN RADIUS: 0.551

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

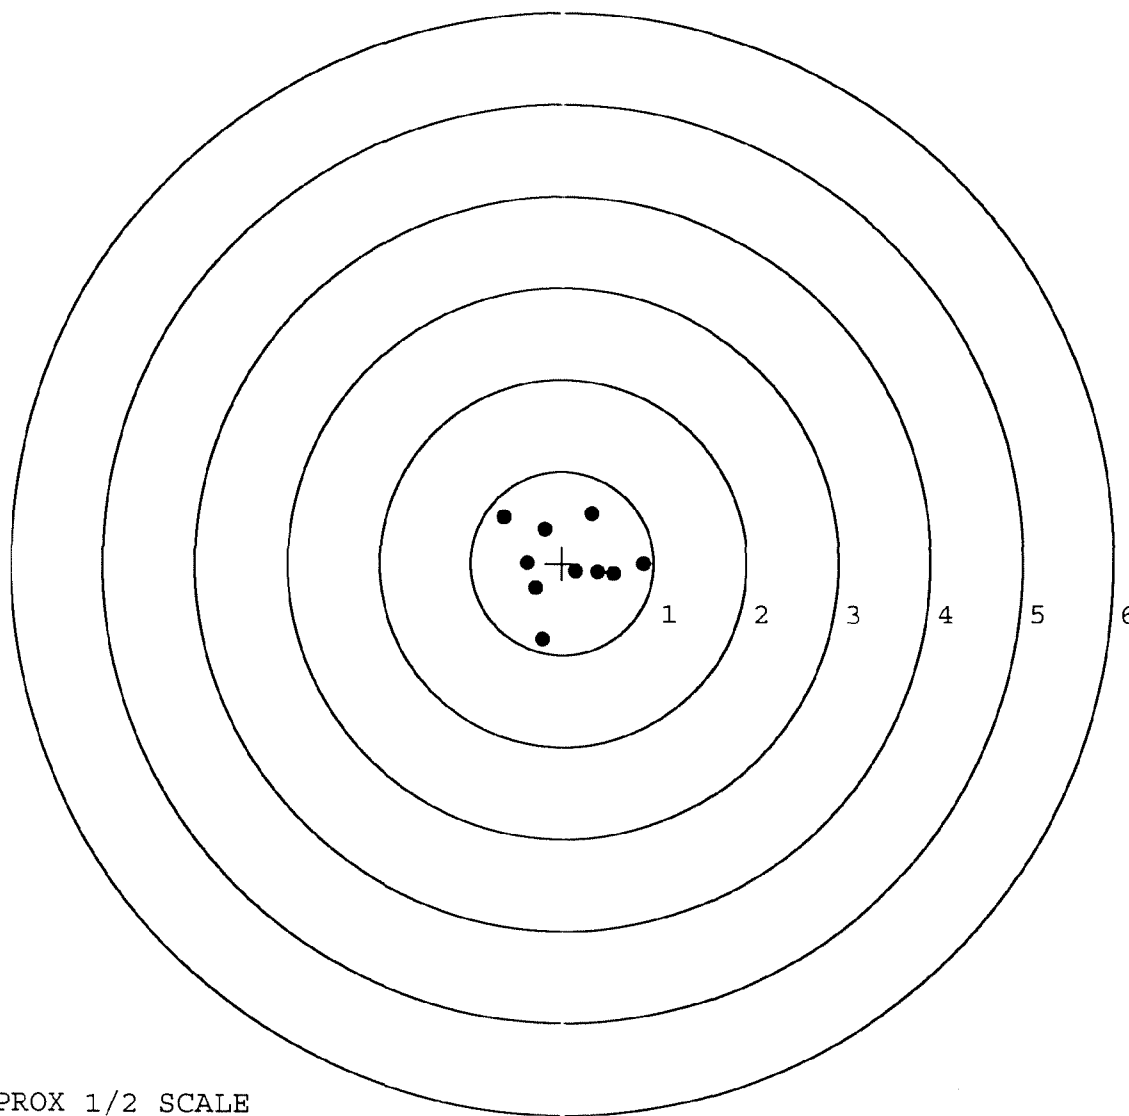

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523341. 0

TARGET NUMBER: 4

FILE DATE: 09/02/2008

FILE TIME: 09:55

POINT#	X	Y
1:	0.771	-0.592
2:	0.444	-0.288
3:	0.382	0.123
4:	-0.172	-0.249
5:	-0.525	-0.632
6:	-0.485	-0.413
7:	-0.499	0.152
8:	-0.143	0.237
9:	-0.090	0.588
10:	-0.297	0.201

X CENTROID: -0.061

Y CENTROID: -0.087

POA TO CENTROID: 0.107

HORZ SPREAD: 1.296

VERT SPREAD: 1.220

GROUP SPREAD: 1.472

MIN RADIUS: 0.196


MAX RADIUS: 0.973

MEAN RADIUS: 0.533

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

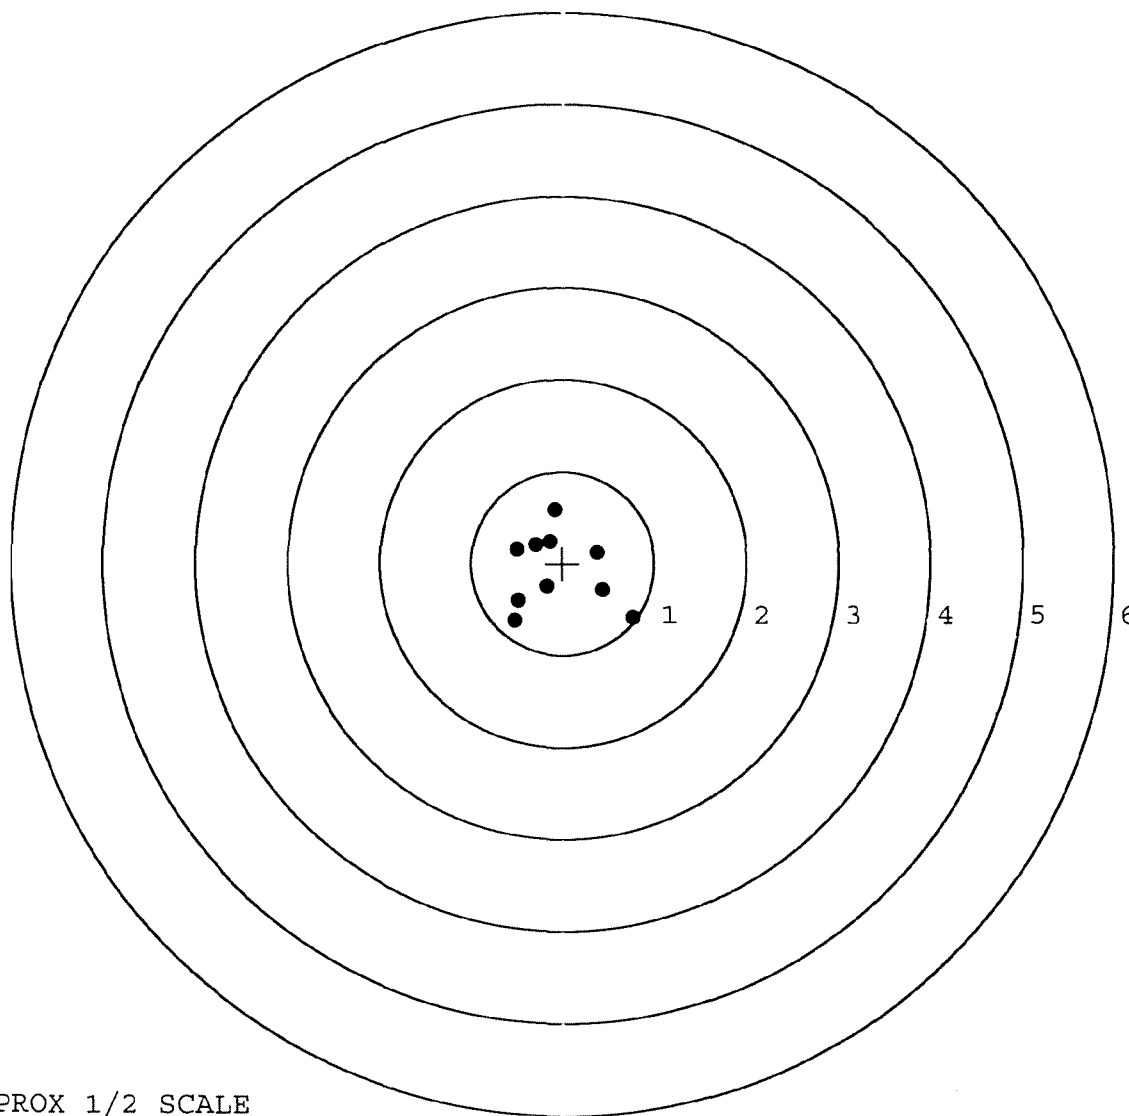

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523341. __0

TARGET NUMBER: 5

FILE DATE: 09/02/2008

FILE TIME: 09:55

POINT#	X	Y
1:	0.001	0.000
2:	0.209	-0.980
3:	0.707	-0.632
4:	0.448	-0.209
5:	-0.045	-0.355
6:	-0.399	-0.128
7:	-1.156	-0.379
8:	-0.137	-0.075
9:	-0.035	0.261
10:	0.293	0.508
11:	0.383	1.029

X CENTROID: 0.024

Y CENTROID: -0.087

POA TO CENTROID: 0.091

HORZ SPREAD: 1.863

VERT SPREAD: 2.009

GROUP SPREAD: 2.086

MIN RADIUS: 0.090


MAX RADIUS: 1.216

MEAN RADIUS: 0.598

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 11

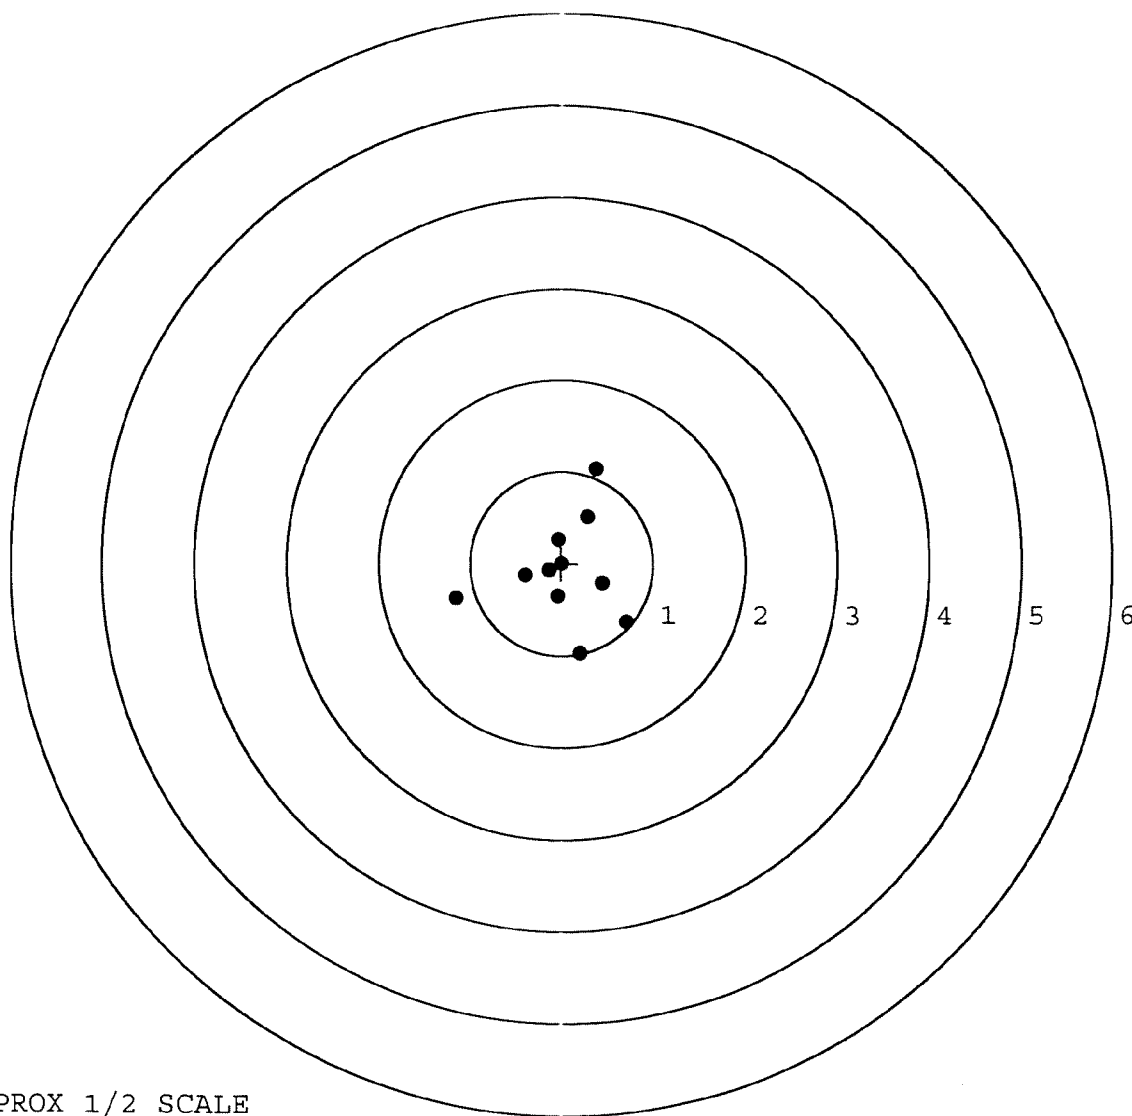

TARGET APPROX 1/2 SCALE

COMMENTS

B	94-18345	ORDER
---	----------	-------

W/10X SCOPE, M-24 SNIPER, W/DEPLOYMENT KIT
ATTN: FRED MARTIN *SCOPE 89-0600*

Accessories	SLING STRAP	HARD CASE	SCOPE MNTS	SCOPE BASE
1	1	1	1	1

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON AL

AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON AL

AL
34201-5025

CUST NO:098397 C.O.D.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

FRT

GUN CONDITION

☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Trigger Hesy	173.31
Scoops Repair	119.43
Clean/Insp/Prep	50.00
	342.74
	343.14

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
-----------	-------	-------	------	--------	---------

GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
----------------	------	------	------	------	------

OFFICE COPY

RD6925 BEV 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400006424

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6523341

DATE _____

TESTER PR

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.69	2.68	2.50	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.70	2.67	2.70	
PULL #3	2.67	2.67	2.90	
PULL #4	2.62	2.65	2.35	
PULL #5	2.64	2.70	2.26	
TOTAL	13.38	13.37	12.71	
AVG.	2.66	2.67	2.54	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.08	3.09		
PULL #2	3.09	3.11		
PULL #3	3.13	3.13		
PULL #4	3.14	3.10		
PULL #5	3.16	3.18		
TOTAL	15.60	15.61		
AVG.	3.12	3.12		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.06	4.24		4.13
PULL #2	4.06	4.10		4.10
PULL #3	4.08	4.22		4.01
PULL #4	4.15	4.23		4.15
PULL #5	4.19	4.23		4.05
TOTAL	20.54	21.00		20.44
AVG.	4.11	4.20		4.09

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

66523341

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607.	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	5 3/4	5 3/4			11/27	WB
	G) Safety Off Force	3 1/4	3 1/4	3 1/4			11/27	WB
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.43	2.44	2.46	2.40	2.52	11/27	WB
	C) Function							
660	Pack							

Remington®

MODEL 700™ M24


UPPONT
RES. US PAT. TM. OFF.

VERY IMPORTANT!
Instruction Book
enclosed to assure
safe use of this
firearm.

SERIAL NO.
C6523341


ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6523341

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6523341

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	9 25	90	RW
600	Proof	9 25	90	RW
607	Check Headspace	9 25	90	RW
610	Dis-assemble Gun	9 25	90	RW
612	Magnaflux Barrel Action		9-26-90	KR
	Magnaflux Bolt		9-26-90	KR
615	Rollmark Caliber		9-26-90	EL
617	Drill and Tap Sight Holes		7/28/90	FB
618	Polish Barrel RB		10/1/90	WB
620	Apply Coatings (Barrel Action)		10-5-90	TJA
	Apply Coating (Bolt)		10-5-90	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		10/8/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		10/8/90	RW
	C) Inspect Ejector Hole for Chamfer		10/8/90	RW
	D) Oil Firing Pin Ass'y		10/8/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		10/10/90	WB

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			10/10/90	WB
	G) Safety Off Force	3	3	3			10/10/90	WB
	H) Trigger Pull Test & Retainability						10/10/90	WB
	I) Firing Pin Indent	.0225	.0225	.0225			10/10/90	WB
	J) Assemble Stock						10/10/90	RW
	K) Assemble Swivel Studs						2/10/90	PS
	L) Attach Front and Rear Sight Assemblies						10/10/90	RW
	M) Iron Sight Alignment						10/10/90	RW
	N) Detach Front & Rear Sights & place in numbered container						10/10/90	RW
	O) Attach Scope to Rifle						10/10/90	RW
	P) Detach & Attach Scope 20 Times						10/10/90	RW
640	Gallery Target & Test						10-11-90	DH
	A) Time						10-11-90	DH
	B) Malfunctions						10-11-90	DH
	C) Pierced Primers						10-11-90	DH
	D) Optical Clarity of Scope						10-11-90	DH
645	Inspect for Live Ammo						10-11-90	DH
655	Final Inspection							
	A) Headspace						2/10/90	PS
	B) Trigger Pull	230	233	229	229	230	2/10/90	PS
	C) Function						2/10/90	PS
660	Pack						12/1/90	DH

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6523341

DATE 10/10/90

TESTER WB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.36	2.46	2.44	2.30	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.54	2.34	2.32	2.33	
PULL #3	2.55	2.39	2.41	2.29	
PULL #4	2.53	2.52	2.38	2.29	
PULL #5	2.50	2.41	2.42	2.30	
TOTAL	12.48	12.12	10.97		
AVG.	2.49	2.42	2.19		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.35	3.16		
PULL #2	3.33	3.18		
PULL #3	3.33	3.16		
PULL #4	3.42	3.16		
PULL #5	3.22	3.14		
TOTAL	16.65	15.80		
AVG.	3.33	3.16		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.18	4.09		4.23
PULL #2	4.14	4.06		4.20
PULL #3	4.11	4.10		4.24
PULL #4	4.13	4.10		4.21
PULL #5	4.11	4.15		4.30
TOTAL	20.67	20.50		21.28
AVG.	4.13	4.10		4.25

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6523341
12 Oct 1990

CENTROIDAL DISTANCES

0	TO	1	.300097
1	TO	2	.647408
1	TO	3	.500892
1	TO	4	.770974
1	TO	5	.692665

11.3
24 <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1912
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1484
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .242033

THE AMR FOR THIS RIFLE IS: 1.015

12 Oct 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C6523341

CENTERFIRE PATTERNS # 1

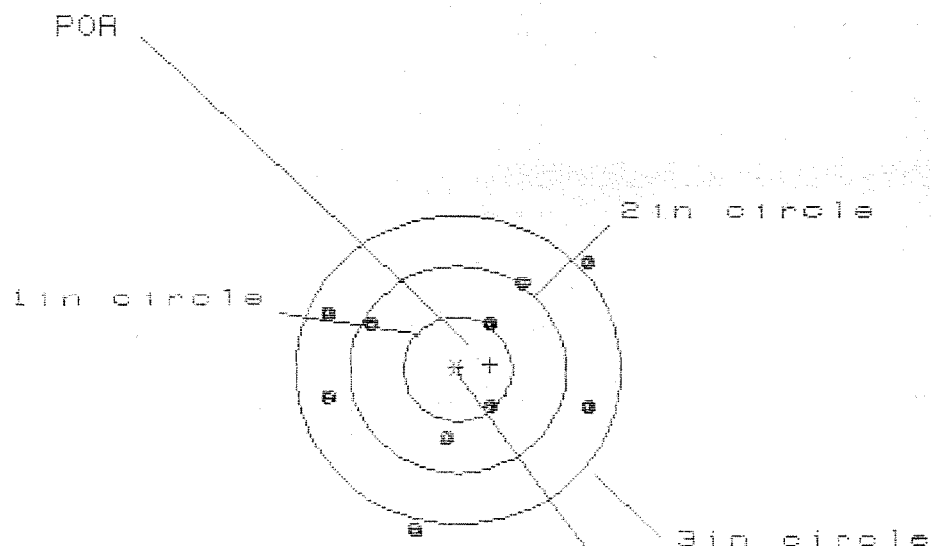

OF SHOTS = 10

IN CIR

1in = 1

2in = 4

3in = 8

IS = 0.410

VS = 2.594

GS = 3.047


CENTROID *

PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.242	1.203	1.353
MINIMUM X	-1.177	-1.216	-1.066
MAXIMUM Y	1.003	.926	.755
MINIMUM Y	-1.591	-.876	-.773
CENTROID X	-.297	-.258	-.408
CENTROID Y	-.043	.134	.031
POR TO CENTROID in.	.300	.290	.409
MIN RADIUS	.410	.350	.526
MEAN RADIUS	1.056	.982	.915
MAX RADIUS	1.631	1.459	1.420
HORIZONTAL SPREAD	2.419	2.419	2.419
VERTICAL SPREAD	2.594	1.702	1.528
EXTREME SPREAD	3.047	2.697	2.567
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8523341

CENTERFIRE PATTERNS # 2

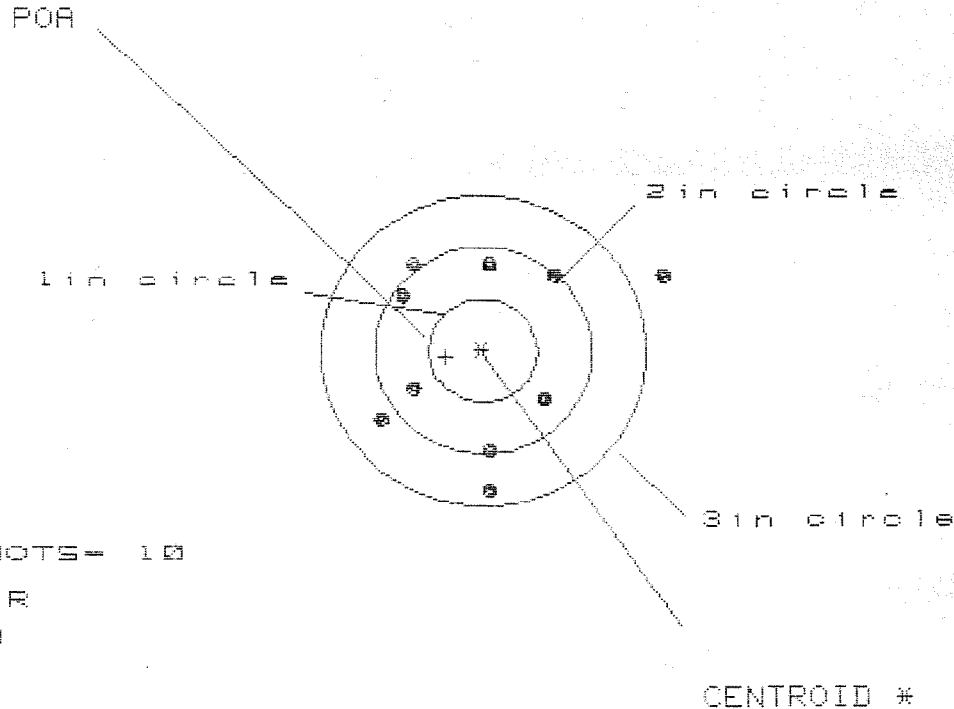

OF SHOTS= 10

IN CIR

1in = 0

2in = 5

3in = 9

HS= 2.635

VS= 2.232

GS= 2.982

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.645	.889	.916
MINIMUM X	:	-.990	-.807	-.780
MAXIMUM Y	:	.884	.966	.808
MINIMUM Y	:	-1.348	-1.266	-1.067
CENTROID X	:	.342	.159	.132
CENTROID Y	:	.061	-.021	.137
POA TO CENTROID in.	:	.347	.160	.191
MIN RADIUS	:	.673	.576	.647
MEAN RADIUS	:	1.068	.964	.912
MAX RADIUS	:	1.802	1.284	1.150
HORIZONTAL SPREAD	:	2.635	1.696	1.696
VERTICAL SPREAD	:	2.232	2.232	1.875
EXTREME SPREAD	:	2.982	2.324	2.220
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8523341

CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 6

3 in = 8

HS= 2.522

VS= 2.810

GS= 3.616

CENTROID #

PATTERN #	3	3	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.513	1.400	.764
MINIMUM X	-1.010	-.907	-.732
MAXIMUM Y	1.267	1.095	1.205
MINIMUM Y	-1.543	-.923	-.013
CENTROID X	.090	.202	.027
CENTROID Y	-.361	-.189	-.299
POA TO CENTROID in.	.372	.277	.300
MIN RADIUS	.460	.516	.543
MEAN RADIUS	1.034	.947	.841
MAX RADIUS	1.844	1.652	1.245
HORIZONTAL SPREAD	2.522	2.307	1.496
VERTICAL SPREAD	2.810	2.018	2.018
EXTREME SPREAD	3.616	2.731	2.025
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	8		

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8523341

CENTERFIRE PATTERNS # 4

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 7

3 in = 10

HS= 1.949

VS= 2.564


GS= 2.565

PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.937	.922	.893
MINIMUM X	-1.012	-1.027	-1.056
MAXIMUM Y	1.424	.717	.594
MINIMUM Y	-1.140	-.982	-.728
CENTROID X	.427	.442	.471
CENTROID Y	-.308	-.466	-.343
POA TO CENTROID in.	.527	.642	.583
MIN RADIUS	.219	.223	.249
MEAN RADIUS	.855	.790	.747
MAX RADIUS	1.430	1.051	1.111
HORIZONTAL SPREAD	1.949	1.949	1.949
VERTICAL SPREAD	2.564	1.699	1.322
EXTREME SPREAD	2.565	2.055	2.855
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		10	

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6523341

CENTERFIRE PATTERNS # 5

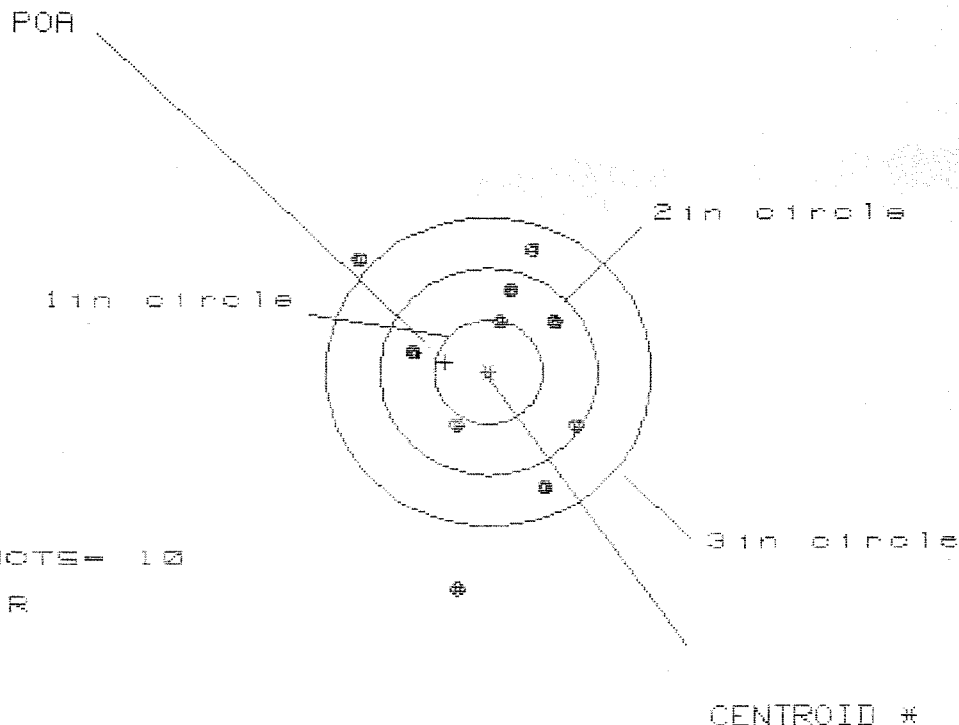

OF SHOTS= 10

IN CIR

1in = 1

2in = 6

3in = 8

HS= 2.016

VS= 3.279

GS= 3.360

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.807	.769	.614
MINIMUM X	:	-1.209	-1.247	-.897
MAXIMUM Y	:	1.172	.938	1.051
MINIMUM Y	:	-2.107	-1.351	-1.238
CENTROID X	:	.394	.432	.588
CENTROID Y	:	-.091	.143	.030
POA TO CENTROID in.	:	.404	.455	.588
MIN RADIUS	:	.472	.237	.343
MEAN RADIUS	:	1.062	.896	.816
MAX RADIUS	:	2.134	1.540	1.267
HORIZONTAL SPREAD	:	2.016	2.016	1.511
VERTICAL SPREAD	:	3.279	2.289	2.289
EXTREME SPREAD	:	3.360	2.808	2.291
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		8	