

C6498816

MODEL 700™ M24

Model **SWS**™


Action

Barrel Length

Capacity

Order No. **5716**

* Includes 1 in chamber.



Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00131270

Serial: C6498816 Model M24 SWS Center Fire
Produced: 06/19/1990

Repairman:

Verify Repair

Status:

Closed 7/11/2007 2:11:34 PM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: DEPT. OF ARMY

DEPT. OF ARMY

Address 1: ATTN: DANIEL WILCOX

ATTN: DANIEL WILCOX

Address 2: HHC 1-87

PO Box:

HHC 1-87

PO Box:

City: FORT DRUM

FORT DRUM

State: NY

Zip Code: 13602

Country: US

State: NY

Zip Code: 13602

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A057	Frt and Rear Sgt Base	2

Repair Search

Refresh

Close

nagletj

7/12/2007

7:40 AM

CAPS

NUM

INS

SCRL



5 Micros...

4 Intern...

5 Micros...

2 SAP L...

Arms Ser...

7:40 AM

Serial Number: C6498816

Model: M24 SWS



RE00131270

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6498816.___0
FILE DATE AND TIME: 07/31/2007 14:48

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.031
The Average Y Centroid of the Five Target Set:	-0.031
The Average Point of Impact of the Five Target Set:	0.044
The Average Mean Radius of the Five Target Set:	0.730
The Distance from POA to Centroid Target #1:	0.081
The Distance from Centroid Target #2 to Centroid Target #1:	0.196
The Distance from Centroid Target #3 to Centroid Target #1:	0.223
The Distance from Centroid Target #4 to Centroid Target #1:	0.175
The Distance from Centroid Target #5 to Centroid Target #1:	0.088

SERIAL NUMBER: C6498816. 0

TARGET NUMBER: 1

FILE DATE: 07/31/2007

FILE TIME: 14:48

X CENTROID: -0.081

Y CENTROID: -0.007

POA TO CENTROID: 0.081

HORZ SPREAD: 2.294

VERT SPREAD: 1.581

GROUP SPREAD: 2.530

MIN RADIUS: 0.117

MAX RADIUS: 1.416


MEAN RADIUS: 0.814

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.223	-0.770
2:	0.041	-0.479
3:	0.776	-0.209
4:	0.395	0.271
5:	0.406	0.807
6:	0.819	0.811
7:	-0.180	-0.070
8:	-0.708	0.109
9:	-1.104	-0.287
10:	-1.475	-0.256

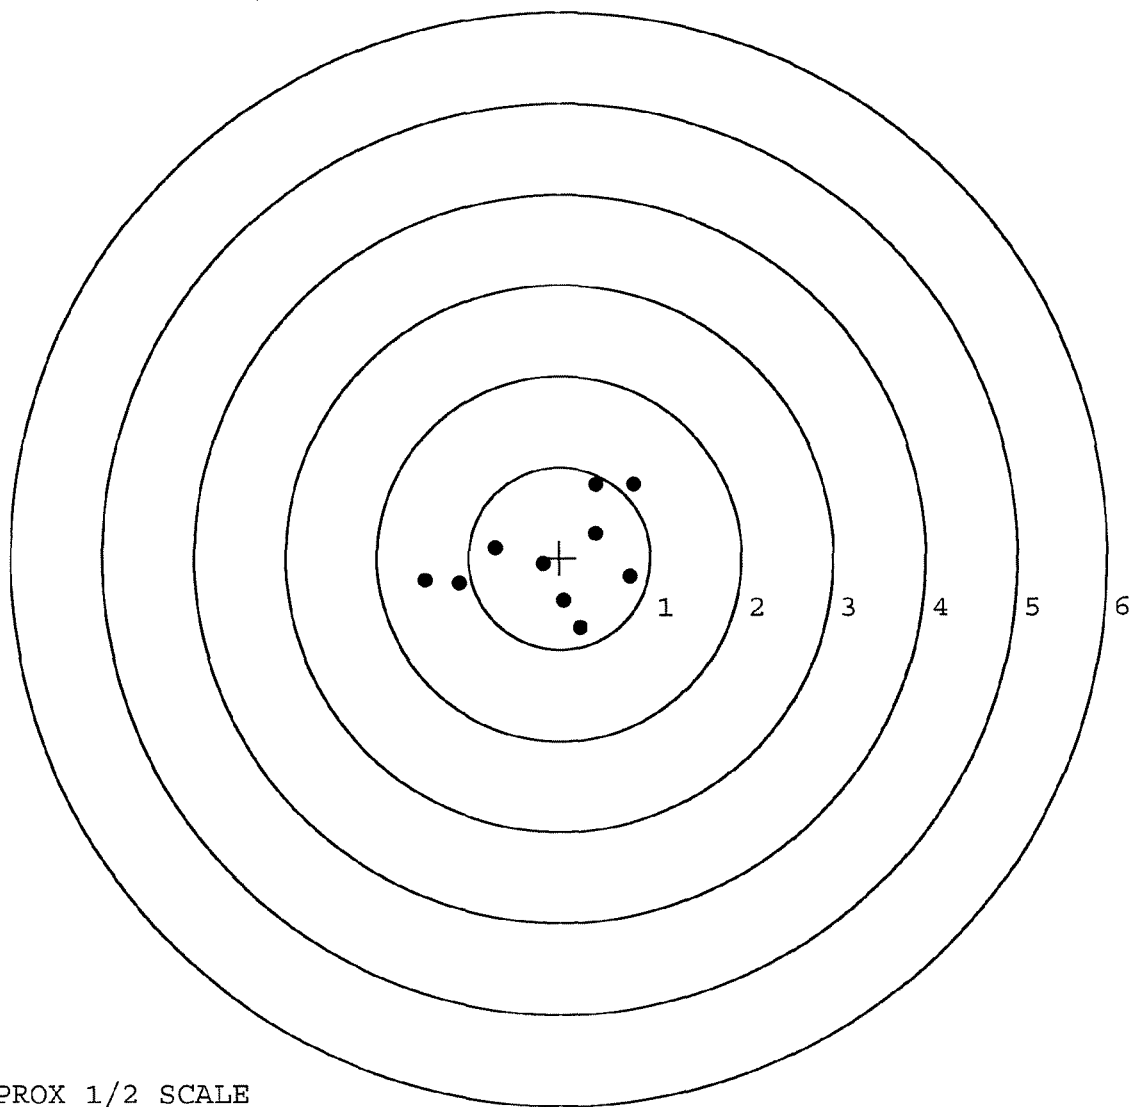

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. 0

TARGET NUMBER: 2

FILE DATE: 07/31/2007

FILE TIME: 14:48

POINT#	X	Y
1:	0.345	-1.013
2:	0.493	-0.497
3:	-0.466	-0.641
4:	-0.373	0.042
5:	-0.607	0.328
6:	0.718	0.921
7:	0.304	0.576
8:	0.239	0.318
9:	0.015	0.424
10:	0.198	0.493

X CENTROID: 0.087

Y CENTROID: 0.095

POA TO CENTROID: 0.129

HORZ SPREAD: 1.325

VERT SPREAD: 1.934

GROUP SPREAD: 1.970

MIN RADIUS: 0.270


MAX RADIUS: 1.138

MEAN RADIUS: 0.656

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

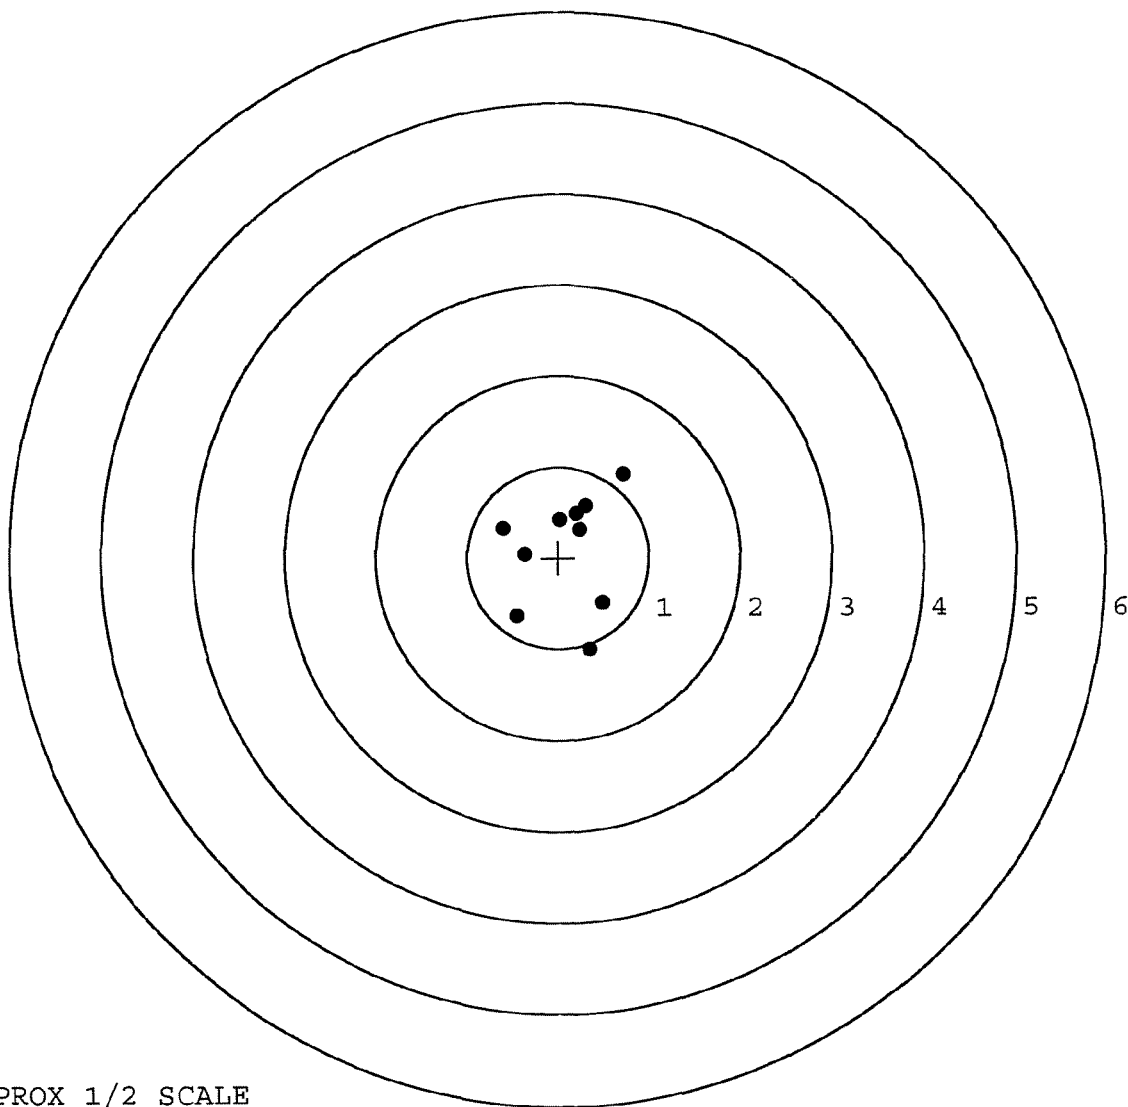


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. 0
TARGET NUMBER: 3
FILE DATE: 07/31/2007
FILE TIME: 14:48

X CENTROID: 0.080
Y CENTROID: -0.163
POA TO CENTROID: 0.181
HORZ SPREAD: 1.145
VERT SPREAD: 1.895
GROUP SPREAD: 1.968
MIN RADIUS: 0.233
MAX RADIUS: 1.194
MEAN RADIUS: 0.610
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.638	-1.218
2:	0.493	0.069
3:	0.334	-0.711
4:	0.223	-0.547
5:	0.229	-0.342
6:	-0.287	-0.298
7:	-0.507	-0.164
8:	-0.182	0.369
9:	-0.253	0.535
10:	0.108	0.677

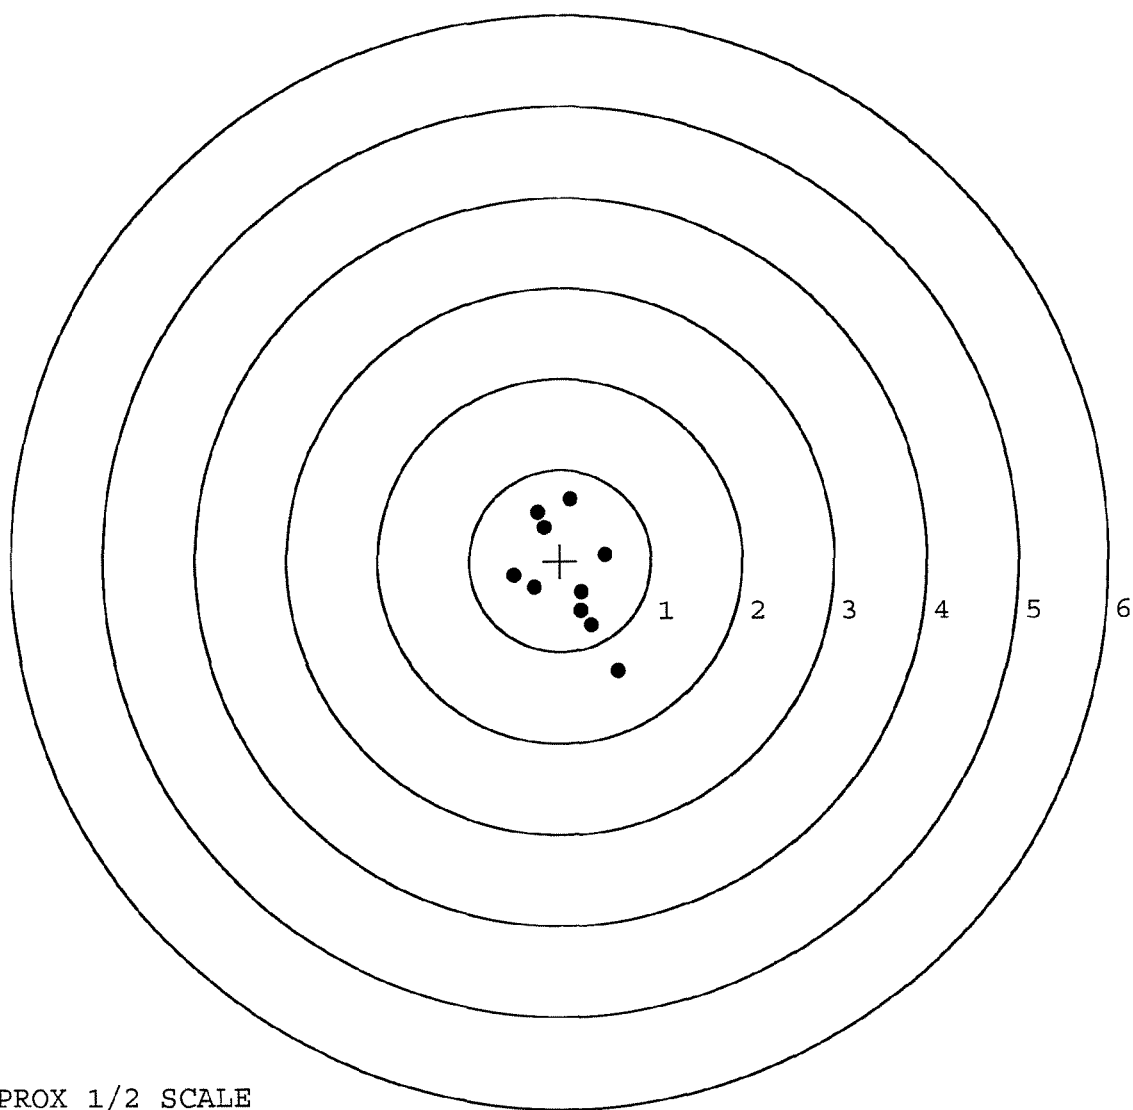

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __ 0

TARGET NUMBER: 4

FILE DATE: 07/31/2007

FILE TIME: 14:48

POINT#	X	Y
1:	1.219	-0.011
2:	0.857	-0.849
3:	0.457	-0.404
4:	0.051	-1.140
5:	-0.762	-0.506
6:	-0.686	0.632
7:	-0.165	1.257
8:	0.084	-0.110
9:	-0.223	-0.082
10:	-0.155	0.204

X CENTROID: 0.068

Y CENTROID: -0.101

POA TO CENTROID: 0.122

HORZ SPREAD: 1.981

VERT SPREAD: 2.397

GROUP SPREAD: 2.407

MIN RADIUS: 0.019


MAX RADIUS: 1.378

MEAN RADIUS: 0.781

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 10

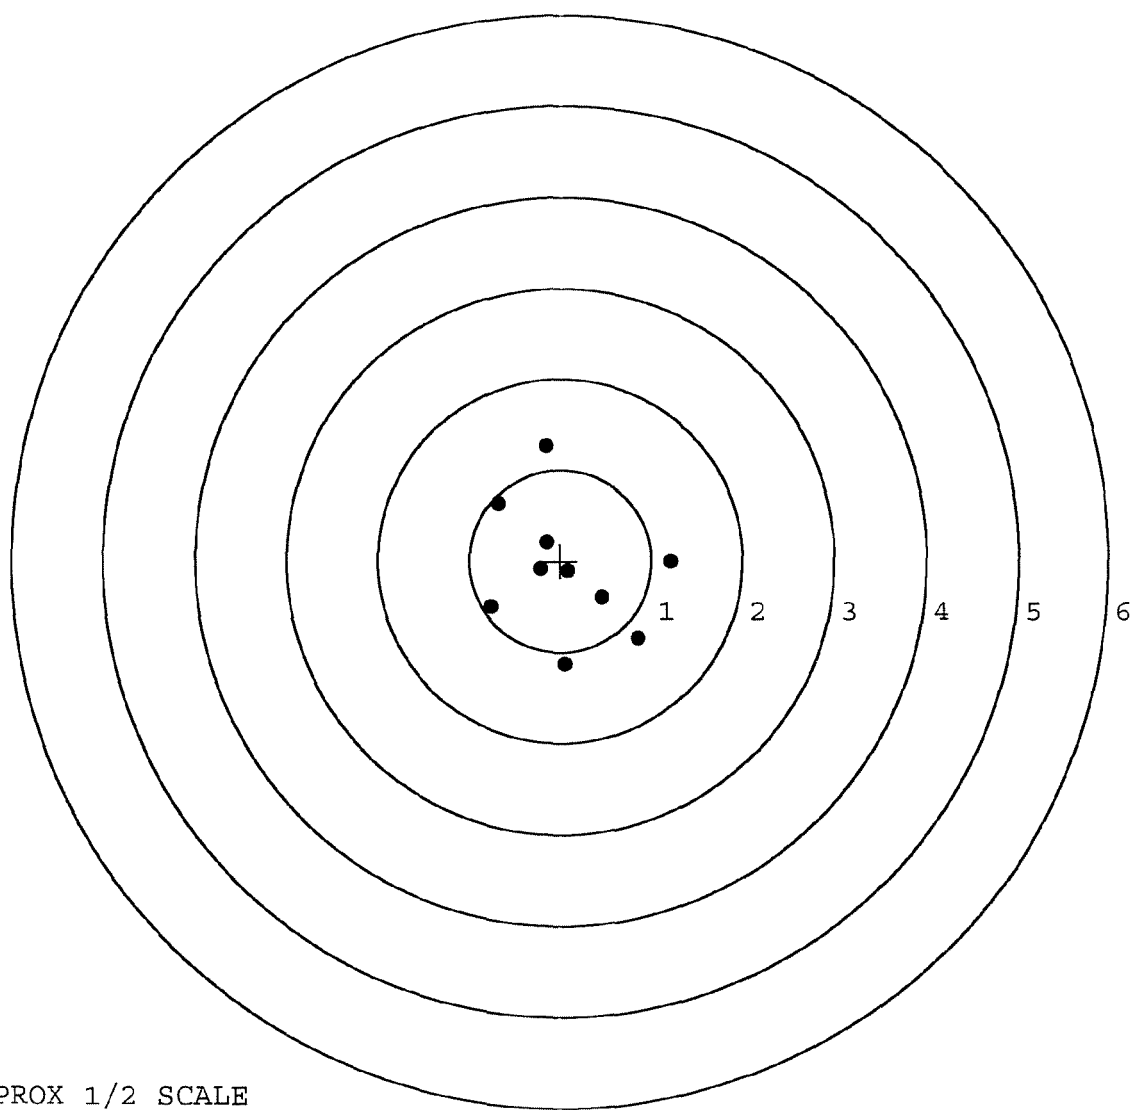


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __0
TARGET NUMBER: 5
FILE DATE: 07/31/2007
FILE TIME: 14:48

POINT#	X	Y
1:	1.005	-0.117
2:	0.990	0.399
3:	0.409	1.295
4:	-0.337	-0.925
5:	-1.281	-0.714
6:	-0.843	0.245
7:	0.085	0.490
8:	0.182	-0.105
9:	-0.065	-0.019
10:	-0.124	-0.315

X CENTROID: 0.002
Y CENTROID: 0.023
POA TO CENTROID: 0.023
HORZ SPREAD: 2.286
VERT SPREAD: 2.220
GROUP SPREAD: 2.625
MIN RADIUS: 0.079
MAX RADIUS: 1.480
MEAN RADIUS: 0.790
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 10

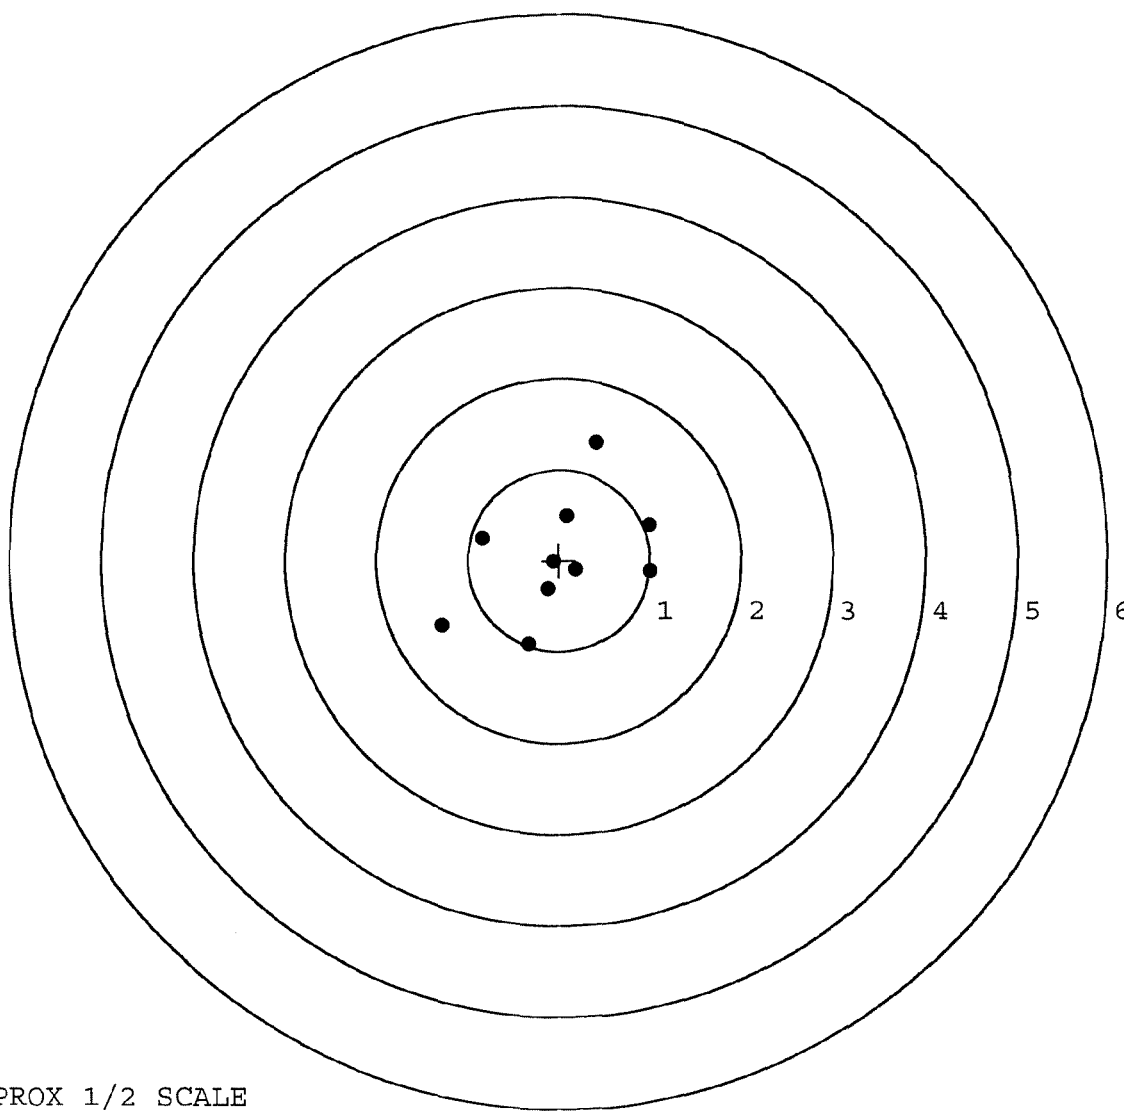

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER		131228		
SERIAL NUMBER		C6498816		
LOG-IN DATE		7-11-07		

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	7-17-07	RTZ
505	RE-BARREL	7-17-07	RTZ
560	ASSEMBLE	7-19-07	TRW
600	PROOF	7-19-07	TRW
605	CHECK HEADSPACE	7-19-07	TRW
610	DIS-ASSEMBLE GUN	7-20-07	RTZ
612	MAGNAFLUX	7-23-07	mmms
510	DRILL AND TAP	7-20-07	TRW
615	ROLLMARK CALIBER	7-20-07	CW
618	ROTO-BLAST	7-24-07	LY
620	APPLY COATINGS	7-24-07	TRW
625	FINAL ASSEMBLY	7-27-07	RTZ
640	FUNCTION TEST AND	PASS FAIL	7-31-07 TRW
650	TARGET	PASS FAIL	7-31-07 TRW
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION		7-31-07 TRW
	A) HEADSPACE	PASS FAIL	8-1-07 RTZ
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	281 280 279 280 274 8-1-07 RTZ
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	5.5 5.5 5.0 8-1-07 RTZ
	G) SAFETY OFF FORCE	2 LBS MIN	2.25 2.25 2.0 8-1-07 RTZ
	I) FIRING PIN INDENT	.020	.022 .022 .022 8-1-07 RTZ
690	PACK		8-6-07 DA

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6498816.___0
FILE DATE AND TIME: 06/03/2005 08:57

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.035
The Average Y Centroid of the Five Target Set:	-0.029
The Average Point of Impact of the Five Target Set:	0.045
The Average Mean Radius of the Five Target Set:	0.692
The Distance from POA to Centroid Target #1:	0.152
The Distance from Centroid Target #2 to Centroid Target #1:	0.277
The Distance from Centroid Target #3 to Centroid Target #1:	0.321
The Distance from Centroid Target #4 to Centroid Target #1:	0.288
The Distance from Centroid Target #5 to Centroid Target #1:	0.246

SERIAL NUMBER: C6498816. __0

TARGET NUMBER: 1

FILE DATE: 06/03/2005

FILE TIME: 08:57

X CENTROID: -0.149

Y CENTROID: 0.033

POA TO CENTROID: 0.152

HORZ SPREAD: 1.351

VERT SPREAD: 1.336

GROUP SPREAD: 1.680

MIN RADIUS: 0.154

MAX RADIUS: 1.065


MEAN RADIUS: 0.618

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.002	0.003
2:	0.521	-0.795
3:	-0.590	-0.605
4:	-0.830	-0.645
5:	0.386	0.377
6:	0.240	0.149
7:	0.110	0.541
8:	-0.178	0.529
9:	-0.473	0.395
10:	-0.676	0.384

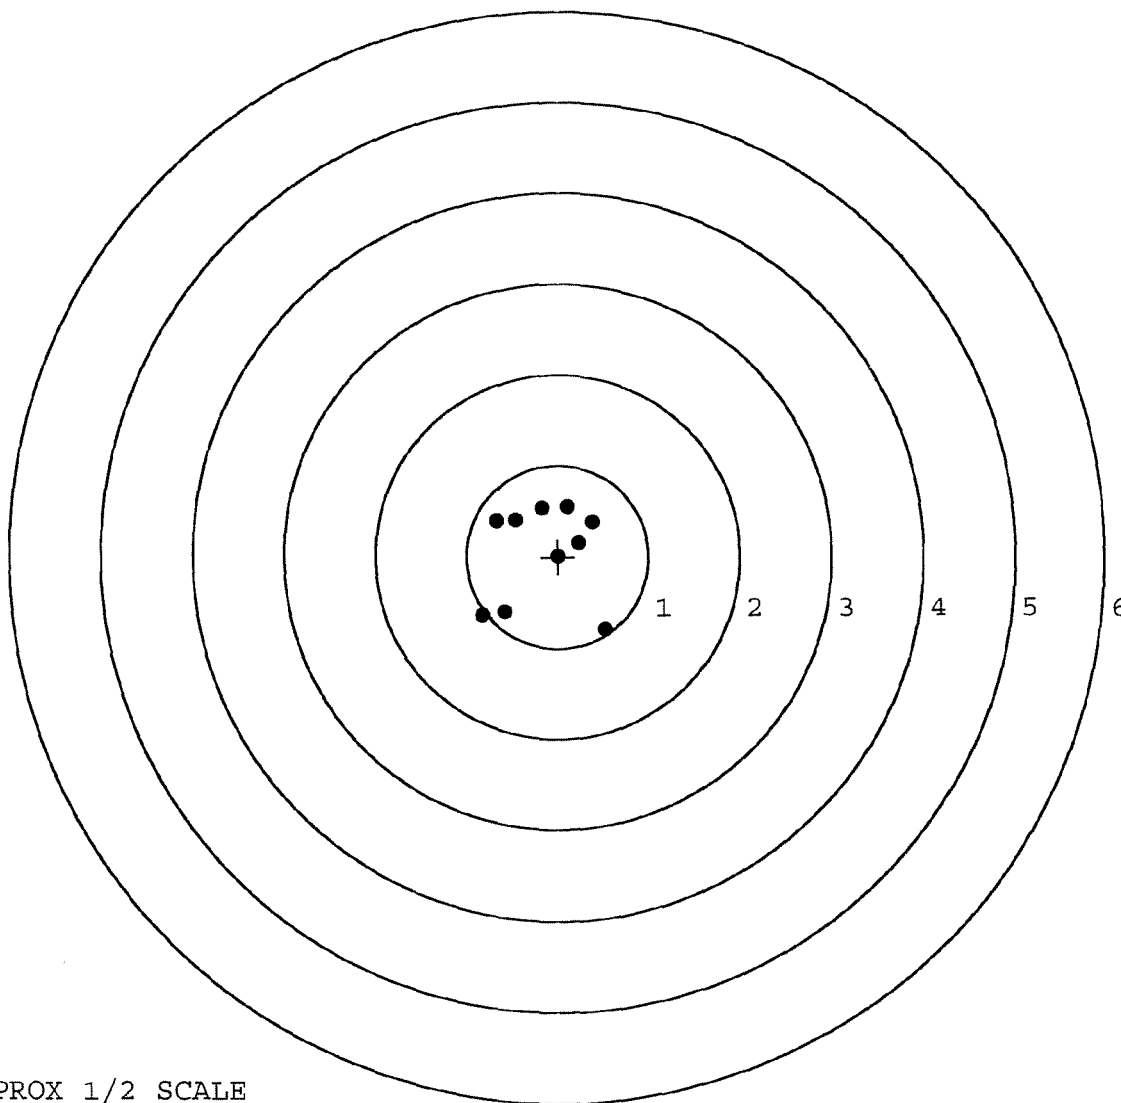

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __0

TARGET NUMBER: 2

FILE DATE: 06/03/2005

FILE TIME: 08:57

X CENTROID: -0.077

Y CENTROID: -0.234

POA TO CENTROID: 0.247

HORZ SPREAD: 1.384

VERT SPREAD: 1.215

GROUP SPREAD: 1.742

MIN RADIUS: 0.057

MAX RADIUS: 0.943


MEAN RADIUS: 0.562

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.627	-0.606
2:	-0.840	-0.641
3:	-0.675	-0.241
4:	-0.008	-0.568
5:	-0.103	-0.285
6:	0.544	-0.491
7:	0.430	-0.380
8:	0.284	0.038
9:	-0.179	0.256
10:	0.408	0.574

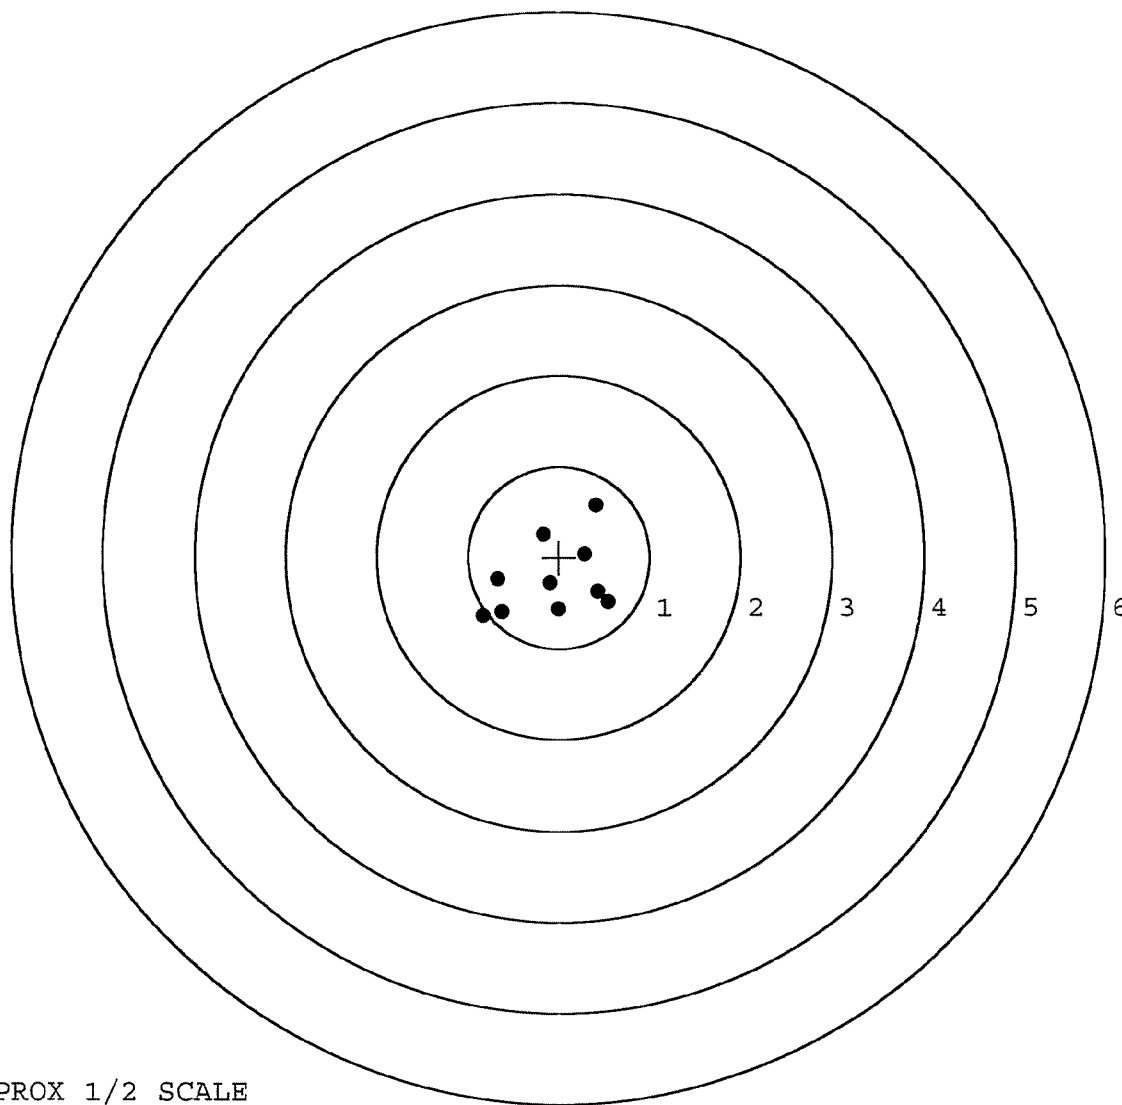


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816.___0
TARGET NUMBER: 3
FILE DATE: 06/03/2005
FILE TIME: 08:57

X CENTROID: 0.164
Y CENTROID: -0.037
POA TO CENTROID: 0.168
HORZ SPREAD: 1.306
VERT SPREAD: 1.778
GROUP SPREAD: 1.784
MIN RADIUS: 0.136
MAX RADIUS: 0.963
MEAN RADIUS: 0.575
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.002	-0.001
2:	0.696	0.752
3:	0.562	0.473
4:	0.375	0.847
5:	-0.610	-0.484
6:	0.134	-0.469
7:	0.188	-0.171
8:	0.019	-0.182
9:	-0.248	-0.208
10:	0.524	-0.931

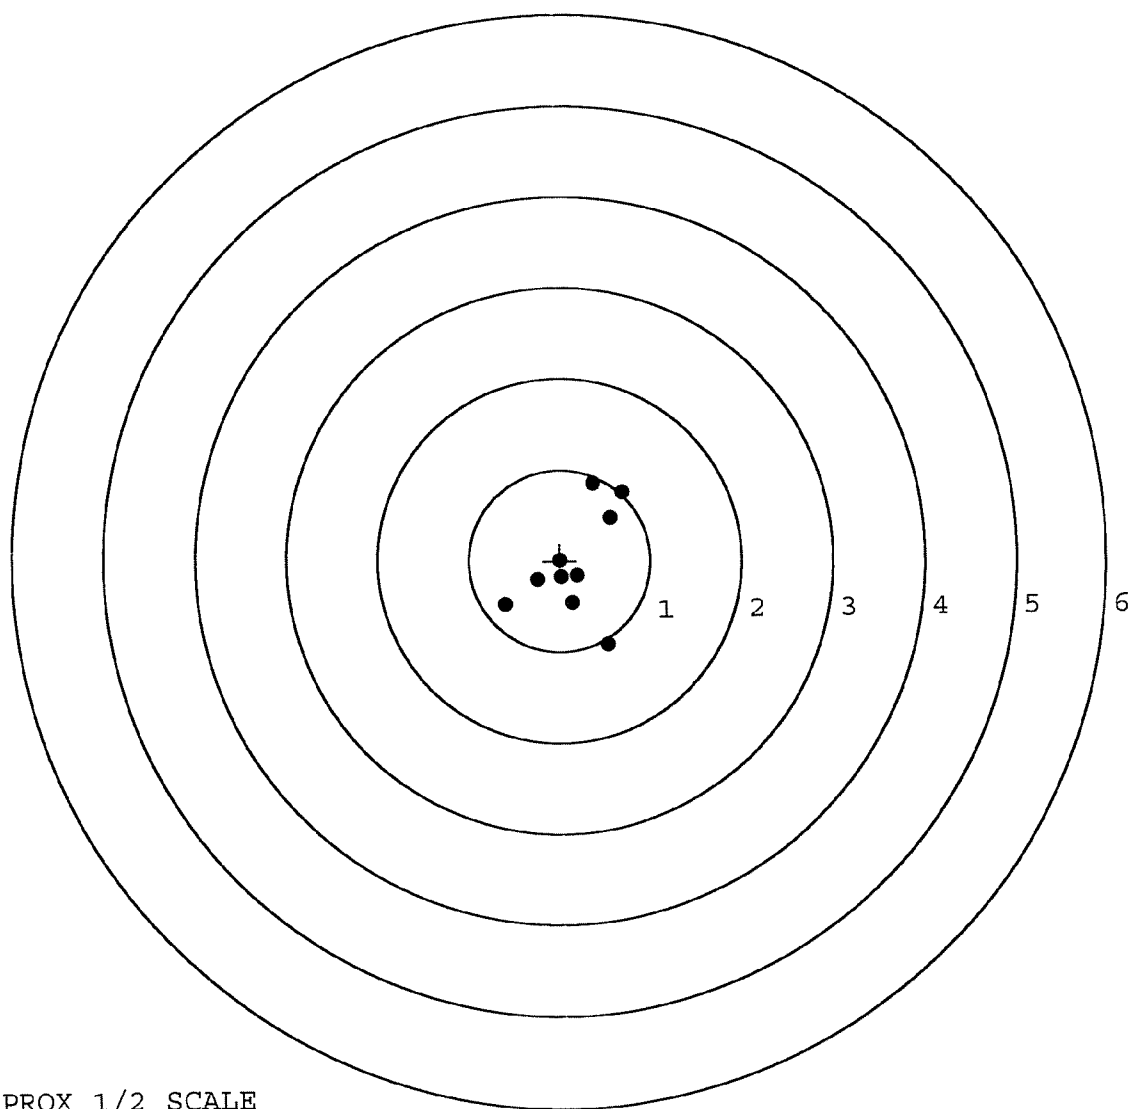

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __0

TARGET NUMBER: 4

FILE DATE: 06/03/2005

FILE TIME: 08:57

X CENTROID: 0.139

Y CENTROID: 0.032

POA TO CENTROID: 0.142

HORZ SPREAD: 1.966

VERT SPREAD: 1.045

GROUP SPREAD: 2.013

MIN RADIUS: 0.506

MAX RADIUS: 1.141


MEAN RADIUS: 0.780

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.259	0.249
2:	0.908	0.475
3:	0.584	0.455
4:	0.869	-0.570
5:	-0.324	0.422
6:	-0.707	0.426
7:	-0.471	0.283
8:	0.064	-0.551
9:	-0.195	-0.348
10:	-0.600	-0.522

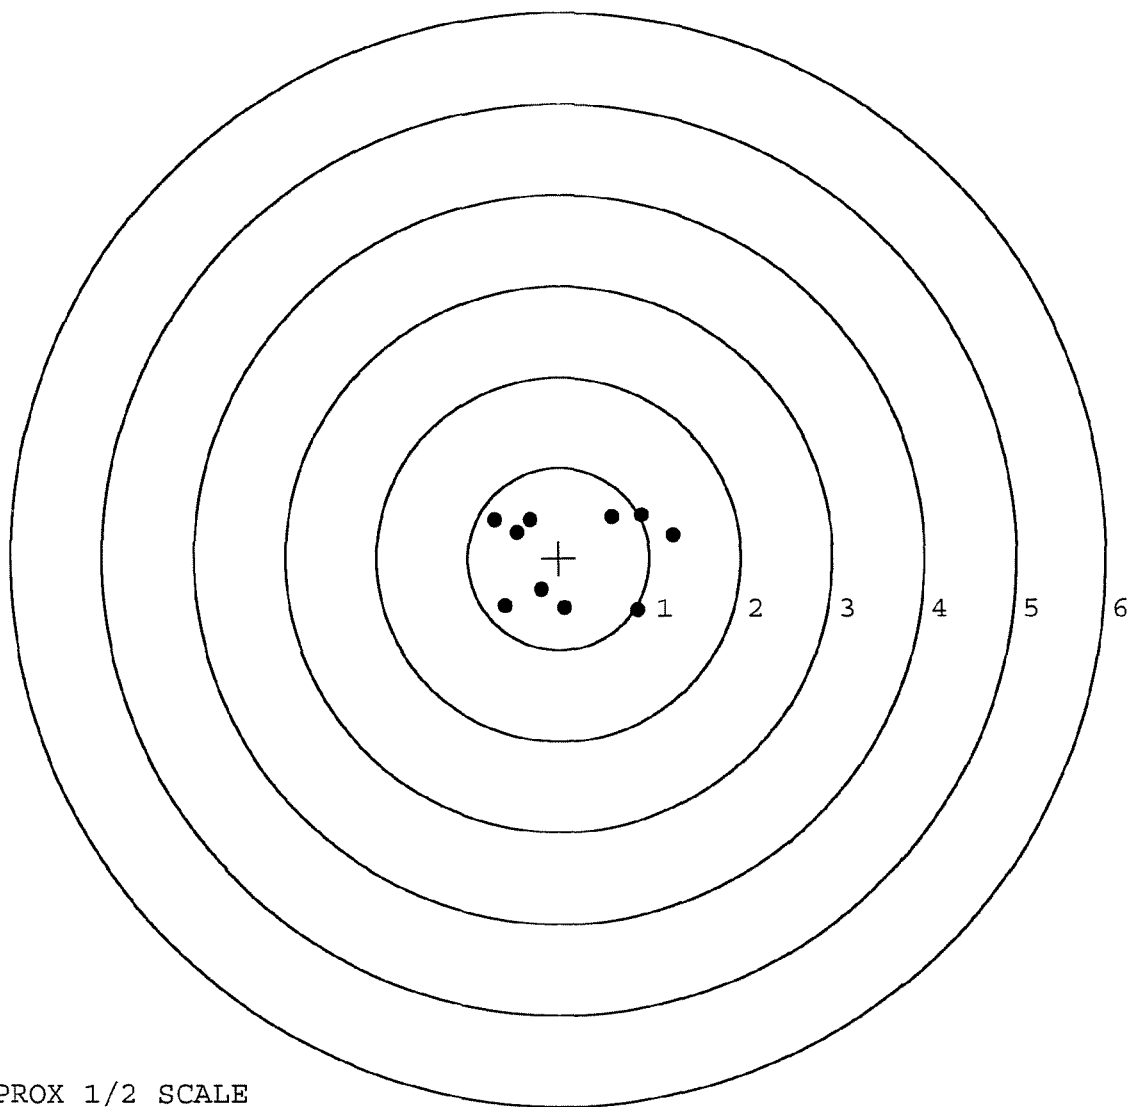


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. 0
TARGET NUMBER: 5
FILE DATE: 06/03/2005
FILE TIME: 08:57

X CENTROID: 0.096
Y CENTROID: 0.061
POA TO CENTROID: 0.114
HORZ SPREAD: 1.833
VERT SPREAD: 2.335
GROUP SPREAD: 2.415
MIN RADIUS: 0.295
MAX RADIUS: 1.509
MEAN RADIUS: 0.923
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 3
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.149	-0.103
2:	1.080	-0.230
3:	0.452	-0.515
4:	0.388	0.021
5:	-0.229	-0.117
6:	-0.069	-0.983
7:	-0.451	-0.843
8:	-0.091	1.164
9:	-0.585	0.861
10:	-0.684	1.352

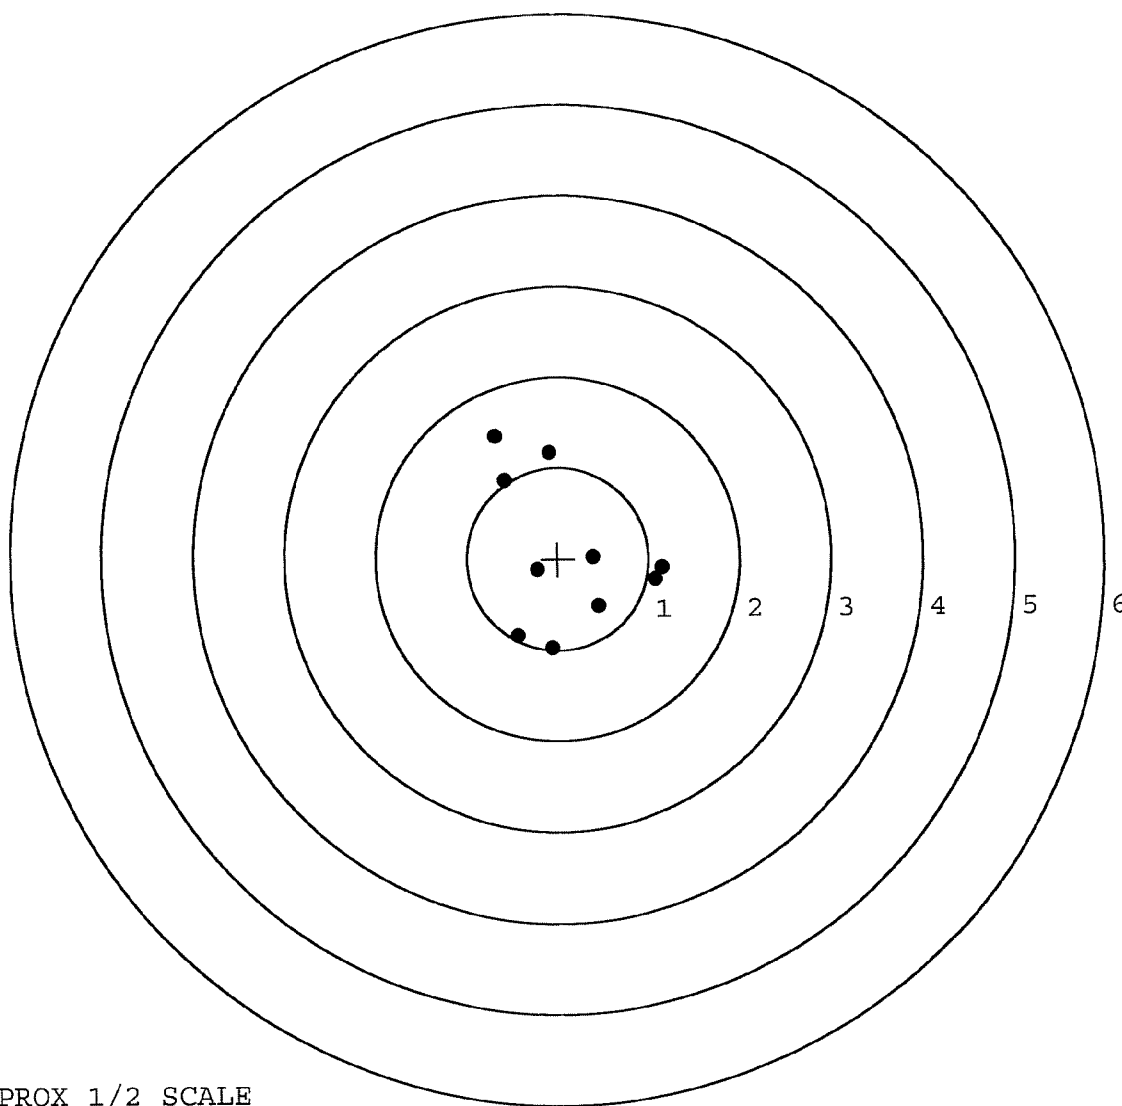

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST

CONTRACT #: DAAE-20-02-D-0127

R. & E NUMBER	97340		
SERIAL NUMBER	C6498816		
LOG-IN DATE	5-26-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	5-31-05	RT
560 A	RE-BARREL		
B	DRILL AND TAP		
575	ASSEMBLE		
600	PROOF		
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	6-3-05	TRW
655	FINAL INSPECT	5-31-05	RT
660	PACK	6-10-05	RT
	Clean + test	5-26-05	RT
		SHIP DATE	
QAR INSPECTION DATE			

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00088359** Serial: C6498816 Model: M24 SWS Center Fire Caliber: 7.62 NATO Repairman: Status: Closed 11/23/2004 1:29 PM

Verify Repair

Address Information

Customer: Received From Return To Received From

Name: HHC 4-31IN 10TH MTN HHC 4-31IN 10TH MTN

Address 1: 10122 N RIVA RIDGE LP 10122 N RIVA RIDGE LP

Address 2: PO Box: PO Box:

City: FORT DRUM FORT DRUM

State: NY Zip Code: 13602 Country: US State: NY Zip Code: 13602 Country: US

FFL

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Studs	3
A010	Hard Case	1
A017	Scope Bases	3

Repair Search Refresh Close

maglet 11/23/2004 1:26 PM CAPS NUM INS SCPL

start 4 3 4

Serial Number: **C6498816**

Model: **M24 SWS**



RE00088359

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6498816.___1

FILE DATE AND TIME: 12/13/2004 08:56

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.134
The Average Y Centroid of the Five Target Set:	-0.014
The Average Point of Impact of the Five Target Set:	0.135
The Average Mean Radius of the Five Target Set:	0.890
The Distance from POA to Centroid Target #1:	0.087
The Distance from Centroid Target #2 to Centroid Target #1:	0.119
The Distance from Centroid Target #3 to Centroid Target #1:	0.128
The Distance from Centroid Target #4 to Centroid Target #1:	0.368
The Distance from Centroid Target #5 to Centroid Target #1:	0.226

SERIAL NUMBER: C6498816. __1

TARGET NUMBER: 1

FILE DATE: 12/13/2004

FILE TIME: 08:56

X CENTROID: 0.025

Y CENTROID: 0.083

POA TO CENTROID: 0.087

HORZ SPREAD: 2.839

VERT SPREAD: 2.021

GROUP SPREAD: 3.275

MIN RADIUS: 0.234

MAX RADIUS: 1.704


MEAN RADIUS: 1.173

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 3

in 3 IN DIAMETER: 7

POINT#	X	Y
1:	1.454	-0.615
2:	0.761	-0.810
3:	0.641	-0.675
4:	1.128	0.265
5:	0.746	1.211
6:	-0.303	0.612
7:	-0.152	-0.070
8:	-1.385	-0.656
9:	-1.327	0.430
10:	-1.310	1.142

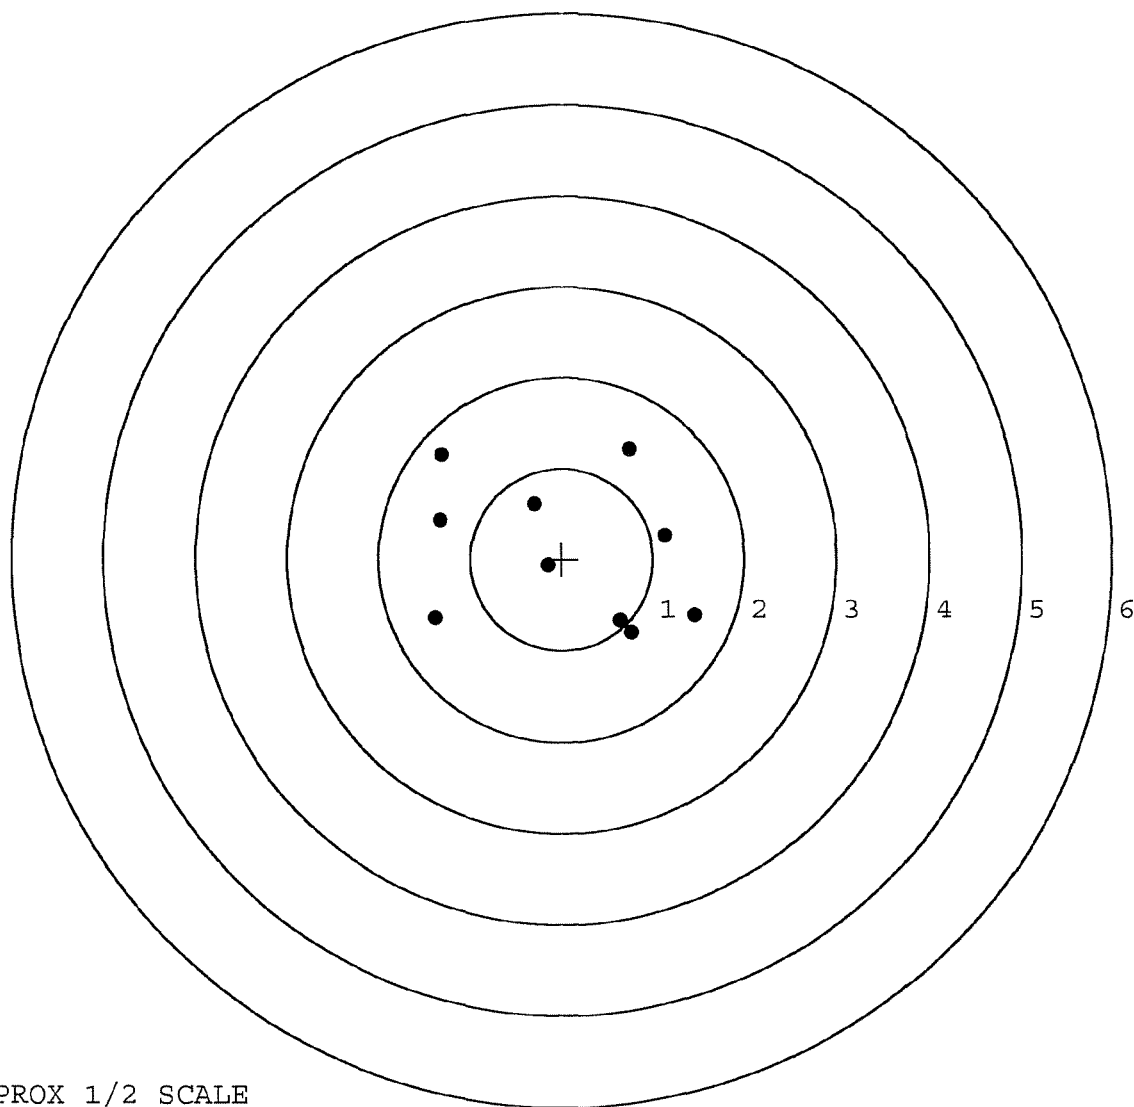

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __1

TARGET NUMBER: 2

FILE DATE: 12/13/2004

FILE TIME: 08:56

X CENTROID: 0.143

Y CENTROID: 0.071

POA TO CENTROID: 0.160

HORZ SPREAD: 2.217

VERT SPREAD: 1.599

GROUP SPREAD: 2.232

MIN RADIUS: 0.302

MAX RADIUS: 1.307


MEAN RADIUS: 0.754

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.399	-0.293
2:	0.788	-0.092
3:	0.449	-0.336
4:	0.259	-0.208
5:	-0.307	-0.257
6:	0.113	-0.571
7:	-0.818	-0.040
8:	-0.089	0.633
9:	0.160	1.028
10:	-0.521	0.846

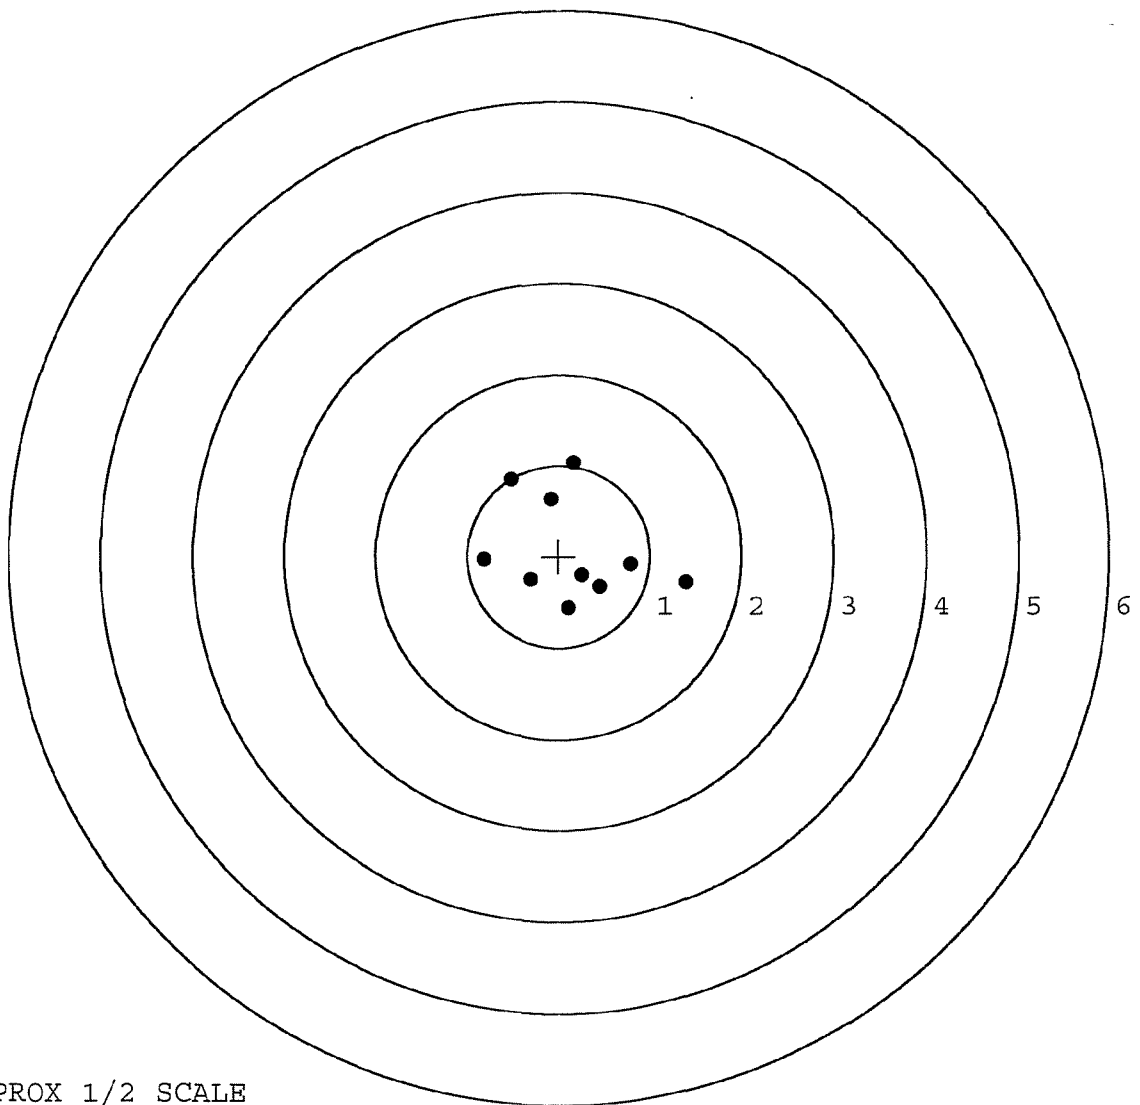

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __1

TARGET NUMBER: 3

FILE DATE: 12/13/2004

FILE TIME: 08:56

X CENTROID: 0.119

Y CENTROID: -0.004

POA TO CENTROID: 0.119

HORZ SPREAD: 2.284

VERT SPREAD: 2.299

GROUP SPREAD: 2.546

MIN RADIUS: 0.231

MAX RADIUS: 1.565


MEAN RADIUS: 0.739

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.371	-0.059
2:	0.549	0.877
3:	0.516	-0.170
4:	0.421	-0.506
5:	0.129	-0.257
6:	-0.105	0.049
7:	-0.033	0.274
8:	-0.178	0.278
9:	-0.563	-1.413
10:	-0.913	0.886

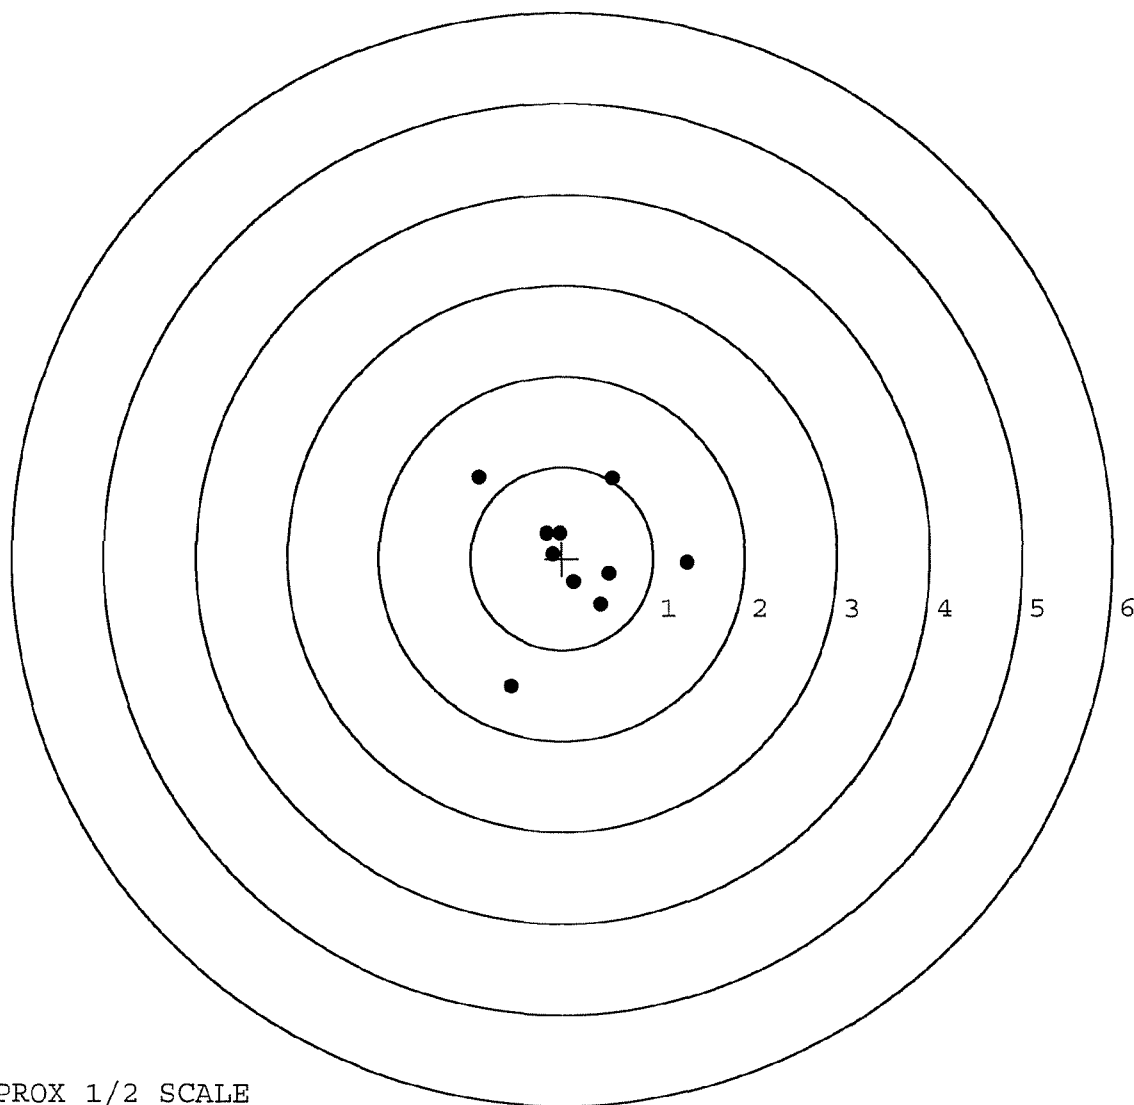


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __ 1
TARGET NUMBER: 4
FILE DATE: 12/13/2004
FILE TIME: 08:56

X CENTROID: 0.356
Y CENTROID: -0.078
POA TO CENTROID: 0.365
HORZ SPREAD: 2.553
VERT SPREAD: 1.938
GROUP SPREAD: 2.563
MIN RADIUS: 0.345
MAX RADIUS: 1.498
MEAN RADIUS: 0.981
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.835	-0.316
2:	1.450	-0.687
3:	1.139	-0.711
4:	0.222	-0.826
5:	0.406	0.630
6:	0.049	1.112
7:	-0.413	0.648
8:	0.018	-0.010
9:	-0.426	-0.082
10:	-0.718	-0.538

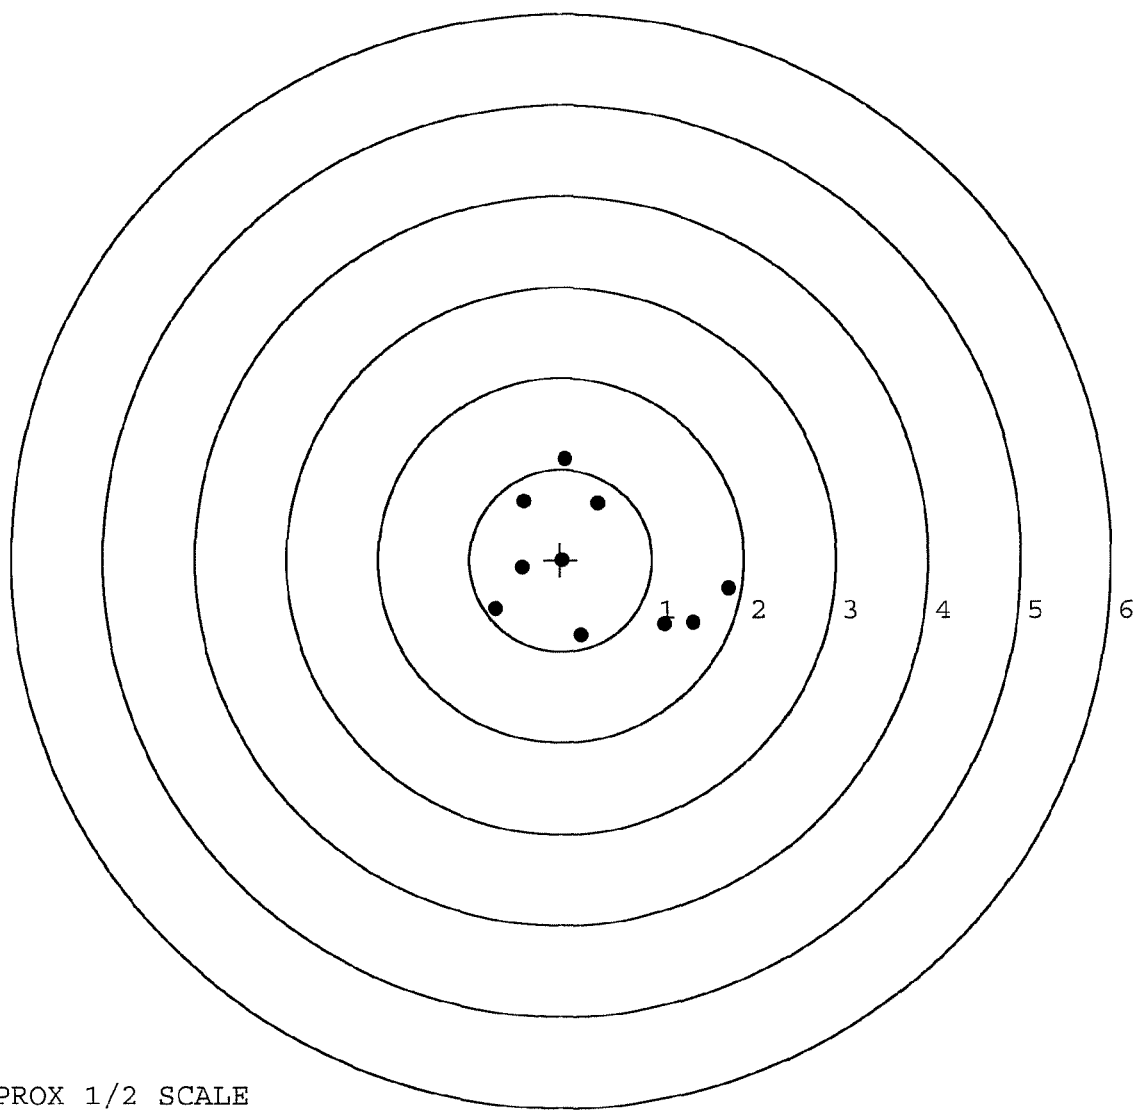


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __1
TARGET NUMBER: 5
FILE DATE: 12/13/2004
FILE TIME: 08:56

POINT#	X	Y
1:	0.587	-0.747
2:	0.510	-0.570
3:	1.072	0.623
4:	0.260	1.073
5:	0.168	0.413
6:	-0.230	0.162
7:	-0.374	-0.061
8:	-0.334	-0.489
9:	-0.338	-0.671
10:	-1.069	-1.154

X CENTROID: 0.025
Y CENTROID: -0.142
POA TO CENTROID: 0.144
HORZ SPREAD: 2.141
VERT SPREAD: 2.227
GROUP SPREAD: 2.782
MIN RADIUS: 0.397
MAX RADIUS: 1.490
MEAN RADIUS: 0.802
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

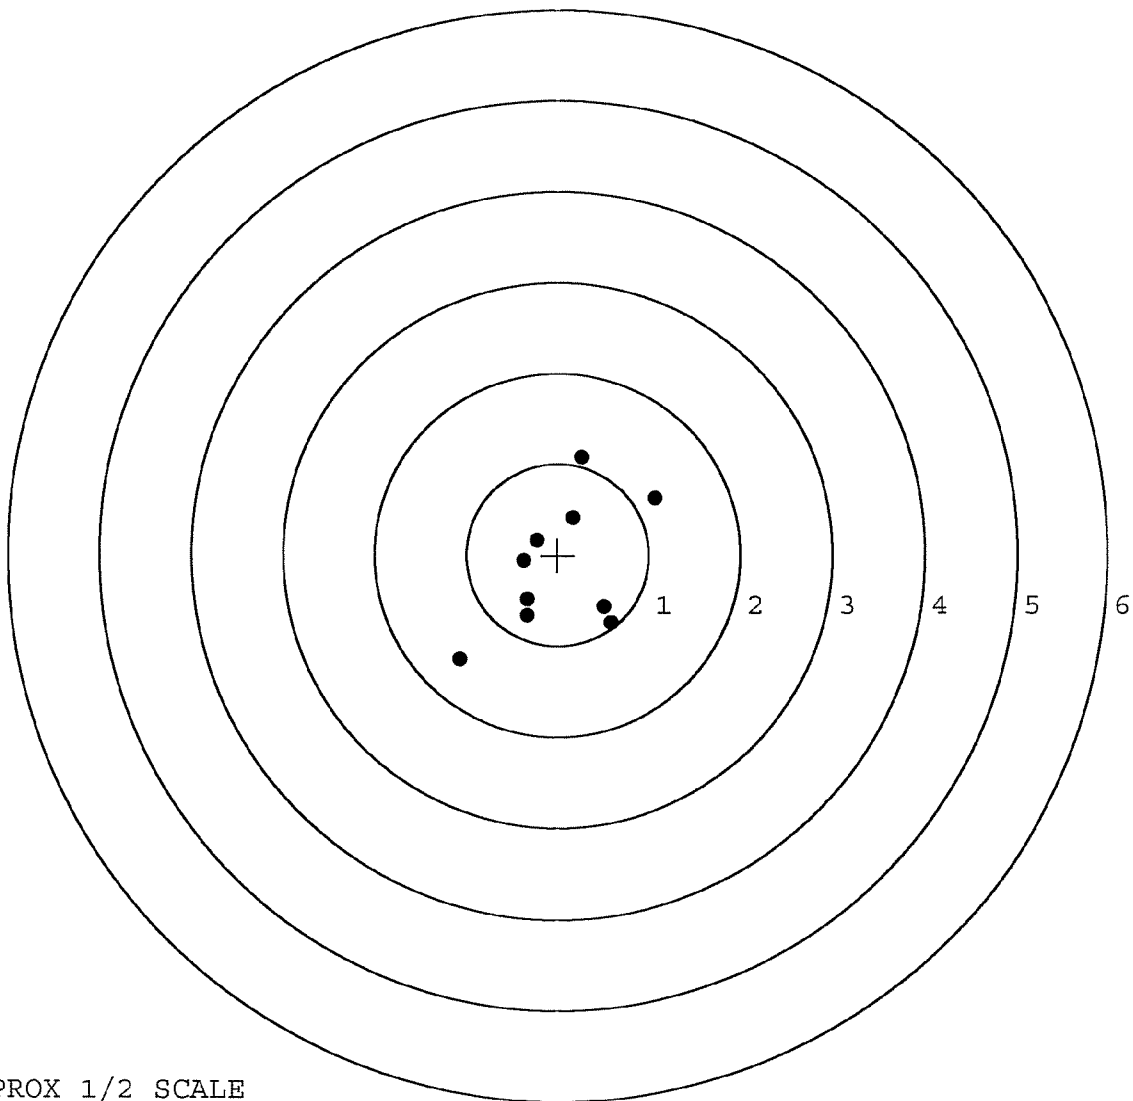

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE 12-10-04

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.30	2.53		2.06	
PULL #2	2.53	2.53		2.09	
PULL #3	2.36	2.39		2.10	
PULL #4	2.45	2.34		2.08	
PULL #5	2.66	2.29		2.11	
TOTAL	12.30	12.08		10.44	
AVERAGE	2.46	2.41		2.08	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.41	3.32		
PULL #2	3.46	3.40		
PULL #3	3.43	3.29		
PULL #4	3.41	3.21		
PULL #5	3.45	3.19		
TOTAL	17.16	16.41		
AVERAGE	3.43	3.28		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.08	4.20		4.39
PULL #2	4.37	4.27		4.15
PULL #3	4.27	4.24		4.23
PULL #4	4.29	4.18		4.25
PULL #5	4.21	4.21		4.19
TOTAL	21.22	21.10		21.21
AVERAGE	4.24	4.22		4.24

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	88359		
SERIAL NUMBER	C649 8816		
LOG-IN DATE	11-23-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	11-29-04	RTL
560 A	RE-BARREL	12-1-04	RTL
B	DRILL AND TAP	12-3-04	TRL
575	ASSEMBLE	12-2-04	RTL
600	PROOF	12-2-04	RTL
605	CHECK HEADSPACE	12-2-04	RTL
610	DIS-ASSEMBLE GUN	12-3-04	RTL
612	MAGNAFLUX	OPERATOR	
615	ROLLMARK CALIBER	12-3-04	SB
618	ROTO-BLAST	12-6-04	LB
620	APPLY COATINGS	12/7/04	HP
625 A	FINAL ASSEMBLY	12-13-04	RTL
B	TRIGGER PULL TEST	N/A	
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	12-13-04	TRL
655	FINAL INSPECT	12-14-04	AC
660	PACK	12-16-04	DA
		SHIP DATE	
		QAR INSPECTION DATE	

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6498816.___0

FILE DATE AND TIME: 06/10/2003 06:21

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.037
The Average Y Centroid of the Five Target Set:	0.044
The Average Point of Impact of the Five Target Set:	0.058
The Average Mean Radius of the Five Target Set:	0.710
The Distance from POA to Centroid Target #1:	0.130
The Distance from Centroid Target #2 to Centroid Target #1:	0.147
The Distance from Centroid Target #3 to Centroid Target #1:	0.433
The Distance from Centroid Target #4 to Centroid Target #1:	0.143
The Distance from Centroid Target #5 to Centroid Target #1:	0.209

SERIAL NUMBER: C6498816. __0

TARGET NUMBER: 1

FILE DATE: 06/10/2003

FILE TIME: 06:21

X CENTROID: -0.122

Y CENTROID: -0.042

POA TO CENTROID: 0.130

HORZ SPREAD: 1.697

VERT SPREAD: 1.608

GROUP SPREAD: 1.912

MIN RADIUS: 0.420

MAX RADIUS: 1.051


MEAN RADIUS: 0.671

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.853	-0.433
2:	-0.353	-1.027
3:	0.187	-0.421
4:	0.378	-0.236
5:	0.305	0.123
6:	-0.768	0.581
7:	-0.603	0.319
8:	-0.844	-0.138
9:	-0.317	0.434
10:	-0.062	0.373

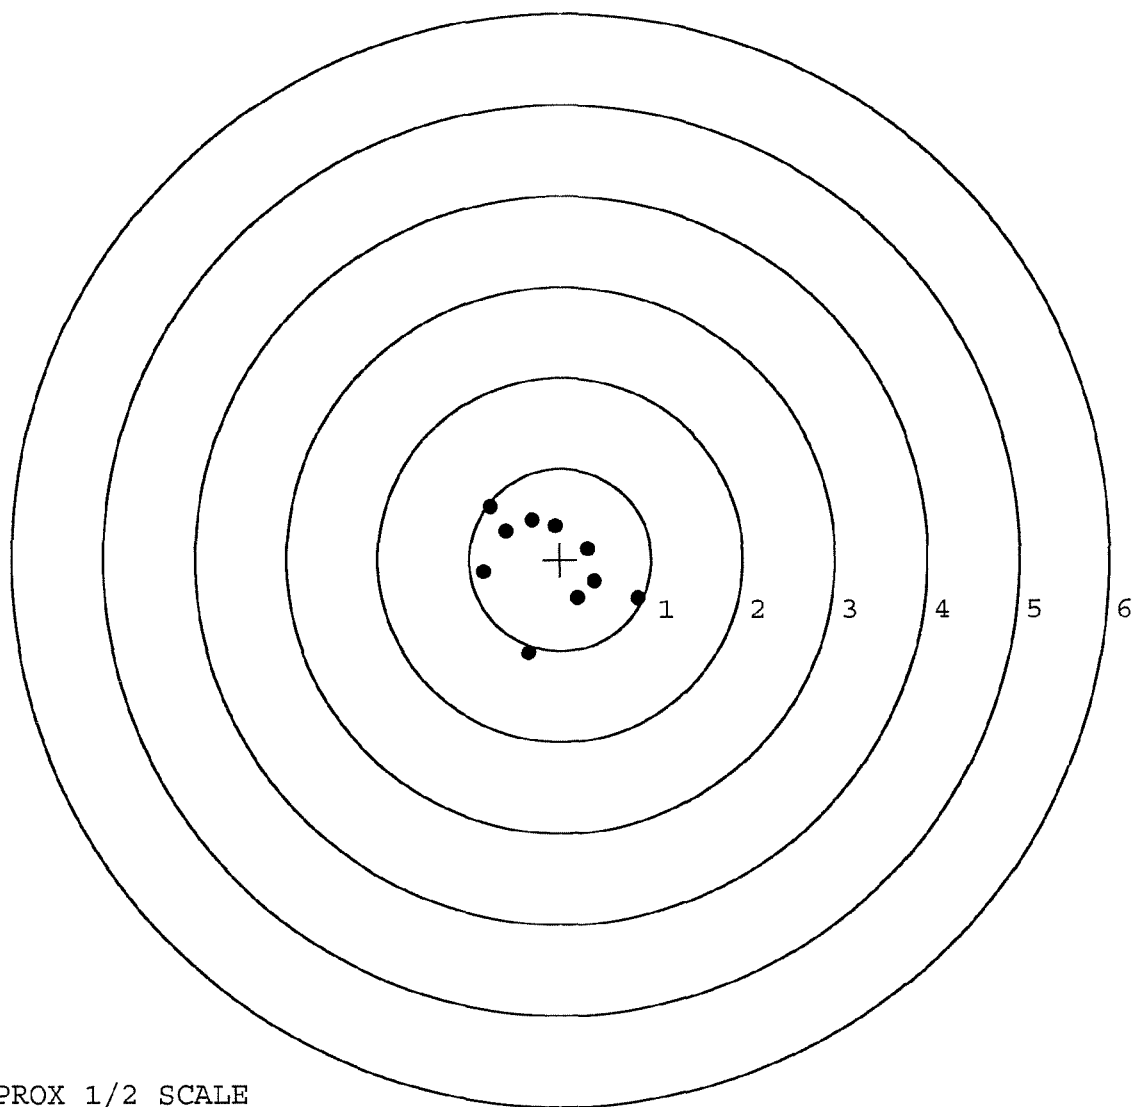

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __0

TARGET NUMBER: 2

FILE DATE: 06/10/2003

FILE TIME: 06:21

X CENTROID: 0.023

Y CENTROID: -0.022

POA TO CENTROID: 0.032

HORZ SPREAD: 1.980

VERT SPREAD: 1.770

GROUP SPREAD: 1.984

MIN RADIUS: 0.328

MAX RADIUS: 1.140


MEAN RADIUS: 0.748

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.178	-1.114
2:	-0.531	-0.755
3:	0.329	-0.316
4:	-0.077	-0.335
5:	1.149	0.154
6:	0.932	0.449
7:	-0.063	0.369
8:	-0.267	0.394
9:	-0.233	0.656
10:	-0.831	0.273

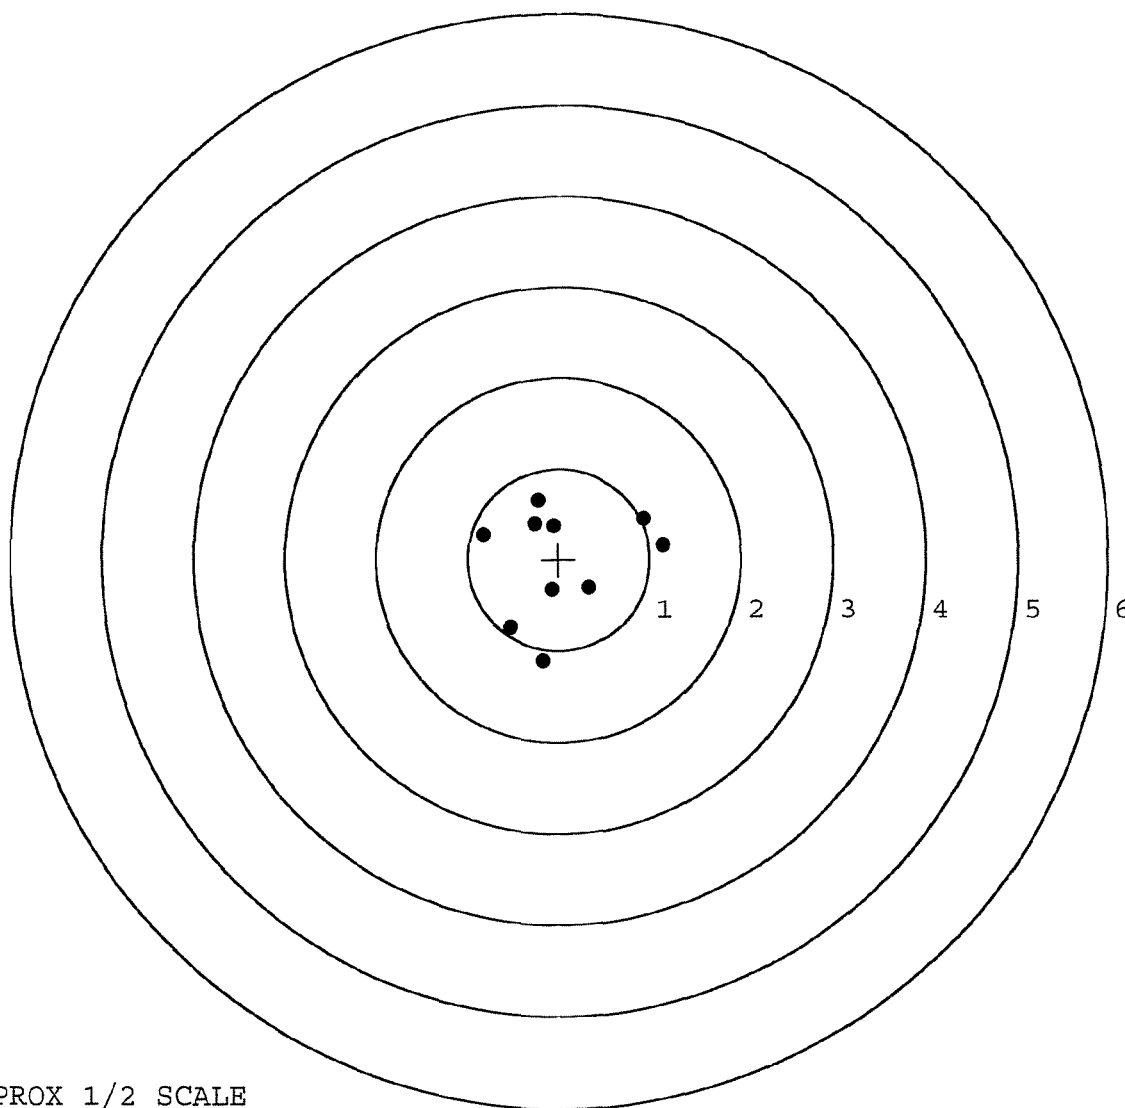


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __ 0
TARGET NUMBER: 3
FILE DATE: 06/10/2003
FILE TIME: 06:21

X CENTROID: 0.203
Y CENTROID: 0.243
POA TO CENTROID: 0.317
HORZ SPREAD: 2.510
VERT SPREAD: 2.593
GROUP SPREAD: 3.387
MIN RADIUS: 0.021
MAX RADIUS: 2.107
MEAN RADIUS: 0.862
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.613	-0.546
2:	-0.220	-0.923
3:	-0.756	-0.604
4:	-0.324	-0.290
5:	-0.101	0.294
6:	0.182	0.240
7:	0.151	0.661
8:	0.039	0.870
9:	0.692	1.062
10:	1.754	1.670

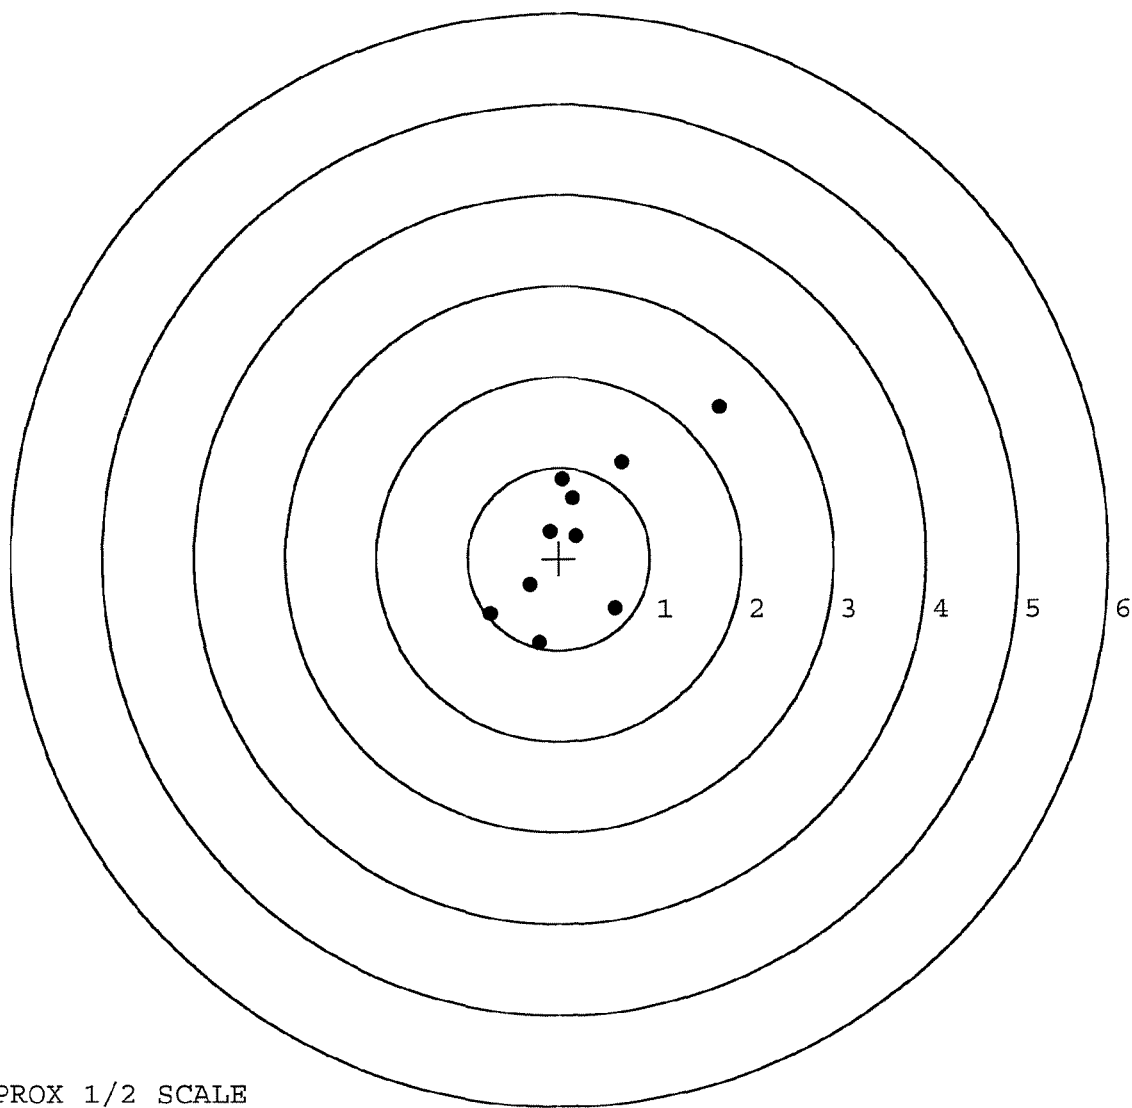

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __0

TARGET NUMBER: 4

FILE DATE: 06/10/2003

FILE TIME: 06:21

X CENTROID: 0.011

Y CENTROID: 0.008

POA TO CENTROID: 0.014

HORZ SPREAD: 1.051

VERT SPREAD: 1.234

GROUP SPREAD: 1.246

MIN RADIUS: 0.085

MAX RADIUS: 0.776


MEAN RADIUS: 0.466

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.068	0.782
2:	-0.366	0.521
3:	-0.376	0.303
4:	-0.631	-0.103
5:	0.039	-0.072
6:	0.420	-0.118
7:	0.346	-0.315
8:	0.243	-0.452
9:	0.120	-0.296
10:	0.248	-0.166

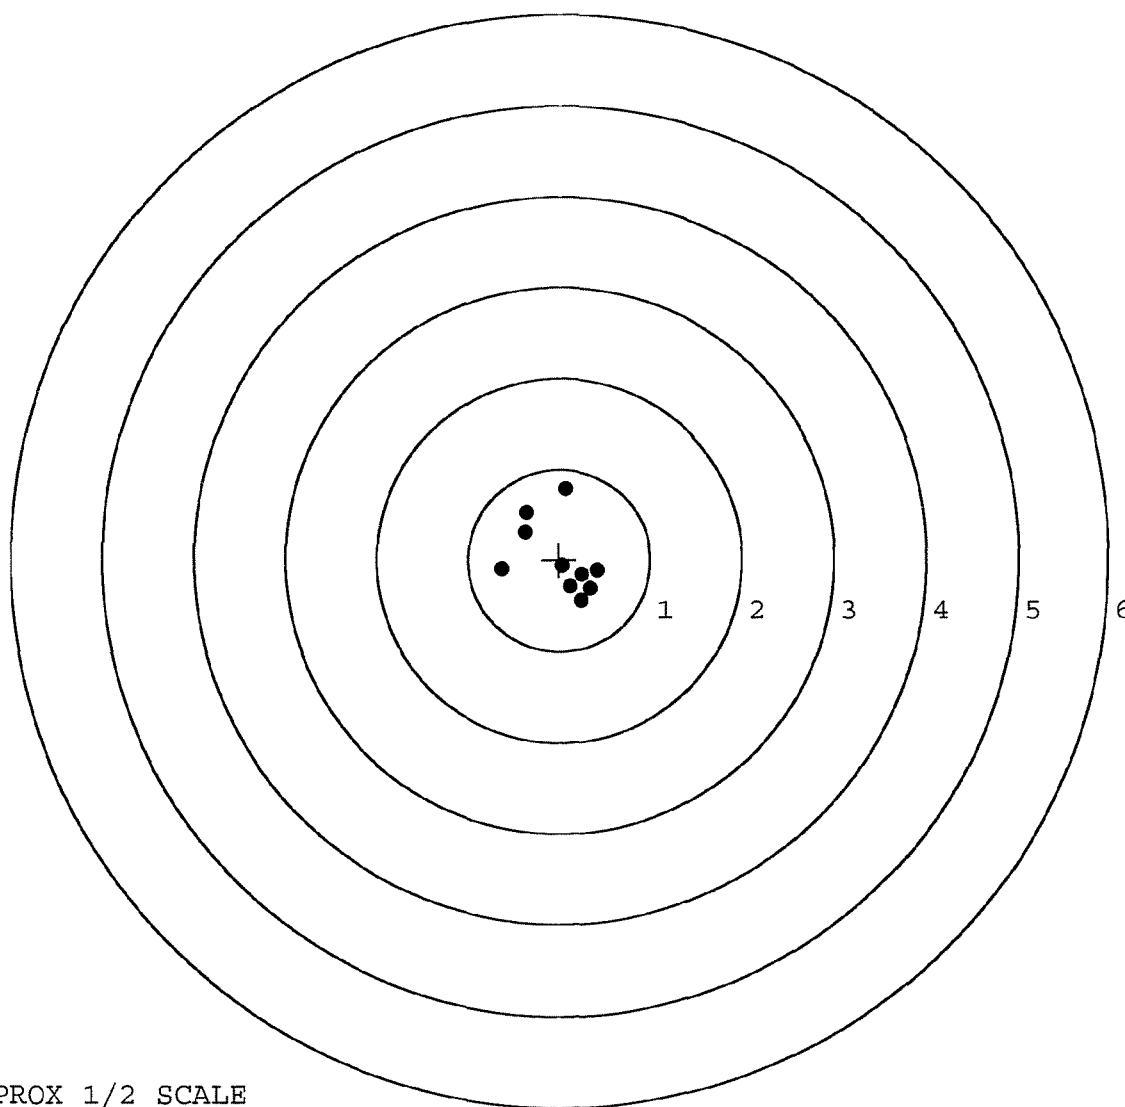


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498816. __0
TARGET NUMBER: 5
FILE DATE: 06/10/2003
FILE TIME: 06:21

X CENTROID: 0.072
Y CENTROID: 0.034
POA TO CENTROID: 0.080
HORZ SPREAD: 1.363
VERT SPREAD: 2.648
GROUP SPREAD: 2.671
MIN RADIUS: 0.278
MAX RADIUS: 1.383
MEAN RADIUS: 0.805
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.634	-1.081
2:	0.394	-1.231
3:	-0.499	-0.633
4:	-0.006	-0.233
5:	0.727	0.611
6:	0.330	0.280
7:	0.101	0.320
8:	-0.367	0.528
9:	-0.636	0.363
10:	0.044	1.417

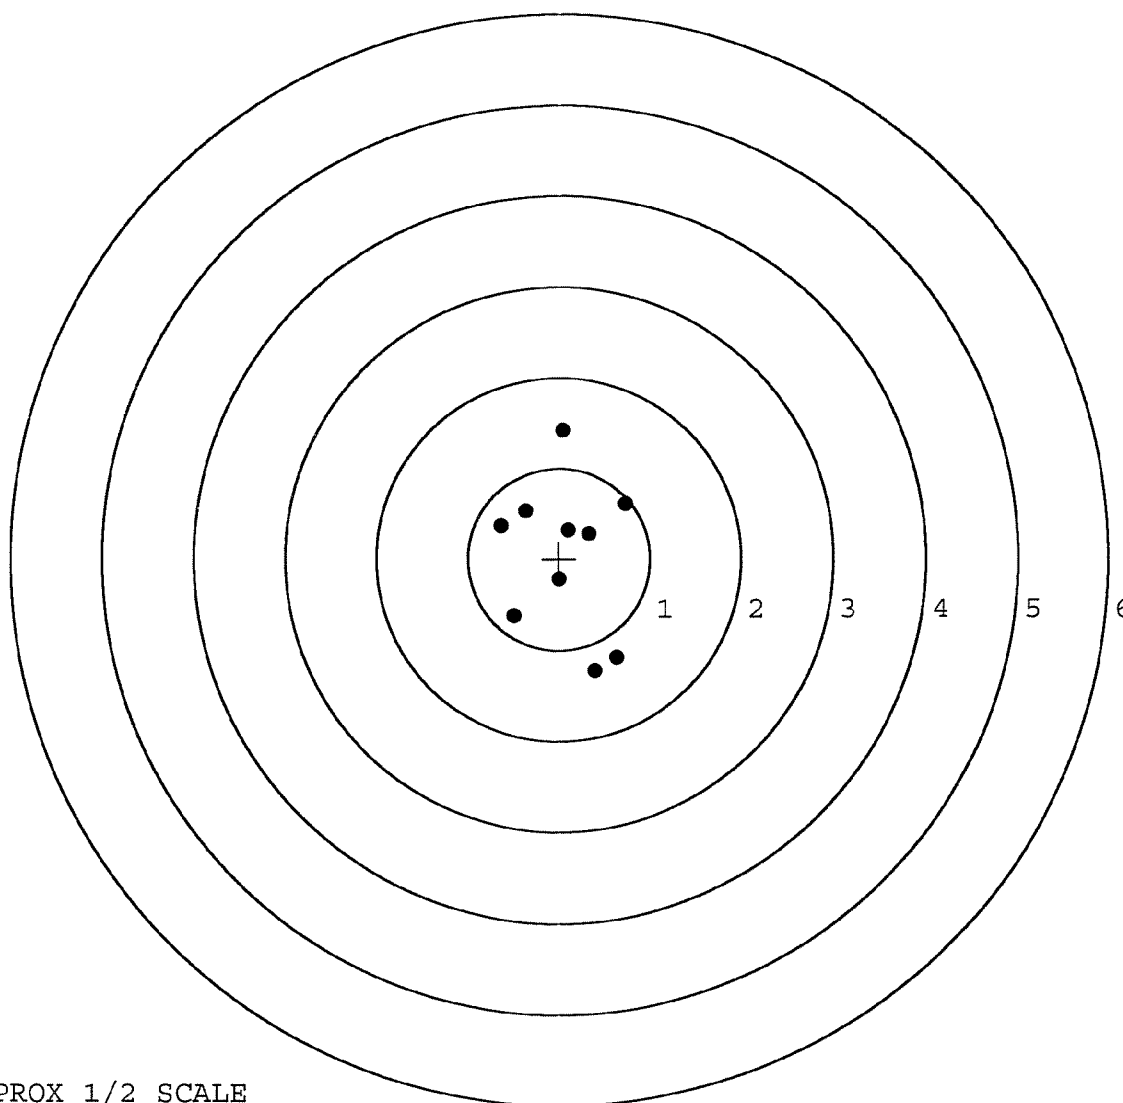

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. _____

DATE 12-6-02

TESTER TRW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.51	2.55	2.34	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT ABLE LESS THAN
PULL #2	2.56	2.53	2.33	
PULL #3	2.62	2.49	2.43	
PULL #4	2.59	2.43	2.34	
PULL #5	2.63	2.49	2.30	
TOTAL	12.91	12.49	11.74	
AVG.	2.58	2.49	2.34	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.36	3.24	
PULL #2	3.48	3.20	
PULL #3	3.27	3.19	
PULL #4	3.23	3.05	
PULL #5	3.35	3.10	
TOTAL	16.69	15.78	
AVG.	3.33 TRW	3.15	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# IF TARGET & ACCU
PULL #1	4.31	4.03		4.05
PULL #2	4.39	4.05		4.06
PULL #3	4.12	4.03		4.01
PULL #4	4.17	4.17		4.00
PULL #5	4.08	4.06 TRW	1.1	3.95
TOTAL	21.07	20.34 TRW		20.03
AVG.	4.21	4.06		4.00

FINAL INSPECTION CHECKLIST M-24 REPAIRS
CONTRACT #: DAAE-20-02-D-0127

SERIAL # C649 8816

INSPECTED BY: RJR

DATE REC'D: 5-21-03

DATE RET'D: 6-16-03

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☒ SCOPE
☒ SCOPE RINGS
☒ MOUNTING SCREWS
☒ MOUNTING BASE
☒ SCREWS
☒ FINISH
☒ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☒ SCOPE CASE
☒ IRON SIGHTS
☒ DEPLOYMENT KIT

TRIGGER ASSEMBLY


☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS:

R & E NUMBER	65723		
SERIAL NUMBER	C6498816		
LOG-IN DATE	5/21/03		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	5/21/03	RTL
560 A	RE-BARREL	5/29/03	RTL
B	DRILL AND TAP	5-29-03	TRW
575	ASSEMBLE	5/29/03	RTL
600	PROOF	5/29/03	RTL
605	CHECK HEADSPACE	5/29/03	RTL
610	DIS-ASSEMBLE GUN	5/29/03	RTL
612	MAGNAFLUX OPERATOR <i>RL</i>		
615	ROLLMARK CALIBER	6-2-03	AB
618	ROTO-BLAST	6/3/03	JAB
620	APPLY COATINGS	6-8	TA
625 A	FINAL ASSEMBLY	6-9-03	RTL
B	TRIGGER PULL TEST	6-16-03	RTL
C	SAFETY "ON" FORCE	6-16-03	RTL
D	SAFETY "OFF" FORCE	6-16-03	RTL
E	FIRING PIN INDENT		
640	TARGET	6-10-03	TRW
655	FINAL INSPECT	6-16-03	RTL
660	PACK	6-16-03	TA
		SHIP DATE	
	QAR INSPECTION DATE		

Serial Number:

Model: 700



M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

[illegible]

Final Inspection

S.N.

DATE REC'D:

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☒ Scope
- ☒ Scope Rings
- ☒ Mounting Screws
- ☒ Mounting Base
- ☒ SCREWS
- ☒ FINISH
- ☒ Looseness
- ☒ CLARITY

Misc.

- ☒ DD-350
- ☒ BAR CODE
- ☒ PACKAGING

Item:

Stock Assy.

- ☒ Stock
- ☒ Sling Swivel Studs
- ☒ ADJUSTABLE Butt PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☒ Scope Case
- ☒ IRON SIGHTS
- ☒ Deployment Kit

Trigger

- ☒ SAFETY OPERATION
- ☒ SET

Comments:

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R99-13507

INITIAL RLP	CUSTOMER ORDER NO. 520	W/ULTRA 10X-M3A SCOPE S/N 090701 W/BI-POD				
DATE RECEIVED 07/01/99	DATE OPENED 07/01/99	DATE CODE LR 2-97	SERIAL NUMBER C6490016	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62	NATO/M24
ACCESSORIES W/SWIVELS		HARD CASE		SCOPE BASE		

FROM:

WEILER, JONATHAN
HHC 1-87 INF
10230 N RIVER RIDGE LOOP
FORT DRUM NY 13602

SHIP TO:

WEILER, JONATHAN
HHC 1-87 INF
10230 N RIVER RIDGE LOOP
FORT DRUM NY
13602

CUST NO: 211406 C.O.D.

ACCOUNT NUMBER	ACCOUNT NUMBER NIC	WRITE ☐	PROM. DATE	ESTIMATED	VIA DOOR
GUN CONDITION					REPAIR CHARGE
☐ NEW					EXCISE
☐ LIGHTLY WORN					TAX
☐ WORN					INSURANCE
☐ VERY WORN					UPS
☐ UNREPAIRABLE					PARCEL POST
☐ MARRED					TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			
MAIN FAULT						

PARTS	COMMENTS
Deployment Kit Assy 96096	Adjusted Magazine Box Chips in Metal Finish & Dents in Stock Normal Water Could Line No problem With Scope, Clean & Inspected Weapon
REPAIRMAN RW	PROOF
GALLERY TESTER	DATE
CLEAN	TEST ✓
DATE	TARGET
DATE	PATTERN
8-25-99	

OFFICE COPY

RD6625 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400008302

Receipt Of Firearm(s) Delivered to the Plant for Repair
Firearm Checked For Live Ammunition ☒

File # 00520

Delivery Date 7 / 1 / 99

Customer Name (Print) Jonathan Weiler
Address Hill 1-87 Ent 10230 17 River Ridge Loop NY 12602 State NY Zip 13602
Phone Number (315) - 775 - 5324

Firearm Description Model 700 M24 Cal./ Ga. 7.62 Nato
Serial Number C16478816
Stock/ Fore-end Condition circle the description
(Excellent; Good; Fair; Poor; Fancy; Plain, Synthetic, Wood)
Comments on Stock/ Fore-end condition _____
Metal Condition circle the description
(Excellent; Good; Fair; Poor; Fancy; Plain Stainless Steel)
Comments on Metal condition Pts in barrel
Barrel Type (VT. Rib; Plain; Deer; Stainless Steel) Barrel length 24 in
List additional accessories IE Scope, Sling, Gun case and description;
Scope #890701 Complete Kit

Customer request: magazine well may be bent; not feeding rounds into the chamber
Return Process Return to Clark St. Ent. ☐ Return via UPS ☐

By signing this receipt the person delivering the firearm understands to be the only person to receive the firearm upon completion of repairs.

Signature Jonathan Weiler Date 01/07/99
person delivering firearm.

Signature Jonathan C Osterwald Date 7/1/99
security officer

Signature _____ Date / /
arms service / CSR

Customer Pick Up Verification

I certify, I am the same person whom delivered the above described firearm to the Remington Ilion plant for repair and may lawfully possess a firearm in New York

State _____
Signature Ronald Voth Date 7/1/99
person receiving firearm must be the same whom delivered

Signature _____ Date / /
security officer or other witness returning the firearm

M24#3

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET					
For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG					
1. ORGANIZATION <i>MHC 1-87 Scouts</i>			2. NOMENCLATURE AND MODEL <i>M24</i>		
3. REGISTRATION/SERIAL/NSN <i>C649 9816</i>	4a. MILES	4b. HOURS	4c. ROUNDS FIRED	4d. HOT STARTS	5. DATE <i>24 June 99</i>
6. TYPE INSPECTION <i>PMCS</i>					
7. APPLICABLE REFERENCE					
TM NUMBER <i>TM 9-1005-306-10</i>		TM DATE <i>June 1989</i>		TM NUMBER	
TM DATE					
COLUMN a — Enter TM item number. COLUMN b — Enter the applicable condition status symbol. COLUMN c — Enter deficiencies and shortcomings.			COLUMN d — Show corrective action for deficiency or shortcoming listed in Column c. COLUMN e — Individual ascertaining completed corrective action initial in this column.		
STATUS SYMBOLS					
"X"—Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"—Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH ("—")—Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.			DIAGONAL "(/)"—Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL—Indicates that a completely satisfactory condition exists. FOR AIRCRAFT—Status symbols will be recorded in red.		
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.					
8a. SIGNATURE (Person(s) performing inspection)		8b. TIME		9a. SIGNATURE (Maintenance Supervisor)	
<i>Ryan B. Obdenburg</i>					
9b. TIME		10. MANHOURS REQUIRED			
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d		INITIAL WHEN CORRECTED e
1	X	Socket Wrench Attachment <i>3/8" hex drive 5/32"</i>			
1	X	.050" Key, Socket Head Screw			
1	X	1/16" Key, Socket Head Screw			
1	X	5/64" Key, Socket Head Screw			
1	X	T-handle Combo Wrench			
1	X	Day Optic Sight Windage Dial w/screws			
1	X	Day Optic Elevation Dial w/screws			
1	X	Day Optic Sight Focus Dial w/screws			
1	X	Day Optic Sight Adj. Dial Dust Cover			
1	X	Day Optic Sight Ring Screws			
1	X	Brush, Chamber			
1	X	Brush, Bore			
1	X	Socket, Socket Wrench 1/2"			
1	X	T-handle torque wrench			
1	X	wrench Box and Open 1/2"			
1	X	Day Optic Sight Sunshade			
1	X	Swabs cleaning Small Arms			
1	X	Cleaning Rod Kit			
1	X	Lens Cleaning Kit			

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

M24 #3

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET					
For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG					
1. ORGANIZATION HHC 1-87 Scouts			2. NOMENCLATURE AND MODEL M24		
3. REGISTRATION/SERIAL/NSN C6498816	4a. MILES	b. HOURS	c. ROUNDS FIRED	d. HOT STARTS	5. DATE 24 June 99
6. TYPE INSPECTION PMCS					
7. APPLICABLE REFERENCE					
TM NUMBER TM - 91805-306-10		TM DATE June 1989		TM NUMBER	
TM DATE					
COLUMN a - Enter TM item number.			COLUMN d - Show corrective action for deficiency or shortcoming listed in Column c.		
COLUMN b - Enter the applicable condition status symbol.			COLUMN e - Individual ascertaining completed corrective action initial in this column.		
COLUMN c - Enter deficiencies and shortcomings.					
STATUS SYMBOLS					
"X"-Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"-Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "-"-Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.			DIAGONAL "/"-Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL-Indicates that a completely satisfactory condition exists. FOR AIRCRAFT-Status symbols will be recorded in red.		
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.					
8a. SIGNATURE (Person(s) performing inspection)		8b. TIME		9a. SIGNATURE (Maintenance Supervisor)	
Ryan B. Orlenberg				9b. TIME	
				10. MANHOURS REQUIRED	
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c		CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e
1	X	Socket Wrench Attachment ^{3/8" hex 8" with 5/32"}			
1	X	.050" Key, Socket Head Screw			
1	X	1/16" Key, Socket Head Screw			
1	X	5/64" Key, Socket Head Screw			
1	X	T-handle Combo wrench			
1	X	Day Optic Sight Windage Dial w/screws			
1	X	Day Optic Elevation Dial w/screws			
1	X	Day Optic Sight Focus Dial w/screws			
1	X	Day Optic sight Adj. Dial Dust Cover			
1	X	Day Optic Sight Ring Screws			
1	X	Brush, Chamber			
1	X	Brush, Bore			
1	X	Socket, Socket Wrench 1/2"			
1	X	T-handle Large Wrench			
1	X	Wrench Box and open 1/2"			
1	X	Day Optic sight Sunshade			
1	X	Swabs cleaning Small Arms			
1	X	Cleaning Rod Kit			
1	X	Lens Cleaning Kit			

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

M24 #3

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET						
For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG						
1. ORGANIZATION <i>HHC 1-87 Scouts</i>			2. NOMENCLATURE AND MODEL <i>M24</i>			
3. REGISTRATION/SERIAL/NSN <i>C6498816</i>	4a. MILES	b. HOURS	c. ROUNDS FIRED	d. HOT STARTS	5. DATE <i>24 June 99</i>	6. TYPE INSPECTION <i>PACS</i>
7. APPLICABLE REFERENCE						
TM NUMBER <i>TM-91005-306-10</i>		TM DATE <i>June 1989</i>		TM NUMBER		TM DATE
COLUMN a — Enter TM item number. COLUMN b — Enter the applicable condition status symbol. COLUMN c — Enter deficiencies and shortcomings.			COLUMN d — Show corrective action for deficiency or shortcoming listed in Column c. COLUMN e — Individual ascertaining completed corrective action initial in this column.			
STATUS SYMBOLS "X"—Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"—Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "—" Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished. DIAGONAL "(/)"—Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL—Indicates that a completely satisfactory condition exists. FOR AIRCRAFT—Status symbols will be recorded in red.						
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.						
8a. SIGNATURE (Person (s) performing inspection)		8b. TIME		9a. SIGNATURE (Maintenance Supervisor)		9b. TIME
<i>Ryan B. Obolunburg</i>						10. MANHOURS REQUIRED
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c		CORRECTIVE ACTION d		INITIAL WHEN CORRECTED e
1	X	Socket Wrench Attachment ^{30" hex} _{31" with 5/32"}				
1	X	.050" Key, Socket Head Screw				
1	X	1/16" Key, Socket Head Screw				
1	X	5/64" Key, Socket Head Screw				
1	X	T-handle Combo wrench				
1	X	Day Optic Sight Windage Dial w/screws				
1	X	Day Optic Elevation Dial w/screws				
1	X	Day Optic Sight Focus Dial w/screws				
1	X	Day Optic sight Adj Dial Dust Cover				
1	X	Day Optic Sight Ring Screws				
1	X	Brushy Chamber				
1	X	Brush, Bore				
1	X	Socket, Socket Wrench 1/2"				
1	X	T-handle torque wrench				
1	X	Wrench Box and open 1/2"				
1	X	Day Optic sight Sunshade				
1	X	Swabs cleaning Small Arms				
1	X	Cleaning Rod Kit				
1	X	Lens Cleaning Kit				

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6498816
23 Jul 1993

CENTROIDAL DISTANCES

0 TO	1	.254283
1 TO	2	.142864
1 TO	3	.0572189
1 TO	4	.226815
1 TO	5	.296177

5
+ <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2882
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0178
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .288749

THE AMR FOR THIS RIFLE IS: .9824

23 Jul 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C849B816

CENTERFIRE PATTERNS # 1

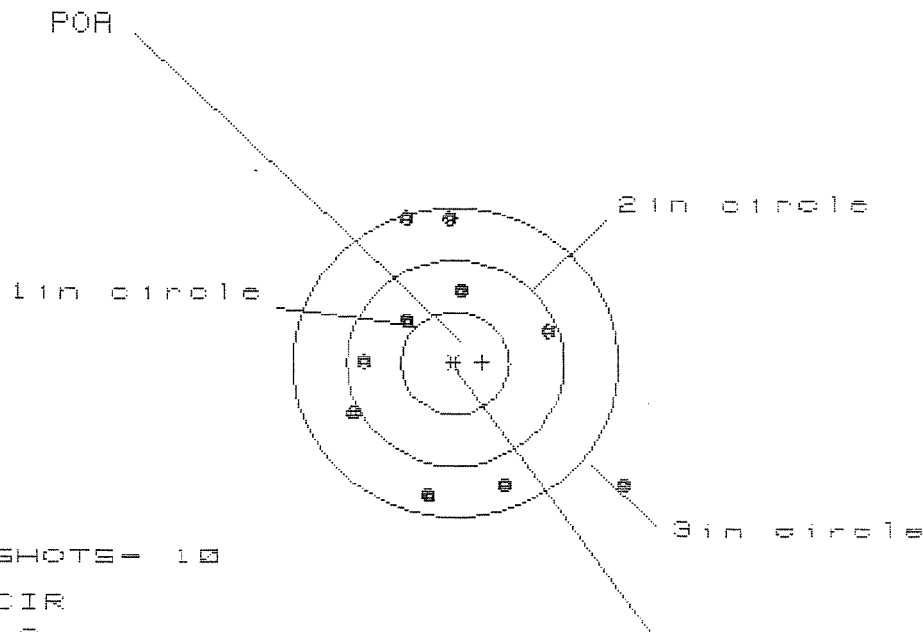

OF SHOTS- 10

IN CIR

1in = 0

2in = 4

3in = 9

HS= 2.497

VS= 2.693

GS= 3.271

CENTROID *


PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.601	.982	.945
MINIMUM X	:	-.896	-.718	-.755
MAXIMUM Y	:	1.378	1.249	1.405
MINIMUM Y	:	-1.315	-1.444	-1.288
CENTROID X	:	-.254	-.432	-.395
CENTROID Y	:	-.012	.117	-.039
POR TO CENTROID in.	:	.254	.447	.397
MIN RADIUS	:	.553	.337	.484
MEAN RADIUS	:	1.144	1.004	.983
MAX RADIUS	:	1.974	1.519	1.407
HORIZONTAL SPREAD	:	2.497	1.700	1.700
VERTICAL SPREAD	:	2.693	2.693	2.693
EXTREME SPREAD	:	3.271	2.783	2.698
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		9	

23 Jul 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6498816

CENTERFIRE PATTERNS

2

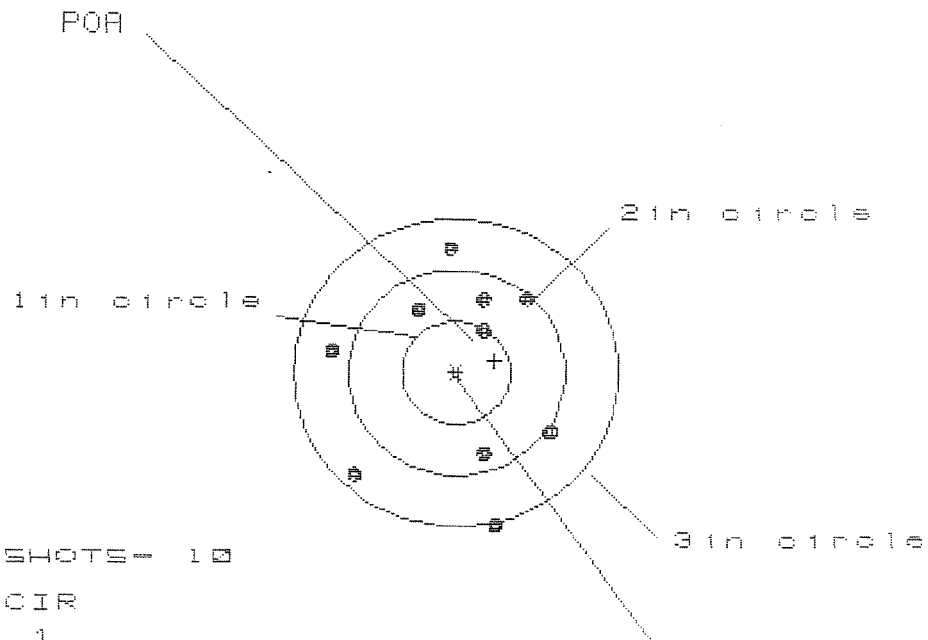

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 10

HS= 1.949

VS= 2.635


GS= 2.671

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.837	.876	.761
MINIMUM X	:	-1.112	-1.073	-1.188
MAXIMUM Y	:	1.176	1.014	.872
MINIMUM Y	:	-1.459	-1.136	-1.082
CENTROID X	:	-.353	-.392	-.277
CENTROID Y	:	-.115	.047	.189
POA TO CENTROID in.	:	.371	.394	.335
MIN RADIUS	:	.439	.340	.166
MEAN RADIUS	:	.983	.892	.768
MAX RADIUS	:	1.500	1.461	1.189
HORIZONTAL SPREAD	:	1.949	1.949	1.949
VERTICAL SPREAD	:	2.635	2.150	1.954
EXTREME SPREAD	:	2.671	2.331	2.113
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

28 JUL 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8498816

CENTERFIRE PATTERNS # 3

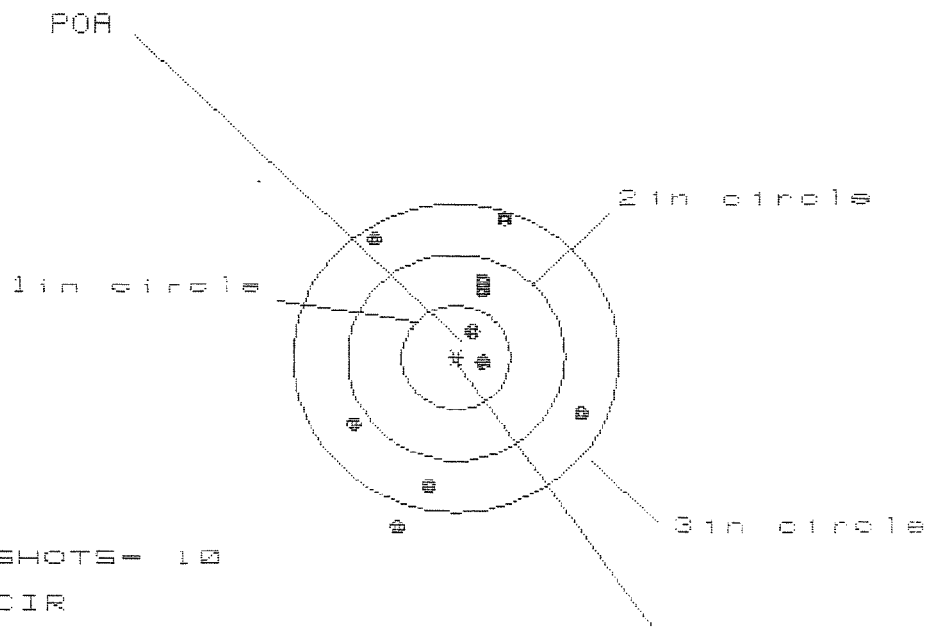

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 4

3 in = 8

HS= 2.129

VS= 3.030

GS= 3.175


PATTERN #	3		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.153	1.096	1.144
MINIMUM X	-0.976	-1.033	-0.985
MAXIMUM Y	1.392	1.210	1.103
MINIMUM Y	-1.638	-1.404	-1.252
CENTROID X	-0.249	-0.192	-0.240
CENTROID Y	0.045	0.227	0.075
POA TO CENTROID in.	0.253	0.297	0.251
MIN RADIUS	0.271	0.113	0.242
MEAN RADIUS	1.024	0.900	0.876
MAX RADIUS	1.715	1.437	1.338
HORIZONTAL SPREAD	2.129	2.129	2.129
VERTICAL SPREAD	3.030	2.614	2.355
EXTREME SPREAD	3.175	2.704	2.554
NUMBER IN ONE INCH CIRCLE	=	2	
NUMBER IN TWO INCH CIRCLE	=	4	
NUMBER IN THREE INCH CIRCLE	=	9	

23 Jul 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8498816

CENTERFIRE PATTERNS

4

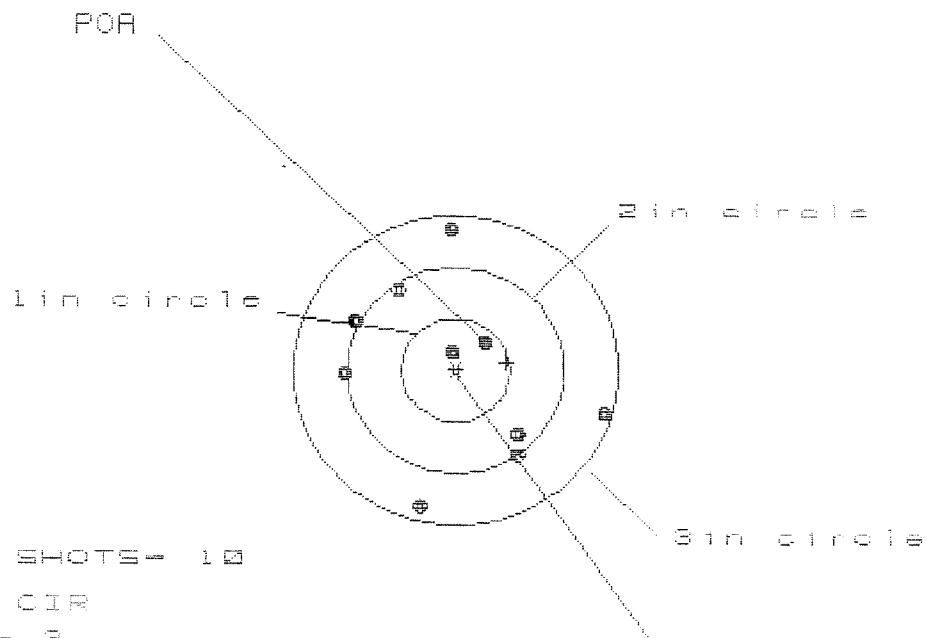

OF SHOTS- 10

IN CIR

1in = 2

2in = 4

3in = 10

HS= 2.425

VS= 2.709

GS= 2.722


CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.415	.749	.767
MINIMUM X	:	-1.010	-.853	-.835
MAXIMUM Y	:	1.407	1.363	.860
MINIMUM Y	:	-1.302	-1.346	-1.176
CENTROID X	:	-.471	-.628	-.646
CENTROID Y	:	-.078	-.034	-.204
POA TO CENTROID in.	:	.477	.629	.678
MIN RADIUS	:	.220	.189	.354
MEAN RADIUS	:	.964	.896	.853
MAX RADIUS	:	1.469	1.371	1.180
HORIZONTAL SPREAD	:	2.425	1.602	1.602
VERTICAL SPREAD	:	2.709	2.709	2.036
EXTREME SPREAD	:	2.722	2.722	2.057
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		10	

23 Jul 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8498816

CENTERFIRE PATTERNS # 5

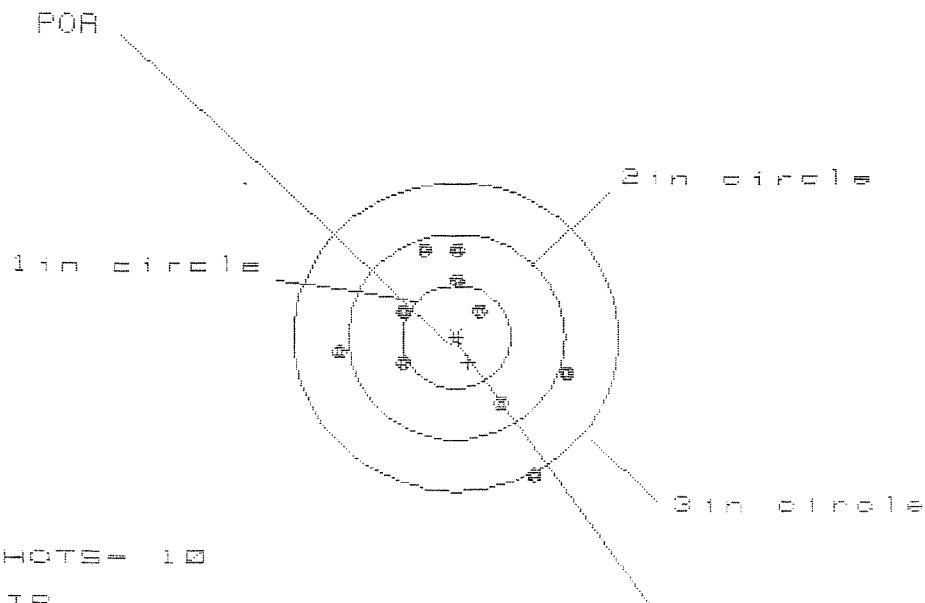

OF SHOTS- 10

IN CIR

1in = 1

2in = 7

3in = 10

HS= 2.125

VS= 2.115

GS= 2.384

CENTROID #

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.993	1.068	.936
MINIMUM X	-1.132	-1.057	-.529
MAXIMUM Y	.811	.666	.631
MINIMUM Y	-1.304	-.775	-.810
CENTROID X	-.114	-.189	-.057
CENTROID Y	.249	.394	.429
FOR TO CENTROID in.	.274	.437	.433
MIN RADIUS	.342	.297	.167
MEAN RADIUS	.797	.686	.623
MAX RADIUS	1.468	1.161	1.057
HORIZONTAL SPREAD	2.125	2.125	1.465
VERTICAL SPREAD	2.115	1.441	1.441
EXTREME SPREAD	2.384	2.132	1.675
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		10	

GFM

CONTRACT # DAAA21-87-C-0086

New Barrel

GUN SERIAL #

C6498816

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		7/14/93	RW
600	Proof		7/14/93	RW
607	Check Headspace		7/14/93	RW
610	Dis-assemble Gun		7/14/93	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		7/19/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		7/19/93	RW
	C) Inspect Ejector Hole for Chamfer		7/19/93	RW
	D) Oil Firing Pin Ass'y		7/19/93	RW
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						7/20/93	RW
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo						7/20/93	RW
655	Final Inspection							
	A) Headspace						7/20/93	RW
	B) Trigger Pull	2.33	2.51	2.52	2.62	2.61	7/20/93	RW
	C) Function						7/20/93	RW
660	Pack							

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 93-14952

INITIAL
FPSCUSTOMER ORDER NO.
7943ATTN: FRED MARTIN W/ULTRA 10X-M3A SCOPE
M-24 W/BI F00

DATE RECEIVED 07/12/93	DATE OPENED 07/12/93	DATE CODE KK 5-90	SERIAL NUMBER C6498816	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62	NATO
ACCESSORIES W/STUDS	SOFT CASE	HARD CASE	SCOPE MNTS	SCOPE BASE		

FROM:

U. S. ARMY
SMALL ARMS MAINT.
CHUCK RUGERIO
FT DRUM

NY 13612

SHIP TO:

U. S. ARMY
SMALL ARMS MAINT.
CHUCK RUGERIO
FT DRUMNY
13612

CUST NO: 080814 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

DOOR

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

Barrel & Receiver Scratched, Barrel Doesn't Float,
Bipod Legs inoperable, Zipper Broken on Soft Case

PARTS

COMMENTS

Barrel Assy - 96002
Soft Case - 96076
1 Scope Ring
Bi-Pod Assy - 96117

Rezinc - Scope Rings & Scope Base &
Swivel Studs.
Repowder Coat - Floor Plate, Latch,
Trigger Guard, Front & Rear Sight
Bases

Repaired Damaged Butt plate on
Stock.
Scope Returned to Vendor for Repair

REPAIRMAN RW	PROOF ✓	CLEAN ✓	TEST ✓	TARGET ✓	PATTERN
GALLERY TESTER RW	DATE 7/14/93	DATE 7/20/93	DATE 7/20/93	DATE 7/20/93	DATE

OFFICE COPY

RD8925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400008317

PAYMENT:

Mastercard / Visa (circle one)

Card #:

Exp. Date:

Signature

RETURN:

☐ Clark Street Entrance☐ Via US Mail or UPS

(PLEASE PRINT CLEARLY)

FIREARMS DELIVERED TO PLANT

FILE NO. 007943DATE 7/12/93

CUSTOMER NAME:

ADDRESS:

ZIP:

PHONE:

FIREARM

MODEL: M-24 w/3 scope CHECK FOR AMMUNITIONGAUGE: 7.65 NATOSERIAL # C6498816

REMINGTON EMPLOYEE:

YES ☐ NO ☐

EMPLOYEE # _____

DEPT. # _____

CONDITION:

WOOD

GOOD

FAIR

POOR

FANCY

PLAIN

METAL

GOOD

FAIR

POOR

FANCY

PLAIN

BARREL

VT. RIB

PLAIN

BEER RSS

ACCESSORIES:

SCOPE: YES NO

(BRAND NAME/POWER) _____

SLING: YES NO

GUN CASE: YES NO (HARD - SOFT)

EXTRA BBL FOR GUN MENTIONED ABOVE:

OTHER (Note in this area items missing or added from orig. equipment)

CUSTOMER REQUEST:

REPAIR PER DATA 93-09-C-0834

SIGNATURE:

(Person delivering firearm to Plant)

DATE:

7/12/93

SIGNATURE:

(Security Officer)

DATE:

7/12/93

SIGNATURE:

(Firearm picked up by)

DATE:

7-12-93

Arm Service Copy

FILE COPY

DATE: 20-MAY-93

MAINTENANCE REQUEST

AWAMP511

CUSTOMER DATA

UIC: WAP2T0 1ST BN, 87TH IN (LI) PHONE: (315)772-8749
UTIL CODE: 8

ACTIVITY DATA

SUP WON: B CO. ~~45TH PSB~~ PHONE: 772-6760
SUP UIC: ~~WAP2T0~~ *210TH MSB* SHOP SEC:
WEP680

EQUIPMENT DATA

TYPE MNT REQ: 1 ID: A NSN: 1005012402136 MODEL: M24
NOUN: SNIPER WEAP SYS. SER NUM: C6498816 QTY: 00001

ORG WON: AP2T01300543 PRIORITY: 13 FAILURE DETECTED: F

MI/KM: 000000 HOURS: 000000 ROUNDS:

IN WARRANTY: N LEVEL OF WORK: F ADMIN NUM:

MALFUNCTION/REMARKS: MISSING PARTS/POC 24837 HMC

PD AUTHENTICATING SIGNATURE: _____

SIGNATURE DATA

SUBMITTED BY: _____ ORD DATE: _____ MIL TIME: _____

ACCEPTED BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____

ACTION DATA

WORK STARTED BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____

INSPECTED BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____

PICKED UP BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____

COMPLETION DATA

QTY RPR: _____ QTY CONDEMNED: _____ NRTS: _____

EVAC WON: _____ EVAC UNIT NAME: _____

DATE: 20-MAY-93

MAINTENANCE REQUEST

AWAMF511

----- CUSTOMER DATA -----

UIC: WAP2T0 1ST BN, 87TH IN (LI) PHONE: (315)772-8749
UTIL CODE: 0

----- ACTIVITY DATA -----

SUP WON: B CO. 46TH FSB PHONE: 772-6760
SUP UIC: WEW590 SHOP SEC:

----- EQUIPMENT DATA -----

TYPE MNT REQ: 1 ID: A NSN: 1005012402136 MODEL: M24
NOUN: SNIPER WEAP SYS. SER NUM: C6498816 QTY: 00001

ORG WON: AP2T01300543 PRIORITY: 13 FAILURE DETECTED: F

MI/KM: 000000 HOURS: 000000 ROUNDS:

IN WARRANTY: N LEVEL OF WORK: F ADMIN NUM:

MALFUNCTION/REMARKS: MISSING PARTS/POC 24837 HHC

PD AUTHENTICATING SIGNATURE: _____

----- SIGNATURE DATA -----

SUBMITTED BY: _____ ORD DATE: _____ MIL TIME: _____

ACCEPTED BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____

----- ACTION DATA -----

WORK STARTED BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____

INSPECTED BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____

PICKED UP BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____

----- COMPLETION DATA -----

QTY RPR: _____ QTY CONDEMNED: _____ NRTS: _____

EVAC WON: _____ EVAC UNIT NAME: _____

NSN: 1005-01-240-2136

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET																																							
For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG																																							
1. ORGANIZATION HHC 1/87 INF					2. NOMENCLATURE AND MODEL M24 SNIPER Weapon System																																		
3. REGISTRATION/SERIAL/NSN C6488816		4a. MILES	b. HOURS	c. ROUNDS FIRED	d. HOT STARTS	5. DATE		6. TYPE INSPECTION PMCS																															
7. APPLICABLE REFERENCE																																							
TM NUMBER 9-1005-365-10			TM DATE		TM NUMBER			TM DATE																															
COLUMN a - Enter TM item number.					COLUMN d - Show corrective action for deficiency or shortcoming listed in Column c.																																		
COLUMN b - Enter the applicable condition status symbol.					COLUMN e - Individual ascertaining completed corrective action initial in this column.																																		
COLUMN c - Enter deficiencies and shortcomings.																																							
STATUS SYMBOLS																																							
"X"-Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"-Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "-" -Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.					DIAGONAL "(/)" -Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL-Indicates that a completely satisfactory condition exists. FOR AIRCRAFT-Status symbols will be recorded in red.																																		
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.																																							
8a. SIGNATURE (Person(s) performing inspection)			8b. TIME		9a. SIGNATURE (Maintenance Supervisor)			9b. TIME																															
Anthony W. [Signature]								10. MANHOURS REQUIRED																															
<table border="1"> <thead> <tr> <th>TM ITEM NO. a</th> <th>STATUS b</th> <th>DEFICIENCIES AND SHORTCOMINGS c</th> <th>CORRECTIVE ACTION d</th> <th>INITIAL WHEN CORRECTED e</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>/</td> <td>Missing Part #6, Swivel Screw NSN 1005-01-2641</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>/</td> <td>Missing Part #29, Day OPTIC Sight, Dust Cover Rear NSN 1005-01-260-2644</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>/</td> <td>Missing Part #30, Brush Chamber, NSN 1005-00-690-8441</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>/</td> <td>Missing Part #42, Lens Cleaning Kit see TM Pg. C-9</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>/</td> <td>Missing Part #28 Day OPTIC Sight Dust Cover Front NSN 1005-01-260-2643</td> <td></td> <td></td> </tr> </tbody> </table>										TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e	1	/	Missing Part #6, Swivel Screw NSN 1005-01-2641			1	/	Missing Part #29, Day OPTIC Sight, Dust Cover Rear NSN 1005-01-260-2644			1	/	Missing Part #30, Brush Chamber, NSN 1005-00-690-8441			1	/	Missing Part #42, Lens Cleaning Kit see TM Pg. C-9			1	/	Missing Part #28 Day OPTIC Sight Dust Cover Front NSN 1005-01-260-2643		
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e																																			
1	/	Missing Part #6, Swivel Screw NSN 1005-01-2641																																					
1	/	Missing Part #29, Day OPTIC Sight, Dust Cover Rear NSN 1005-01-260-2644																																					
1	/	Missing Part #30, Brush Chamber, NSN 1005-00-690-8441																																					
1	/	Missing Part #42, Lens Cleaning Kit see TM Pg. C-9																																					
1	/	Missing Part #28 Day OPTIC Sight Dust Cover Front NSN 1005-01-260-2643																																					

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

NOTICE OF REJECTION

PURCHASED COMPONENTS

TO: PURCHASING DEPARTMENT, 52-2H

DATE REC'D 7/14/93

NAME OF VENDOR: Leupold & Stevens

PART NO. 434 Ultra Super Scope

DRAWING NO. 89-0963

NAME OF PART: Scope

PURCHASE ORDER NO. _____

QUANTITY REC'D 7

R/S NO. _____

REASON FOR REJECTION: Will Not Clear

Clean/Check/Repair/Calibrate As Necessary

Please Overrite Return

Make SWS

PURCHASED PARTS ENGINEER _____

INSPECTION DEPARTMENT _____

THIS FORM NOT VALID UNLESS CO-SIGNED BY ENGINEER.

Remington



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24

SERIAL NO.
C6498816

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

01



5716 C6498816

UPC



0 47700 25716 7

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400008324

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6498816

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	5 9	90	RW
600	Proof	5 9	90	RW
607	Check Headspace	5 9	90	RW
610	Dis-assemble Gun	5 9	90	RW
612	Magnaflux Barrel Action	5-1590		KER
	Magnaflux Bolt	5-1590		KER
615	Rollmark Caliber	5-1590		CS
617	Drill and Tap Sight Holes		5/17/90	KB
618	Polish Barrel RB		5/17/90	RB
620	Apply Coatings (Barrel Action)		5-25-90	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		5/25/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/25/90	RW
	C) Inspect Ejector Hole for Chamfer		5/25/90	RW
	D) Oil Firing Pin Ass'y		5/25/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		6-4-90	JH

op. #	OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	4	4	4	6-5-90	94		
	G) Safety Off Force	3	3	3	6-5-90	94		
	H) Trigger Pull Test & Retainability				6-4-90	94		
	I) Firing Pin Indent	.0225	.0235	.0235	6-5-90	94		
	J) Assemble Stock				6/5/90	RW		
	K) Assemble Swivel Studs				6-8-90	94		
	L) Attach Front and Rear Sight Assemblies				6/5/90	RW		
	M) Iron Sight Alignment				6/5/90	RW		
	N) Detach Front & Rear Sights & place in numbered container				6/5/90	RW		
	O) Attach Scope to Rifle				6/5/90	WB		
	P) Detach & Attach Scope 20 Times				6/5/90	WB		
640	Gallery Target & Test				6-7-90	AC		
	A) Time				6-7-90	AC		
	B) Malfunctions				6-7-90	AC		
	C) Pierced Primers				6-7-90	AC		
	D) Optical Clarity of Scope				6-7-90	AC		
645	Inspect for Live Ammo				6-7-90	AC		
655	Final Inspection				6-8-90	94		
	A) Headspace				6-8-90	94		
	B) Trigger Pull	234	223	227	225	221	6-8-90	94
	C) Function						6-8-90	94
660	Pack				6-9-90	0/4		

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6498816

DATE 6-4-90

TESTER JR

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.16	2.23	2.48	2.34	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.38	2.17	2.40	2.23	
PULL #3	2.29	2.15	2.31	2.27	
PULL #4	2.30	2.19	2.35	2.25	
PULL #5	2.19	2.50	2.18	2.21	
TOTAL	11.32	11.24	11.72		
AVG.	2.264	2.248	2.344		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.23	3.26		
PULL #2	3.10	3.28		
PULL #3	3.32	3.05		
PULL #4	3.20	3.26		
PULL #5	3.15	3.25		
TOTAL	16.00	16.10		
AVG.	3.20	3.22		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.27	4.30		4.30
PULL #2	4.28	4.28		4.33
PULL #3	4.24	4.27		4.30
PULL #4	4.14	4.32		4.24
PULL #5	4.32	4.29		4.28
TOTAL	21.25	21.46		21.45
AVG.	4.25	4.292		4.29

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6498816
7 Jun 1990

CENTROIDAL DISTANCES

0 TO	1	.258306
1 TO	2	.193644
1 TO	3	.666145
1 TO	4	.796492
1 TO	5	.522456


$\frac{45}{12} + 12$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1074
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.074
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .130425
THE AMR FOR THIS RIFLE IS: .7864

7 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C649B816

CENTERFIRE PATTERNS # 1

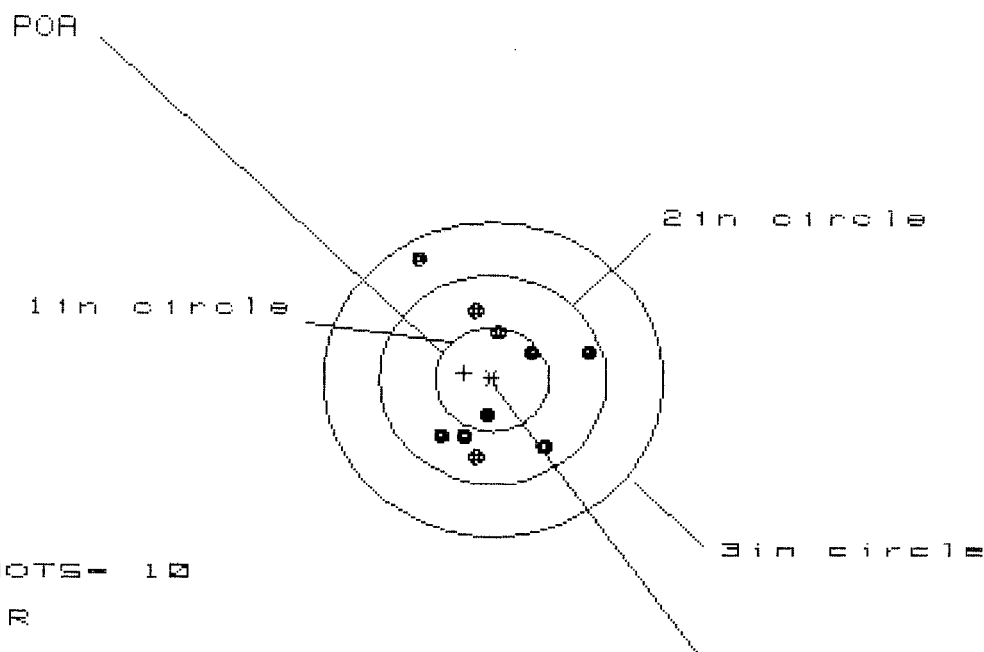

OF SHOTS- 10

IN CIR

1in = 3

2in = 9

3in = 10

HS= 1.458

VS= 1.938

GS= 2.049


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.849	.781	.465
MINIMUM X	-.609	-.537	-.439
MAXIMUM Y	1.174	.751	.798
MINIMUM Y	-.756	-.626	-.579
CENTROID X	.251	.319	.221
CENTROID Y	-.061	-.191	-.238
POA TO CENTROID in.	.258	.372	.325
MIN RADIUS	.324	.226	.145
MEAN RADIUS	.679	.589	.536
MAX RADIUS	1.323	.865	.809
HORIZONTAL SPREAD	1.458	1.318	.904
VERTICAL SPREAD	1.938	1.377	1.377
EXTREME SPREAD	2.049	1.520	1.377
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	9		
NUMBER IN THREE INCH CIRCLE =	10		

7 Jun 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C649B816

CENTERFIRE PATTERNS # 2

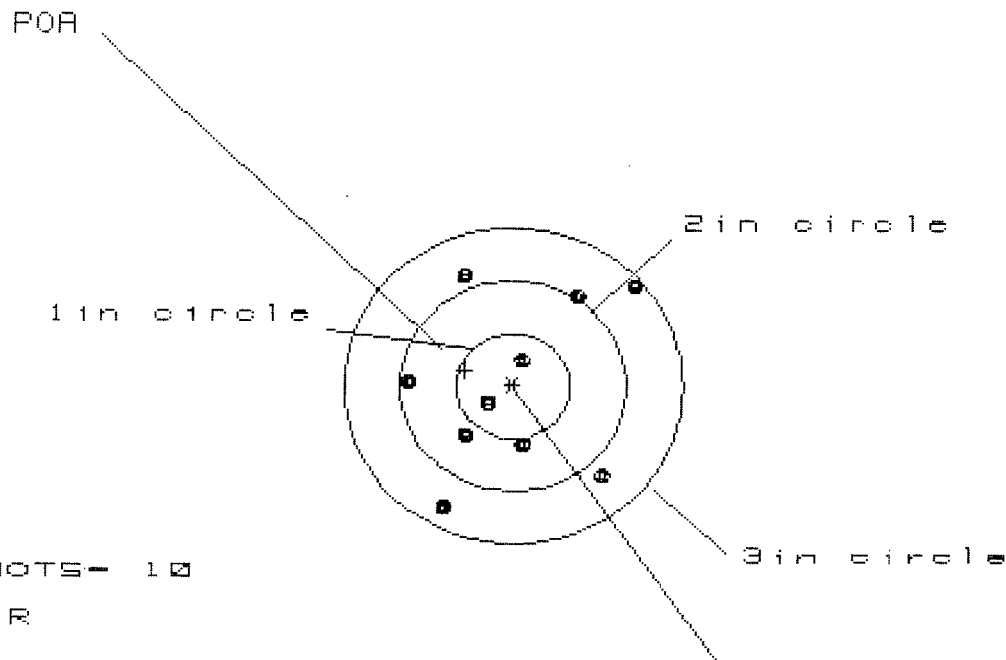

OF SHOTS- 10

IN CIR

1in - 2

2in - 5

3in - 10

HS- 1.963

VS- 2.176

GS- 2.690


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.069	.884	.819
MINIMUM X	:	-.894	-.775	-.841
MAXIMUM Y	:	1.020	1.122	.990
MINIMUM Y	:	-1.156	-1.054	-.884
CENTROID X	:	.424	.305	.370
CENTROID Y	:	-.148	-.251	-.119
POA TO CENTROID in.	:	.449	.395	.389
MIN RADIUS	:	.205	.056	.182
MEAN RADIUS	:	.847	.757	.713
MAX RADIUS	:	1.410	1.184	1.205
HORIZONTAL SPREAD	:	1.963	1.659	1.659
VERTICAL SPREAD	:	2.176	2.176	1.974
EXTREME SPREAD	:	2.690	2.354	2.206
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

7 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6498816

CENTERFIRE PATTERNS # 3

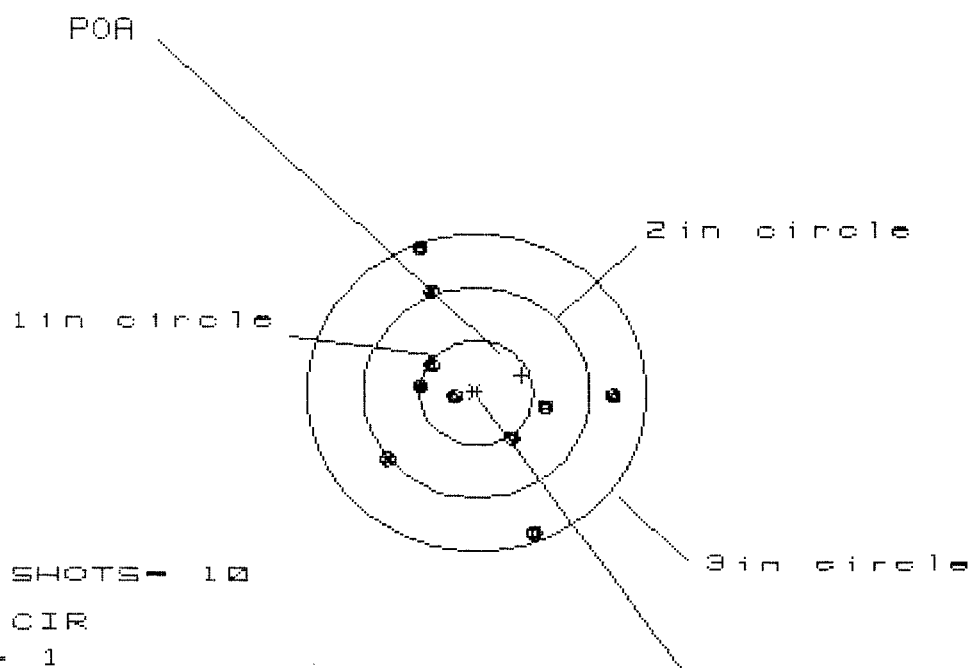

OF SHOTS - 10

IN CIR

1in = 1

2in = 5

3in = 10

HS= 1.997

VS= 2.616

GS= 2.775


CENTROID #

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.244	1.194	1.247
MINIMUM X	:	-.753	-.803	-.750
MAXIMUM Y	:	1.327	1.168	1.025
MINIMUM Y	:	-1.289	-1.141	-.637
CENTROID X	:	-.406	-.356	-.409
CENTROID Y	:	-.171	-.319	-.176
POA TO CENTROID in.	:	.441	.478	.445
MIN RADIUS	:	.161	.230	.157
MEAN RADIUS	:	.852	.788	.718
MAX RADIUS	:	1.402	1.249	1.248
HORIZONTAL SPREAD	:	1.997	1.997	1.997
VERTICAL SPREAD	:	2.616	2.309	1.662
EXTREME SPREAD	:	2.775	2.466	2.080
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

7 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C649B816

CENTERFIRE PATTERNS # 4

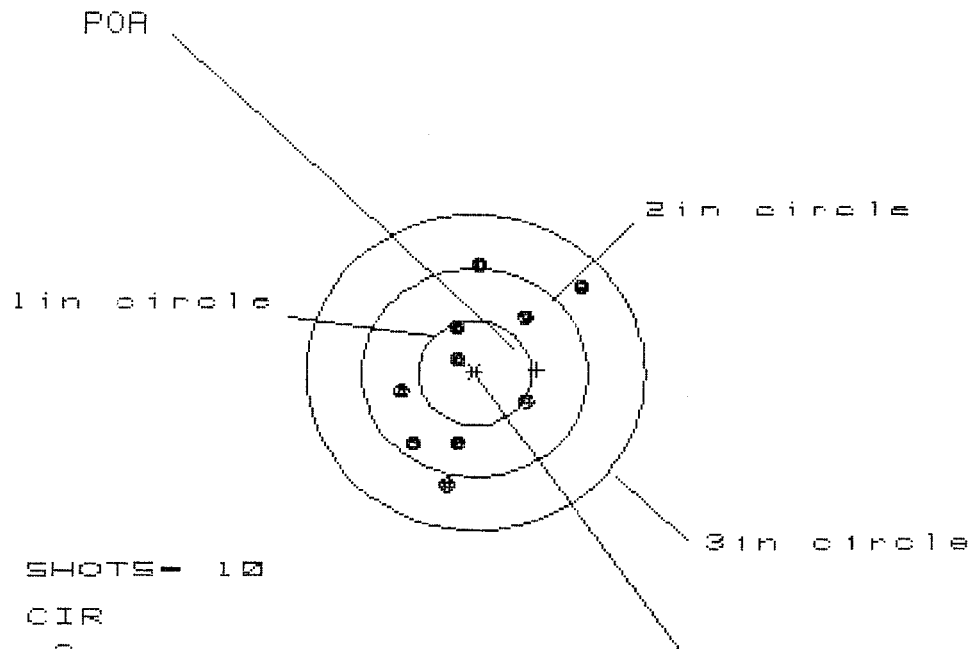

OF SHOTS- 10

IN CIR

1in = 2

2in = 7

3in = 10

HS= 1.540

VS= 2.124


GS= 2.270

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.909	.595	.590
MINIMUM X	:	-.631	-.529	-.544
MAXIMUM Y	:	1.009	1.104	.976
MINIMUM Y	:	-1.115	-1.020	-.688
CENTROID X	:	-.545	-.647	-.632
CENTROID Y	:	-.033	-.128	.000
POA TO CENTROID in.	:	.546	.659	.632
MIN RADIUS	:	.210	.217	.120
MEAN RADIUS	:	.751	.684	.626
MAX RADIUS	:	1.247	1.119	.991
HORIZONTAL SPREAD	:	1.540	1.124	1.124
VERTICAL SPREAD	:	2.124	2.124	1.664
EXTREME SPREAD	:	2.270	2.146	1.765
NUMBER IN ONE INCH CIRCLE =			2	
NUMBER IN TWO INCH CIRCLE =			7	
NUMBER IN THREE INCH CIRCLE =			10	

7 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6498816

CENTERFIRE PATTERNS # 5

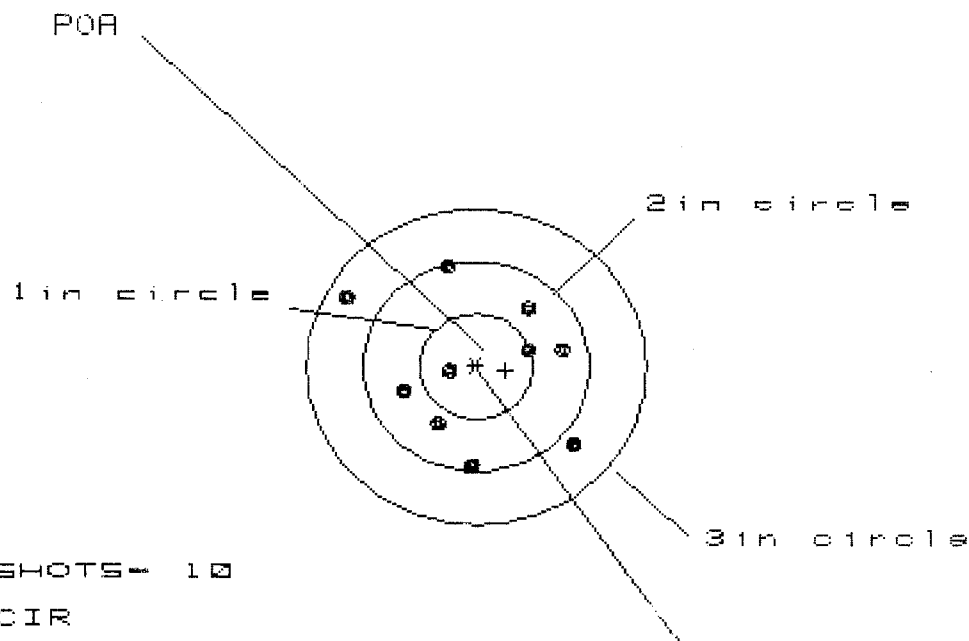

OF SHOTS- 10

IN CIR

1 in - 1

2 in - 7

3 in - 10

HS- 2.001

VS= 1.959

GS= 2.440

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.891	.768	.731
MINIMUM X	:	-1.110	-.751	-.655
MAXIMUM Y	:	.996	1.069	.934
MINIMUM Y	:	-.963	-.890	.975
CENTROID X	:	-.261	-.138	.234
CENTROID Y	:	.043	-.030	.055
POA TO CENTROID in.	:	.264	.141	.240
MIN RADIUS	:	.265	.392	.294
MEAN RADIUS	:	.803	.745	.699
MAX RADIUS	:	1.286	1.128	1.019
HORIZONTAL SPREAD	:	2.001	1.519	1.386
VERTICAL SPREAD	:	1.959	1.959	1.959
EXTREME SPREAD	:	2.440	2.076	1.973
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

ORDER
R 97-06940

CUSTOMER ORDER NO. _____

WOG 2 OF 4

RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
03/20/97	03/24/97	PN 6-93	C6498816		700 7.62 NATO
ACCESSORIES	W/STUDS	SCOPE BASE			

FROM:

SHIP TO:

DEPT OF THE ARMY
CONSOL STA SUP OFC
BLDG F 4525 CAMP HALE RD
FORT DRUM NY 13602

DEPT OF THE ARMY
CONSOL STA SUP OFC
BLDG P 4525 CAMP HALE RD
FORT DRUM NY
13602

CUST NO: 164458 C.D.L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE	PROM. DATE	ESTIMATED	VIA
					UPS

GUN CONDITION

☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			
MAIN FAULT						

MAIN FAULT

W52 H097156 H242

ARTS

COMMENTS

96003 - Barre /
96018 - Stock

Repowder Coat Trigger Guard Assy,
Front & Rear Sight Bases

Resin Scope Base + SWave!

REPAIRMAN <i>RW</i>	PROOF <i>✓</i>	CLEAN <i>✓</i>	TEST <i>K</i>	TARGET <i>K</i>	PATTERN <i>—</i>
GALLERY TESTER <i>A</i>	DATE <i>3/24/97</i>	DATE <i>4/18/97</i>	DATE <i>4/9/97</i>	DATE <i>4/9/97</i>	DATE <i>—</i>

OFFICE COPY

RD6925 REV. 6/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400008334

21 DAY TURN - AROUND

M-24
CONTRACT # DAAA09-92-C-0834

Barrel

R&E NO.

SERIAL NO.

C6498816

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	<i>3/24/97</i>	<i>RW</i>
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	<i>4/9/97</i>	<i>A</i>
655	FINAL INSPECT		
660	PACK		
QAR INSPECTION		SHIP DATE	

Final Inspection

Sn: C64988/6

DATE REC'D: 3/20/97

DATE RET'D:

AUDITOR: AW

Item:

Barrel Assy.

✓ BARREL✓ RECEIVER✓ FRONT SIGHT BLOCK✓ REAR SIGHT BLOCK✓ SCREWS✓ FINISH

Scope Assy.

— Scope— Scope Rings— Mounting Screws— Mounting Base— Screws— Finish— Looseness— CLARITY

Misc.

— DD-250— BAR CODE— PACKAGING

Item:

Stock Assy.

✓ Stock✓ Sling Swivel Studs✓ ADJUSTABLE Butt PLATE✓ Lock Nuts✓ BARREL CLEARANCE✓ COLOR/FINISH

Systems Case

— Scope Case— Iron Sights— Deployment Kit

Trigger

✓ SAFETY OPERATION✓ SET✓

Comments: _____
