

C6498825

MODEL 700™ M24

Model **SWS**

Action _____™

Barrel Length _____

Capacity _____

Order No. **5716**

*Includes 1 in chamber.

Remington

CAR 702

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 0498825

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	QUALITY AUDIT	8-21-90	RB
600	Proof		8-21-90	RB
607	Check Headspace		8-21-90	RB
610	Dis-assemble Gun		8-21-90	RB
612	Magnaflux Barrel Action		8/22/90	KCR
	Magnaflux Bolt		8/22/90	KCR
615	Rollmark Caliber		8/22/90	CB
617	Drill and Tap Sight Holes		8/22/90	FB
618	Polish Barrel RB		8/22/90	WB
620	Apply Coatings (Barrel Action)		8/21/90	TH
	Apply Coating (Bolt)			
625	Final Assembly		9/10/90	WB
	A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		9/10/90	WB
	C) Inspect Ejector Hole for Chamfer		9/10/90	WB
	D) Oil Firing Pin Ass'y		9/10/90	WB
	E) Adjust Trigger Pull to Min Setting and Stake		9/10/90	WB

op. #	OP. NAME	READINGS				DATE	INIT
655 nt.	F) Safety On Force	7 5	5	5		9/10/90	WB
	G) Safety Off Force	2 1/2	2 1/2	2 1/2		9/10/90	WB
	H) Trigger Pull Test & Retainability					9/10/90	WB
	I) Firing Pin Indent	.0225	.022	.022		9/10/90	WB
	J) Assemble Stock					9/10/90	KS
	K) Assemble Swivel Studs					9/13/90	JS
	L) Attach Front and Rear Sight Assemblies					9/10/90	KS
	M) Iron Sight Alignment					9/10/90	KS
	N) Detach Front & Rear Sights & place in numbered container					9/10/90	KS
	O) Attach Scope to Rifle					9/10/90	KS
	P) Detach & Attach Scope 20 Times					9/10/90	KS
640	Gallery Target & Test					9-11-90	DH
	A) Time					9-11-90	DH
	B) Malfunctions					9-11-90	DH
	C) Pierced Primers					9-11-90	DH
	D) Optical Clarity of Scope					9-11-90	DH
645	Inspect for Live Ammo					9-11-90	DH
655	Final Inspection						
	A) Headspace					9/13/90	JS
	B) Trigger Pull	2.37	2.31	2.30	2.24	2.37	9-12-90 JM
	C) Function						9/13/90 JS
660	Pack						
						9/20/90	RF

MOD.		GA. CAL.	GUN #	ASSEM. #
#	DATE	MALFUNCTION/DEFECT		
TEST	1st	SCOPE IS 9-11-90 LOOSE		KS
	2nd	Repaired		
	3rd			
	4th			
		FUNCTION		RD 6654 Rev 1

TEST INIT. ACTION TO CORRECT		ASSEM. #
PROOF		
TEST		
TGT		
PROOF		
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6498825
DATE 9/10/90
TESTER WB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.43	2.29	2.65	2.37	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.32	2.26	2.56	2.31	
PULL #3	2.34	2.31	2.62	2.30	
PULL #4	2.37	2.32	2.48	2.24	
PULL #5	2.38	2.25	2.63	2.37	
TOTAL	11.84	11.43	12.94	11.59	
AVG.	2.37	2.38	2.59	2.318	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.26	3.29		
PULL #2	3.09	3.20		
PULL #3	3.11	3.15		
PULL #4	3.03	3.20		
PULL #5	3.29	3.13		
TOTAL	15.75	15.97		
AVG.	3.15	3.19		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.12	4.13		4.04
PULL #2	4.24	4.00		3.95
PULL #3	4.07	4.11		3.95
PULL #4	4.00	4.11		4.02
PULL #5	4.16	4.15		4.02
TOTAL	20.59	20.50		19.98
AVG.	4.12	4.10		4.00

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6498825
11 Sep 1990

CENTROIDAL DISTANCES

0	TO	1	.312349
1	TO	2	.107168
1	TO	3	.421836
1	TO	4	.0603738
1	TO	5	.309919


$\frac{3}{4}$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2396
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0664
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .24863
THE AMR FOR THIS RIFLE IS: .905

11 Sep 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C8498825

CENTERFIRE PATTERNS # 1

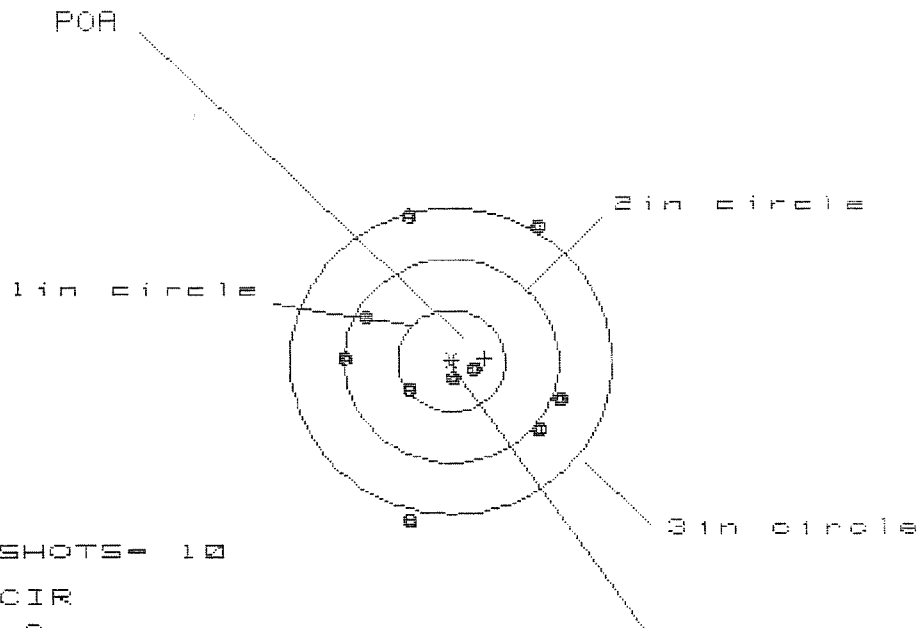

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 5

3 in = 8

HS= 2.004

VS= 3.021

GS= 3.139


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.020	.981	1.083
MINIMUM X	-.984	-1.023	-.921
MAXIMUM Y	1.436	1.260	1.402
MINIMUM Y	-1.585	-.824	-.682
CENTROID X	-.311	-.272	-.374
CENTROID Y	-.029	.147	.005
POA TO CENTROID in.	.312	.310	.374
MIN RADIUS	.206	.291	.245
MEAN RADIUS	.964	.915	.812
MAX RADIUS	1.623	1.400	1.431
HORIZONTAL SPREAD	2.004	2.004	2.004
VERTICAL SPREAD	3.021	2.084	2.084
EXTREME SPREAD	3.139	2.391	2.391
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

11 Sep 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6498825

CENTERFIRE PATTERNS # 2

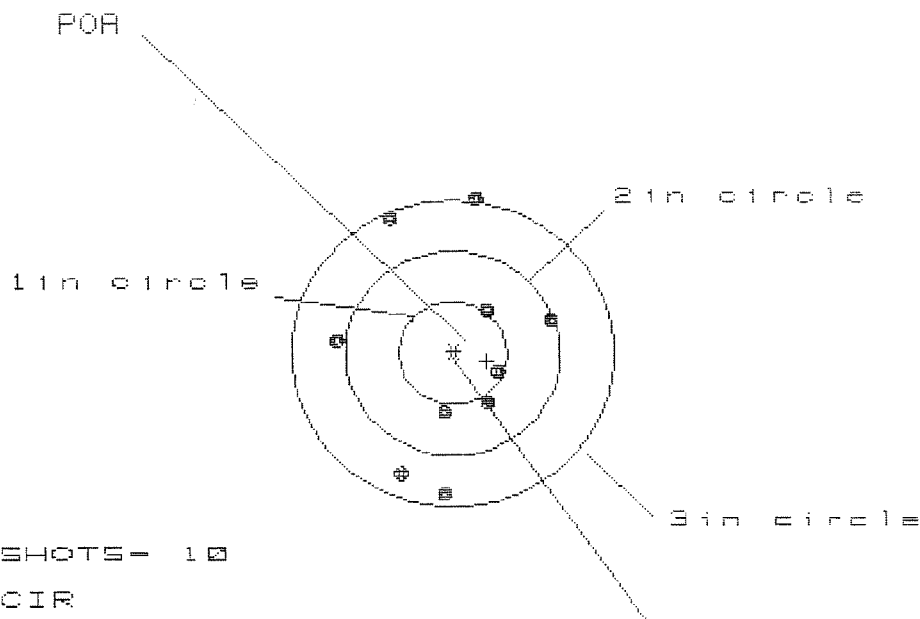

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 9

HS= 1.965

VS= 2.863

GS= 2.879


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.931	.957	.892
MINIMUM X	:	-1.034	-1.008	-1.073
MAXIMUM Y	:	1.504	1.498	.782
MINIMUM Y	:	-1.359	-1.191	-1.004
CENTROID X	:	-.317	-.343	-.278
CENTROID Y	:	.078	-.089	-.276
POA TO CENTROID in.	:	.326	.354	.392
MIN RADIUS	:	.413	.378	.215
MEAN RADIUS	:	.969	.886	.760
MAX RADIUS	:	1.523	1.583	1.172
HORIZONTAL SPREAD	:	1.965	1.965	1.965
VERTICAL SPREAD	:	2.863	2.689	1.786
EXTREME SPREAD	:	2.879	2.730	2.081
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

11 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08498825

CENTERFIRE PATTERNS # 3

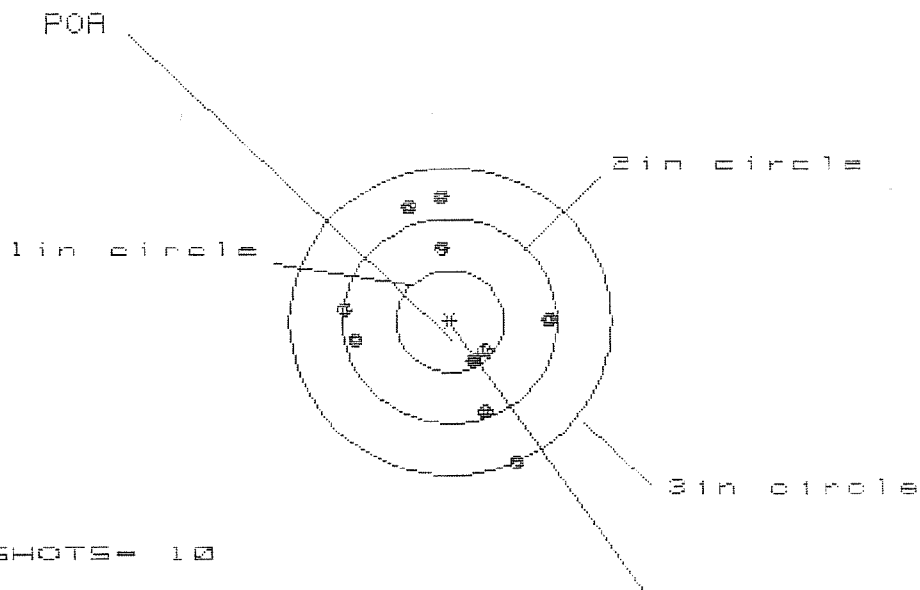

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 7

3 in = 9

HS= 1.942

VS= 2.603

GS= 2.718


CENTROID #

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.956	1.021	.983
MINIMUM X	:	-.986	-.921	-.959
MAXIMUM Y	:	1.177	1.018	1.139
MINIMUM Y	:	-1.426	-1.029	-.908
CENTROID X	:	-.216	-.281	-.243
CENTROID Y	:	.382	.541	.420
POA TO CENTROID in.	:	.439	.609	.486
MIN RADIUS	:	.404	.528	.450
MEAN RADIUS	:	.916	.847	.810
MAX RADIUS	:	1.541	1.085	1.139
HORIZONTAL SPREAD	:	1.942	1.942	1.942
VERTICAL SPREAD	:	2.603	2.047	2.047
EXTREME SPREAD	:	2.718	2.094	2.071
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		9	

11 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08498825

CENTERFIRE PATTERNS # 4

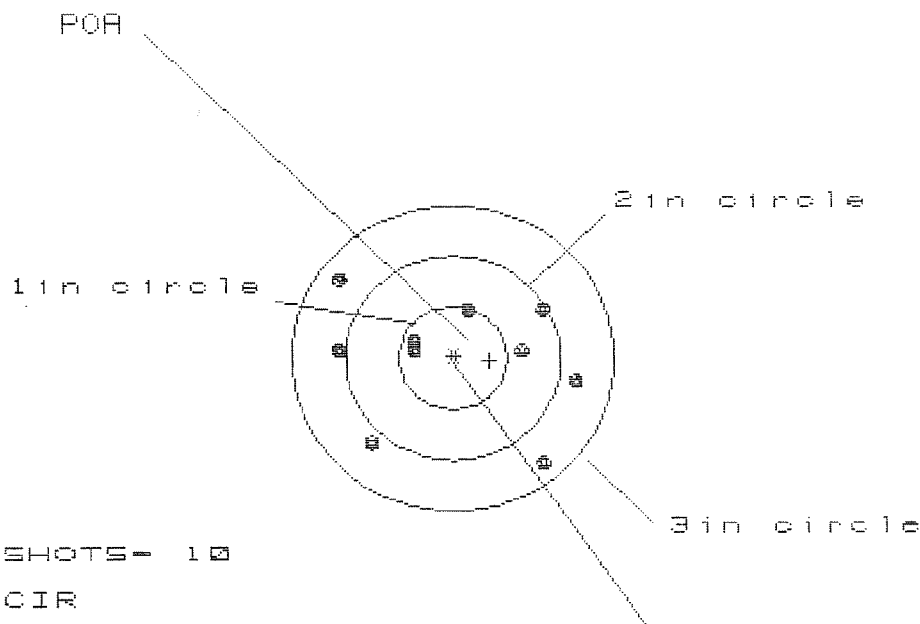

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 10

HS= 2.190

VS= 1.741

GS= 2.566

CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.122	1.213	1.091
MINIMUM X	:	-1.068	-.977	-1.099
MAXIMUM Y	:	.729	.616	.456
MINIMUM Y	:	-1.012	-.946	-.869
CENTROID X	:	-.338	-.429	-.307
CENTROID Y	:	.025	.138	.061
POA TO CENTROID in.	:	.339	.451	.313
MIN RADIUS	:	.379	.249	.390
MEAN RADIUS	:	.889	.815	.783
MAX RADIUS	:	1.302	1.260	1.179
HORIZONTAL SPREAD	:	2.190	2.190	2.190
VERTICAL SPREAD	:	1.741	1.562	1.325
EXTREME SPREAD	:	2.566	2.388	2.211
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

11 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/CS498825

CENTERFIRE PATTERNS # 5

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 4

2 in = 7

3 in = 10

HS= 2.800

VS= 1.802

GS= 2.867

CENTROID *

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.397	.847	.691
MINIMUM X	:	-1.403	-1.248	-.876
MAXIMUM Y	:	.886	.946	.945
MINIMUM Y	:	-.916	-.856	-.857
CENTROID X	:	-.016	-.171	-.015
CENTROID Y	:	-.124	-.184	-.183
POA TO CENTROID in.	:	.125	.251	.183
MIN RADIUS	:	.199	.197	.244
MEAN RADIUS	:	.787	.690	.618
MAX RADIUS	:	1.499	1.248	1.081
HORIZONTAL SPREAD	:	2.800	2.095	1.567
VERTICAL SPREAD	:	1.802	1.802	1.802
EXTREME SPREAD	:	2.867	2.153	1.917
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

Remington
REG. U.S. PAT. & TM. OFF.

VERY IMPORTANT!
Instruction Book
enclosed to assure
safe use of this
firearm.


MODEL 700™ M24

SERIAL NO.
C6498825

ORDER NO.
5716


01

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6498825

UPC



0 47700 25716 7