

C6225235

MODEL 700TM M24

Model **700 M24TM**

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington[®]

M2400011248

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

88299

5081

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 6725735

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel RB		7/24/89	WLB
620	Apply Coatings (Barrel Action)		7/25/89	TA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake		7/27/89	JO

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability						7/19/89	JU
	I) Firing Pin Indent							
	J) Assemble Stock						7/30/89	AW
	K) Assemble Swivel Studs						7/31/89	WB
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection						8/2/89	JS
	A) Headspace							
	B) Trigger Pull	2.30	2.23	2.12	2.16	2.15	8/2/89	JS
	C) Function						8/2/89	JS
660	Pack						8/3/89	WB

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50#+ .50#
3.00#+ .75#
4.00#+1.00#

SERIAL NO. C6225235
DATE 27 July 89
TESTER J. H.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.28		2.40	2.30	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.25		2.33	2.23	
PULL #3	2.34		2.29	2.12	
PULL #4	2.29		2.33	2.16	
PULL #5	2.33		2.24	2.15	
TOTAL	11.49		11.59	10.96	
AVG.	2.298		2.318	2.192	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1				
PULL #2				
PULL #3				
PULL #4				
PULL #5				
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.21			
PULL #2	4.20			
PULL #3	4.13			
PULL #4	4.11			
PULL #5	3.92			
TOTAL	20.57			
AVG.	4.114			

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225735

OPERATION		DATE	INT
#	NAME		
575- 580	ASSEMBLY	2/1	FB
600	PROOF	2/2/88	RL
615	MAGNAFLUX BARREL	2/18/88	P/C.
	MAGNAFLUX BOLT	2/25/88	P/C.
620	COATING	3/2/88	TJA
625- 630	FINAL ASSEMBLY		
635	TEST		
640	TARGET		
	FIRING PIN INDENT		
660	PACK		

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6225235

1730

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill & Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coatings (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		9/9/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		9/9/88	RW
	C) Inspect Ejector Hole for Chamfer		9/9/88	RW

OVER

OP.#		READINGS	DATE	INITIAL
625 cont.	D) Oil Firing Pin Ass'y		9/9/88	RW
	E) Adjust Trigger Pull to Min. Setting and Stake		9 Sept 88	JU + AS
	F) Safety on Force	6 5.75 5	9 Sept 88	JU + AS
	G) Safety off Force	3 3 3	9 Sept 88	JU + AS
	H) Trigger Pull Test & Retainability		9 Sept 88	JU + AS
	I) Firing Pin Indent	.021 .021 .021	9 Sept 88	JU + AS
	J) Assemble Stock		9/15/88	RW
	K) Assemble Swivel Studs		10-12-88	JS.
	L) Attach Front & Rear Sight Assemblies		9/15/88	RW
	M) Iron Sight Alignment		9/15/88	RW
	N) Detach Front & Rear Sights & place in numbered container		9/15/88	RW
	O) Attach Scope to Rifle		10/5/88	RW
	P) Detach & Attach Scope 20 times		10/5/88	JS.
640	Gallery Target & Test	86 R 69 L	10-11-88	AC
	A) Optical Clarity of Scope	OK	10-11-88	AC
645	Inspect for Live Ammo	NONE	10-11-88	AC
655	Final Inspection A) Headspace		10-12-88	JS.
	B) Trigger Pull		10-14-88	JS.
	C) Function		10-12-88	JS.
660	Pack		10-21-88	JS.

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6225235
DATE 9 Sept 88
TESTER J. U. + W. S.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.51	2.50	2.55	2.90	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.49	2.46	2.51	2.91	
PULL #3	2.42	2.49	2.50	2.87	
PULL #4	2.48	2.47	2.45	2.87	
PULL #5	2.50	2.51	2.52	2.87	
TOTAL	12.40	12.43	12.63	14.32	
AVG.	2.48	2.486	2.526	2.864	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.37	3.31		
PULL #2	3.30	3.31		
PULL #3	3.16	3.33		
PULL #4	3.30	3.09		
PULL #5	3.24	3.34		
TOTAL	16.37	16.38		
AVG.	3.274	3.276		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.24	4.19		4.25
PULL #2	4.21	4.21		4.10
PULL #3	4.24	4.19		4.21
PULL #4	4.22	4.21		4.24
PULL #5	4.19	4.25		4.15
TOTAL	21.10	21.05		20.95
AVG.	4.22	4.21		4.19

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225235

CENTERFIRE PATTERNS # 1

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS= 10

IN CIR

1in = 3

2in = 7

3in = 10

HS= 1.698

VS= 2.614


GS= 2.691

PATTERN #	:	1	2	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.695	.758	.757
MINIMUM X	:	-1.003	-.940	-.941
MAXIMUM Y	:	1.256	1.106	.874
MINIMUM Y	:	-1.358	-1.021	-.883
CENTROID X	:	.062	-.001	.000
CENTROID Y	:	-1.392	-1.242	-1.380
POA TO CENTROID in.	:	1.394	1.242	1.380
MIN RADIUS	:	.305	.439	.365
MEAN RADIUS	:	.851	.786	.728
MAX RADIUS	:	1.471	1.106	.953
HORIZONTAL SPREAD	:	1.698	1.698	1.698
VERTICAL SPREAD	:	2.614	2.127	1.757
EXTREME SPREAD	:	2.691	2.128	1.834
NUMBER IN ONE INCH CIRCLE	=	3		
NUMBER IN TWO INCH CIRCLE	=	7		
NUMBER IN THREE INCH CIRCLE	=	10		

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225235

CENTERFIRE PATTERNS # 2

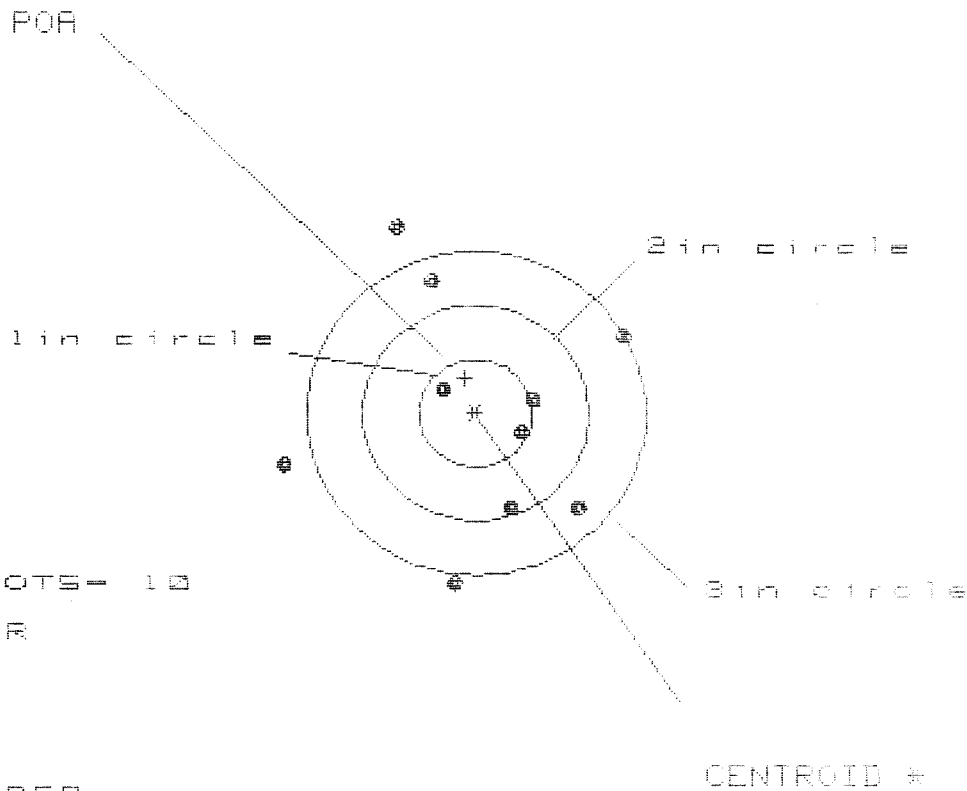

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 4

3 in = 7

HS= 2.969

VS= 3.289


GS= 3.329

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.261	1.180	.957
MINIMUM X	:	-1.708	-1.789	-1.723
MAXIMUM Y	:	1.727	1.396	1.365
MINIMUM Y	:	-1.562	-1.370	-1.401
CENTROID X	:	.095	.176	.400
CENTROID Y	:	-.326	-.518	-.486
POA TO CENTROID in.	:	.340	.547	.630
MIN RADIUS	:	.383	.296	.075
MEAN RADIUS	:	1.148	1.043	.894
MAX RADIUS	:	1.875	1.807	1.544
HORIZONTAL SPREAD	:	2.969	2.969	1.679
VERTICAL SPREAD	:	3.289	2.766	2.766
EXTREME SPREAD	:	3.329	3.180	2.773
NUMBER IN ONE INCH CIRCLE =	:	2		
NUMBER IN TWO INCH CIRCLE =	:	4		
NUMBER IN THREE INCH CIRCLE =	:	7		

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225235

CENTERFIRE PATTERNS # 3

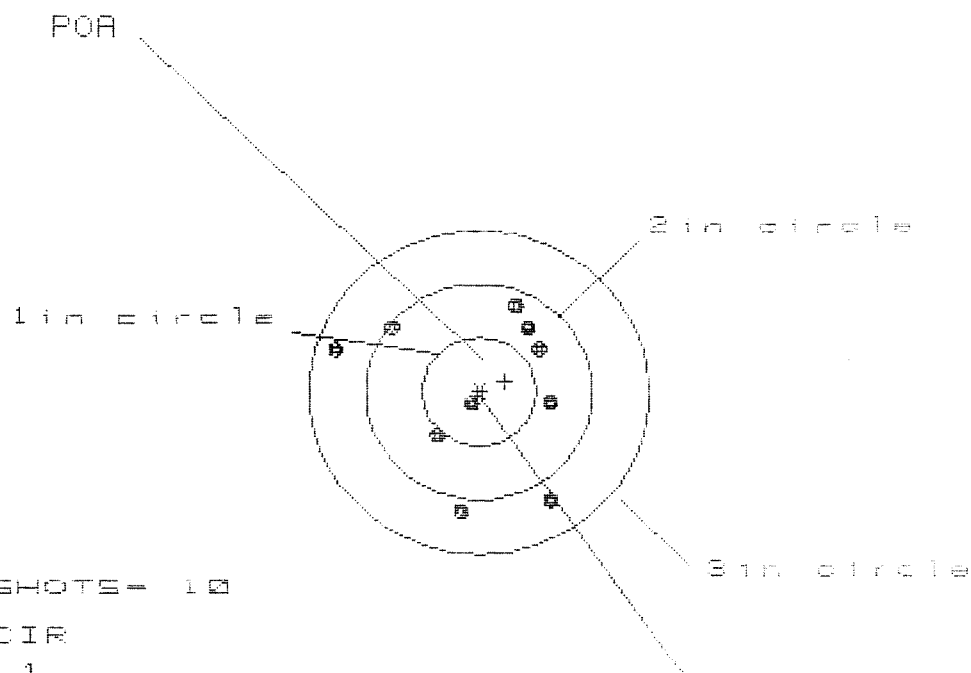

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 7

3 in = 10

HS = 1.916

VS = 1.877

GS = 2.414


CENTROID #

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.665	.526	.591
MINIMUM X	:	-1.251	-.905	-.841
MAXIMUM Y	:	.780	.828	.704
MINIMUM Y	:	-1.097	-1.049	-1.173
CENTROID X	:	-.229	-.090	-.154
CENTROID Y	:	-.095	-.143	-.019
POA TO CENTROID in.	:	.248	.169	.156
MIN RADIUS	:	.146	.224	.250
MEAN RADIUS	:	.819	.754	.690
MAX RADIUS	:	1.325	1.121	1.193
HORIZONTAL SPREAD	:	1.916	1.431	1.431
VERTICAL SPREAD	:	1.877	1.877	1.877
EXTREME SPREAD	:	2.414	2.170	1.945
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225235

CENTERFIRE PATTERNS # 4

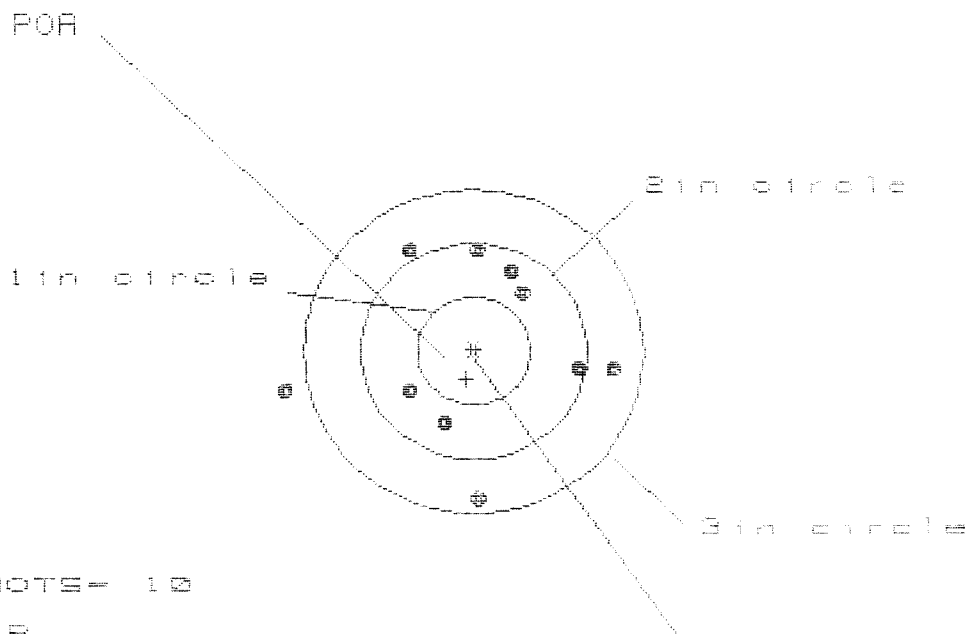

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 6

3 in = 8

HS= 2.861

VS= 2.331

GS= 2.868


CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.235	1.054	1.040
MINIMUM X	:	-1.626	-.791	-.885
MAXIMUM Y	:	.940	.896	.717
MINIMUM Y	:	-1.391	-1.435	-.895
CENTROID X	:	.066	.247	.261
CENTROID Y	:	.262	.306	.485
POA TO CENTROID in.	:	.270	.393	.551
MIN RADIUS	:	.684	.601	.440
MEAN RADIUS	:	1.033	.942	.847
MAX RADIUS	:	1.673	1.439	1.123
HORIZONTAL SPREAD	:	2.861	1.845	1.845
VERTICAL SPREAD	:	2.331	2.331	1.612
EXTREME SPREAD	:	2.868	2.428	2.169
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225235

CENTERFIRE PATTERNS # 5

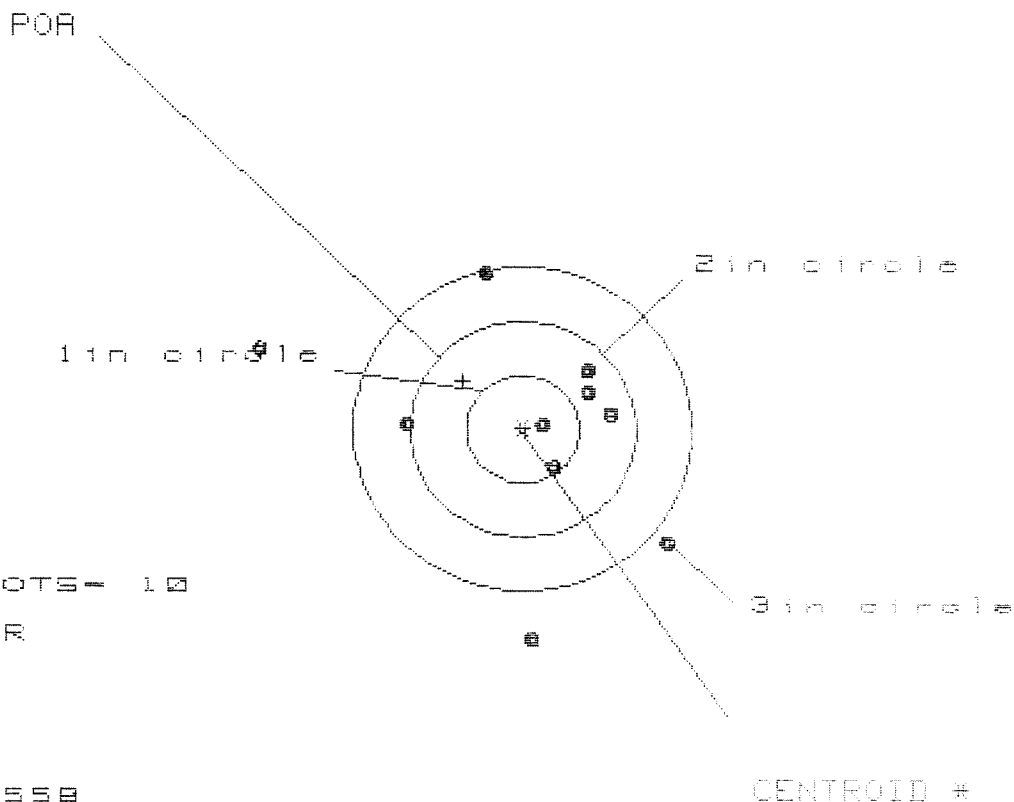

OF SHOTS - 10

IN CIR

1 in = 2

2 in = 5

3 in = 6

HS= 3.558

VS= 3.425

GS= 4.002

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.237	.979	.953
MINIMUM X	:	-2.321	-1.310	-1.336
MAXIMUM Y	:	1.476	1.561	1.328
MINIMUM Y	:	-1.949	-1.864	-1.218
CENTROID X	:	.527	.785	.811
CENTROID Y	:	-.447	-.532	-.299
POR TO CENTROID in.	:	.691	.948	.864
MIN RADIUS	:	.154	.162	.175
MEAN RADIUS	:	1.144	.937	.793
MAX RADIUS	:	2.443	1.876	1.547
HORIZONTAL SPREAD	:	3.558	2.289	2.289
VERTICAL SPREAD	:	3.425	3.425	2.546
EXTREME SPREAD	:	4.002	3.444	2.978
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		6	

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225235

CENTROIDAL DISTANCES

0 TO	1	1.39338
1 TO	2	1.06651
1 TO	3	1.32924
1 TO	4	1.654
1 TO	5	1.05321

$\frac{4}{25}$ (----POA

1

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1042
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.3996
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .412962
THE AMR FOR THIS RIFLE IS: .999

REWORKED 8/89

M-24

88-1230

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6725235

[REDACTED]

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		APR 23 1991	dw
600	Proof		APR 23 1991	dw
607	Check Headspace		APR 23 1991	dw
610	Dis-assemble Gun		APR 23 1991	dw
612	Magnaflux Barrel Action		APR 24 1991	KCR
	Magnaflux Bolt		APR 24 1991	KCR
615	Rollmark Caliber		APR 24 1991	GS
617	Drill and Tap Sight Holes		APR 25 1991	FB
618	Polish Barrel		APR 25 1991	WB
620	Apply Coatings (Barrel Action)		APR 26 1991	TJA
	Apply Coating (Bolt)		APR 26 1991	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		5/7/91	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/7/91	RW
	C) Inspect Ejector Hole for Chamfer		5/7/91	RW
	D) Oil Firing Pin Ass'y		5/7/91	RW
	E) Adjust Trigger Pull to Min Setting and Stake		5/8/91	DH

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			5-10-91	✱
	G) Safety Off Force	3	3	3			5-10-91	✱
	H) Trigger Pull Test & Retainability						5-10-91	D/H
	I) Firing Pin Indent	.20	.21	.21			5-10-91	✱
	J) Assemble Stock						5/11/91	RW
	K) Assemble Swivel Studs						5/11/91	RW
	L) Attach Front and Rear Sight Assemblies						5/11/91	RW
	M) Iron Sight Alignment						5/11/91	RW
	N) Detach Front & Rear Sights & place in numbered container						5/11/91	RW
	O) Attach Scope to Rifle						5/11/91	RW
	P) Detach & Attach Scope 20 Times						5/11/91	RW
640	Gallery Target & Test						5-11-91	DH
	A) Time						5-11-91	DH
	B) Malfunctions						5-11-91	DH
	C) Pierced Primers						5-11-91	DH
	D) Optical Clarity of Scope						5-11-91	DH
645	Inspect for Live Ammo						5-11-91	DH
655	Final Inspection							
	A) Headspace						5/13/91	RW
	B) Trigger Pull	2.29	2.58	2.60	2.53	2.62	5/11/91	✱
	C) Function	2.144	2.39	2.42	2.40	2.39	5/13/91	✱
660	Pack						5/18/91	WB

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. CG225235

DATE 5-10-91

TESTER OH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.32	2.29	2.56	2.44	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.26	2.31	2.55	2.39	
PULL #3	2.21	2.36	2.54	2.42	
PULL #4	2.31	2.30	2.53	2.40	
PULL #5	2.30	2.30	2.54	2.39	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.36	3.18		
PULL #2	3.13	3.14		
PULL #3	3.11	3.17		
PULL #4	3.14	3.11		
PULL #5	3.16	3.15		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.20	4.08		4.76
PULL #2	4.11	3.98		4.45
PULL #3	4.11	4.10		4.31
PULL #4	4.09	4.09		4.59
PULL #5	4.10	4.07		4.61
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225235
11 May 1991

CENTROIDAL DISTANCES

Ø TO	1	.284682
1 TO	2	.379617
1 TO	3	.169446
1 TO	4	.314441
1 TO	5	.0609262

245 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0682
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1856
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .12655

THE AMR FOR THIS RIFLE IS: .9514


11 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08225235

CENTERFIRE PATTERNS

1

FOR

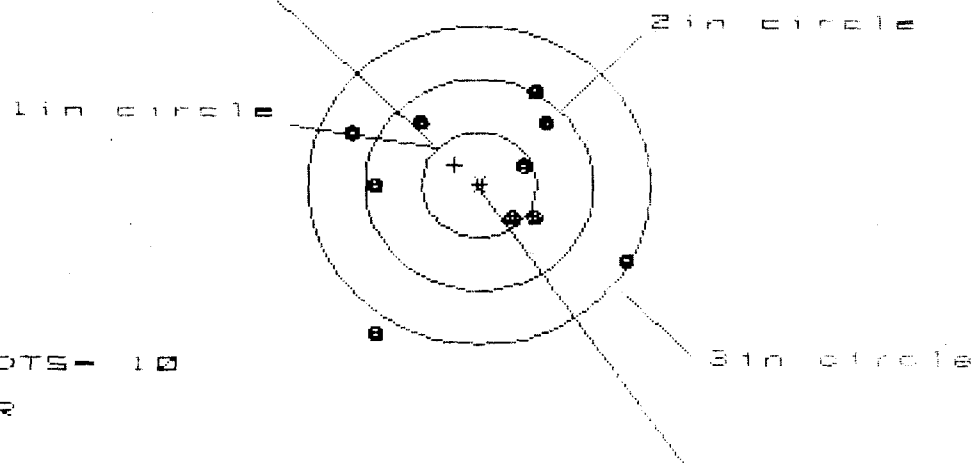

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 3

HS= 2.377

VS= 2.362

CS= 2.785


CENTROID #

PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.272	1.166	.584
MINIMUM X	:	-1.105	-1.211	-1.066
MAXIMUM Y	:	.914	.753	.644
MINIMUM Y	:	-1.448	-.871	-.588
CENTROID X	:	.212	.318	.172
CENTROID Y	:	-.190	-.029	.080
FOR TO CENTROID in.	:	.285	.320	.190
MIN RADIUS	:	.389	.256	.421
MEAN RADIUS	:	.936	.816	.747
MAX RADIUS	:	1.734	1.455	1.082
HORIZONTAL SPREAD	:	2.377	2.377	1.649
VERTICAL SPREAD	:	2.362	1.624	1.232
EXTREME SPREAD	:	2.785	2.648	1.775
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

11 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06225235

CENTERFIRE PATTERNS # 2

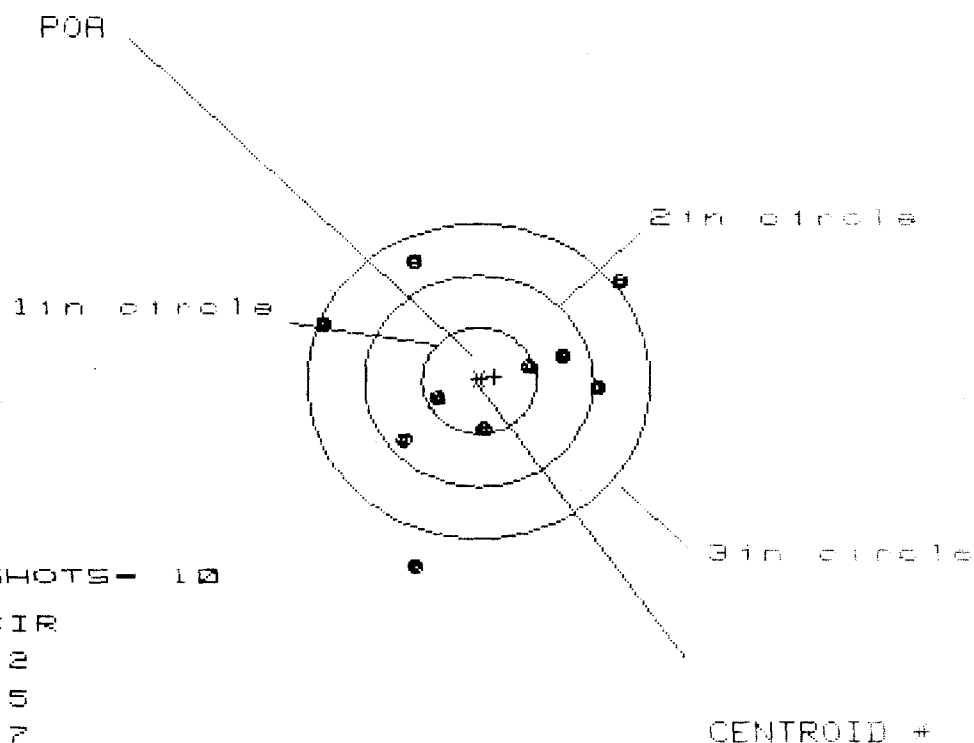

OF SHOTS - 10

IN CIR

1in = 2

2in = 5

3in = 7

HS = 2.595

VS = 2.951


GS = 3.232

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.189	1.128	.944
MINIMUM X	:	-1.406	-1.467	-.867
MAXIMUM Y	:	1.168	.969	1.016
MINIMUM Y	:	-1.783	-.738	-.691
CENTROID X	:	-.138	-.077	.107
CENTROID Y	:	-.043	.156	.109
POA TO CENTROID in.	:	.144	.173	.152
MIN RADIUS	:	.388	.409	.220
MEAN RADIUS	:	1.022	.932	.819
MAX RADIUS	:	1.866	1.515	1.298
HORIZONTAL SPREAD	:	2.595	2.595	1.811
VERTICAL SPREAD	:	2.951	1.707	1.707
EXTREME SPREAD	:	3.232	2.621	2.339
NUMBER IN ONE INCH CIRCLE =			2	
NUMBER IN TWO INCH CIRCLE =			5	
NUMBER IN THREE INCH CIRCLE =			7	

11 May 1991

FILE: PATTERNING/CENTERFIRE_PATT/CR225235

CENTERFIRE PATTERNS # 3

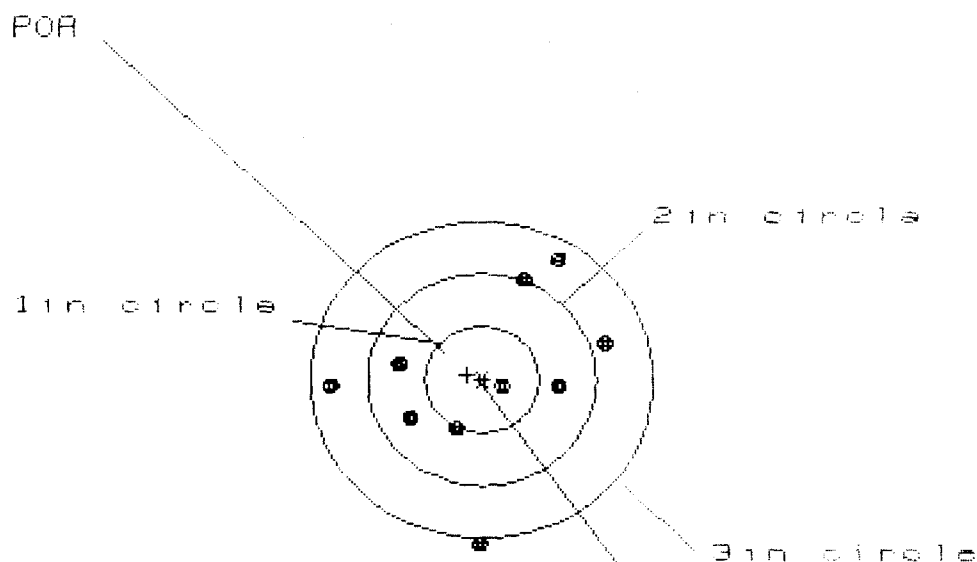

OF SHOTS - 10

IN CIR

1in = 1

2in = 5

3in = 9

HS = 2.431

VS = 2.686

GS = 2.762

CENTROID #


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.097	1.099	.932
MINIMUM X	:	-1.334	-1.332	-.934
MAXIMUM Y	:	1.118	.944	.921
MINIMUM Y	:	-1.568	-.652	-.675
CENTROID X	:	.126	.124	.291
CENTROID Y	:	-.044	.130	.153
POR TO CENTROID in.	:	.134	.180	.329
MIN RADIUS	:	.183	.282	.240
MEAN RADIUS	:	.925	.860	.783
MAX RADIUS	:	1.568	1.345	1.045
HORIZONTAL SPREAD	:	2.431	2.431	1.866
VERTICAL SPREAD	:	2.686	1.596	1.596
EXTREME SPREAD	:	2.762	2.453	1.980
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

11 May 1991

FILE: \PATTERNING\CENTERFIRE_PATT\06225235

CENTERFIRE PATTERNS

4

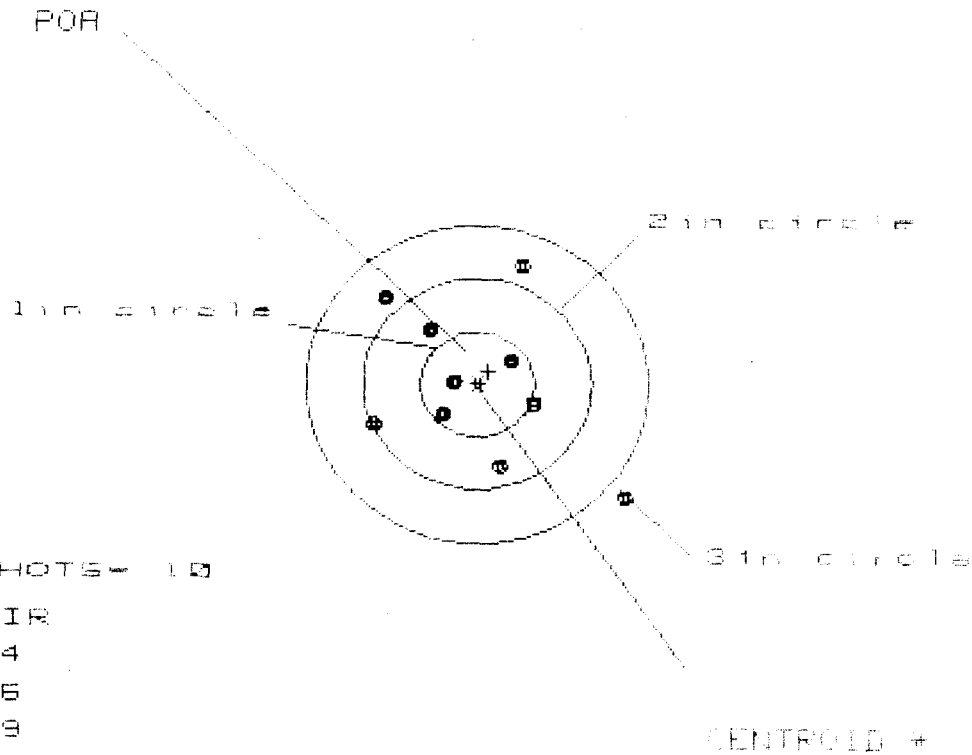

OF SHOTS = 10

IN CIR

1 in = 4

2 in = 6

3 in = 9

MS = 2.206

VS = 2.196

ES = 2.750


PATTERN #	:	4	9	9
SHOTS (BEST OF)	:	10	9	9
MAXIMUM X	:	1.264	.598	.662
MINIMUM X	:	-.942	-.802	-.730
MAXIMUM Y	:	1.132	1.014	.803
MINIMUM Y	:	-1.064	-.848	-.722
CENTROID X	:	-.095	-.235	-.289
CENTROID Y	:	-.122	-.084	-.130
POR TO CENTROID in.	:	.154	.235	.326
MIN RADIUS	:	.214	.140	.013
MEAN RADIUS	:	.791	.679	.595
MAX RADIUS	:	1.652	1.134	.979
HORIZONTAL SPREAD	:	2.206	1.400	1.460
VERTICAL SPREAD	:	2.196	1.862	1.525
EXTREME SPREAD	:	2.750	2.013	1.904
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

11 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08225035

CENTERFIRE PATTERNS # 5

POA

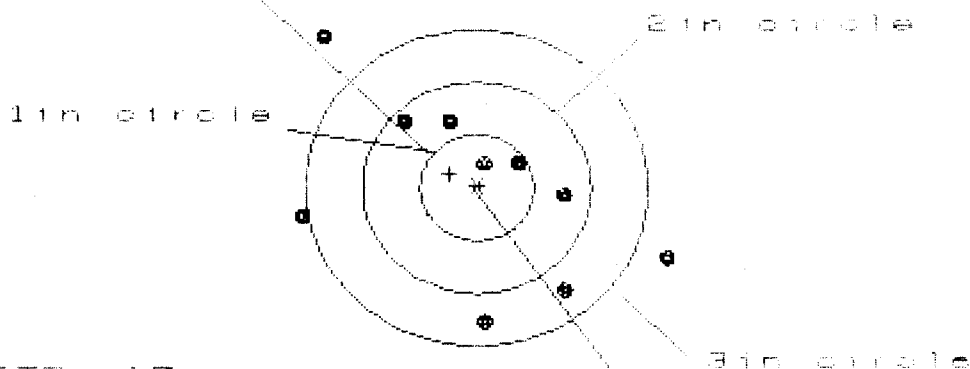

OF SHOTS - 10

IN CIR

1in = 2

2in = 5

3in = 7

HS = 3.229

VS = 2.750

GS = 3.635

CENTROID *

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.657	1.512	1.323
MINIMUM X	-1.572	-1.717	-1.528
MAXIMUM Y	1.459	.809	.748
MINIMUM Y	-1.291	-1.129	-1.190
CENTROID X	.236	.381	.192
CENTROID Y	-.134	-.296	-.235
POA TO CENTROID in.	.272	.482	.303
MIN RADIUS	.269	.434	.370
MEAN RADIUS	1.083	.989	.909
MAX RADIUS	1.954	1.719	1.536
HORIZONTAL SPREAD	3.229	3.229	2.357
VERTICAL SPREAD	2.750	1.938	1.938
EXTREME SPREAD	3.635	3.253	2.402
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	7		

INITIAL JUM		CUSTOMER ORDER NO.		COMMENTS M-24 SNIPER CLEUPOLD 10X SCOPE DEPLOYMENT KIT			
DATE RECEIVED 04/19/91	DATE OPENED 04/19/91	DATE CODE	SERIAL NUMBER C6225235	MODEL AND GRADE 9999 7.62 NATO		ORDER R 91-09408	
ACCESSORIES HARD CASE		SLING STRAP		W/STUDS		W/SWIVELS	

FROM:	SHIP TO:
MAINTANCE DIVISION USAIC ATTN ATZB-DL-MA-Q BLDG 226 FORT BENNING GA 319055173	MAINTANCE DIVISION USAIC ATTN ATZB-DL-MA-Q BLDG 226 FORT BENNING GA 319055173

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	CLEAN/TEST	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	------------	-----------	------------

REPAIR CHARGE	TAX	INSURANCE	UPS	PARCEL POST	TOTAL
---------------	-----	-----------	-----	-------------	-------

GUN CONDITION:

☐ NEW
 ☐ SLIGHTLY WORN
 ☒ VERY WORN
 ☐ MISUSED
 ☐ MARRED

CUSTOMER'S REQUEST

① NEW BARREL, STOCK, TRIGGER ASSY
 ② RE-POWDER COAT BOLT, TRIGGER GUARD ASSY
 ③ RE-CONDITION SCOPE
 ④ NEW FIRING PIN
 ⑤ NEW EXTRACTOR, EXTRACTOR PIN, EXTRACTOR SPRING

PARTS	MISSING PARTS REPLACED					
	Sling Replaced w/c					
	1- 96115 - OIL BOTTLE					
	1- 16935 - CHAMBER BRUSH					
	1- 96106 - M16 CLEANING BRUSH					
	REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
	GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

[illegible]

R 97-11614

FROM:	SHIP TO:
SUPPLY & SERVICE DIVISION WHSE. 224 FT. BENNING GA 31905	SUPPLY & SERVICE DIVISION WHSE. 224 FT. BENNING GA 31905

CUST NO:080509 C.O.D

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1	C1	D1	E1	F1
TRIGGER GROUP		B2				
BOLT ASSY.		B3				
BARREL ASSY.		B4				
REC. ASSY.		B5				
WOOD			C2	D2	E2	F2
METAL			C3	D3	E3	F3

MAIN FAULT

Trigger Adjusted outside of factory
(Follow - Down)

[illegible]

OFFICE COPY

RD6925 REV. 6/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

M2400011276

SECTION III - EQUIPMENT DATA

5. TYPE MNT REQ CODE	6. ID	7. NSN <i>100501240236</i>	15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751		
8. MODEL	9. NOUN <i>M-24 Sniper Rifle</i>		15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751	16. MILES/KILOMETERS/HOURS/ROUNDS M <i>9</i> K	
10a. ORG WON/DOC NO		10b. EIC	H R		
11. SERIAL NUMBER <i>C6225235</i>	12. QTY	13. PD	17. PROJECT CODE (if assigned)	18. ACCOUNT PROCESSING CODE	19. IN WARRANTY? (enter Y or N)
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)			20. ADMIN NO		
			21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)		
			22. LEVEL OF WORK		
			23. SIGNATURE		
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs)					
<i>Fires Prematurely ^{SN} C6225235, ^{NC} 6225253 (also will not go on safe)</i>					
25. REMARKS <i>Fire prematurely</i>					

PREPARATION INSTRUCTIONS FOR THIS PAGE

SECTION I

Block 1a. Enter UIC of submitting organization.
 Block 1b. Enter name of submitting organization.
 Block 1c. Enter number to be called when maint. is completed.
 Block 2a. Enter UIC of supporting SAMS-2/SAMS-1/TDA if work is requested while intransit and away from your support maintenance unit.
 Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751.
 Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.

SECTION II

Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.

SECTION III

Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751.
 Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751.
 Block 7. Enter the NSN or stock number of the item being submitted.
 Block 8. Enter model of item being submitted.
 Block 9. Enter noun/nomenclature of item being submitted.
 Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank.
 Block 10b. Enter End Item Code. See AMDF.
 Block 11. Enter serial number of item being submitted.

SECTION III (Cont'd)

Block 12. Enter the quantity of items being submitted.
 Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1.
 Block 14. For DSU, GSU/AVIM, DEPOT use.
 Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751.
 Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751.
 Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting.
 Block 17. Enter the project code if one has been assigned. If not, leave blank.
 Block 18. See DA Pamphlets 738-750 and 738-751.
 Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty.
 Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted.
 Block 21. For DSU/GSU/AVIM/Depot use.
 Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act.
 Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank.
 Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint.
 Block 25. Self-explanatory.

34a. SUBMITTED BY	35a. ACCEPTED BY	35c. DATE
34b. DATE	35b. STATUS	35d. TIME

Block 34a. Enter first initial and last name of submitter.
 Block 34b. Enter ordinal date submitted (YYDDD).
 Block 35a. Enter first initial and last name of person accepting maint. request.
 Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751.
 Block 35c. Enter ordinal date accepted (YYDDD).
 Block 35d. Enter military time.

5. TYPE MNT REQ CODE		6. ID		7. NSN <i>100501240236</i>		15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751								
8. MODEL						15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751								
9. NOUN <i>M-24 Sniper Rifle</i>						16. MILES/KILOMETERS/HOURS/ROUNDS M <i>9</i> K								
10a. ORG WON/DOC NO				10b. EIC		H R								
11. SERIAL NUMBER <i>C6225235</i>			12. QTY		13. PD		17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE		19. IN WARRANTY? (enter Y or N)		20. ADMIN NO	
14. MALFUNCTION DESCRIPTION (for DSU, GSUI/AVIM, DEPOT use)						21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)								
						22. LEVEL OF WORK				23. SIGNATURE				

25. REMARKS Fires Prematurely ^{SN} C6 22 52 35, ~~N 62 23 25 3~~ (also will not go on safe)
Fire prematurely

SECTION IV - TASK REQUIREMENTS DATA

[illegible][illegible][illegible]

29. QTY RPR	30. QTY CONDEMN	31. QTY NRTS	32. EVAC WON	33. EVAC UNIT NAME

34a. SUBMITTED BY		35a. ACCEPTED BY		35c. DATE		36a. WORK STARTED BY		37a. INSPECTED BY			38a. PICKED UP BY												
34b. DATE		35b. STATUS		35d. TIME		36b. STATUS		36c. DATE		36d. TIME		37b. STATUS		37c. DATE		37d. TIME		38b. STATUS		38c. DATE		38d. TIME	

21 DAY TURN - AROUND

Barrel

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

C6225235

LOG IN DATE: / /

DATE

INIT.

INSPECT & VERIFY:

OP. #

OP. NAME

550

DIS-ASSEMBLE GUN

560 A

RE-BARREL AT CUSTOM SHOP

B

DRILL & TAP

C

POLISH

575

ASSEMBLE

600

PROOF

6-20-97

A

605

CHECK HEADSPACE

6-20-97

A

610

DIS-ASSEMBLE

612

MAGNAFLUX

615

ROLLMARK CALIBER

618

ROTO-BLAST

620

APPLY COATINGS

625 A

FINAL ASSEMBLY

8-8-97

RW

B

TRIGGER PULL TEST

C

SAFETY ON FORCE

D

SAFETY OFF FORCE

E

FIRING PIN INDENT

640

TARGET

8-26-97

RW

655

FINAL INSPECT

660

PACK

QAR INSPECTION

SHIP DATE

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225235
26 Aug 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0342
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1334
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .137714

THE AMR FOR THIS RIFLE IS: 1.159

CENTROIDAL DISTANCES

0	TO	1	.0573062
1	TO	2	.253728
1	TO	3	.452981
1	TO	4	.232002
1	TO	5	.224876


5 + 4 <----POA
3

PATTERN #: 1
 POA TO CENTROID: .057
 MIN RADIUS : .267
 MEAN RADIUS : 1.079
 MAX RADIUS : 2.111
 CENTROID X : -.050
 CENTROID Y : -.028

26 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225235

CENTERFIRE PATTERN # 1

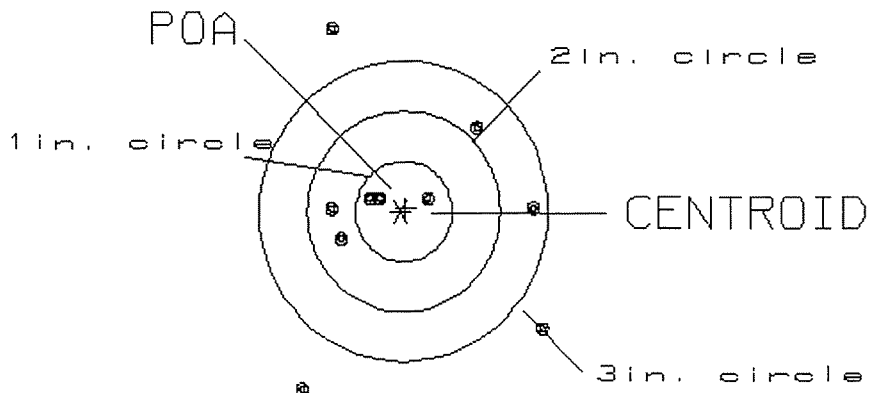

OF SHOTS= 10

IN CIRCLE

HS= 2.52

3

VS= 3.67

5

GS= 3.72


7

PATTERN #: 2
 POA TO CENTROID: .218
 MIN RADIUS : .564
 MEAN RADIUS : 1.020
 MAX RADIUS : 1.511
 CENTROID X : .193
 CENTROID Y : -.101

26 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225235

CENTERFIRE PATTERN # 2

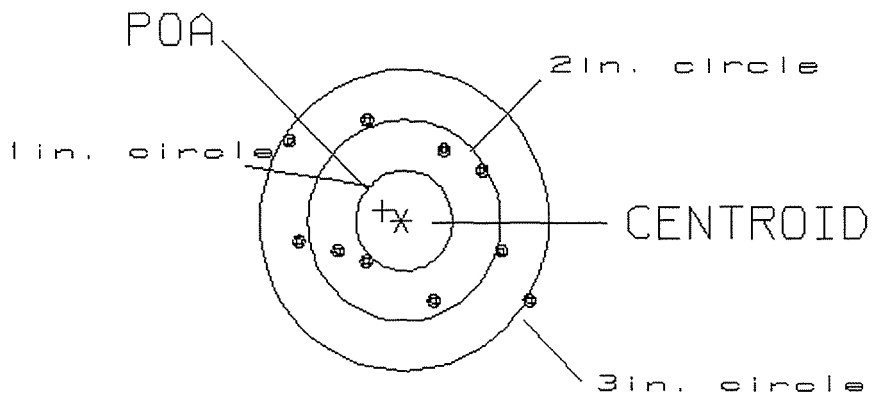

OF SHOTS= 10

IN CIRCLE

HS= 2.52
 VS= 1.81
 GS= 3.00


0
 5
 9

PATTERN #: 3
 POA TO CENTROID: .497
 MIN RADIUS : .402
 MEAN RADIUS : 1.302
 MAX RADIUS : 2.164
 CENTROID X : -.204
 CENTROID Y : -.454

26 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/CG225235

CENTERFIRE PATTERN # 3

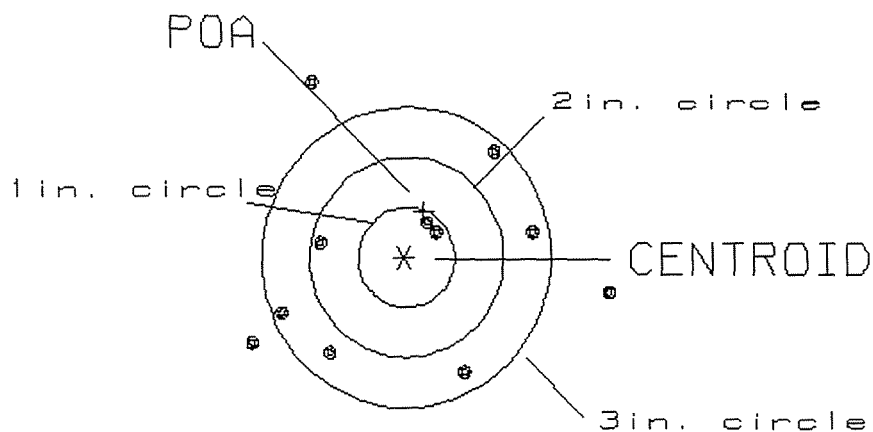

OF SHOTS= 11

IN CIRCLE

HS= 3.73
 VS= 2.83
 GS= 3.77


2
 3
 6

PATTERN #: 4
 POA TO CENTROID: .216
 MIN RADIUS : .339
 MEAN RADIUS : 1.235
 MAX RADIUS : 2.326
 CENTROID X : .135
 CENTROID Y : -.168

26 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225235

CENTERFIRE PATTERN # 4

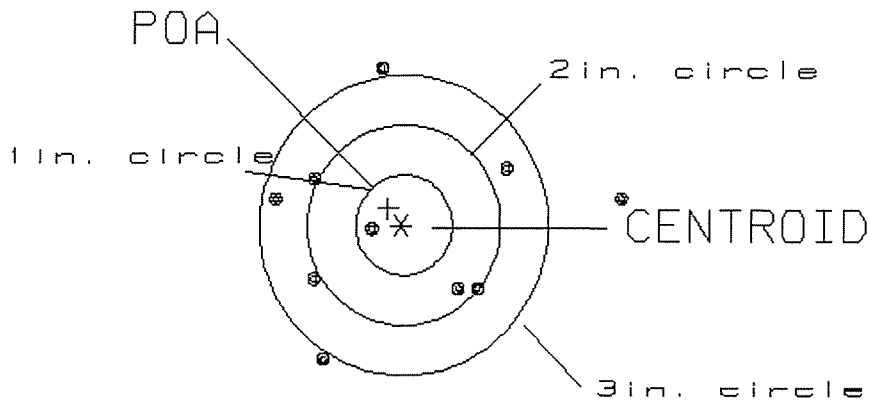

OF SHOTS= 10

IN CIRCLE

HS= 3.61
 VS= 2.86
 GS= 3.61

1
 3
 7


PATTERN #: 5

POA TO CENTROID: .259
 MIN RADIUS : .326
 MEAN RADIUS : 1.159
 MAX RADIUS : 2.190
 CENTROID X : -.245
 CENTROID Y : .084

26 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225235

CENTERFIRE PATTERN # 5

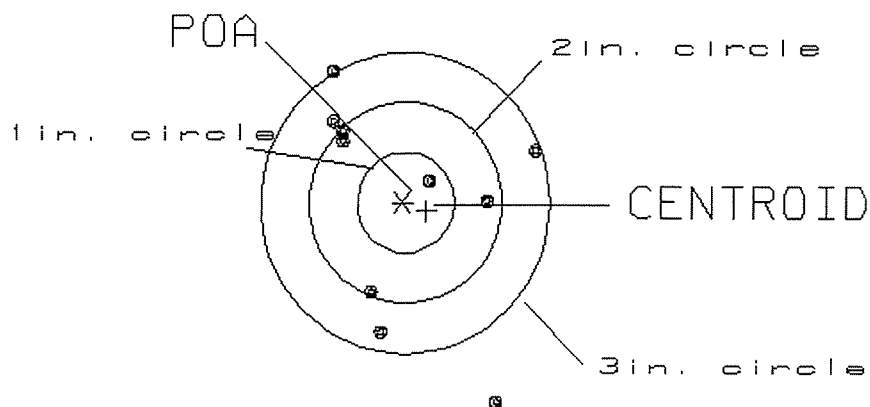

OF SHOTS= 10

IN CIRCLE

HS= 2.17
 VS= 3.30
 GS= 3.73

1
 5
 8

Final Inspection

Sn: C6725235

DATE REC'D: 6-18-97

DATE RET'D:

AUDITOR: RW

Item:

BARREL ASSY.

☒ BARREL

☒ RECEIVER

☒ FRONT SIGHT BLOCK

☒ REAR SIGHT BLOCK

☒ SCREWS

☒ FINISH

SCOPE ASSY.

☒ SCOPE

☒ SCOPE RINGS

☒ MOUNTING SCREWS

☒ MOUNTING BASE

☒ SCREWS

☒ FINISH

☒ LOOSENESS

☒ CLARITY

MISC.

☐ DD-250

☐ BAR CODE

☐ PACKAGING

Item:

STOCK ASSY.

☒ STOCK

☒ SLING SWIVEL STUDS

☒ ADJUSTABLE BUTT PLATE

☒ LOCK NUTS

☒ BARREL CLEARANCE

☒ COLOR/FINISH

SYSTEMS CASE

☐ SCOPE CASE

☐ IRON SIGHTS

☐ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION

☒ SET

Comments:

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 98-10122

INITIAL CUSTOMER ORDER NO.

JJM

W/10 X SCOPE

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

05/05/98

05/05/98

C6225235

700 7.62

NATO

ACCESSORIES

HARD CASE

W/STUDS

W/SWIVELS

FROM:

SHIP TO:

U S ARMY
CO D 2/29 INF REGT
FT BENNING

GA 31905

U S ARMY
CO D 2/29 INF REGT
FT BENNINGGA
31905

CUST NO:187354 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

B1

TRIGGER GROUP

B2

BOLT ASSY.

B3

BARREL ASSY.

B4

REC. ASSY.

B5

WOOD

C1

METAL

C2

D1

D2

D3

E1

E2

E3

E4

E5

MAIN FAULT

Ejector stuck in Bolt

PARTS

COMMENTS

Reamed ejector hole, polished
ejector 10 Rd test

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

RW

✓

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

RW

7-15-98

OFFICE COPY

RD8925 REV. 7/9

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

M2400011287

MAINTENANCE REQUEST				PAGE NO.	NO. OF PAGES	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG									
SECTION I - EQUIPMENT DATA									
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD		PD AUTHENTICATION	
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION <i>Cco 424 IN RBT</i>		B. LOCATION <i>FT. Benning Ga 3905</i>			C. UNIT IDENT CODE <i>W2L5K4</i>		
2. SERIAL NO. <i>C6225235</i>		3. NOUN NOMENCLATURE <i>M24365</i>		4. LINE NO. <i>295387</i>		5. MODEL		6. NATIONAL STOCK NUMBER <i>1005-01-240-2136</i>	
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS	11. MILES	12. ROUNDS <i>200</i>
14. FAILURE DETECTED DURING (Select one - use ☒ or X)				15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)					
☐ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☐ F Inspection ☐ H Other		☐ 068 Inoperative ☐ 258 Overheating ☐ 790 Out of Adjustment ☐ 008 Noisy ☐ 387 Low Performance ☐ Other							
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). <i>Extractor is Broken</i>									
B. REMARKS									
PREPARATION INSTRUCTIONS (Prior to using this form, read DA PAM 738-750 for detailed preparation instructions)									
1. Place a "✓" or an "X" in the box for the type of action required. 2. Enter the WESDC if the item is Materiel Condition Status Reportable. 3. Enter the priority designator as determined from the urgency of need and force activity designator. 4. The Unit Commander, Chief of TDA activity or their designated representative will authenticate, by signature, a priority of 01 through 08. 5. Block 1A. Enter the name of the organization submitting the request. 6. Block 1B. Enter the unit submitting the request; units overseas enter APO only. 7. Block 1C. Enter the unit identification code of the unit in block 1A. 8. Block 2. Enter the equipment serial number. For ammunition, enter the lot number. For administrative-use vehicles, enter the USA registration number. 9. Block 3. Enter the noun abbreviation of the item. 10. Block 4. Enter the item line number, if applicable. 11. Block 5. Enter the model number. 12. Block 6. Enter the National Stock Number of the item listed in Block 3.					13. Block 7. Enter the name of the support activity. 14. Block 7A. Enter the symbol of the maintenance category (O, F, H, D, or L). 15. Block 8. Enter the utilization code. 16. Block 9A. Enter the word "yes" if the item is Materiel Condition Status Reportable. 17. Block 9B. Enter the equipment readiness code, if applicable. 18. Block 9C. Enter the word "yes" if the item is a pacing item. 19. Block 10. Enter the hour reading, if applicable. 20. Block 11. Enter the mileage from the odometer, if applicable. 21. Block 12. Enter the total rounds fired, if applicable. 22. Block 13. For turbine engines, enter the number of hot starts. 23. Block 14. Enter a "✓" or "X" in the proper block. 24. Block 15. Enter a "✓" or "X" in the proper block. 25. Block 16. Describe briefly the fault or symptoms needing correction.				
23. SUBMITTED BY		24. RECEIVED BY							
JULIAN DATE		JULIAN DATE							

MAINTENANCE REQUEST					PAGE NO.		NO OF PAGES		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)				
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG													
SECTION I - EQUIPMENT DATA													
CONTROL NUMBER		WORK ORDER NO.			WESDC		ORG. PD		PD AUTHENTICATION				
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION Cco 49 INF REGT			B. LOCATION Ft. Benning Ga 3A05				C. UNIT IDENT CODE W2L5K4				
2. SERIAL NO. C6223235		3. NOUN NOMENCLATURE M249SWS			LINE NO. 295387		5. MODEL		6. NATIONAL STOCK NUMBER 1005-01-240-236				
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS		11. MILES	12. ROUNDS 200	13. STARTS		
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)								
☐ A Sch. Main. ☐ B Handling		☐ C Test ☐ D Normal Op		☐ E Storage ☐ F Inspection		☐ G Flight ☐ H Other		☐ 068 Inoperative ☐ 008 Noisy		☐ 258 Overheating ☐ 387 Low Performance		☐ 790 Out of Adjustment ☐ Other	
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). Extensor is Broken													
B. REMARKS													
SECTION II - WORK ACCOMPLISHED													
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)				19. AMS ACCT. CODE			
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor							
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE	G. QTY.	H. PARTS COST			
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE									
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
					I. TOTAL MANHOURS		J. TOTAL MANHOURS COST \$		K. TOTAL PARTS COST \$				
21. DELAY (Select One)					☐ 1 Parts	☐ 2 Manpower	☐ 3 Facilities	☐ 4 Funds	☐ 5 Tools	22. Data Transcribed			
23. SUBMITTED BY		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		28. DISPOSITION (Select One)			
										☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged			
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE					