

C6594559

MODEL 700TM M24

Model **SWS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.



Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00092917** Serial: C6594559 Model: M24 SWS Center Fire Caliber: 7.62 NATO Produced: 12/18/1990 Repairman: Status: Closed 2/10/2005 11:39:45 AM

Verify Repair: [REDACTED]

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: DEF DIST DEPOT ANNISTON DEF DIST DEPOT ANNISTON

Address 1: Address 2: PO Box: PO Box:

City: ANNISTON ANNISTON

State: AL Zip Code: 362014199 Country: US State: AL Zip Code: 362014199 Country: US

FFL: [REDACTED]

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information: Phone: Fax: Email: Comments:

Received Condition: Good Condition Notes: CSR Notes:

Accessories Received:

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A057	Frt and Rear Sgt Base	1

Repair Search Refresh Close

Today: 2/14/2005 9:24 AM CAPS NUM JINS SCPL

start 5 2 4 Arms Service

Serial Number: **C6594559**

Model: **M24 SWS**



RE00092917

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6594559.___0
FILE DATE AND TIME: 07/07/2005 08:09


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.040
The Average Y Centroid of the Five Target Set:	-0.140
The Average Point of Impact of the Five Target Set:	0.145
The Average Mean Radius of the Five Target Set:	0.969
The Distance from POA to Centroid Target #1:	0.107
The Distance from Centroid Target #2 to Centroid Target #1:	0.571
The Distance from Centroid Target #3 to Centroid Target #1:	0.409
The Distance from Centroid Target #4 to Centroid Target #1:	0.044
The Distance from Centroid Target #5 to Centroid Target #1:	0.192

SERIAL NUMBER: C6594559. __0
TARGET NUMBER: 1
FILE DATE: 07/07/2005
FILE TIME: 08:09

X CENTROID: 0.106
Y CENTROID: 0.011
POA TO CENTROID: 0.107
HORZ SPREAD: 2.707
VERT SPREAD: 3.654
GROUP SPREAD: 3.654
MIN RADIUS: 0.101
MAX RADIUS: 2.199
MEAN RADIUS: 1.014
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.425	0.671
2:	0.796	-0.048
3:	0.072	-0.085
4:	-0.220	-0.293
5:	0.071	-0.999
6:	0.201	-2.186
7:	0.079	0.725
8:	-0.233	0.534
9:	-1.282	0.319
10:	0.152	1.468

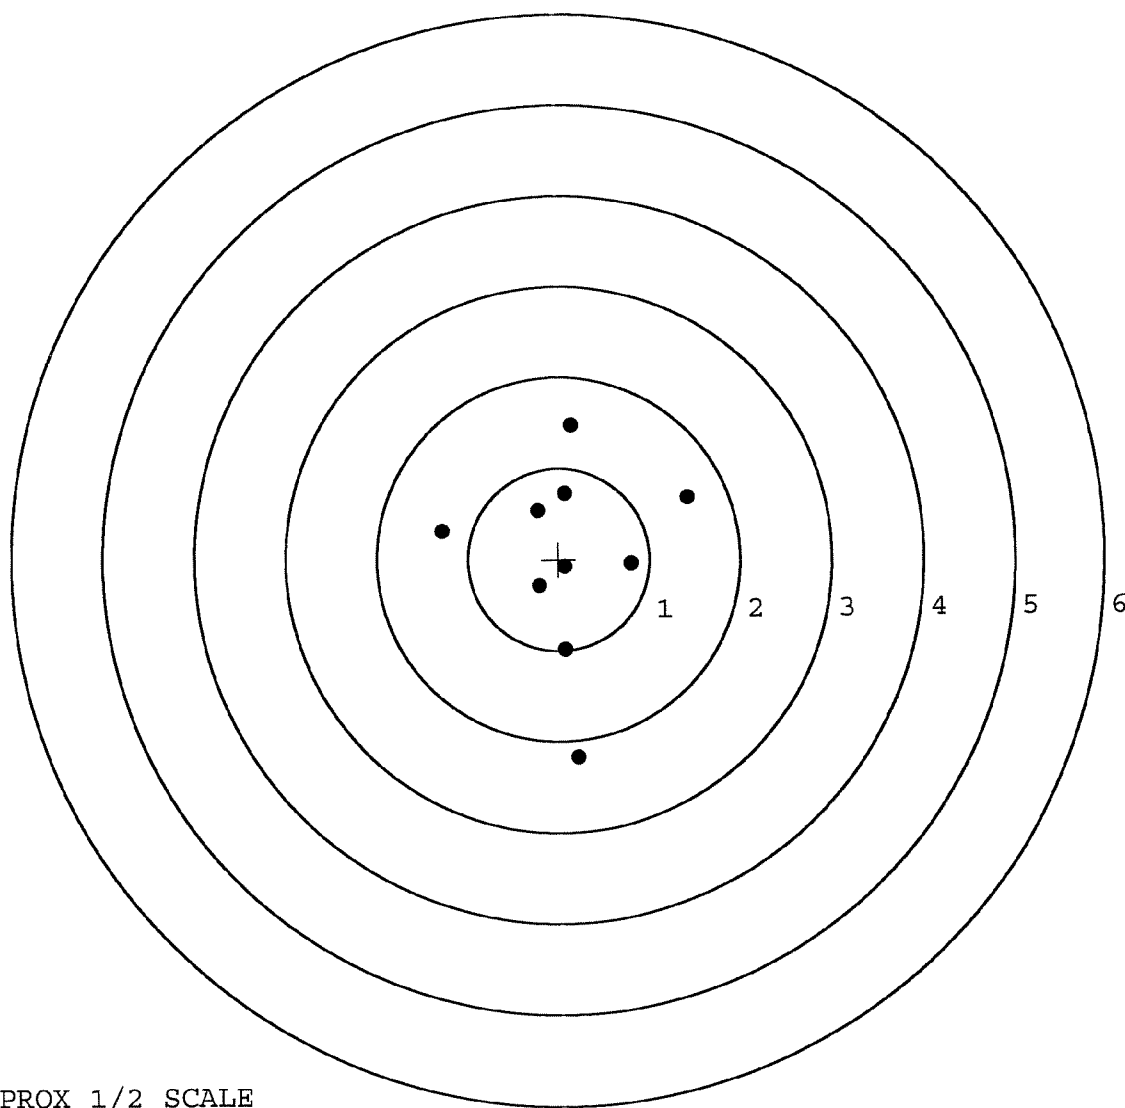

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594559. __0

TARGET NUMBER: 2

FILE DATE: 07/07/2005

FILE TIME: 08:09

X CENTROID: -0.426

Y CENTROID: -0.196

POA TO CENTROID: 0.469

HORZ SPREAD: 2.495

VERT SPREAD: 3.843

GROUP SPREAD: 4.261

MIN RADIUS: 0.559

MAX RADIUS: 2.293


MEAN RADIUS: 1.224

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 7

POINT#	X	Y
1:	0.004	-0.854
2:	0.170	-1.342
3:	-1.038	-2.406
4:	-1.692	-1.207
5:	-1.103	0.188
6:	-0.880	0.743
7:	-0.512	0.434
8:	-0.378	0.361
9:	0.367	0.686
10:	0.803	1.437

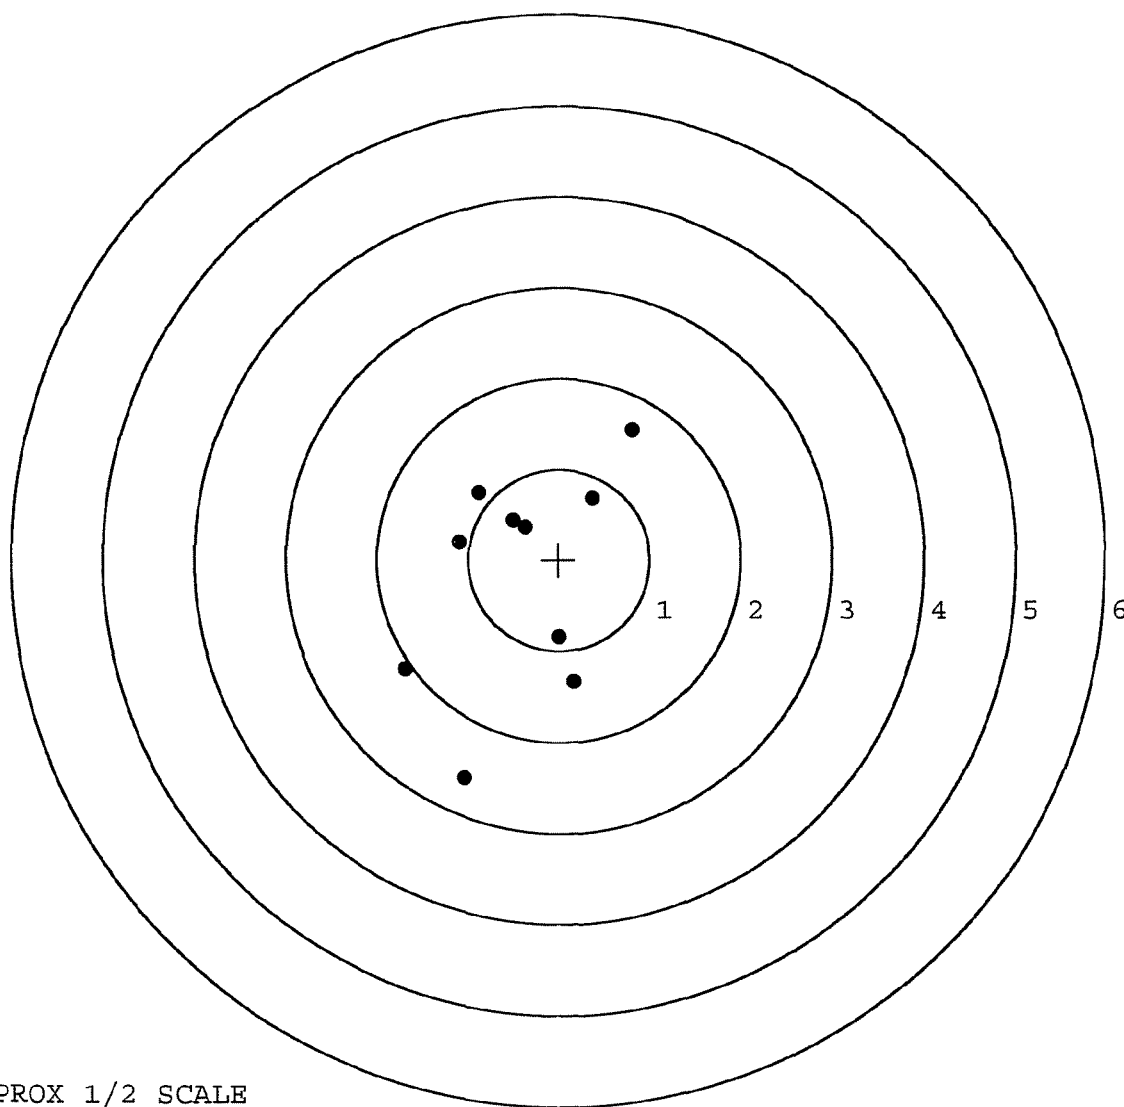

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594559. __0

TARGET NUMBER: 3

FILE DATE: 07/07/2005

FILE TIME: 08:09

X CENTROID: 0.099

Y CENTROID: -0.398

POA TO CENTROID: 0.410

HORZ SPREAD: 1.667

VERT SPREAD: 3.203

GROUP SPREAD: 3.297

MIN RADIUS: 0.223

MAX RADIUS: 1.889


MEAN RADIUS: 0.893

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.883	-1.643
2:	0.907	-2.106
3:	0.254	-0.169
4:	0.388	-0.525
5:	-0.015	-0.771
6:	-0.365	-0.350
7:	-0.760	0.624
8:	-0.500	0.481
9:	0.124	1.097
10:	0.079	-0.620

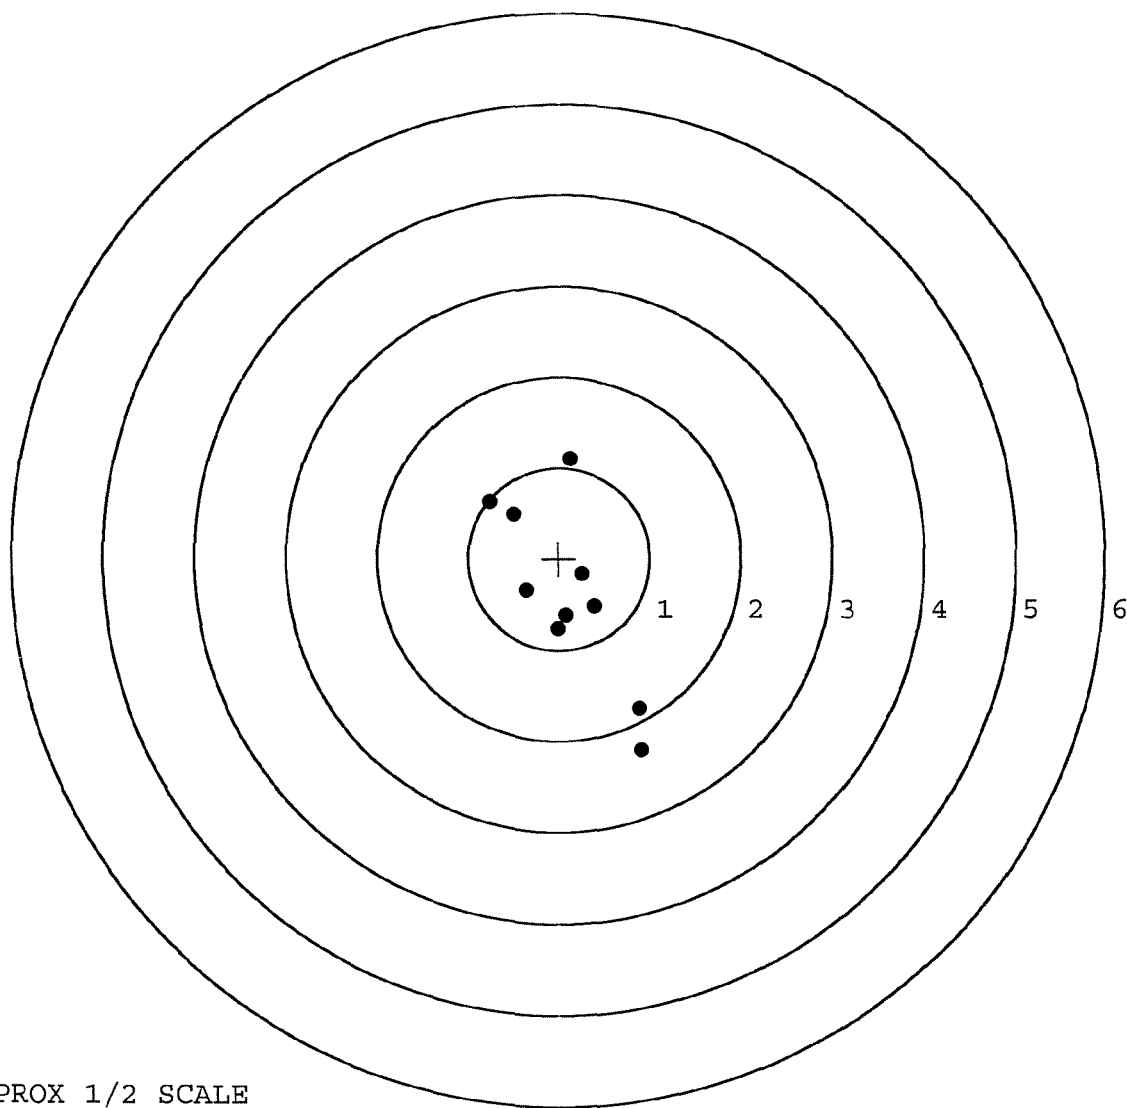

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594559. 0

TARGET NUMBER: 4

FILE DATE: 07/07/2005

FILE TIME: 08:09

X CENTROID: 0.069

Y CENTROID: -0.013

POA TO CENTROID: 0.070

HORZ SPREAD: 2.087

VERT SPREAD: 2.333

GROUP SPREAD: 2.422

MIN RADIUS: 0.249

MAX RADIUS: 1.433


MEAN RADIUS: 0.913

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.095	1.030
2:	-0.780	0.807
3:	0.713	0.673
4:	0.153	0.410
5:	-0.180	-0.012
6:	-1.067	-0.444
7:	-0.555	-1.303
8:	0.584	-0.781
9:	0.707	-0.424
10:	1.020	-0.085

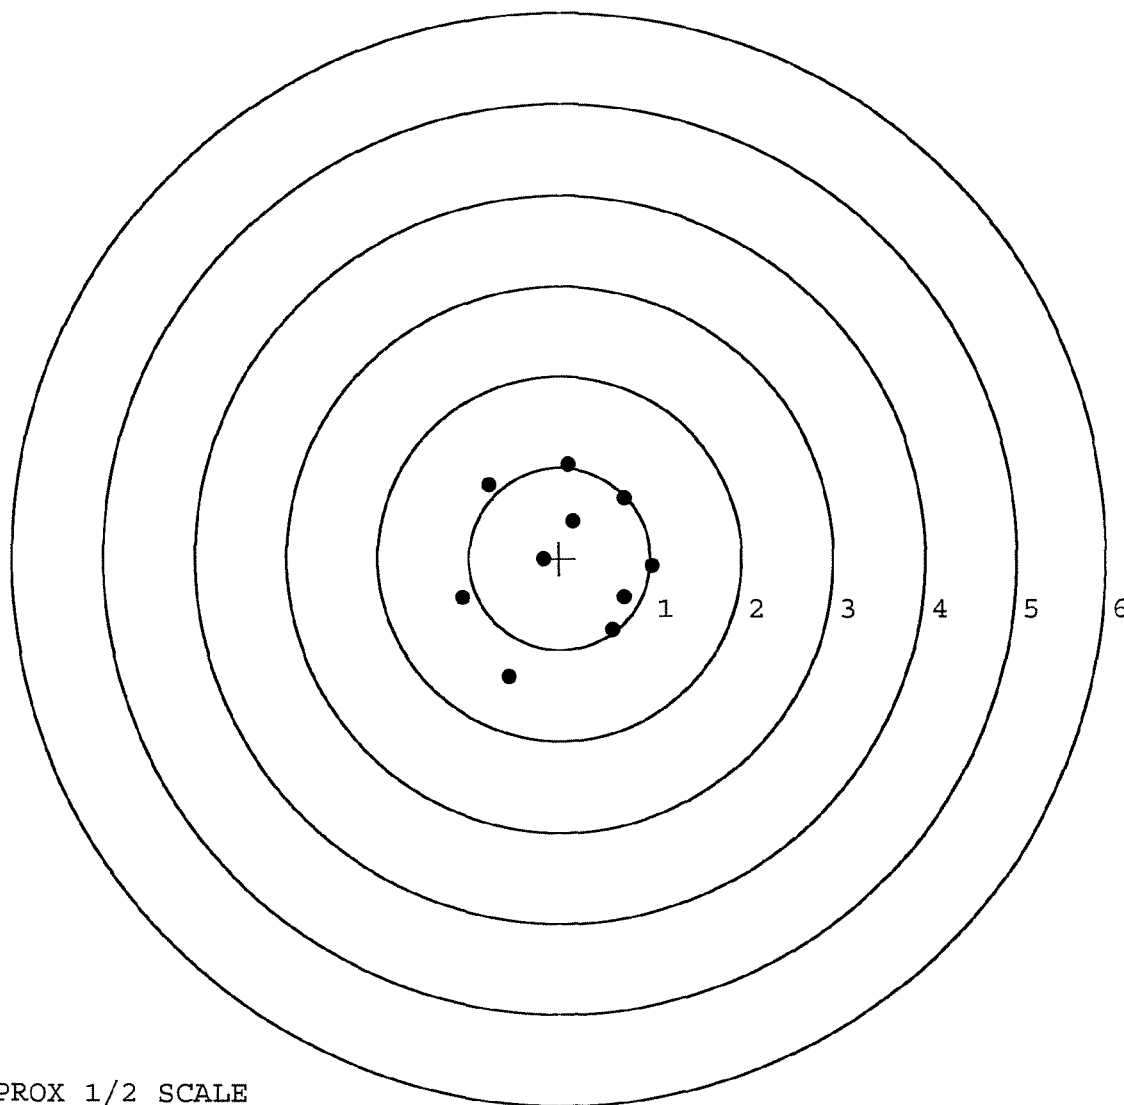

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594559. 0

TARGET NUMBER: 5

FILE DATE: 07/07/2005

FILE TIME: 08:09

X CENTROID: -0.050

Y CENTROID: -0.102

POA TO CENTROID: 0.114

HORZ SPREAD: 2.032

VERT SPREAD: 1.842

GROUP SPREAD: 2.450

MIN RADIUS: 0.284

MAX RADIUS: 1.367


MEAN RADIUS: 0.801

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.335	0.656
2:	-0.718	0.544
3:	-1.059	0.296
4:	-0.437	-0.182
5:	-0.882	-1.186
6:	0.038	-0.754
7:	0.116	-0.366
8:	0.902	-0.366
9:	0.233	-0.076
10:	0.973	0.414

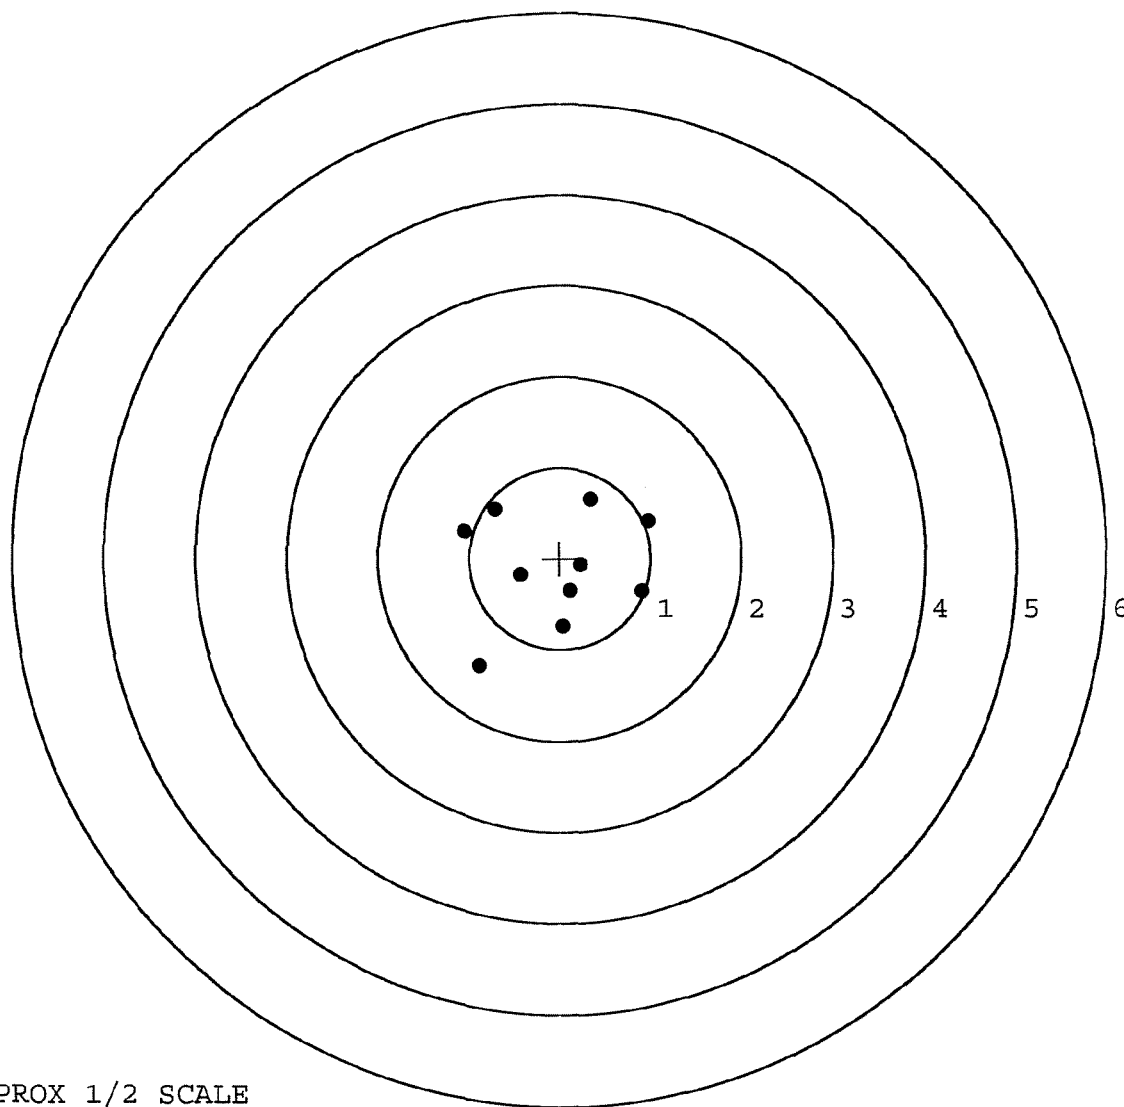

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R. & E NUMBER	92917		
SERIAL NUMBER	C6594559		
LOG-IN DATE	2-10-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	6-1-05	RTZ
560 A	RE-BARREL	6-6-05	RTZ
B	DRILL AND TAP	6-8-05	TPW
575	ASSEMBLE	6-6-05	RTZ
600	PROOF	6-7-05	AC
605	CHECK HEADSPACE	6-7-05	AC
610	DIS-ASSEMBLE GUN	6-7-05	RTZ
612	MAGNAFLUX	6-9-05	CW
615	ROLLMARK CALIBER	6-9-05	CW
618	ROTO-BLAST	6-10-05	LB
620	APPLY COATINGS	6-13-05	WJ
625 A	FINAL ASSEMBLY	7-6-05	RTZ
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE	8-9-05	AC
D	SAFETY "OFF" FORCE	8-9-05	AC
E	FIRING PIN INDENT	8-9-05	AC
640	TARGET	7-7-05	AC
655	FINAL INSPECT	8-9-05	AC
660	PACK	9-6-05	RAH
		SHIP DATE	
		QAR INSPECTION DATE	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 94-21345

INITIAL CUSTOMER ORDER NO.

W/LEUOPLD 10X SCOPE, DEPLOYMENT KIT

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

07/15/94

07/18/94

C6594559

700 7.62

NATO

ACCESSORIES

SCOPE MNTS

SCOPE BASE

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL
36201-5025

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Barrel

Stock

Trigger Assy

Firing pin Assy

Mag Spring

Front & Rear Sight Assy

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400019299

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6594559

DATE 5-11-96

TESTER DA

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.31	2.71	2.76		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.33	2.62	2.51		
PULL #3	2.58	2.66	2.58		
PULL #4	2.68	2.35	2.86		
PULL #5	2.68	2.73	2.68		
TOTAL	12.58	13.07	13.39		
AVG.	2.51	2.61	2.67		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.05	3.00		
PULL #2	3.15	2.99		
PULL #3	3.09	2.90		
PULL #4	3.01	3.03		
PULL #5	3.00	2.70		
TOTAL	15.30	14.62		
AVG.	3.06	2.92		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.16	3.81		4.34
PULL #2	4.31	3.89		4.15
PULL #3	4.21	4.15		4.39
PULL #4	4.00	3.93		4.17
PULL #5	4.21	4.24		4.11
TOTAL	20.89	20.02		21.16
AVG.	4.17	4.00		4.23

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6594559
27 Mar 1900

CENTROIDAL DISTANCES

0 TO	1	.212558
1 TO	2	.41357
1 TO	3	.289696
1 TO	4	.189855
1 TO	5	.152778

2.6
H <----POR


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0308
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1654
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .168243

THE AMR FOR THIS RIFLE IS: 1

27 Mar 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6594559

CENTERFIRE PATTERNS # 1

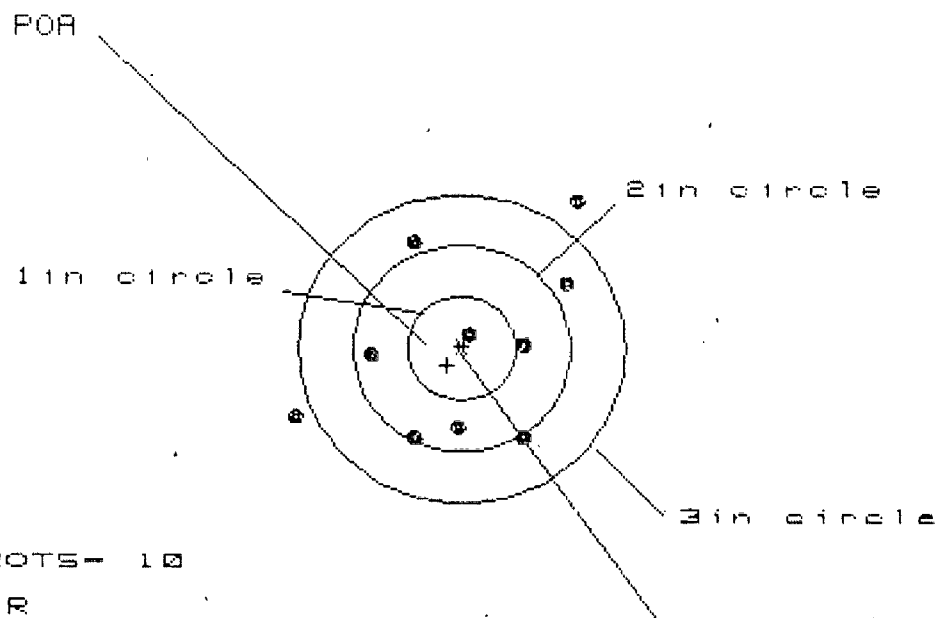

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 8

HS= 2.529

VS= 2.358

GS= 3.307


CENTROID *

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.025	1.083	.909
MINIMUM X	:	-1.504	-1.390	-.844
MAXIMUM Y	:	1.454	1.164	1.099
MINIMUM Y	:	-.904	-.742	-.807
CENTROID X	:	.134	.020	.193
CENTROID Y	:	.165	.003	.068
POA TO CENTROID in.	:	.212	.020	.205
MIN RADIUS	:	.179	.377	.252
MEAN RADIUS	:	1.001	.909	.817
MAX RADIUS	:	1.779	1.482	1.194
HORIZONTAL SPREAD	:	2.529	2.473	1.753
VERTICAL SPREAD	:	2.358	1.906	1.906
EXTREME SPREAD	:	3.307	2.800	2.148
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

27 Mar 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6594559

CENTERFIRE PATTERNS # 2

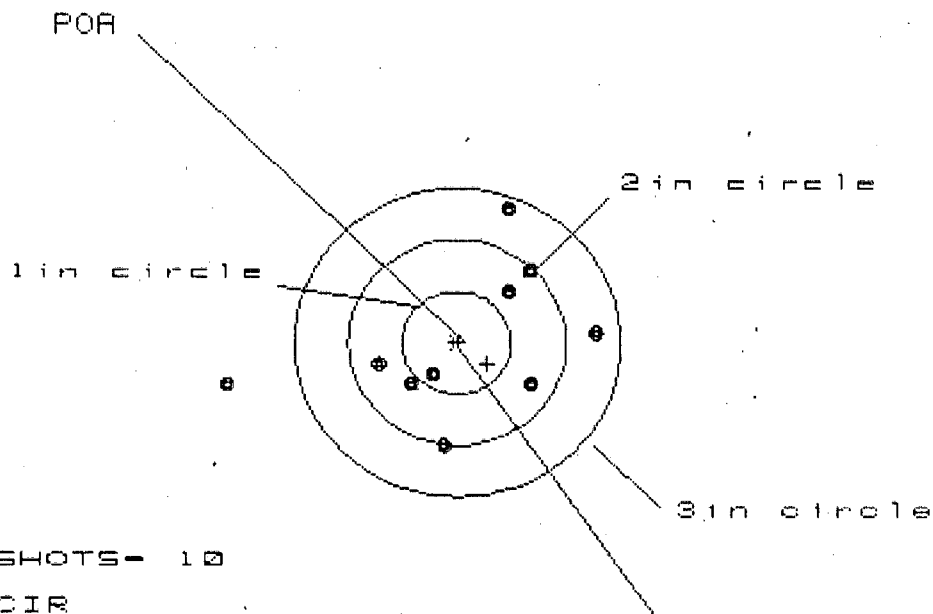

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 9

HS= 3.349

VS= 2.322

GS= 3.387


CENTROID #

PATTERN #	12	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.264	1.032	1.061
MINIMUM X	-2.085	-.939	-.910
MAXIMUM Y	1.273	1.233	.829
MINIMUM Y	-1.049	-1.089	-.935
CENTROID X	-.278	-.046	-.075
CENTROID Y	.201	.241	.087
POA TO CENTROID in.	.343	.245	.114
MIN RADIUS	.410	.540	.499
MEAN RADIUS	.996	.857	.792
MAX RADIUS	2.116	1.255	1.093
HORIZONTAL SPREAD	3.349	1.971	1.971
VERTICAL SPREAD	2.322	2.322	1.764
EXTREME SPREAD	3.387	2.385	2.001
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	9		

27 Mar 1900

FILE:/PATTERNING/CENTERFIRE_PATT/C6594559

CENTERFIRE PATTERNS # 3

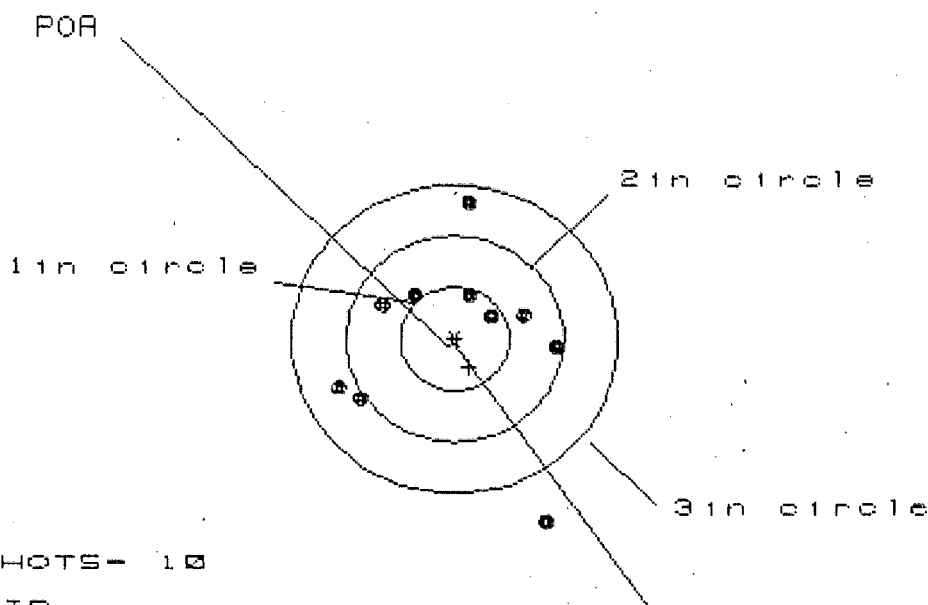

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 9

HS= 2.010

VS= 3.002

GS= 3.170


CENTROID #

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.938	1.031	1.054
MINIMUM X	:	-1.072	-.979	-.956
MAXIMUM Y	:	1.347	1.154	.418
MINIMUM Y	:	-1.735	-.773	-.629
CENTROID X	:	-.134	-.227	-.251
CENTROID Y	:	.275	.468	.324
POA TO CENTROID in.	:	.306	.520	.410
MIN RADIUS	:	.412	.372	.466
MEAN RADIUS	:	.926	.775	.739
MAX RADIUS	:	1.926	1.209	1.111
HORIZONTAL SPREAD	:	2.010	2.010	2.010
VERTICAL SPREAD	:	3.002	1.927	1.047
EXTREME SPREAD	:	3.170	2.190	2.048
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

27 Mar 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06594559

CENTERFIRE PATTERNS # 4

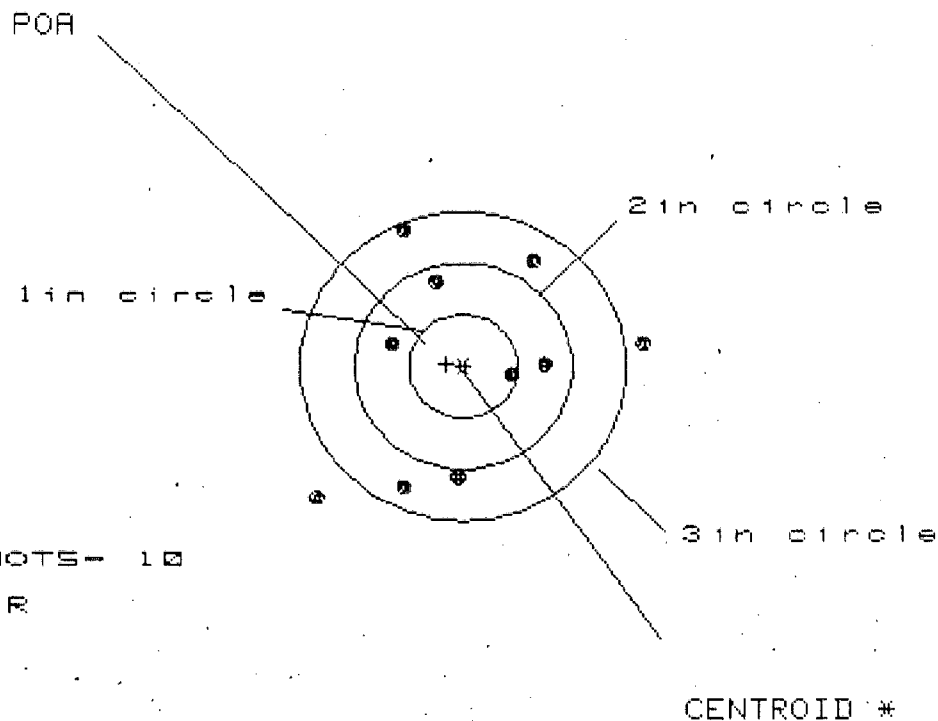

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 8

HS= 3.052

VS= 2.662


GS= 3.427

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.666	1.512	.756
MINIMUM X	:	-1.386	-.811	-.622
MAXIMUM Y	:	1.348	1.202	1.215
MINIMUM Y	:	-1.314	-1.320	-1.307
CENTROID X	:	.152	.306	.117
CENTROID Y	:	-.024	.122	.109
POA TO CENTROID in.	:	.154	.329	.160
MIN RADIUS	:	.472	.381	.542
MEAN RADIUS	:	1.144	1.031	.971
MAX RADIUS	:	1.910	1.515	1.418
HORIZONTAL SPREAD	:	3.052	2.323	1.378
VERTICAL SPREAD	:	2.662	2.522	2.522
EXTREME SPREAD	:	3.427	2.660	2.543
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	4		
NUMBER IN THREE INCH CIRCLE	=	8		

27 Mar 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6594559

CENTERFIRE PATTERNS # 5

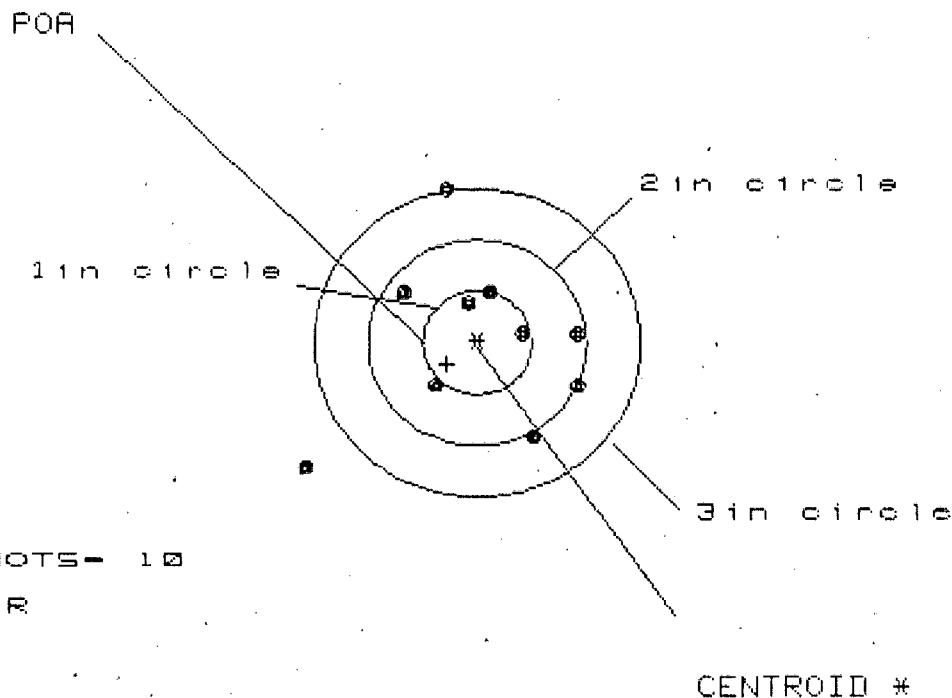

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 8

HS= 2.506

VS= 2.716

GS= 3.016

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.964	.792	.742
MINIMUM X	:	-1.542	-.888	-.938
MAXIMUM Y	:	1.503	1.368	.572
MINIMUM Y	:	-1.213	-1.078	-.907
CENTROID X	:	.280	.452	.502
CENTROID Y	:	.210	.345	.174
POA-TO-CENTROID in.	:	.351	.569	.532
MIN RADIUS	:	.361	.263	.210
MEAN RADIUS	:	.934	.784	.700
MAX RADIUS	:	1.962	1.426	1.099
HORIZONTAL SPREAD	:	2.506	1.680	1.680
VERTICAL SPREAD	:	2.716	2.446	1.479
EXTREME SPREAD	:	3.016	2.549	1.921
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		8	

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 659 4559

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607.	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	7	7	7			5/29/96	R
	G) Safety Off Force	4	4	4			5/29/96	A
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent	.024	.023	.022			5/29/96	AC
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.44	2.39	2.32	2.38	2.41	5/29/96	WS
	C) Function							
660	Pack							

VERY IMPORTANT!
Instruction Book
enclosed to assure
safe use of this
 firearm.



Remington

MODEL 700TM H24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

20


SERIAL NO.
C6594559

ORDER NO.
5716



5716 C6594559

UPC



0 47700 25716 7

1 ROW 516/HTS
OK

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6594559

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		10/30/90	Kd
600	C Proof Ejector		10/30/90	Kd
607	D) Inspect Check Headspace		10/30/90	Kd
610	Dis-assemble Gun		10/30/90	Kd
612	Magnaflux Barrel Action		11/1/90	KCR
	Magnaflux Bolt		11/1/90	KCR
615	Rollmark Caliber		11/1/90	GB
617	Drill and Tap Sight Holes		11/6/90	LB
618	Polish Barrel AB		11/7/90	WB
620	Apply Coatings (Barrel Action)		11-26-90	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		12/4/90	KS
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		12/4/90	KS
	C) Inspect Ejector Hole for Chamfer		12/4/90	KS
	D) Oil Firing Pin Ass'y		12/4/90	KS
	E) Adjust Trigger Pull to Min Setting and Stake		12/5/90	JK

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5	5	5	12/5/90	WLB
	G) Safety Off Force	2	2	2	2	2	12/5/90	WLB
	H) Trigger Pull Test & Retainability						12/5/90	SL
	I) Firing Pin Indent	0215	0215	0215	0215	0215	12/5/90	WLB
	J) Assemble Stock						12/5/90	KS
	K) Assemble Swivel Studs						12-7-90	SL
	L) Attach Front and Rear Sight Assemblies						12/5/90	KS
	M) Iron Sight Alignment						12/5/90	KS
	N) Detach Front & Rear Sights & place in numbered container						12/5/90	KS
	O) Attach Scope to Rifle						12/5/90	KS
	P) Detach & Attach Scope 20 Times						12/5/90	KS
640	Gallery Target & Test						12-6-90	DH
	A) Time						12-6-90	DH
	B) Malfunctions						12-6-90	DH
	C) Pierced Primers						12-6-90	DH
	D) Optical Clarity of Scope						12-6-90	DH
645	Inspect for Live Ammo						12-6-90	DH
655	Final Inspection						12-7-90	SL
	A) Headspace						12-7-90	SL
	B) Trigger Pull	261	250	261	262	250	12-7-90	SL
	C) Function						12-7-90	SL
660	Pack						12/19/90	VF

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN

INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6594559

DATE 12/5/90

TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.38	2.40	2.32	2.61	MIN. SETTING,
PULL #2	2.40	2.31	2.30	2.50	NO AVG. OF 5
PULL #3	2.33	2.38	2.30	2.61	READINGS ACCEPT-
PULL #4	2.43	2.43	2.25	2.62	ABLE LESS THAN 2#
PULL #5	2.42	2.50	2.22	2.50	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.24	3.32		
PULL #2	3.23	3.30		
PULL #3	3.25	3.31		
PULL #4	3.23	3.33		
PULL #5	3.27	3.31		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.43	4.30		4.41
PULL #2	4.36	4.36		4.40
PULL #3	4.32	4.38		4.45
PULL #4	4.32	4.26		4.50
PULL #5	4.38	4.49		4.46
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06594559
6 Dec 1990

CENTROIDAL DISTANCES

0 TO	1	.148277
1 TO	2	.341094
1 TO	3	.264683
1 TO	4	.473368
1 TO	5	.111114

 <----POI

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .014
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0794
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0806248
THE AMR FOR THIS RIFLE IS: .8866

6 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06594559

CENTERFIRE PATTERNS # 1

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS - 10

IN CIR

1in = 2

2in = 6

3in = 10

HS = 2.0889

VS = 1.746


GS = 2.379

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.112	1.188	1.216
MINIMUM X	-.977	-.853	-.825
MAXIMUM Y	1.174	1.262	.348
MINIMUM Y	-.572	-.484	-.327
CENTROID X	-.031	-.155	-.183
CENTROID Y	.145	.057	-.100
POA TO CENTROID in.	.148	.165	.209
MIN RADIUS	.336	.363	.227
MEAN RADIUS	.847	.767	.675
MAX RADIUS	1.364	1.282	1.225
HORIZONTAL SPREAD	2.089	2.041	2.041
VERTICAL SPREAD	1.746	1.746	.675
EXTREME SPREAD	2.379	2.102	2.102
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

6 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6594559

CENTERFIRE PATTERNS # 2

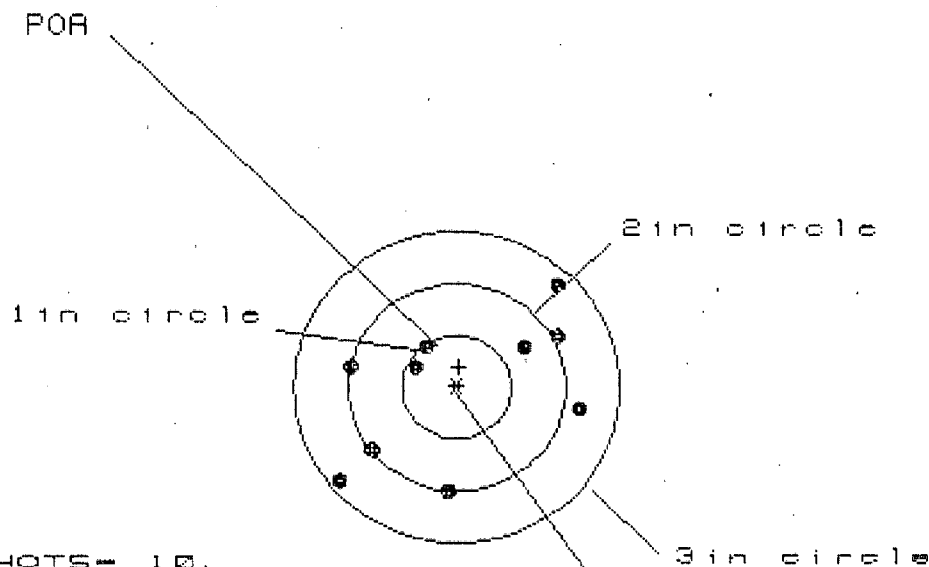

OF SHOTS- 10.

IN CIR . . .

1in = 1

2in = 5

3in = 10

HS= 2.157

VS= 1.937


GS= 2.713

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.113	.997	1.094
MINIMUM X	-1.044	-1.053	-.956
MAXIMUM Y	.972	.869	.511
MINIMUM Y	-.965	-1.068	-.960
CENTROID X	-.023	.093	-.004
CENTROID Y	-.196	-.093	-.201
POA TO CENTROID in.	.197	.131	.201
MIN RADIUS	.401	.476	.420
MEAN RADIUS	.949	.887	.848
MAX RADIUS	1.397	1.195	1.104
HORIZONTAL SPREAD	2.157	2.050	2.050
VERTICAL SPREAD	1.937	1.937	1.471
EXTREME SPREAD	2.713	2.352	2.073
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		10	

6 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6594559

CENTERFIRE PATTERNS # 3

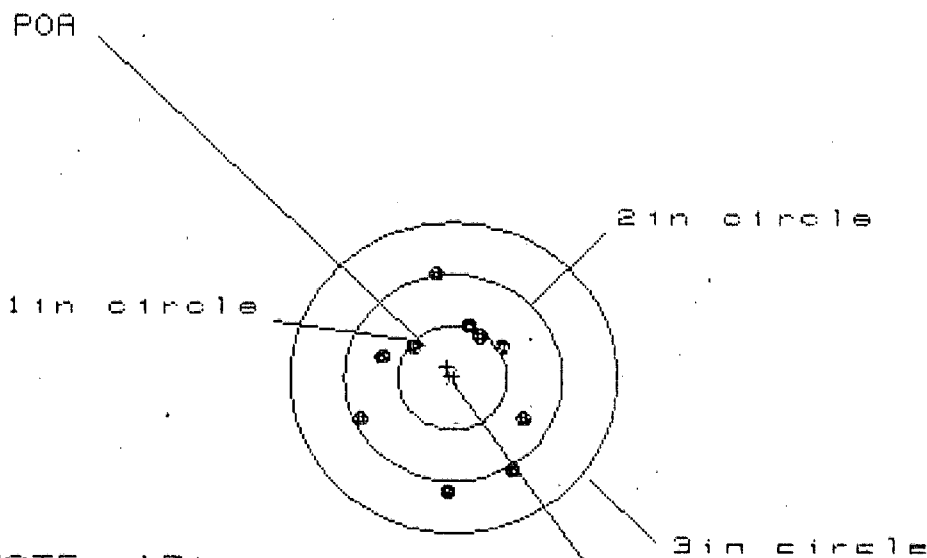

OF SHOTS- 10

IN CIR

1in = 1

2in = 8

3in = 10

HS= 1.522

VS= 2.076

GS= 2.077

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.630	.622	.691
MINIMUM X	:	-.892	-.900	-.831
MAXIMUM Y	:	.974	.852	.722
MINIMUM Y	:	-1.102	-1.038	-.615
CENTROID X	:	.053	.061	-.008
CENTROID Y	:	-.106	.016	.146
POA TO CENTROID in.	:	.118	.063	.146
MIN RADIUS	:	.426	.362	.255
MEAN RADIUS	:	.757	.689	.598
MAX RADIUS	:	1.105	1.176	1.034
HORIZONTAL SPREAD	:	1.522	1.522	1.522
VERTICAL SPREAD	:	2.076	1.890	1.337
EXTREME SPREAD	:	2.077	2.015	1.534
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			8	
NUMBER IN THREE INCH CIRCLE =			10	

6 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6594559

CENTERFIRE PATTERNS # 4

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 9

HS= 2.999

VS= 2.693

GS= 3.414

CENTROID #

PATTERN #	4
SHOTS (BEST OF)	10
MAXIMUM X	1.549
MINIMUM X	-1.450
MAXIMUM Y	1.216
MINIMUM Y	-1.477
CENTROID X	.150
CENTROID Y	-.289
POA TO CENTROID in.	.330
MIN RADIUS	.081
MEAN RADIUS	1.091
MAX RADIUS	2.140
HORIZONTAL SPREAD	2.999
VERTICAL SPREAD	2.693
EXTREME SPREAD	3.414
NUMBER IN ONE INCH CIRCLE	1
NUMBER IN TWO INCH CIRCLE	5
NUMBER IN THREE INCH CIRCLE	9

6 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6594559

CENTERFIRE PATTERNS # 5

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 3

2in = 8

3in = 9

HS= 1.882

VS= 2.437

GS= 2.453

CENTROID *

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.842	.758	.617
MINIMUM X	-1.040	-1.124	-.605
MAXIMUM Y	1.370	.879	.764
MINIMUM Y	-1.067	-.915	-.604
CENTROID X	-.087	-.003	.138
CENTROID Y	.049	-.103	.012
POA TO CENTROID in.	.100	.103	.138
MIN RADIUS	.108	.071	.157
MEAN RADIUS	.789	.674	.552
MAX RADIUS	1.567	1.450	.969
HORIZONTAL SPREAD	1.882	1.882	1.222
VERTICAL SPREAD	2.437	1.794	1.368
EXTREME SPREAD	2.453	2.322	1.711
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		9	

C6594562

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington