

CB594653

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.



A screenshot of the Windows XP taskbar. The Start button is on the left. To its right, there are icons for an open folder, a document with a magnifying glass icon and the number '2', a document with a magnifying glass icon and the number '5', and another document with a magnifying glass icon and the number '2'. On the far right of the taskbar is the system tray, which includes a clock showing 11:24 AM and several system icons.

RE00080436

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6594663.___0
FILE DATE AND TIME: 05/19/2004 07:52


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.015
The Average Y Centroid of the Five Target Set:	-0.012
The Average Point of Impact of the Five Target Set:	0.019
The Average Mean Radius of the Five Target Set:	0.726
The Distance from POA to Centroid Target #1:	0.013
The Distance from Centroid Target #2 to Centroid Target #1:	0.090
The Distance from Centroid Target #3 to Centroid Target #1:	0.157
The Distance from Centroid Target #4 to Centroid Target #1:	0.087
The Distance from Centroid Target #5 to Centroid Target #1:	0.130

SERIAL NUMBER: C6594663.____0
TARGET NUMBER: 1
FILE DATE: 05/19/2004
FILE TIME: 07:52

X CENTROID: -0.010
Y CENTROID: 0.008
POA TO CENTROID: 0.013
HORZ SPREAD: 2.965
VERT SPREAD: 1.621
GROUP SPREAD: 2.965
MIN RADIUS: 0.310
MAX RADIUS: 1.849
MEAN RADIUS: 0.866
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.782	-0.449
2:	0.629	0.323
3:	0.458	1.074
4:	0.345	-0.191
5:	0.013	-0.301
6:	-0.205	-0.547
7:	-0.634	-0.370
8:	-1.183	-0.464
9:	-0.480	0.490
10:	-0.824	0.520

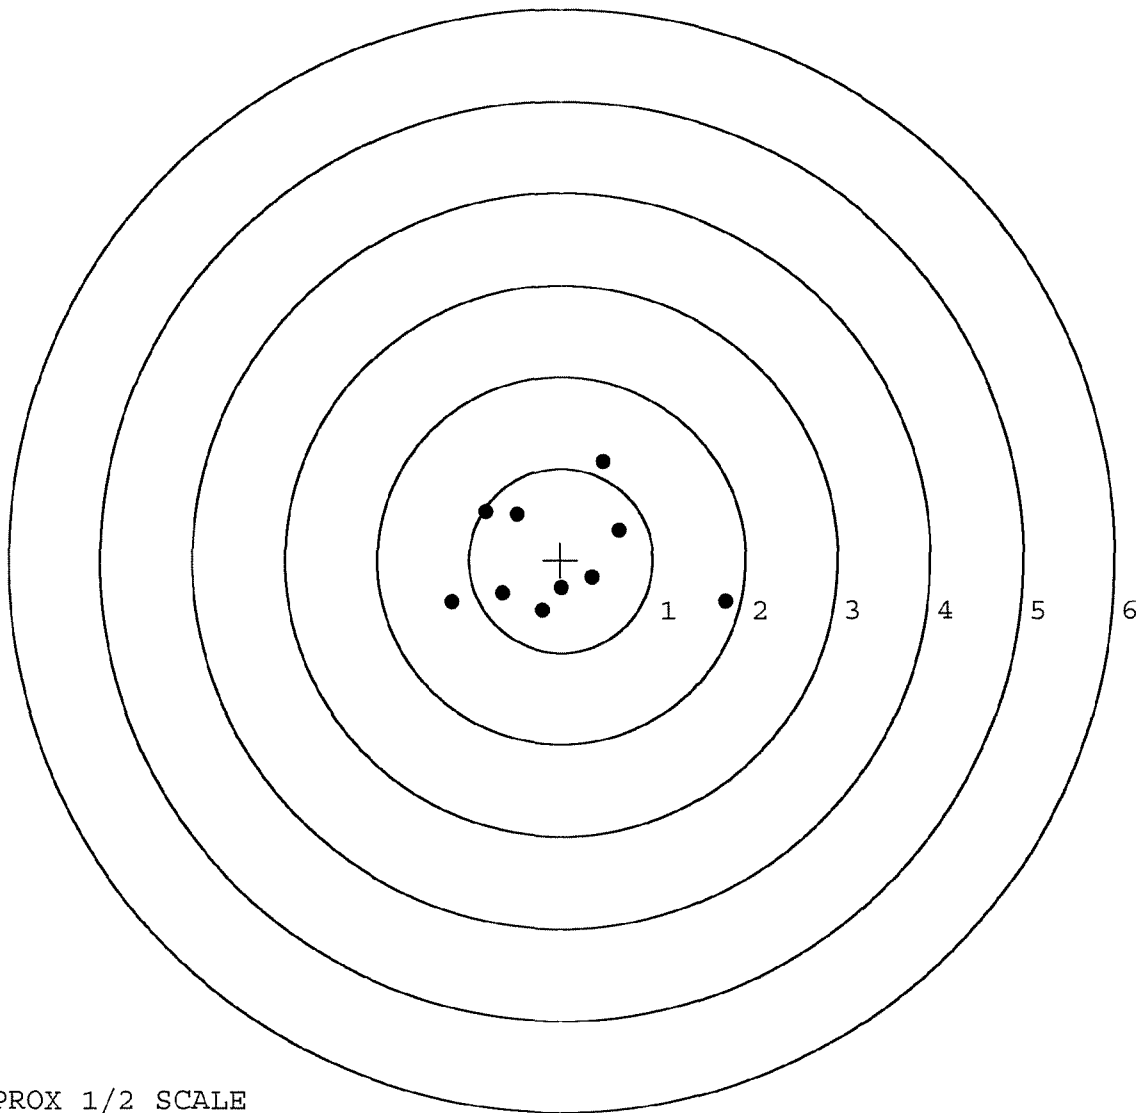

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594663.___0

TARGET NUMBER: 2

FILE DATE: 05/19/2004

FILE TIME: 07:52

X CENTROID: 0.057

Y CENTROID: -0.053

POA TO CENTROID: 0.077

HORZ SPREAD: 2.362

VERT SPREAD: 1.135

GROUP SPREAD: 2.381

MIN RADIUS: 0.239

MAX RADIUS: 1.359


MEAN RADIUS: 0.748

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.118	0.041
2:	-0.909	0.419
3:	-1.244	0.342
4:	-0.322	-0.716
5:	0.188	-0.679
6:	-0.181	-0.023
7:	-0.148	0.245
8:	0.545	-0.026
9:	0.461	-0.276
10:	1.058	0.146

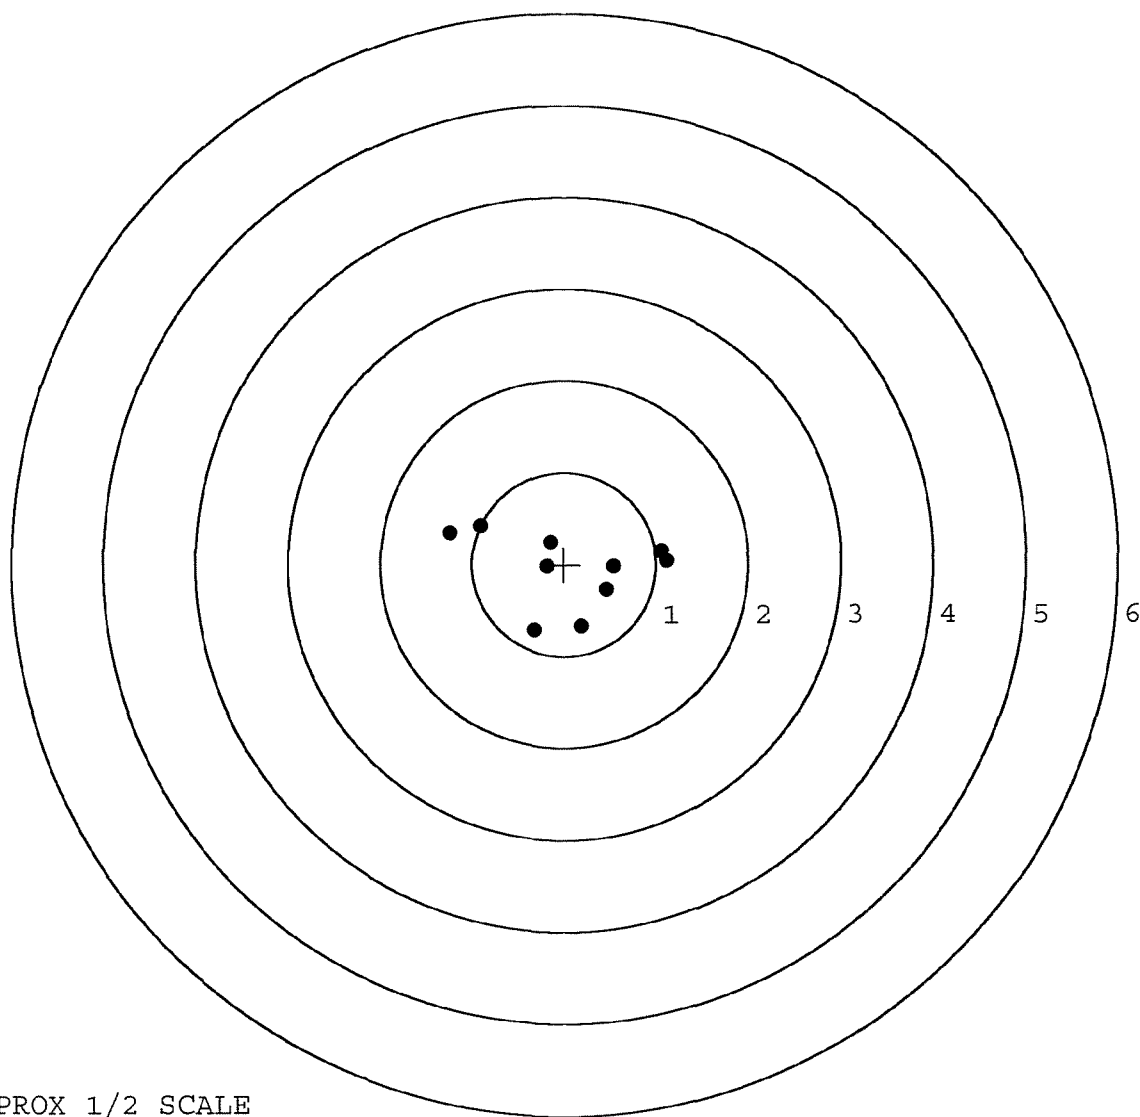


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594663. __0
TARGET NUMBER: 3
FILE DATE: 05/19/2004
FILE TIME: 07:52


X CENTROID: -0.166
Y CENTROID: -0.009
POA TO CENTROID: 0.167
HORZ SPREAD: 1.691
VERT SPREAD: 1.764
GROUP SPREAD: 2.275
MIN RADIUS: 0.218
MAX RADIUS: 1.218
MEAN RADIUS: 0.805
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.477	-1.043
2:	0.590	-0.511
3:	0.133	-0.827
4:	0.731	0.174
5:	-0.836	-0.241
6:	-0.731	0.269
7:	-0.796	0.446
8:	-0.960	0.721
9:	-0.176	0.209
10:	-0.095	0.711

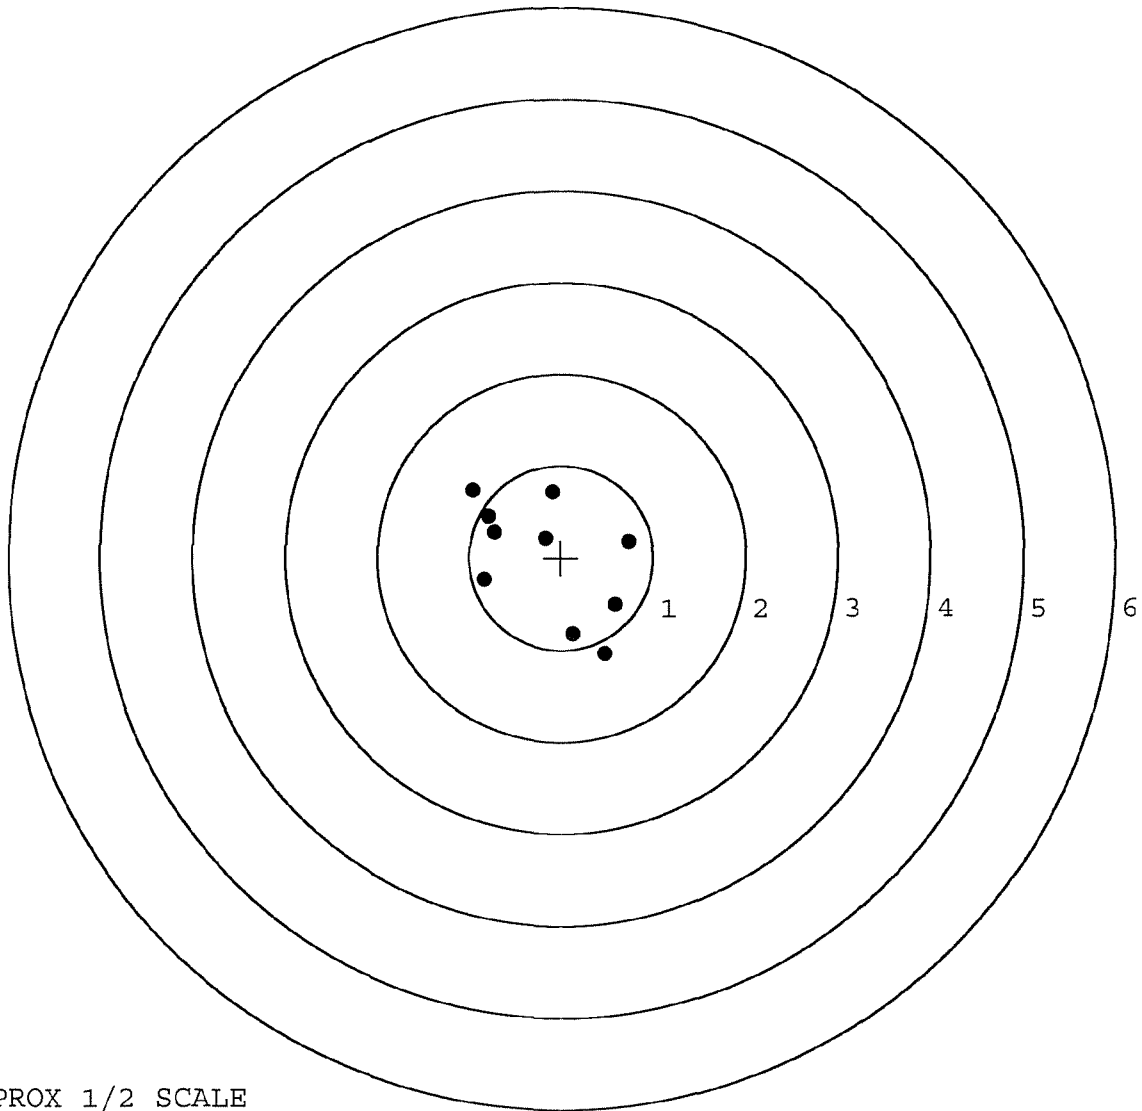

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594663.____0	POINT#	X	Y
TARGET NUMBER: 4	1:	0.876	-0.444
FILE DATE: 05/19/2004	2:	0.527	-0.356
FILE TIME: 07:52	3:	0.174	-0.517
	4:	-0.118	-0.915
X CENTROID: -0.069	5:	-0.417	-0.205
Y CENTROID: -0.056	6:	0.193	0.061
POA TO CENTROID: 0.089	7:	0.068	0.713
HORZ SPREAD: 1.972	8:	-0.171	0.506
VERT SPREAD: 1.628	9:	-0.723	0.043
GROUP SPREAD: 2.211	10:	-1.096	0.555
MIN RADIUS: 0.287			
MAX RADIUS: 1.195			
MEAN RADIUS: 0.694			
# IN 1 IN DIAMETER: 2			
# IN 2 IN DIAMETER: 8			
# in 3 IN DIAMETER: 10			

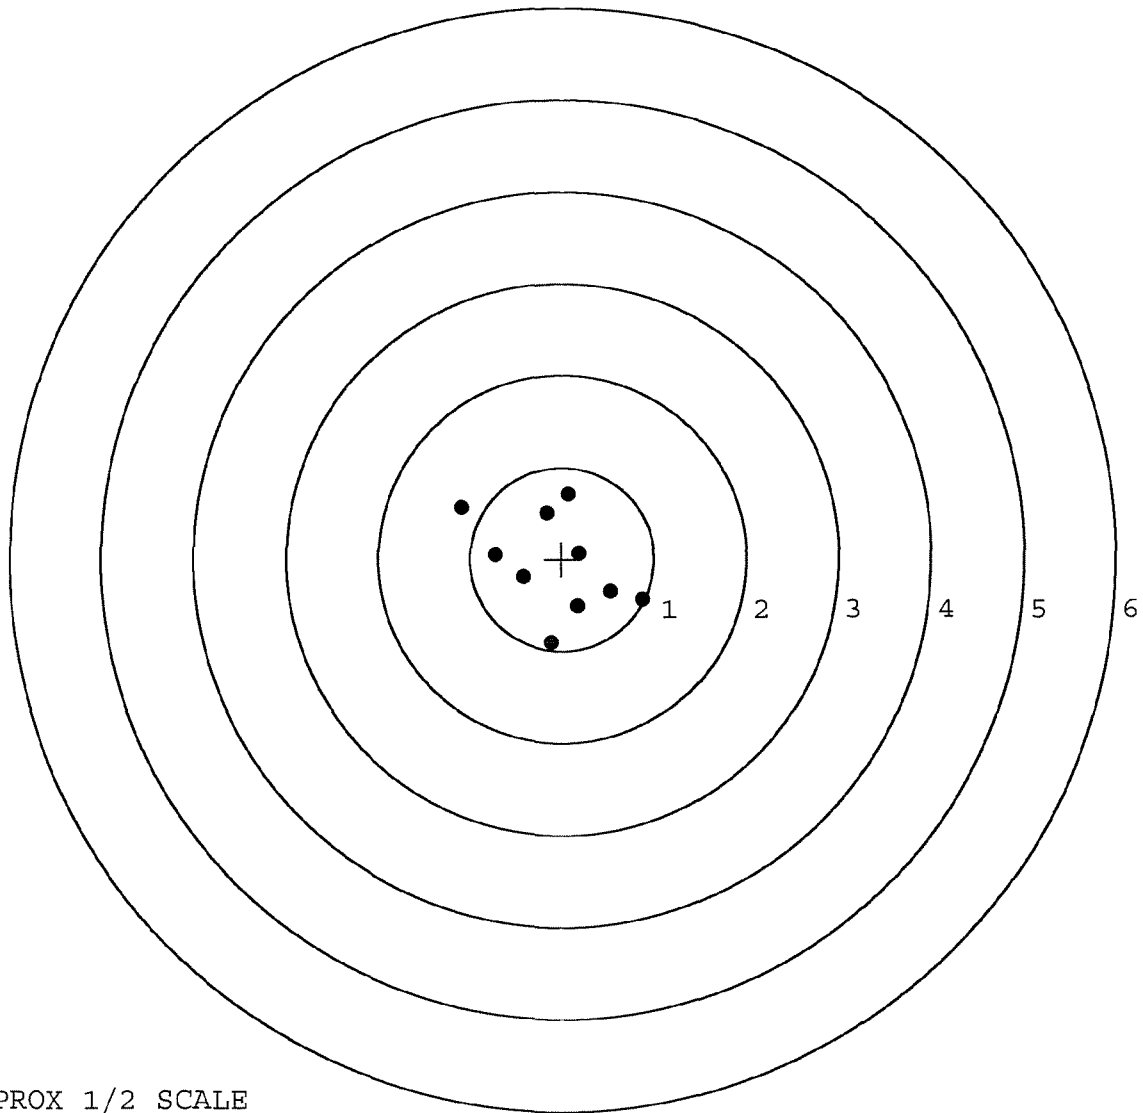


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6594663. __0
TARGET NUMBER: 5
FILE DATE: 05/19/2004
FILE TIME: 07:52

X CENTROID: 0.114
Y CENTROID: 0.048
POA TO CENTROID: 0.124
HORZ SPREAD: 1.305
VERT SPREAD: 1.479
GROUP SPREAD: 1.564
MIN RADIUS: 0.244
MAX RADIUS: 1.010
MEAN RADIUS: 0.518
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.020	-0.398
2:	0.128	-0.661
3:	0.268	0.625
4:	0.282	0.354
5:	0.037	0.818
6:	-0.165	0.284
7:	-0.285	0.007
8:	-0.213	-0.126
9:	-0.108	-0.234
10:	0.179	-0.187

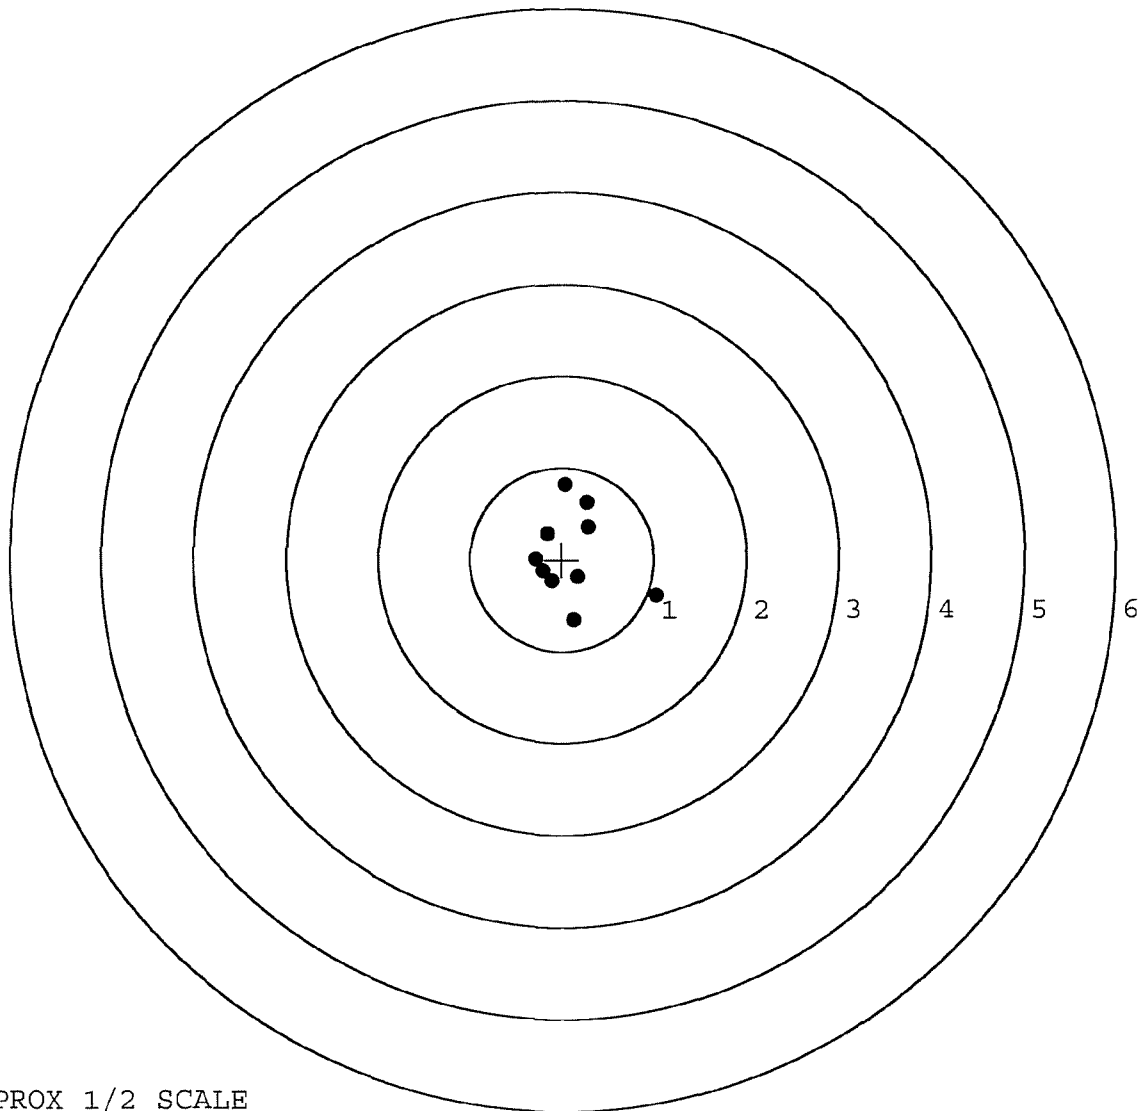

TARGET APPROX 1/2 SCALE

FINAL INSPECTION CHECKLIST M-24 REPAIRS
CONTRACT #: DAAE-20-02-D-0127

SERIAL # 06594663 INSPECTED BY: RTL

DATE REC'D: 4-29-04 DATE RET'D: 6-7-04

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☒ SCOPE
☒ SCOPE RINGS
☒ MOUNTING SCREWS
☒ MOUNTING BASE
☒ SCREWS
☒ FINISH
☒ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☒ SCOPE CASE
☒ IRON SIGHTS
☒ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS:

R & E NUMBER	80436		
SERIAL NUMBER	C6594663		
LOG-IN DATE	4-29-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	4-30-04	RTL
560 A	RE-BARREL	5-4-04	RTL
B	DRILL AND TAP	5-5-04	TRW
575	ASSEMBLE	5-4-04	RTL
600	PROOF	5-4-04	RTL
605	CHECK HEADSPACE	5-4-04	RTL
610	DIS-ASSEMBLE GUN	5-4-04	RTL
612	MAGNAFLUX	PK	
615	ROLLMARK CALIBER	5/6/04	AB
618	ROTO-BLAST	5/7/04	SW
620	APPLY COATINGS	5-10	TA
625 A	FINAL ASSEMBLY	5-14-04	RTL
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	5-19-04	AC
655	FINAL INSPECT	6-2-04	RTL
660	PACK	6-9-04	QA
		SHIP DATE	
	QAR INSPECTION DATE		

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

Remington[®]

REG. U.S. PAT. & TM. OFF.

DUPONT


MODEL 700TM H24

SERIAL NO.
C6594660


ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.

UPC



0 47700 25716 7



5716 C6594660

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6594663

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		12/21/90	K.S.
600	Proof		12/21/90	K.S.
607	Check Headspace		12/21/90	K.S.
610	Dis-assemble Gun		12/21/90	K.S.
612	Magnaflux Barrel Action		1/9/91	KR
	Magnaflux Bolt		"	KR
615	Rollmark Caliber		"	GL
617	Drill and Tap Sight Holes	1 10 91		FB
618	Polish Barrel	1 10 91		WC
620	Apply Coatings (Barrel Action)		1-22-91	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		1/30/91	KS
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		1/30/91	KS
	C) Inspect Ejector Hole for Chamfer		1/30/91	KS
	D) Oil Firing Pin Ass'y		1/30/91	KS
	E) Adjust Trigger Pull to Min Setting and Stake		1/31/91	GL

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			1/31/91	JP
	G) Safety Off Force	3	3	3			1/31/91	JP
	H) Trigger Pull Test & Retainability						1/31/91	JP
	I) Firing Pin Indent	.0215	.0215	.0215			1/31/91	JP
	J) Assemble Stock						1/31/91	KA
	K) Assemble Swivel Studs						2-19-91	A
	L) Attach Front and Rear Sight Assemblies						1/31/91	KA
	M) Iron Sight Alignment						1/31/91	KA
	N) Detach Front & Rear Sights & place in numbered container						1/31/91	KA
	O) Attach Scope to Rifle						1/31/91	KA
	P) Detach & Attach Scope 20 Times						1/31/91	KA
640	Gallery Target & Test						2-5-91	AC
	A) Time						2-5-91	AC
	B) Malfunctions						2-5-91	AC
	C) Pierced Primers						2-5-91	AC
	D) Optical Clarity of Scope						2-5-91	AC
645	Inspect for Live Ammo						2-5-91	AC
655	Final Inspection						2-19-91	A
	A) Headspace							
	B) Trigger Pull	2.76	2.62	2.75	2.78	2.50	4/18/91	WB
	C) Function						2-19-91	A
660	Pack						3-19-91	VF

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6594663
DATE 1/31/91
TESTER JL

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.39	2.38	2.30	2.76	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.56	2.22	2.33	2.62	
PULL #3	2.57	2.23	2.28	2.75	
PULL #4	2.14	2.35	2.28	2.78	
PULL #5	2.37	2.31	2.35	2.80	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.52	3.29		
PULL #2	3.21	3.36		
PULL #3	3.25	3.21		
PULL #4	3.15	3.43		
PULL #5	3.29	3.29		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.21	4.42		4.24
PULL #2	4.36	4.35		4.47
PULL #3	4.32	4.41		4.44
PULL #4	4.42	4.43		4.38
PULL #5	4.43	4.38		4.20
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6594663
6 Feb 1991

Gov't

CENTROIDAL DISTANCES

0 TO	1	.263795
1 TO	2	.134239
1 TO	3	.575223
1 TO	4	.252198
1 TO	5	.475689

35 <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0824
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0206
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .034936
THE GMR FOR THIS RIFLE IS: .9158

Govt

5 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C65946B3

CENTERFIRE PATTERNS # 1

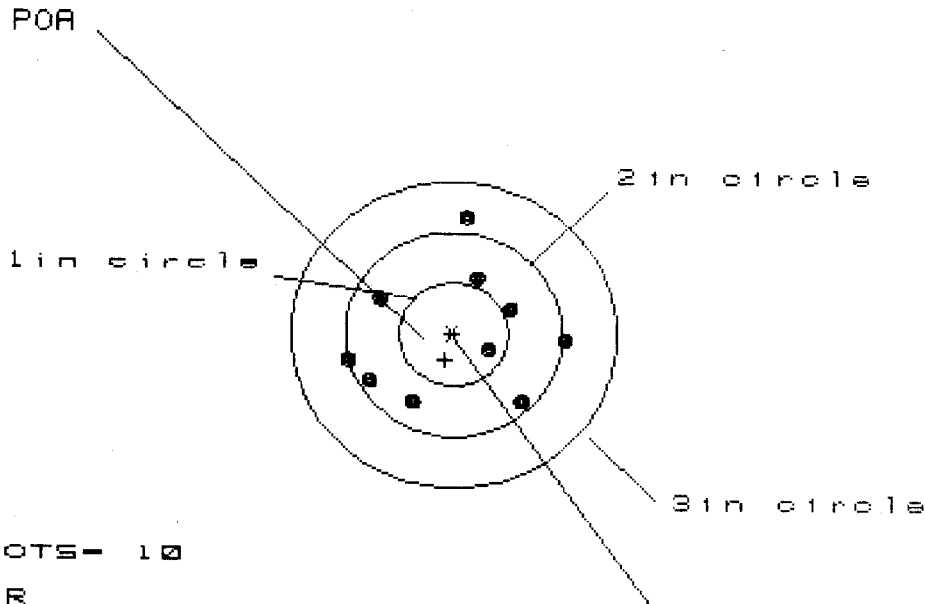

* OF SHOTS- 10

IN CIR

1in = 1

2in = 7

3in = 10

HS= 2.059

VS= 1.754


GS= 2.062

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.034	1.052	.926
MINIMUM X	:	-1.024	-1.007	-.902
MAXIMUM Y	:	1.101	.691	.680
MINIMUM Y	:	-.653	-.531	-.542
CENTROID X	:	.078	.061	.187
CENTROID Y	:	.252	.130	.141
POA TO CENTROID in.	:	.264	.143	.234
MIN RADIUS	:	.393	.368	.249
MEAN RADIUS	:	.807	.768	.717
MAX RADIUS	:	1.112	1.052	.976
HORIZONTAL SPREAD	:	2.059	2.059	1.828
VERTICAL SPREAD	:	1.754	1.222	1.222
EXTREME SPREAD	:	2.062	2.062	1.868
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

5 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06594663

CENTERFIRE PATTERNS # 2

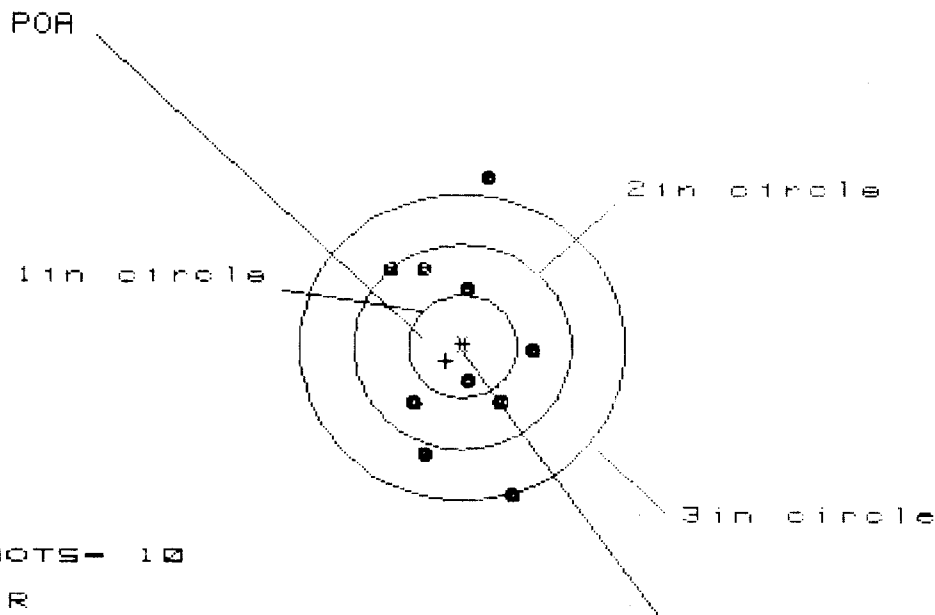

OF SHOTS- 10

IN CIR

1in - 1

2in - 6

3in - 9

HS- 1.359

VS- 3.076

GS- 3.085

CENTROID #


PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.690	.716	.779
MINIMUM X	:	-.669	-.643	-.580
MAXIMUM Y	:	1.663	.982	.828
MINIMUM Y	:	-1.413	-1.228	-1.057
CENTROID X	:	.152	.126	.063
CENTROID Y	:	.140	-.045	.109
POA TO CENTROID IN.	:	.206	.133	.126
MIN RADIUS	:	.296	.119	.285
MEAN RADIUS	:	.908	.792	.737
MAX RADIUS	:	1.680	1.326	1.091
HORIZONTAL SPREAD	:	1.359	1.359	1.359
VERTICAL SPREAD	:	3.076	2.210	1.885
EXTREME SPREAD	:	3.085	2.488	1.910
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	9		

5 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06594663

CENTERFIRE PATTERNS # 3

POA

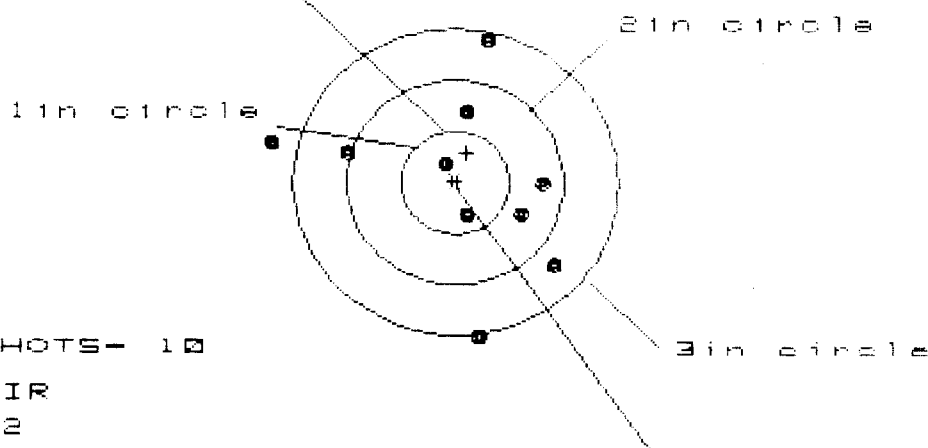

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 5

3 in = 8

HS= 2.554

VS= 2.946

GS= 2.948


CENTROID #

PATTERN #	:	3	4	8
SHOTS (BEST OF)	:	10		
MAXIMUM X	:	.882	.697	.695
MINIMUM X	:	-1.672	-1.184	-1.186
MAXIMUM Y	:	1.418	1.461	1.275
MINIMUM Y	:	-1.528	-1.485	-.938
CENTROID X	:	-.106	.079	.081
CENTROID Y	:	-.293	-.336	-.150
POA TO CENTROID in.	:	.312	.345	.171
MIN RADIUS	:	.265	.276	.339
MEAN RADIUS	:	.955	.849	.768
MAX RADIUS	:	1.716	1.485	1.278
HORIZONTAL SPREAD	:	2.554	1.881	1.881
VERTICAL SPREAD	:	2.946	2.946	2.213
EXTREME SPREAD	:	2.948	2.948	2.296
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	5		
NUMBER IN THREE INCH CIRCLE	=	8		

5 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PAT1-06534663

CENTERFIRE PATTERNS # 4

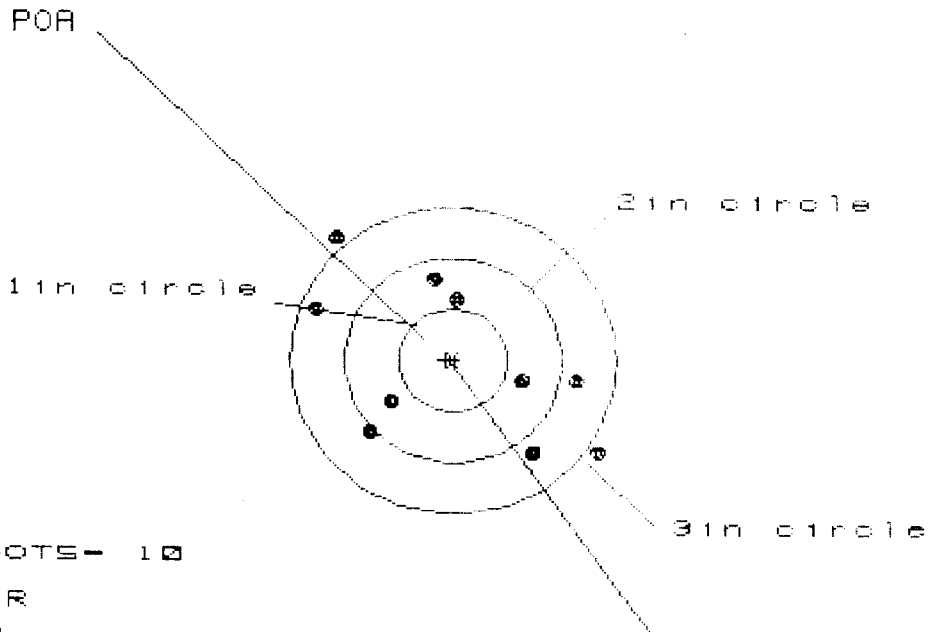

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 4

3 in = 0

HS = 2.599

VS = 2.075

GS = 3.143

CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	4	8
MAXIMUM X	:	1.337	1.141	1.141
MINIMUM X	:	-1.262	-1.114	-1.223
MAXIMUM Y	:	1.188	1.090	.862
MINIMUM Y	:	-.887	-.961	-.825
CENTROID X	:	.068	-.000	.029
CENTROID Y	:	-.000	.098	-.038
POA TO CENTROID in.	:	.068	.127	.048
MIN RADIUS	:	.626	.560	.654
MEAN RADIUS	:	1.069	.996	.940
MAX RADIUS	:	1.604	1.398	1.332
HORIZONTAL SPREAD	:	2.599	2.364	2.364
VERTICAL SPREAD	:	2.075	2.051	1.687
EXTREME SPREAD	:	3.143	2.704	2.453
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

5 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/065946B3

CENTERFIRE PATTERNS # 5

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 10

HS= 1.910

VS= 2.126

GS= 2.214

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.614	.470	.454
MINIMUM X	:	-1.296	-.675	-.692
MAXIMUM Y	:	1.192	1.185	1.003
MINIMUM Y	:	-.934	-.961	-.815
CENTROID X	:	.220	.364	.380
CENTROID Y	:	-.202	-.175	-.321
POA TO CENTROID in.	:	.298	.404	.498
MIN RADIUS	:	.252	.262	.337
MEAN RADIUS	:	.840	.773	.724
MAX RADIUS	:	1.317	1.173	1.101
HORIZONTAL SPREAD	:	1.910	1.145	1.145
VERTICAL SPREAD	:	2.126	2.126	1.818
EXTREME SPREAD	:	2.214	2.203	1.923
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	10		

RECEIVING ESTIMATING REPORT

COMMENTS

ORDER
R 96-21862

INITIAL CUST NO.

JJM

W/LEUPOLD 10X SCOPE

Scope # 90-0549

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

10/03/96

10/03/96

BL 1-91

C6594663

700

7.62

NATO

ACCESSORIES

W/STUDS

W/SWIVELS

SCOPE BASE

FROM:

SHIP TO:

TRANSPORTATION OFFICER
ANNISTON ARMY DEPOT
ANNISTON

AL 36201

TRANSPORTATION OFFICER
ANNISTON ARMY DEPOT
ANNISTONAL
36201

CUST NO: 150939 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

☐ NEW☐ LIGHTLY WORN☐ WORN☐ VERY WORN☐ UNREPAIRABLE☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

✓ Trigger Assy

96024

Scope Sent Back To Factory
for Inspe.

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 6/95

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400021420

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6594663
DATE 4-12-97
TESTER DA

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.73	2.68	2.70		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.73	2.69	2.59		
PULL #3	2.74	2.73	2.54		
PULL #4	2.74	2.71	2.61		
PULL #5	2.68	2.67	2.59		
TOTAL	13.62	13.48	13.03		
AVG.	2.72	2.69	2.60		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.18	3.01		
PULL #2	3.13	3.14		
PULL #3	3.17	3.14		
PULL #4	3.08	3.13		
PULL #5	3.17	3.06		
TOTAL	15.73	15.48		
AVG.	3.14	3.09		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.22	4.07		4.38
PULL #2	4.14	4.07		4.31
PULL #3	4.06	4.06		4.39
PULL #4	4.11	4.07		4.39
PULL #5	4.11	4.05		4.31
TOTAL	20.64	20.32		21.78
AVG.	4.12	4.06		4.35

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. C6594663

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF		
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST	2.38	2.41 2.46 2.46 2.49
C	SAFETY ON FORCE	5	5 5
D	SAFETY OFF FORCE	2.5	2.5 2.5
E	FIRING PIN INDENT		
640	TARGET		
655	FINAL INSPECT	6/18/97	Rv
660	PACK		
QAR INSPECTION		SHIP DATE	

Final Inspection

S.N: C6594663

DATE REC'D: 10/3/96

DATE RET'D:

AUDITOR: *RU*

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☐ FINISH

Scope Assy.

- ☒ Scope
- ☒ Scope Rings
- ☐ Mounting Screws
- ☒ Mounting Base
- ☒ Screws
- ☒ Finish
- ☒ Looseness
- ☒ CLARITY

Misc.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

Stock Assy.

- ☒ Stock
- ☒ Sling Swivel Studs
- ☒ ADJUSTABLE Butt PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☒ Scope Case
- ☒ Iron SIGHTS
- ☒ Deployment Kit

Trigger

- ☐ SAFETY OPERATION
- ☒ Set

Comments: _____
