

C6594680

MODEL 700™ M24

Model **SWS**™

Action

Barrel Length

Capacity

Order No. **5715**

\*Includes 1 in chamber.

*Remington*

**Remington**<sup>®</sup> **DUPONT**  
REG. U.S. PAT. & TM. OFF.

**VERY IMPORTANT:**  
 Instruction Book  
 enclosed to assure  
 safe use of this  
 firearm.

**MODEL 700<sup>TM</sup> H24**

**SERIAL NO.**  
**C6594680**

**ORDER NO.**  
**5716**


**20**

MADE IN ILLION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6594680

**UPC**



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6594680

| OP. #        | OP. NAME                                                       | READINGS | DATE    | INIT |
|--------------|----------------------------------------------------------------|----------|---------|------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   | 1 16     | 91      | RW   |
| 600          | Proof                                                          | 1 16     | 91      | RW   |
| 607          | Check Headspace                                                | 1 16     | 91      | RW   |
| 610          | Dis-assemble Gun                                               | 1 16     | 91      | RW   |
| 612          | Magnaflux Barrel<br>Action                                     | 1 18     | 91      | KR   |
|              | Magnaflux Bolt                                                 | 1 18     | 91      | KR   |
| 615          | Rollmark Caliber                                               | 1 18     | 91      | LS   |
| 617          | Drill and Tap Sight Holes                                      | 1 24     | 91      | FB   |
| 618          | Polish Barrel                                                  | 1 24     | 91      | WB   |
| 620          | Apply Coatings<br>(Barrel Action)                              |          | 2-15-91 | TA   |
|              | Apply Coating (Bolt)                                           |          |         |      |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          | 2/18/91 | RW   |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          | 2/18/91 | RW   |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          | 2/18/91 | RW   |
|              | D) Oil Firing Pin Ass'y                                        |          | 2/18/91 | RW   |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          | 2/18/91 |      |

| op. #        | OP. NAME                                                    | READINGS        |                 |                 |      |      | DATE    | INIT |
|--------------|-------------------------------------------------------------|-----------------|-----------------|-----------------|------|------|---------|------|
| 625<br>cont. | F) Safety On Force                                          | 5               | 5               | 4 $\frac{3}{4}$ |      |      | 2-22-91 | DH   |
|              | G) Safety Off Force                                         | 2 $\frac{1}{4}$ | 2 $\frac{1}{4}$ | 2 $\frac{1}{4}$ |      |      | 2-22-91 | DH   |
|              | H) Trigger Pull Test & Retainability                        |                 |                 |                 |      |      | 2/24/91 |      |
|              | I) Firing Pin Indent                                        | .0215           | .021            | .0205           |      |      | 2-22-91 | DH   |
|              | J) Assemble Stock                                           |                 |                 |                 |      |      | 2/28/91 | RW   |
|              | K) Assemble Swivel Studs                                    |                 |                 |                 |      |      | 3/2/91  | WB   |
|              | L) Attach Front and Rear Sight Assemblies                   |                 |                 |                 |      |      | 2/28/91 | RW   |
|              | M) Iron Sight Alignment                                     |                 |                 |                 |      |      | 2/28/91 | RW   |
|              | N) Detach Front & Rear Sights & place in numbered container |                 |                 |                 |      |      | 2/28/91 | RW   |
|              | O) Attach Scope to Rifle                                    |                 |                 |                 |      |      | 2/28/91 | RW   |
|              | P) Detach & Attach Scope 20 Times                           |                 |                 |                 |      |      | 2/28/91 | RW   |
| 640          | Gallery Target & Test.                                      |                 |                 |                 |      |      | 2/28/91 | NF   |
|              | A) Time                                                     |                 |                 |                 |      |      | "       | NF   |
|              | B) Malfunctions                                             |                 |                 |                 |      |      | "       | NF   |
|              | C) Pierced Primers                                          |                 |                 |                 |      |      | "       | NF   |
|              | D) Optical Clarity of Scope                                 |                 |                 |                 |      |      | "       | NF   |
| 645          | Inspect for Live Ammo                                       |                 |                 |                 |      |      | 2-28-91 | NF   |
| 655          | Final Inspection                                            |                 |                 |                 |      |      | 3/2/91  | WB   |
|              | A) Headspace                                                |                 |                 |                 |      |      |         |      |
|              | B) Trigger Pull                                             | 2.43            | 2.27            | 2.24            | 2.24 | 2.29 | 3-1-91  | JB   |
|              | G) Function                                                 |                 |                 |                 |      |      | 3/2/91  | WB   |
| 660          | Pack                                                        |                 |                 |                 |      |      | 3-15-91 | DH   |

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# ± .50#  
3.00# ± .75#  
4.00# ± 1.00#

SERIAL NO. C6594680

DATE 2-21-91

TESTER DA

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |      | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------|------------------------------------------------------------------------|
| PULL #1 | 256              | 251                      | 250                            | 2.43 | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 262              | 247                      | 256                            | 2.22 |                                                                        |
| PULL #3 | 253              | 252                      | 260                            | 2.24 |                                                                        |
| PULL #4 | 264              | 242                      | 250                            | 2.24 |                                                                        |
| PULL #5 | 246              | 248                      | 254                            | 2.24 |                                                                        |
| TOTAL   |                  |                          |                                |      |                                                                        |
| AVG.    |                  |                          |                                |      |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.13             | 3.14                     |  |          |
| PULL #2 | 3.11             | 3.03                     |  |          |
| PULL #3 | 3.13             | 3.01                     |  |          |
| PULL #4 | 3.12             | 3.11                     |  |          |
| PULL #5 | 3.16             | 3.00                     |  |          |
| TOTAL   |                  |                          |  |          |
| AVG.    |                  |                          |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.40             | 4.13                     |                                | 4.06                                 |
| PULL #2 | 4.34             | 4.32                     |                                | 4.04                                 |
| PULL #3 | 4.33             | 4.31                     |                                | 4.00                                 |
| PULL #4 | 4.19             | 4.10                     |                                | 4.06                                 |
| PULL #5 | 4.32             | 4.18                     |                                | 4.07                                 |
| TOTAL   |                  |                          |                                |                                      |
| AVG.    |                  |                          |                                |                                      |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # C6594680  
1 Mar 1991

CENTROIDAL DISTANCES

|        |          |
|--------|----------|
| 0 TO 1 | .122483  |
| 1 TO 2 | .151013  |
| 1 TO 3 | .177674  |
| 1 TO 4 | .0960052 |
| 1 TO 5 | .359668  |


-----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .003  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0508  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0508883  
THE AMR FOR THIS RIFLE IS: 1.11

1 Mar 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/C6534680

# CENTERFIRE PATTERNS # 1

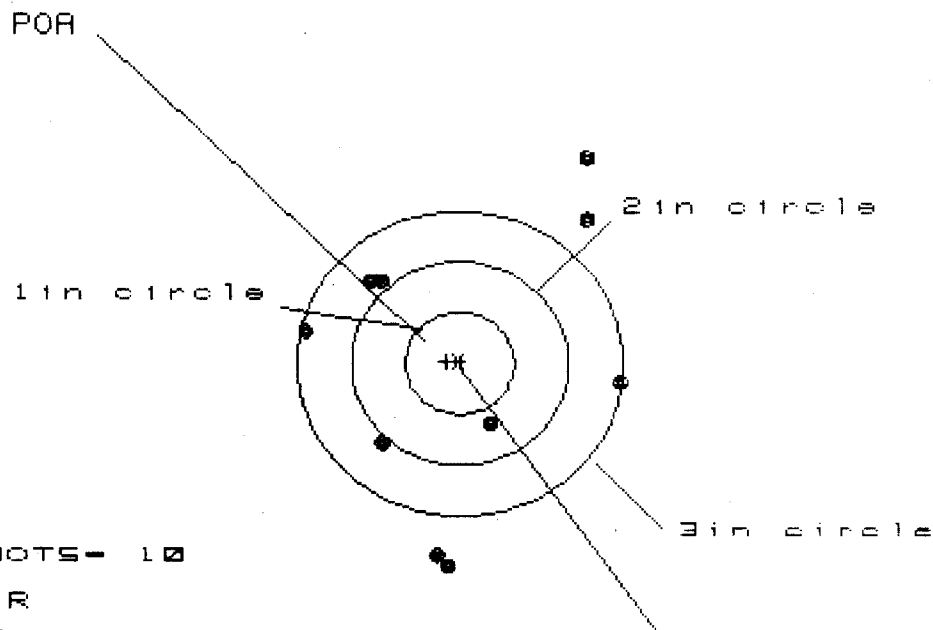

# OF SHOTS- 10

# IN CIR

1in = 0

2in = 1

3in = 6

HS= 2.938

VS= 3.951

GS= 4.146


CENTROID #

| PATTERN #                     | 1      | 9      | 8      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | 1.481  | 1.609  | 1.613  |
| MINIMUM X                     | -1.457 | -1.329 | -1.325 |
| MAXIMUM Y                     | 2.003  | 1.647  | 1.432  |
| MINIMUM Y                     | -1.948 | -1.726 | -1.853 |
| CENTROID X                    | .121   | -.007  | -.011  |
| CENTROID Y                    | -.019  | -.241  | -.026  |
| POA TO CENTROID in.           | .123   | .242   | .028   |
| MIN RADIUS                    | .626   | .546   | .697   |
| MEAN RADIUS                   | 1.494  | 1.371  | 1.321  |
| MAX RADIUS                    | 2.314  | 2.085  | 1.922  |
| HORIZONTAL SPREAD             | 2.938  | 2.938  | 2.939  |
| VERTICAL SPREAD               | 3.951  | 3.373  | 3.285  |
| EXTREME SPREAD                | 4.146  | 3.596  | 3.555  |
| NUMBER IN ONE INCH CIRCLE =   |        | 0      |        |
| NUMBER IN TWO INCH CIRCLE =   |        | 1      |        |
| NUMBER IN THREE INCH CIRCLE = |        | 6      |        |

1 Mar 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/C65946B0

# CENTERFIRE PATTERNS # 2

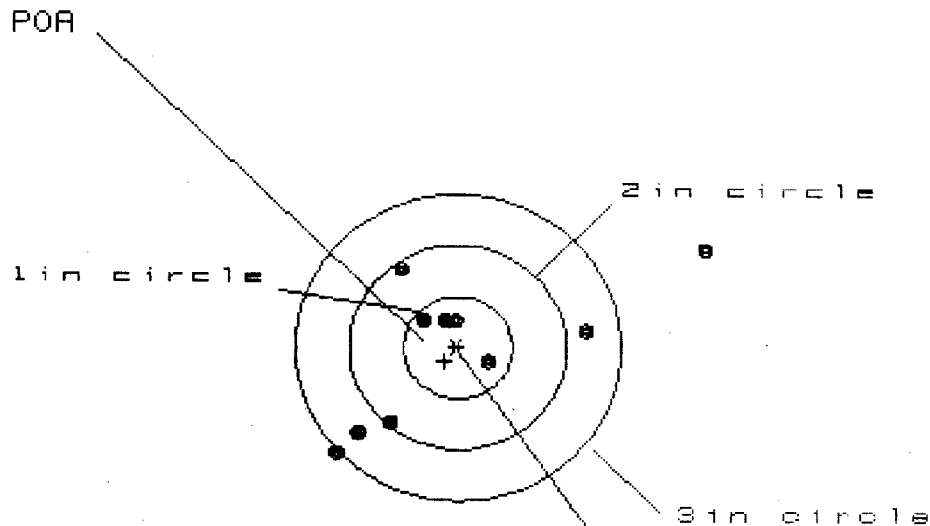

# OF SHOTS- 10

# IN CIR

1 in - 4

2 in - 6

3 in - 8

HS- 3.435

VS= 1.923

GS= 3.937


CENTROID \*

|                             |   |        |       |       |
|-----------------------------|---|--------|-------|-------|
| PATTERN #                   | : |        |       |       |
| SHOTS (BEST OF)             | : | 10     | 9     | 8     |
| MAXIMUM X                   | : | 2.286  | 1.450 | 1.339 |
| MINIMUM X                   | : | -1.149 | -.895 | -.755 |
| MAXIMUM Y                   | : | .933   | .824  | .713  |
| MINIMUM Y                   | : | -.990  | -.887 | -.840 |
| CENTROID X                  | : | .123   | -.131 | -.020 |
| CENTROID Y                  | : | .132   | .028  | .139  |
| POA TO CENTROID in.         | : | .180   | .134  | .140  |
| MIN RADIUS                  | : | .253   | .399  | .275  |
| MEAN RADIUS                 | : | .960   | .783  | .688  |
| MAX RADIUS                  | : | 2.469  | 1.479 | 1.351 |
| HORIZONTAL SPREAD           | : | 3.435  | 2.345 | 2.094 |
| VERTICAL SPREAD             | : | 1.923  | 1.711 | 1.553 |
| EXTREME SPREAD              | : | 3.937  | 2.624 | 2.329 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 4     |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 6     |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 8     |       |

1 Mar 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/C65346B0

# CENTERFIRE PATTERNS # 3

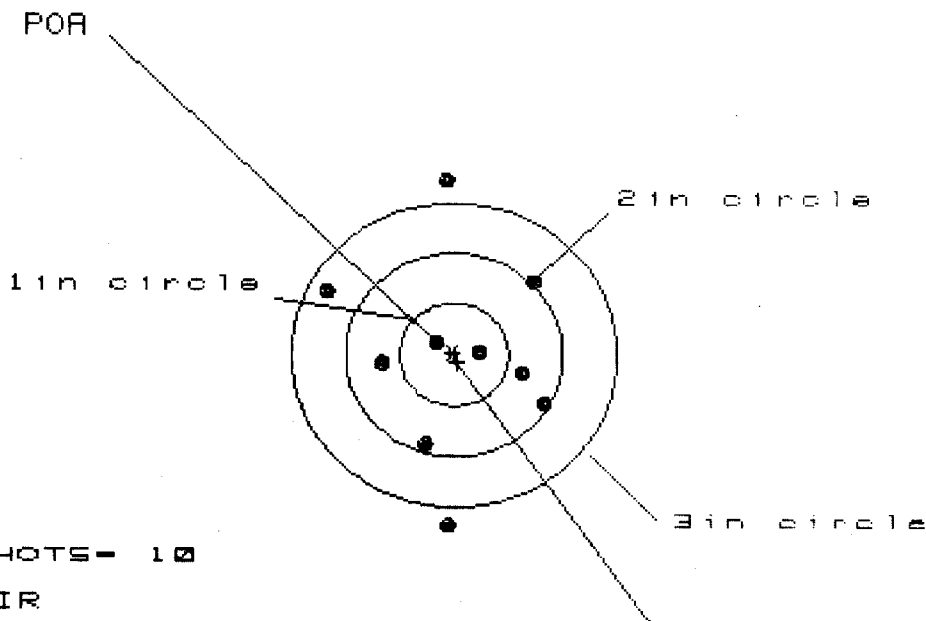

# OF SHOTS- 10

# IN CIR

1in = 2

2in = 5

3in = 8

HS= 1.958

VS= 3.355

GS= 3.355

CENTROID #

| PATTERN #                   | : | 10     | 9      | 8      |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | .814   | .802   | .791   |
| MINIMUM X                   | : | -1.144 | -1.156 | -1.167 |
| MAXIMUM Y                   | : | 1.697  | .893   | .710   |
| MINIMUM Y                   | : | -1.658 | -1.470 | -.868  |
| CENTROID X                  | : | -.031  | -.019  | -.008  |
| CENTROID Y                  | : | .073   | -.115  | .068   |
| POA TO CENTROID in.         | : | .080   | .117   | .069   |
| MIN RADIUS                  | : | .244   | .342   | .232   |
| MEAN RADIUS                 | : | .934   | .850   | .746   |
| MAX RADIUS                  | : | 1.700  | 1.472  | 1.323  |
| HORIZONTAL SPREAD           | : | 1.958  | 1.958  | 1.958  |
| VERTICAL SPREAD             | : | 3.355  | 2.363  | 1.578  |
| EXTREME SPREAD              | : | 3.355  | 2.515  | 2.227  |
| NUMBER IN ONE INCH CIRCLE   | = | 2      |        |        |
| NUMBER IN TWO INCH CIRCLE   | = | 6      |        |        |
| NUMBER IN THREE INCH CIRCLE | = | 8      |        |        |

1 Mar 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/C8594680


# CENTERFIRE PATTERNS # 4

POA

1in circle

2in circle

3in circle



# OF SHOTS- 10

# IN CIR

1in = 2

2in = 7

3in = 8

HS= 2.520

VS= 2.739

GS= 3.117

CENTROID #


| PATTERN #                   | : | 10     | 9      | 8      |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.273  | 1.134  | 1.080  |
| MINIMUM X                   | : | -1.247 | -1.122 | -1.176 |
| MAXIMUM Y                   | : | 1.605  | 1.479  | .760   |
| MINIMUM Y                   | : | -1.134 | -.990  | -.805  |
| CENTROID X                  | : | .025   | .164   | .218   |
| CENTROID Y                  | : | -.018  | .108   | -.077  |
| POA TO CENTROID in.         | : | .031   | .196   | .231   |
| MIN RADIUS                  | : | .206   | .392   | .332   |
| MEAN RADIUS                 | : | .970   | .899   | .781   |
| MAX RADIUS                  | : | 1.686  | 1.541  | 1.321  |
| HORIZONTAL SPREAD           | : | 2.520  | 2.256  | 2.256  |
| VERTICAL SPREAD             | : | 2.739  | 2.469  | 1.565  |
| EXTREME SPREAD              | : | 3.117  | 2.491  | 2.376  |
| NUMBER IN ONE INCH CIRCLE   | = | 2      |        |        |
| NUMBER IN TWO INCH CIRCLE   | = | 7      |        |        |
| NUMBER IN THREE INCH CIRCLE | = | 8      |        |        |

1 Mar 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/06594880

# CENTERFIRE PATTERNS # 3

POA

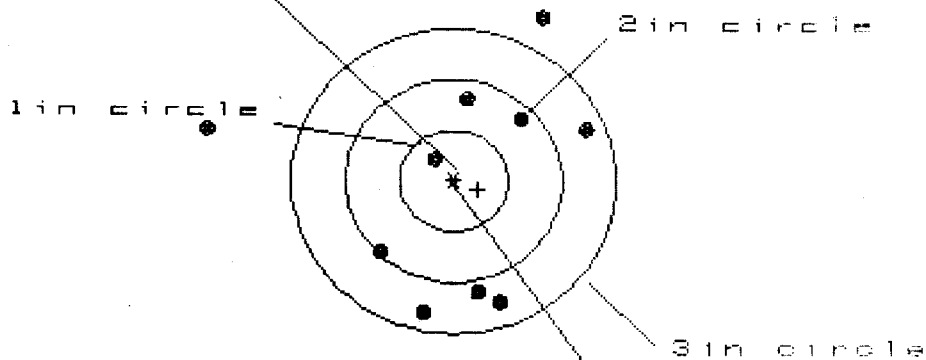

# OF SHOTS- 10

# IN CIR

1 in = 1

2 in = 4

3 in = 8

CENTROID \*

HS= 3.505

VS= 2.944

GS= 3.505

| PATTERN #                   | : | 10     | 9      | 8      |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.211  | .956   | 1.024  |
| MINIMUM X                   | : | -2.294 | -.895  | -.827  |
| MAXIMUM Y                   | : | 1.661  | 1.713  | 1.032  |
| MINIMUM Y                   | : | -1.283 | -1.231 | -1.017 |
| CENTROID X                  | : | -.223  | .032   | -.036  |
| CENTROID Y                  | : | .086   | .034   | -.180  |
| POA TO CENTROID in.         | : | .239   | .047   | .184   |
| MIN RADIUS                  | : | .266   | .481   | .591   |
| MEAN RADIUS                 | : | 1.193  | 1.056  | .951   |
| MAX RADIUS                  | : | 2.343  | 1.799  | 1.272  |
| HORIZONTAL SPREAD           | : | 3.505  | 1.851  | 1.851  |
| VERTICAL SPREAD             | : | 2.944  | 2.944  | 2.049  |
| EXTREME SPREAD              | : | 3.505  | 3.129  | 2.300  |
| NUMBER IN ONE INCH CIRCLE   | = | 1      |        |        |
| NUMBER IN TWO INCH CIRCLE   | = | 4      |        |        |
| NUMBER IN THREE INCH CIRCLE | = | 8      |        |        |

## RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 94-18734

INITIALS CUSTOMER ORDER NO.

JJM DAAA09-92-C-0834

W/10X SCOPE M-24 SNIPER W/DEPLOYMENT KIT  
ATTN FRED MARTIN

500.00 90-0764

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

06/14/94

06/15/94

C6594680

700 7.62

NATO

ACCESSORIES

HARD CASE

SCOPE MNTS

SCOPE BASE

SLING STRAP

FROM:

SHIP TO:

COMMANDER (W52H094138H226)  
DEFENSE DIST DEPOT ANNISTON  
ATTN DDAA-UR BLDG 112  
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)  
DEFENSE DIST DEPOT ANNISTON  
ATTN DDAA-UR BLDG 112  
ANNISTONAL  
36201-5025

CUST NO: 098397 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW  
☐ LIGHTLY WORN  
☐ WORN  
☐ VERY WORN  
☐ UNREPAIRABLE  
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Trigger Assy 173.31  
CTI 50.00  
\$223.31

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

M2400021729

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS  
2.50# ± .50#  
3.00# ± .75#  
4.00# ± 1.00#

SERIAL NO. C6594680  
DATE 10-30-95  
TESTER DA

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------------------------------------------------------------------------|
| PULL #1 | 2.44             | 2.52                     | 2.57                           | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.41             | 2.55                     | 2.50                           |                                                                        |
| PULL #3 | 2.54             | 2.66                     | 2.49                           |                                                                        |
| PULL #4 | 2.31             | 2.28                     | 2.51                           |                                                                        |
| PULL #5 | 2.65             | 2.28                     | 2.47                           |                                                                        |
| TOTAL   | 12.35            | 12.29                    | 12.54                          |                                                                        |
| AVG.    | 2.47             | 2.45                     | 2.50                           |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.04             | 3.14                     |  |          |
| PULL #2 | 3.02             | 3.06                     |  |          |
| PULL #3 | 3.06             | 3.00                     |  |          |
| PULL #4 | 3.21             | 3.11                     |  |          |
| PULL #5 | 3.18             | 3.00                     |  |          |
| TOTAL   | 15.51            | 15.31                    |  |          |
| AVG.    | 3.10             | 3.06                     |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.08             | 4.03                     | 4.13                           |                                      |
| PULL #2 | 4.03             | 3.93                     | 4.07                           |                                      |
| PULL #3 | 4.04             | 3.94                     | 4.02                           |                                      |
| PULL #4 | 4.09             | 3.99                     | 4.09                           |                                      |
| PULL #5 | 4.04             | 4.02                     | 4.12                           |                                      |
| TOTAL   | 20.28            | 19.91                    | 20.43                          |                                      |
| AVG.    | 4.05             | 3.98                     | 4.08                           |                                      |

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 6594680

| OP. #        | OP. NAME                                                       | READINGS | DATE | INITIAL |
|--------------|----------------------------------------------------------------|----------|------|---------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   |          |      |         |
| 600          | Proof                                                          |          |      |         |
| 607          | Check Headspace                                                |          |      |         |
| 610          | Dis-assemble Gun                                               |          |      |         |
| 612          | Magnaflux Barrel<br>Action                                     |          |      |         |
|              | Magnaflux Bolt                                                 |          |      |         |
| 615          | Rollmark Caliber                                               |          |      |         |
| 617          | Drill and Tap Sight Holes                                      |          |      |         |
| 618          | Polish Barrel                                                  |          |      |         |
| 620          | Apply Coatings<br>(Barrel Action)                              |          |      |         |
|              | Apply Coating (Bolt)                                           |          |      |         |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          |      |         |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          |      |         |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          |      |         |
|              | D) Oil Firing Pin Ass'y                                        |          |      |         |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          |      |         |

| op. #        | OP. NAME                                                    | READINGS |       |      |      |      | DATE  | INIT |
|--------------|-------------------------------------------------------------|----------|-------|------|------|------|-------|------|
| 625<br>cont. | F) Safety On Force                                          | 5 1/2    | 5 1/2 | 5    |      |      | 12/14 | WB   |
|              | G) Safety Off Force                                         | 3        | 3 1/4 | 3    |      |      | 12/14 | WB   |
|              | H) Trigger Pull Test & Retainability                        |          |       |      |      |      |       |      |
|              | I) Firing Pin Indent                                        |          |       |      |      |      |       |      |
|              | J) Assemble Stock                                           |          |       |      |      |      |       |      |
|              | K) Assemble Swivel Studs                                    |          |       |      |      |      |       |      |
|              | L) Attach Front and Rear Sight Assemblies                   |          |       |      |      |      |       |      |
|              | M) Iron Sight Alignment                                     |          |       |      |      |      |       |      |
|              | N) Detach Front & Rear Sights & place in numbered container |          |       |      |      |      |       |      |
|              | O) Attach Scope to Rifle                                    |          |       |      |      |      |       |      |
|              | P) Detach & Attach Scope 20 Times                           |          |       |      |      |      |       |      |
| 640          | Gallery Target & Test                                       |          |       |      |      |      |       |      |
|              | A) Time                                                     |          |       |      |      |      |       |      |
|              | B) Malfunctions                                             |          |       |      |      |      |       |      |
|              | C) Pierced Primers                                          |          |       |      |      |      |       |      |
|              | D) Optical Clarity of Scope                                 |          |       |      |      |      |       |      |
| 645          | Inspect for Live Ammo                                       |          |       |      |      |      |       |      |
| 655          | Final Inspection                                            |          |       |      |      |      |       |      |
|              | A) Headspace                                                |          |       |      |      |      |       |      |
|              | B) Trigger Pull                                             | 2.44     | 2.40  | 2.50 | 2.36 | 2.49 | 12/14 | WB   |
|              | C) Function                                                 |          |       |      |      |      |       |      |
| 660          | Pack                                                        |          |       |      |      |      |       |      |