

C6587522

MODEL 700TM M24

Model **SMS** TM


Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

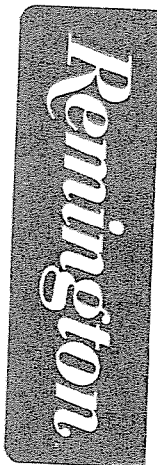

Remington
 MODEL 700™ M24

VERY IMPORTANT!
 Instruction Book
 enclosed to assure
 safe use of this
 firearm.

REG. U.S. PAT. & TM. OFF.

SERIAL NO.
 C6587522

ORDER NO.
 5716


MADE IN ILLION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

Ø1



5716 C6587522

LPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6587522

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	1023	90	RW
600	Proof	1023	90	RW
607	Check Headspace	1023	90	RW
610	Dis-assemble Gun	1023	90	RW
612	Magnaflux Barrel Action		10/24/90	KR
	Magnaflux Bolt		10/24/90	KR
615	Rollmark Caliber		10/24/90	ZL
617	Drill and Tap Sight Holes		10/25/90	PB
618	Polish Barrel PB		10/26/90	WB
620	Apply Coatings (Barrel Action)		11-7-90	TH
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		11/12/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/12/90	RW
	C) Inspect Ejector Hole for Chamfer		11/12/90	RW
	D) Oil Firing Pin Ass'y		11/12/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		11/17/90	WB

op. #	OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	5	5	5	11/16/90	WLB		
	G) Safety Off Force	2	2	2	11/16/90	WLB		
	H) Trigger Pull Test & Retainability				11/17/90	WLB		
	I) Firing Pin Indent	.021	.0215	.0215	11/16/90	WLB		
	J) Assemble Stock				11/19/90	RW		
	K) Assemble Swivel Studs				11-27-90	WLB		
	L) Attach Front and Rear Sight Assemblies				11/19/90	RW		
	M) Iron Sight Alignment				11/19/90	RW		
	N) Detach Front & Rear Sights & place in numbered container				11/19/90	RW		
	O) Attach Scope to Rifle				11/19/90	RW		
	P) Detach & Attach Scope 20 Times				11/19/90	RW		
640	Gallery Target & Test				11-28-90	DH		
	A) Time				11-28-90	DH		
	B) Malfunctions				11-28-90	DH		
	C) Pierced Primers				11-28-90	DH		
	D) Optical Clarity of Scope				11-28-90	DH		
645	Inspect for Live Ammo				11-28-90	DH		
655	Final Inspection							
	A) Headspace				11-27-90	WLB		
	B) Trigger Pull	245	232	250	245	248	11-27-90	WLB
	C) Function						11-27-90	WLB
660	Pack						12/18/90	WLB

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6587522

DATE 11/17/90

TESTER WB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.52	2.46	2.37	2.45	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.32	2.60	2.57	2.32	
PULL #3	2.51	2.60	2.44	2.50	
PULL #4	2.43	2.62	2.59	2.45	
PULL #5	2.35	2.45	2.62	2.48	
TOTAL	12.13	12.73	12.79		
AVG.	2.40	2.54	2.56		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.30	3.11		
PULL #2	3.20	3.16		
PULL #3	3.40	3.23		
PULL #4	3.37	3.11		
PULL #5	3.38	3.15		
TOTAL	16.65	15.76		
AVG.	3.33	3.15		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.07	4.16		4.27
PULL #2	4.13	4.33		4.21
PULL #3	4.11	4.14		4.10
PULL #4	4.20	4.16		4.17
PULL #5	4.19	4.17		4.27
TOTAL	20.60	20.86		21.02
AVG.	4.12	4.17		4.20

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6587522
27 Nov 1990

CENTROIDAL DISTANCES

0 TO	1	.26967
1 TO	2	.403358
1 TO	3	.389371
1 TO	4	.323693
1 TO	5	.353344

5
4 <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0256
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0458
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .052469

THE AMR FOR THIS RIFLE IS: .8528

26 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/CG587522

CENTERFIRE PATTERNS # 1

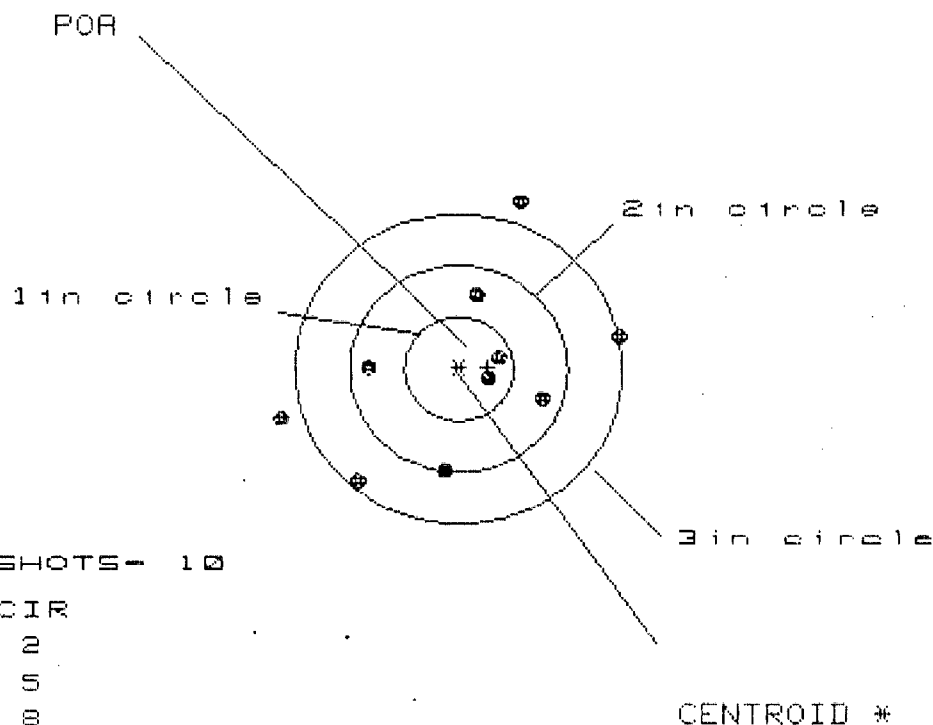

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 8

HS= 3.094

VS= 2.755


GS= 3.203

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.426	1.486	1.285
MINIMUM X	:	-1.668	-1.608	-1.103
MAXIMUM Y	:	1.663	.934	.896
MINIMUM Y	:	-1.092	-.908	-.946
CENTROID X	:	-.269	-.329	-.128
CENTROID Y	:	-.019	-.203	-.165
POA TO CENTROID in.:	:	.270	.387	.209
MIN RADIUS	:	.313	.358	.154
MEAN RADIUS	:	1.050	.975	.841
MAX RADIUS	:	1.749	1.636	1.453
HORIZONTAL SPREAD	:	3.094	3.094	2.388
VERTICAL SPREAD	:	2.755	1.842	1.842
EXTREME SPREAD	:	3.203	3.203	2.784
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

26 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06587522

CENTERFIRE PATTERNS # 2

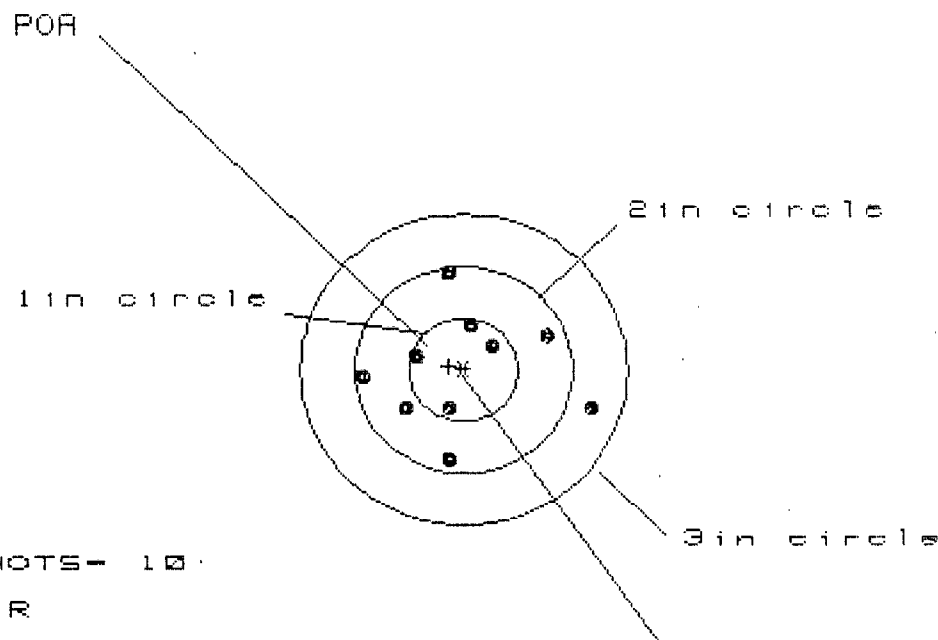

OF SHOTS- 10

IN CIR

1in = 4

2in = 9

3in = 10

HS= 2.062

VS= 1.839

GS= 2.082


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.118	.902	.800
MINIMUM X	:	-.944	-.820	-.408
MAXIMUM Y	:	.942	.902	.887
MINIMUM Y	:	-.897	-.937	-.952
CENTROID X	:	.134	.010	.112
CENTROID Y	:	-.036	.004	.019
POA TO CENTROID in.	:	.139	.011	.114
MIN RADIUS	:	.399	.301	.382
MEAN RADIUS	:	.720	.654	.629
MAX RADIUS	:	1.176	.944	.962
HORIZONTAL SPREAD	:	2.062	1.722	1.288
VERTICAL SPREAD	:	1.839	1.839	1.839
EXTREME SPREAD	:	2.082	1.840	1.840
NUMBER IN ONE INCH CIRCLE =			4	
NUMBER IN TWO INCH CIRCLE =			9	
NUMBER IN THREE INCH CIRCLE =			10	

26 Nov 1938

FILE:/PATTERNING/CENTERFIRE_PATT/C6587222

CENTERFIRE PATTERNS # 3

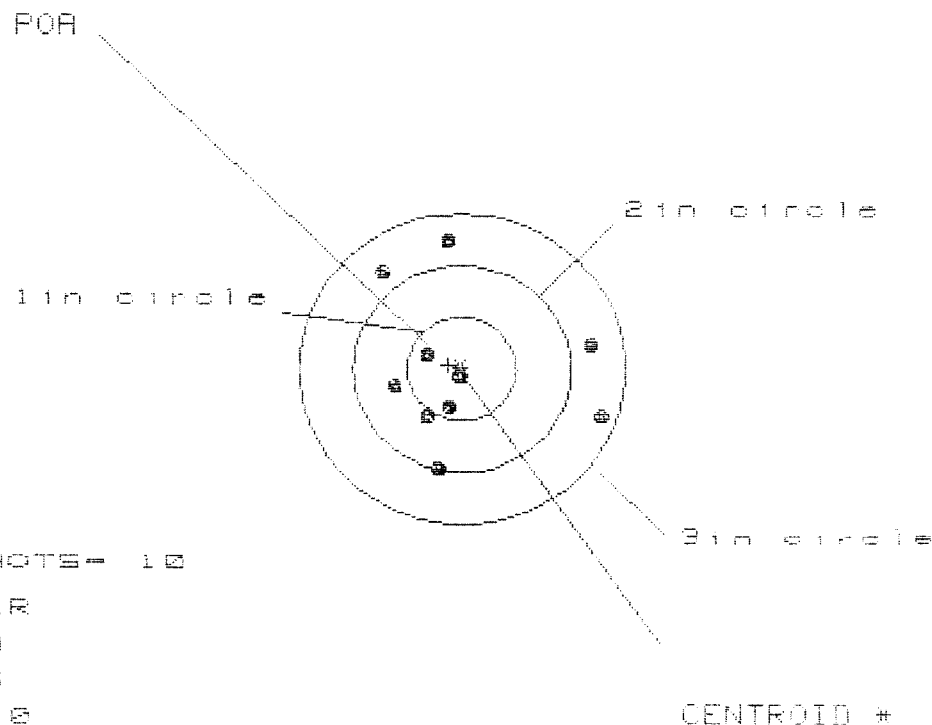

OF SHOTS- 10

IN CIR

1in = 3

2in = 5

3in = 10

HS= 2.072

VS= 2.281

GS= 2.511

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.309	1.334	1.342
MINIMUM X	:	-.763	-.617	-.609
MAXIMUM Y	:	1.285	1.231	1.038
MINIMUM Y	:	-.996	-1.050	-.896
CENTROID X	:	.120	-.026	-.034
CENTROID Y	:	-.036	.013	-.136
POA TO CENTROID in.	:	.125	.031	.140
MIN RADIUS	:	.078	.167	.124
MEAN RADIUS	:	.811	.725	.623
MAX RADIUS	:	1.395	1.344	1.380
HORIZONTAL SPREAD	:	2.072	1.951	1.951
VERTICAL SPREAD	:	2.281	2.281	1.934
EXTREME SPREAD	:	2.511	2.288	2.079
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

26 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06587522

CENTERFIRE PATTERNS # 4

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 8

HS- 2.201

VS= 3.030

GS= 3.216

CENTROID *

PATTERN #

4

SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.220	1.186	.901
MINIMUM X	:	-.981	-1.015	-.867
MAXIMUM Y	:	1.075	.857	.939
MINIMUM Y	:	-1.955	-1.397	-1.315
CENTROID X	:	-.138	-.104	-.252
CENTROID Y	:	-.315	-.097	-.179
POA TO CENTROID in.	:	.344	.142	.309
MIN RADIUS	:	.283	.301	.139
MEAN RADIUS	:	1.067	.945	.861
MAX RADIUS	:	1.980	1.412	1.362
HORIZONTAL SPREAD	:	2.201	2.201	1.768
VERTICAL SPREAD	:	3.030	2.254	2.254
EXTREME SPREAD	:	3.216	2.362	2.271
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

26 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6587522

CENTERFIRE PATTERNS # 5

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 4

2 in = 9

3 in = 10

HS= 1.041

VS= 1.106

GS= 2.139

CENTROID *

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.044	.788	.704
MINIMUM X	-.797	-.681	-.765
MAXIMUM Y	.665	.357	.311
MINIMUM Y	-.441	-.367	-.406
CENTROID X	.025	-.091	-.007
CENTROID Y	.177	.103	.149
POA TO CENTROID in.	.179	.138	.149
MIN RADIUS	.170	.145	.212
MEAN RADIUS	.616	.531	.501
MAX RADIUS	1.238	.863	.825
HORIZONTAL SPREAD	1.841	1.469	1.469
VERTICAL SPREAD	1.106	.724	.717
EXTREME SPREAD	2.139	1.626	1.469
NUMBER IN ONE INCH CIRCLE =		4	
NUMBER IN TWO INCH CIRCLE =		9	
NUMBER IN THREE INCH CIRCLE =		10	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
94-18357

INITIAL

CUSTOMER ORDER NO.

FDC

DAAA09-92-C-0834

W/10X SCOPE, M-24 SNIPER, W/DEPLOYMENT KIT
ATTN: FRED MARTIN

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

06/11/94

06/11/94

C6587522

700 7.62

NATO

ACCESSORIES

SLING STRAP

HARD CASE

SCOPE MNTS

SCOPE BASE

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL

36201-5025

CUST NO: 098397 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

FRT

GUN CONDITION

☐ NEW☐ LIGHTLY WORN☐ WORN☐ VERY WORN☐ UNREPAIRABLE☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

BOLT ASSY.

B3

BARREL ASSY.

B4

D1

REC. ASSY.

B5

D2

WOOD

C1

D3

METAL

C2

E5

F5

MAIN FAULT

PARTS

COMMENTS

✓ Barrel
Trigger Assy
CTI#643.42
173.31
50.06
#866.73

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400022001

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6587522

DATE 2/26/96

TESTER RW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.72	2.83	2.86	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.72	2.54	2.67	
PULL #3	2.64	2.88	2.92	
PULL #4	2.64	2.68	2.88	
PULL #5	2.75	2.55	2.50	
TOTAL	13.47	13.48	13.83	
AVG.	2.69	2.70	2.77	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.27	3.13	
PULL #2	3.07	3.33	
PULL #3	3.37	3.07	
PULL #4	3.25	3.12	
PULL #5	3.34	3.01	
TOTAL	16.30	15.66	
AVG.	3.26	3.13	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.09	4.14		4.46
PULL #2	4.33	4.08		4.43
PULL #3	4.17	3.94		4.25
PULL #4	4.05	4.04		4.08
PULL #5	4.13	4.30		4.30
TOTAL	20.77	20.50		21.52
AVG.	4.15	4.10		4.30

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6587522

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607.	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6 1/2	6 1/2	6 1/2			3/7	AC
	G) Safety Off Force	4	4	4			3/7	AC
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.74	2.72	2.71	2.70	2.65	3/7/96	WB
	C) Function							
660	Pack							

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6587522
2 Jan 1900

CENTROIDAL DISTANCES

0 TO 1	2.01502
1 TO 2	.824896
1 TO 3	1.0048
1 TO 4	.552351
1 TO 5	1.14112

1
3⁴


+ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0242
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: 1.3276
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: 1.32782
THE AMR FOR THIS RIFLE IS: .9158

2 Jan 1908

FILE:/PATTERNING/CENTERFIRE_PATT/C6587522

CENTERFIRE PATTERNS # 1

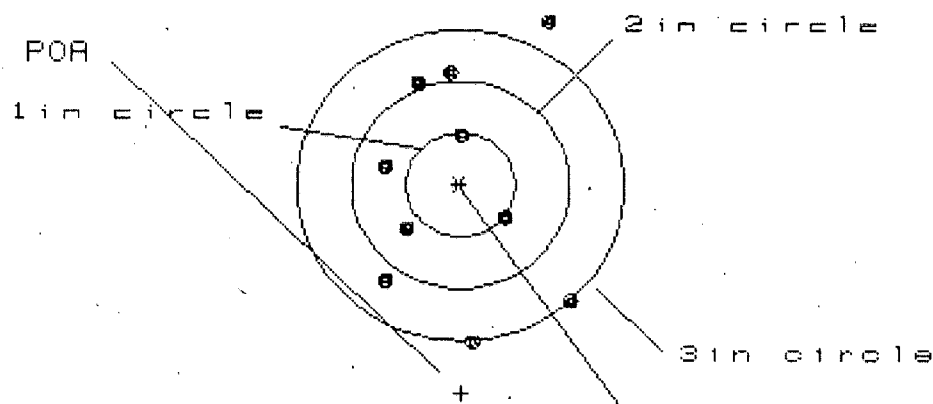

CENTROID *

OF SHOTS- 10

IN CIR

1 in - 1

2 in - 4

3 in - 7

HS= 1.695

VS= 3.060


GS= 3.132

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.021	1.110	.588
MINIMUM X	-.674	-.585	-.446
MAXIMUM Y	1.551	1.300	1.177
MINIMUM Y	-1.509	-1.337	-1.460
CENTROID X	-.010	-.099	-.238
CENTROID Y	2.015	1.843	1.966
POA TO CENTROID in.	2.015	1.845	1.981
MIN RADIUS	.496	.459	.445
MEAN RADIUS	1.046	.953	.862
MAX RADIUS	1.746	1.488	1.505
HORIZONTAL SPREAD	1.695	1.695	1.034
VERTICAL SPREAD	3.060	2.637	2.637
EXTREME SPREAD	3.132	2.649	2.649
NUMBER IN ONE INCH CIRCLE	1		
NUMBER IN TWO INCH CIRCLE		4	
NUMBER IN THREE INCH CIRCLE			7

2 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8587522

CENTERFIRE PATTERNS # 2

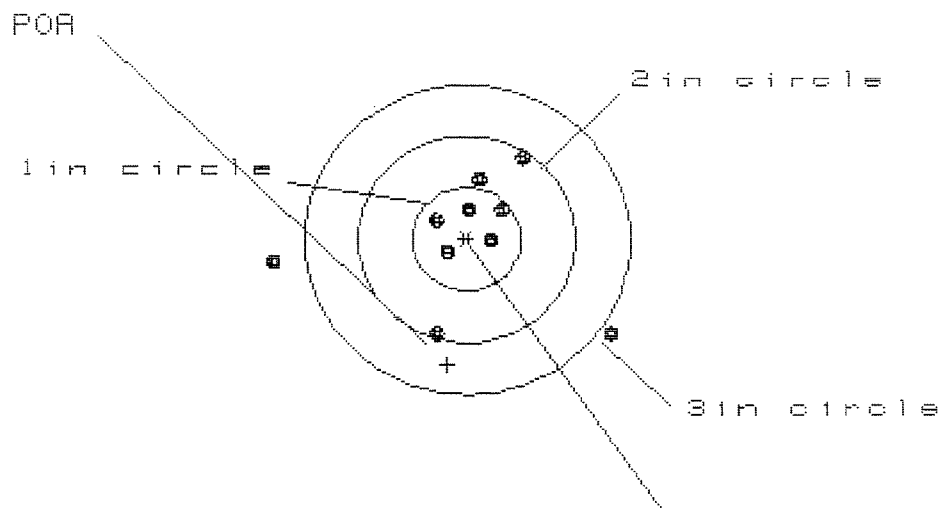

OF SHOTS= 10

IN CIR

1 in = 5

2 in = 8

3 in = 8

HS= 3.112

VS= 1.676

GS= 3.186


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.308	1.108	.483
MINIMUM X	:	-1.804	-.527	-.388
MAXIMUM Y	:	.767	.744	.630
MINIMUM Y	:	-.909	-.932	-1.046
CENTROID X	:	.183	.383	.244
CENTROID Y	:	1.213	1.236	1.350
POA TO CENTROID in.:	:	1.227	1.294	1.372
MIN RADIUS	:	.213	.011	.167
MEAN RADIUS	:	.737	.600	.460
MAX RADIUS	:	1.815	1.434	1.116
HORIZONTAL SPREAD	:	3.112	1.635	.871
VERTICAL SPREAD	:	1.676	1.676	1.676
EXTREME SPREAD	:	3.186	1.889	1.889
NUMBER IN ONE INCH CIRCLE =	:		5	
NUMBER IN TWO INCH CIRCLE =	:		8	
NUMBER IN THREE INCH CIRCLE =	:		8	

2 Jan 1900

FILE:/PATTERNING/CENTERFIRE_PATT/C8587522

CENTERFIRE PATTERNS # 3

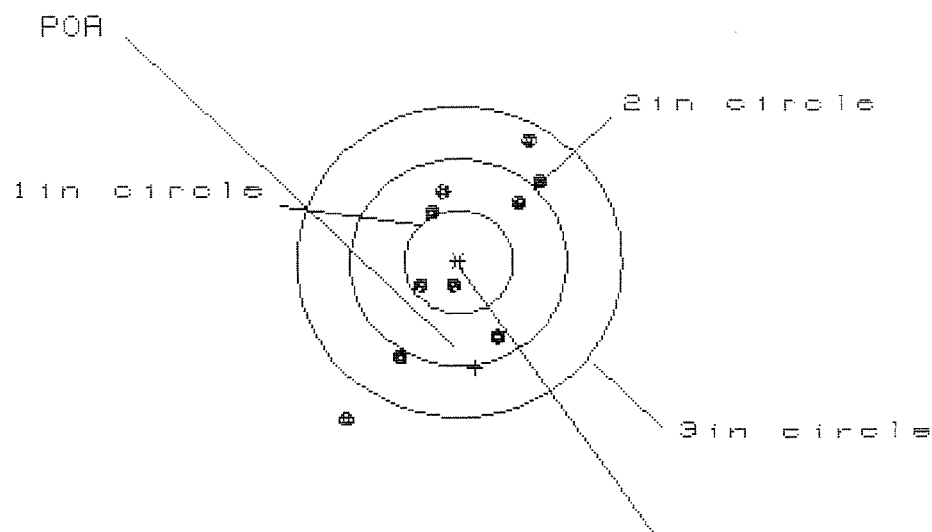

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 8

HS= 1.804

VS= 2.692

GS= 3.187


CENTROID #

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.781	.667	.738
MINIMUM X	:	-1.023	-.631	-.560
MAXIMUM Y	:	1.176	1.008	.715
MINIMUM Y	:	-1.516	-1.106	-.980
CENTROID X	:	-.150	-.036	-.107
CENTROID Y	:	1.020	1.188	1.062
POA TO CENTROID in.	:	1.031	1.189	1.068
MIN RADIUS	:	.229	.416	.277
MEAN RADIUS	:	.879	.765	.703
MAX RADIUS	:	1.829	1.274	1.129
HORIZONTAL SPREAD	:	1.804	1.298	1.298
VERTICAL SPREAD	:	2.692	2.114	1.695
EXTREME SPREAD	:	3.187	2.430	2.135
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

2 Jan 1908

FILE:/PATTERNING/CENTERFIRE_PATT/C8587522

CENTERFIRE PATTERNS # 4

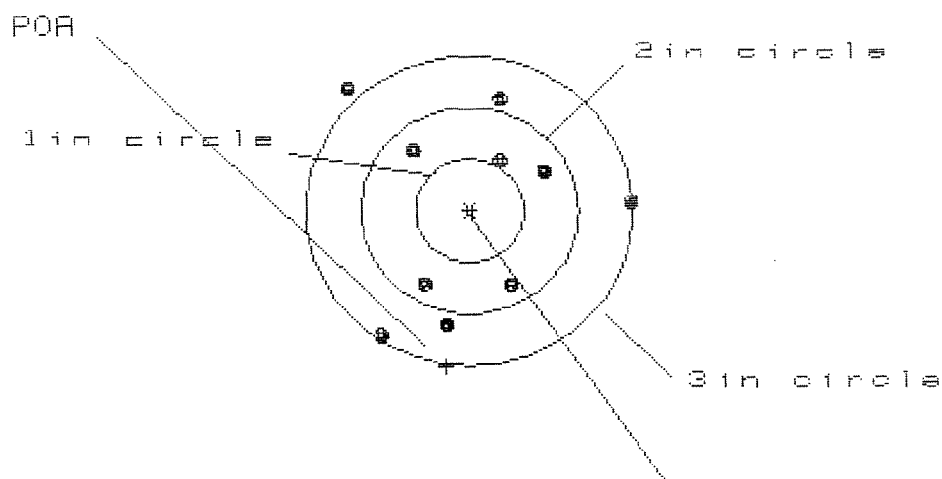

OF SHOTS - 10

IN CIR

1in = 0

2in = 5

3in = 9

HS = 2.527

VS = 2.405


GS = 2.738

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.435	1.313	1.200
MINIMUM X	:	-1.093	-.905	-.798
MAXIMUM Y	:	1.143	1.264	1.122
MINIMUM Y	:	-1.261	-1.134	-1.128
CENTROID X	:	.216	.338	.451
CENTROID Y	:	1.511	1.384	1.526
POA TO CENTROID in.	:	1.527	1.425	1.591
MIN RADIUS	:	.560	.631	.470
MEAN RADIUS	:	1.060	.991	.912
MAX RADIUS	:	1.582	1.451	1.209
HORIZONTAL SPREAD	:	2.527	2.218	1.998
VERTICAL SPREAD	:	2.405	2.398	2.250
EXTREME SPREAD	:	2.738	2.617	2.297
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

2 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06587522

CENTERFIRE PATTERNS # 5

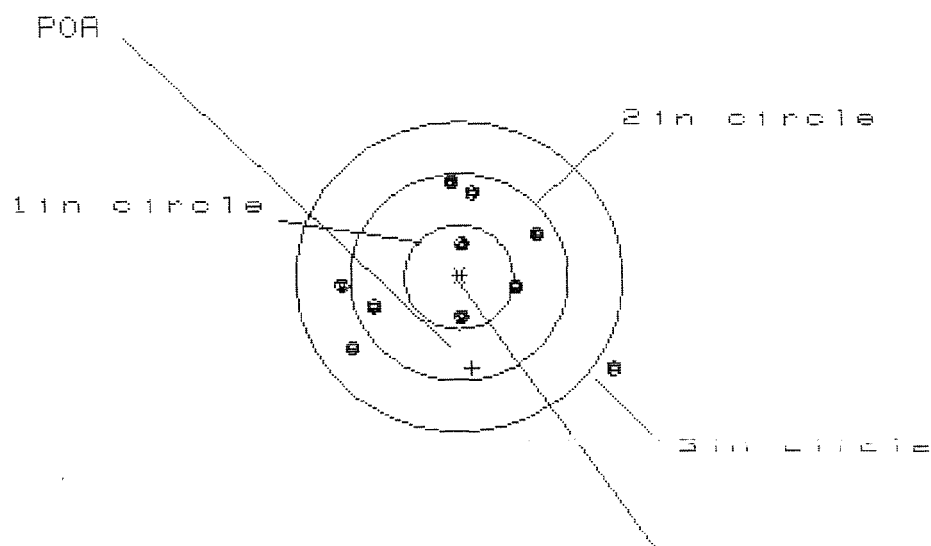

OF SHOTS= 10

IN CIR

1in = 2

2in = 7

3in = 9

HS= 2.559

VS= 1.803

GS= 2.671

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.452	.881	.784
MINIMUM X	-1.107	-.945	-1.042
MAXIMUM Y	.950	.856	.753
MINIMUM Y	-.853	-.822	-.529
CENTROID X	-.118	-.280	-.183
CENTROID Y	.879	.973	1.076
POA TO CENTROID in.	.886	1.013	1.091
MIN RADIUS	.299	.298	.158
MEAN RADIUS	.857	.763	.689
MAX RADIUS	1.684	1.129	1.080
HORIZONTAL SPREAD	2.559	1.826	1.826
VERTICAL SPREAD	1.803	1.678	1.282
EXTREME SPREAD	2.671	1.994	1.886
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		9	

26 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/CG587522

CENTERFIRE PATTERNS # 4

POA

1in circle

2in circle

3in circle

CENTROID #

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 8

HS= 2.201

VS= 3.030

GS= 3.216

PATTERN #

4

SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.220	1.186	.901
MINIMUM X	:	-.981	-1.015	-.867
MAXIMUM Y	:	1.075	.857	.939
MINIMUM Y	:	-1.955	-1.397	-1.315
CENTROID X	:	-.138	-.104	-.252
CENTROID Y	:	-.315	-.097	-.179
POA TO CENTROID in.	:	.344	.142	.309
MIN RADIUS	:	.283	.301	.139
MEAN RADIUS	:	1.067	.945	.861
MAX RADIUS	:	1.980	1.412	1.362
HORIZONTAL SPREAD	:	2.201	2.201	1.768
VERTICAL SPREAD	:	3.030	2.254	2.254
EXTREME SPREAD	:	3.216	2.362	2.271
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			4	
NUMBER IN THREE INCH CIRCLE =			8	